


### Directions for use:

The MSDD basic is suited for installation in front panels of control cabinets and is used for connecting service devices (PC, monitor, etc.). The socket-outlets are not protected against short-circuit or overload. The appropriate protection in accordance with EN 60950 must be guaranteed from the final user by providing security for the attached circuits. The circuits which are attached to the data and communication interfaces (D-Sub.Min., RJ45/45 etc.) must be in accordance with the requirements on SELV electric circuits (according to EN 60950; section 2,2), with the requirements on TNV electric circuits (according to EN 60950; section 2,3 (with consideration of section 2,1,1,1)) or with the requirements on electric circuits with current limiting (according to EN 60950; section 2,4).

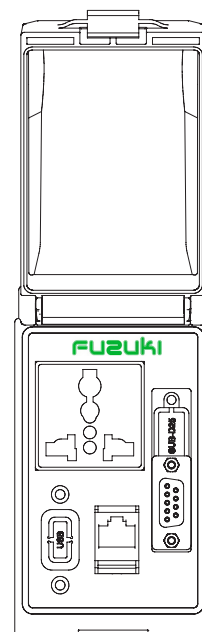

### Technical data:

#### **Universal socket**

|                          |                 |
|--------------------------|-----------------|
| Nominal voltage          | : 250 V AC      |
| Frequency for AC voltage | : 50 / 60 Hz    |
| Nominal current          | : 20 A          |
| No. of poles             | : 2 + ground    |
| Type of connection       | : spring        |
| Max. Cable diameter      | : AWG 14 ... 13 |

#### **D-Sub according to EN 41652**

|                          |                       |
|--------------------------|-----------------------|
| Nominal voltage          | : 125 V AC / 150 V DC |
| Nominal current          | : 3 A                 |
| Frequency for AC voltage | : 50 / 60 Hz          |
| No. of poles             | : 9 pole female       |
| Type of connection       | : soldering           |
| Max. Cable diameter      | : AWG 20              |
| Attachment plug type     | : UNC 4-40            |

#### **RJ 45/45 female shielded**

|                          |                                                |
|--------------------------|------------------------------------------------|
| Data rate                | : specification Cat 3                          |
| Nominal voltage          | : 48 V                                         |
| Nominal current          | : 1 A                                          |
| UL Rating                | : Rating 175 mA 42.4 V Use Class 2 Source Only |
| Frequency for AC voltage | : 50 / 60 Hz                                   |
| No. of poles             | : 8 pole female                                |
| Type of connection       | : connector can be plugged in from both sides  |
| Attachment plug type     | : snap-in locking                              |

|       |                |           |      |                                                                                     |           |                               |  |            |
|-------|----------------|-----------|------|-------------------------------------------------------------------------------------|-----------|-------------------------------|--|------------|
|       |                |           |      | Date                                                                                | Name      | 订货号：68713808<br>插座，网口，USB，DB9 |  |            |
|       |                |           |      | Dwn.                                                                                | 07.Dec.04 |                               |  | ROSIE      |
|       |                |           |      | Chk.                                                                                |           |                               |  |            |
|       |                |           |      | Sup.                                                                                |           |                               |  |            |
|       |                |           |      |                                                                                     |           |                               |  |            |
|       |                |           |      |  |           | P11110-808                    |  | Blatt<br>1 |
| Index | Revision       | Date      | Name |                                                                                     |           |                               |  |            |
| A     | First edition  | 07.Dec.04 | YONG |                                                                                     |           |                               |  |            |
| B     | Second edition | 08.Dec.09 | J.K  |                                                                                     |           |                               |  |            |

**Other information:**

Housing frame, cover and fastening plate

Degree of protection

Ambient temperature

Storing temperature

Wall cut-out


: Plastic PC+ABS

: IP 54

: -5°C...+55°C

: -20°C...+60°C

**Attention:**  
Wall cut-out not symmetrical  
to the outside edge

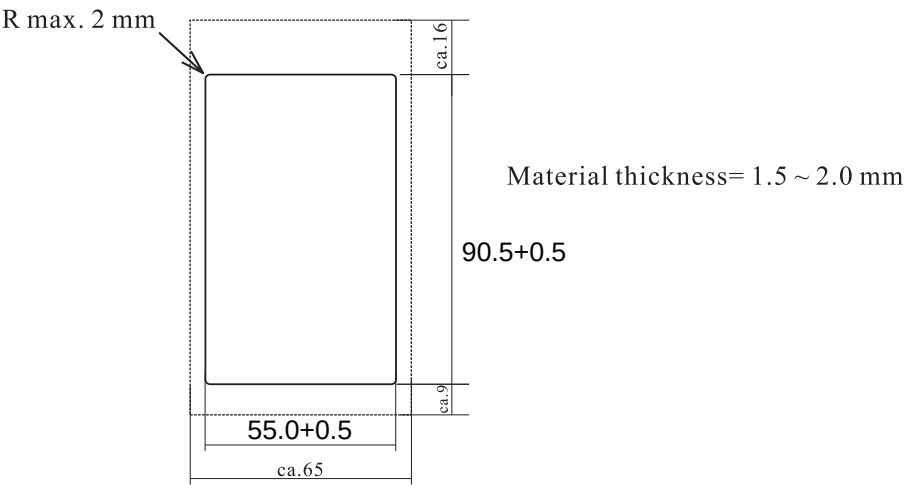

Dimensions (W × H × D)

Weight

Approval

: 65 × 116 × 43 mm

: **128克**

: N/A

实物照片：



|       |                |           |      |        |           |       |                                    |  |  |
|-------|----------------|-----------|------|--------|-----------|-------|------------------------------------|--|--|
|       |                |           |      |        | Date      | Name  | 订货号：68713808<br>插座，网口，USB，DB9      |  |  |
|       |                |           |      | Dwn.   | 07.Dec.04 | ROSIE |                                    |  |  |
|       |                |           |      | Chk.   |           |       |                                    |  |  |
|       |                |           |      | Sup.   |           |       |                                    |  |  |
|       |                |           |      |        |           |       | P11110-808<br><br>Blatt 2<br>2 Bl. |  |  |
| Index | Revision       | Date      | Name | FUZUKI |           |       |                                    |  |  |
| A     | First edition  | 07.Dec.04 | YONG |        |           |       |                                    |  |  |
| B     | Second edition | 08.Dec.09 | J.K  |        |           |       |                                    |  |  |