

Statics Review

Aditya Dangra

April 18, 2019

Contents

1	Chapter 1: General Principles	1
1.1	Important Points	1
1.2	General Procedure	1
1.3	Relevant Problems	2
2	Chapter 2: Force Vectors	3
2.1	Vector Operations	3
2.2	Force Components	4
2.3	The Dot Product	5
2.4	Relevant Problems	5
3	Chapter 3: Particle Equilibrium	6
3.1	Relevant Problems	6
4	Chapter 4: Force System Resultants	6
4.1	The Cross Product	7
4.2	Moments	7
4.3	Moment About an Axis	8
4.4	Couple Moments	8
	References	10

1 Chapter 1: General Principles

Statics deals with the equilibrium of bodies, that is, those that are at rest or moving with constant velocity. Its importance to the real world stems from the need to keep things from moving, such as buildings or bridges.

1.1 Important Points

The following points outline the foundations upon which the study of Statics is built upon.

- Statics is the study of bodies that are at rest or moving with constant velocity [1].
- Newton's three laws of motion are integral to the study of statics and should be memorized.
- If size is negligible, then a system can be reduced to a single particle containing all of its mass.
- Concentrated forces are assumed to act at a single point on a body (In reality, all forces are distributed loads).
- The meter, second, and kilogram are base units of the SI system.
- The foot, second, and pound are base units of the Imperial system.
- Mass measures the quantity of matter that does not change depending on location. Weight refers to the gravitational attraction of the earth on a quantity of mass.

1.2 General Procedure

Attending lectures, reading books, and studying example problems help, but **the most effective way of learning is to *solve problems*** [1]. The following is a generalized procedure that should apply to all problems and ensure success:

- Read the problem and try to correlate the situation with the theory studied.

- Draw a free body diagram of the situation with all necessary forces, moments, and dimensions.
- Write out any relevant equations and diagrams.
- Solve the necessary equations in an efficient manner.
- Study the answer with technical judgement and common sense to determine whether it seems reasonable.

1.3 Relevant Problems

In Chapter 1, the problems focus on unit conversions and Newton's Law of Gravitation. Some relevant problems include:

- Unit Conversions:
 - 1-2, 1-7, 1-9, 1-10, 1-14
- Density and Gravitation:
 - 1-17, 1-19, 1-21




Figure 1: Adding two vectors *tip to tail*

2 Chapter 2: Force Vectors

A **scalar** is any positive or negative quantity that can be specified by its *magnitude*. A **vector** is any quantity that requires both a *magnitude* and a *direction* [2]. A vector is shown graphically by an arrow indicating the sense of direction and an angle θ between the vector and a fixed axis.

2.1 Vector Operations

Like scalars, vectors can also be added and multiplied, but a slightly different set of rules apply.

Multiplication by a Scalar

When a vector is multiplied by a scalar, its magnitude will be increased by that amount. Multiplying by a negative reverses the direction of the vector.

Vector Addition

Adding vectors is done *tip to tail*, as in the second vector's tail is moved to the tip of the first vector (Figure 1). The vector between the first tail and the final tip is the **resultant**, another vector. Vectors can also be added component-wise, where the x -component of the resultant is the sum of the x -components of the vectors being added and so on.

Vector Subtraction

Vector subtraction is defined as a special case of vector addition. Instead of being subtracted, the vector is multiplied by -1 and instead added (shown below).

$$\vec{R} = \vec{A} - \vec{B} = \vec{A} + (-\vec{B})$$

2.2 Force Components

Forces can be represented with magnitude and direction but it is usually easier to work with components in the x , y , and z directions. It is possible to calculate the components using an angle and magnitude or with the **coordinate direction angles** α (alpha), β (beta), and γ (gamma). Coordinate direction angles are measured between the vector and the *positive* x , y , and z axes. α , β , and γ for a vector \vec{A} are defined as:

$$\cos \alpha = \frac{A_x}{A} \qquad \cos \beta = \frac{A_y}{A} \qquad \cos \gamma = \frac{A_z}{A}$$

The following identity also holds:

$$\cos^2 \alpha + \cos^2 \beta + \cos^2 \gamma = 1$$

Sometimes, the direction of a vector can be specified in terms of a **transverse angle** θ and an **azimuth angle** ϕ , as shown in figure 2. The formula to find the components should not be memorized, instead determined by trigonometry.

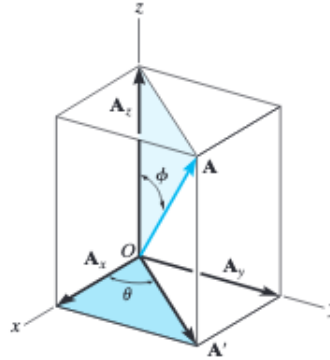


Figure 2: A vector's direction in terms of θ and ϕ [1]

2.3 The Dot Product

The dot product can be used to find the angle between 2 vectors. Expressed in equation form:

$$\begin{aligned}\vec{A} \cdot \vec{B} &= AB \cos \theta \\ &= A_x B_x + A_y B_y + A_z B_z\end{aligned}$$

The magnitude of the projection of \vec{A} onto \vec{u}_a is determined from the dot product, $A_a = \vec{A} \cdot \vec{u}_a$.

2.4 Relevant Problems

In Chapter 2, the problems focus on working with Force Vectors, determining components from angles, and using the dot product. Some relevant problems include:

- Force Vectors:
 - 2-2, 2-6, 2-7, 2-17, 2-19, 2-31, 2-43, 2-55
- Cartesian Vectors:
 - 2-61, 2-66, 2-70, 2-78, 2-86, 2-99, 2-103
- The Dot Product:
 - 2-106, 2-110, 2-113, 2-115, 2-130, 2-137

3 Chapter 3: Particle Equilibrium

When a body's forces' lines of action pass through a single point, the body can be thought of as a particle. For this particle to be in equilibrium, the net force must equal 0 ($\sum \vec{F} = 0$).

Accounting for all of the forces can be done with the help of a free-body diagram. This diagram cuts the particle away from its surroundings and shows all forces acting on the particle with their known/unknown magnitudes and directions [2].

If the geometry is hard to visualize, it is easier to solve the system's equilibrium equations in the x , y , and z directions.

$$\sum F_x = 0 \qquad \sum F_y = 0 \qquad \sum F_z = 0$$

3.1 Relevant Problems

In Chapter 3, the problems focus on two-dimensional and three-dimensional particle equilibrium. Some relevant problems include:

- Two-dimensions:
 - 3-7, 3-9, 3-23, 3-30, 3-31, 3-37, 3-42
- Three-dimensions:
 - 3-46, 3-47, 3-60, 3-67

4 Chapter 4: Force System Resultants

Forces, along with a tendency to cause translation, also produce a tendency to cause rotation. This effect is called a **moment** whose magnitude is the product of the magnitude of \vec{F} and d , the perpendicular distance to the line of action of \vec{F} .

4.1 The Cross Product

Moments are three-dimensional vectors perpendicular to the plane containing the other two vectors. The operation to describe this, the cross product, is not yet in our vector algebra toolkit, so we define the cross product of vectors \vec{A} and \vec{B} as a vector \vec{C} with magnitude $C = AB \sin \theta$ and a direction as specified by the right-hand rule.

As with other vector operations, it is usually easier to work in terms of components, so the cross product can be written as:

$$\vec{A} \times \vec{B} = \begin{vmatrix} \hat{i} & \hat{j} & \hat{k} \\ A_x & A_y & A_z \\ B_x & B_y & B_z \end{vmatrix}$$

4.2 Moments

If a force \vec{F} is \vec{r} away from point O , the moment about point O can be expressed using the cross product:

$$\vec{M}_O = \vec{r} \times \vec{F} \quad (1)$$

Since \vec{F} is a sliding vector, we can make use of its *principle of transmissibility*. This principle states that any position vector \vec{r} from point O creates *the same moment* about point O , as shown in figure 3.

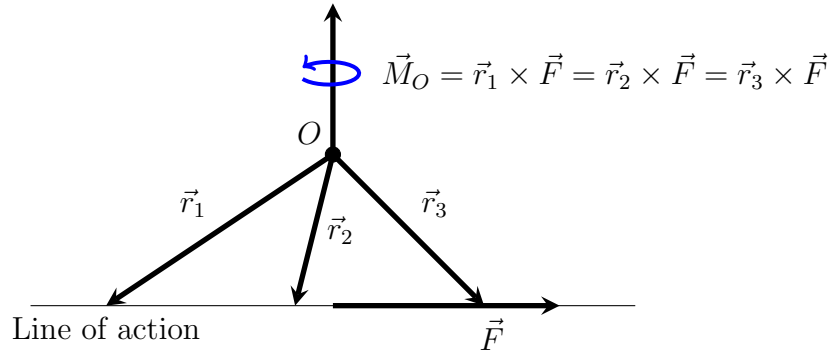


Figure 3: The principle of transmissibility.

An influential, some might say famous [2], French man by the name of Pierre Varignon noticed that "the moment of a force about a point is equal to the sum of the moments of the components of the force about the point." This means that the moment of a component can be determined simply by using the right-hand rule with the thumb pointing in the direction of the moment.

4.3 Moment About an Axis

If the perpendicular distance d_a to an axis a is known, the moment about that axis is simply:

$$M_a = Fd_a$$

If the axis a is defined by \hat{u}_a , the unit vector in the direction of the axis, a moment \vec{M}_O can be found with $\vec{r} \times \vec{F}$. In this case, \vec{r} is a vector from *anywhere on the axis to anywhere on the force's line of action*. The component of \vec{M}_O along the axis is found by $\vec{M}_O \cdot \hat{u}_a$ (finding "how much of \vec{M}_O points in the direction of \hat{u}_a ").

4.4 Couple Moments

No, these do not involve long walks on the beach. A **Couple Moment** is produced by a **Force Couple**, a pair of equal and opposite forces separated by a distance d or a vector \vec{r} (Figure 4). As a result, there is no net movement but a net rotation everywhere on the body (moments are free vectors [2]).




Figure 4: A Force Couple

When a force \vec{F} is moved to another point P not on its line of action, a couple moment is applied to the body. The couple moment is determined by taking the moment of the force about point P [1].

Usually, a three-dimensional force and couple moment will not be perpendicular. Therefore, the furthest simplification of this system will be a point P where only the component of moment in the direction of the force remains. This combination of resultant force \vec{F}_R and collinear couple moment \vec{M}_{\parallel} is called a **screwdriver**. The procedure to reduce a system to a wrench is usually as follows:

- Find \vec{F}_R and $(\vec{M}_R)_O$ about a point O
- Resolve the couple moment $(\vec{M}_R)_O$ into components parallel and perpendicular to \vec{F}_R
 - \vec{M}_{\parallel} is found as the moment about the resultant force's line of action (moment about an axis)
 - \vec{M}_{\perp} is found by observing:

$$\begin{aligned}\vec{M}_R &= \vec{M}_{\parallel} + \vec{M}_{\perp} \\ \vec{M}_R - \vec{M}_{\parallel} &= \vec{M}_{\perp}\end{aligned}$$

- The location of P is determined from $d = M_{\perp}/F_R$
- Since \vec{M}_{\parallel} is a free vector, it can be moved to point P

References

- [1] R. C. Hibbeler, *Engineering Mechanics: Statics & Dynamics (Fourteenth Edition)*, Pearson Prentice Hall, Hoboken, New Jersey, 2016.
- [2] B. Buckham, *ENGR 141 Lecture*, University of Victoria, Victoria, B.C., 2019.