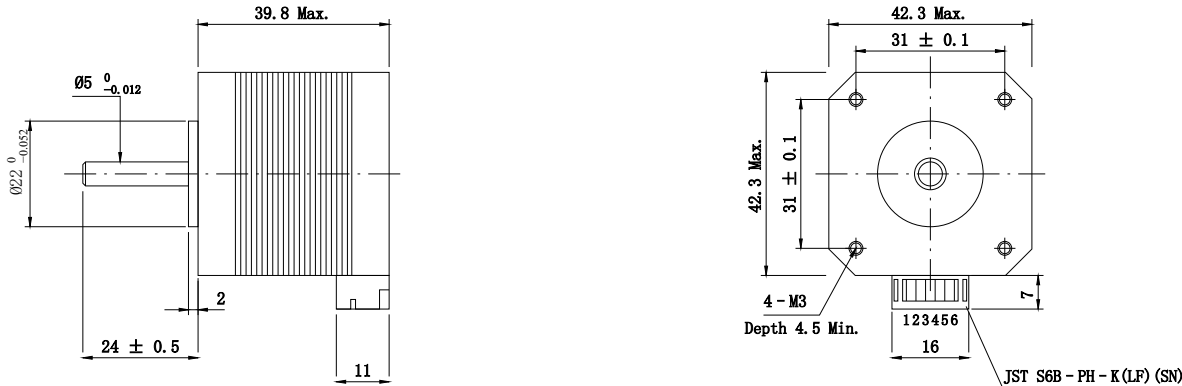




	1	2	3	4	5	6	7	8																																																																																																																																															
A	 MODEL REFERENCE Source designation 17HD2024N 17HDN SERIES Source: 17HDN_series.pdf, pp. A-26 / A-27 Drawing ID: C17HD2024-01N Laser marking / lot format: not specified in source. Exciting Sequence vs. Direction of rotation Two-phase bipolar / full-step schematic <table><tr><th>STEP</th><th>A+</th><th>B+</th><th>A-</th><th>B-</th></tr><tr><td>1</td><td>+</td><td>+</td><td>-</td><td>-</td></tr><tr><td>2</td><td>-</td><td>+</td><td>+</td><td>-</td></tr><tr><td>3</td><td>-</td><td>-</td><td>+</td><td>+</td></tr><tr><td>4</td><td>+</td><td>-</td><td>-</td><td>+</td></tr></table> 200 full steps per revolution (1.8°). Phase labels are schematic only. Connector pin assignment and rotation direction are not specified in the source. No pulley specification is provided. <table><tr><th colspan="2">PULLEY</th></tr><tr><td>TOOTH SPECIFICATION</td><td>Not specified</td></tr><tr><td>PITCH</td><td>Not specified</td></tr><tr><td>NUMBER OF TEETH</td><td>Not specified</td></tr><tr><td>OUT DIAMETER</td><td>Not specified</td></tr><tr><td>DIA OF PICH CIRCLE</td><td>Not specified</td></tr></table> CHARACTERISTICS <table><tr><th>ITEMS</th><th>SPECIFICATIONS</th></tr><tr><td>Rated Voltage</td><td>4.1 V (I × R)</td></tr><tr><td>Rated Current</td><td>DC 1.0 A / phase</td></tr><tr><td>Step Angle</td><td>1.8°</td></tr><tr><td>Phase</td><td>2 (bipolar)</td></tr><tr><td>Resistance per phase</td><td>4.1 Ω / phase</td></tr><tr><td>Inductance per phase</td><td>8.5 mH / phase</td></tr><tr><td>Holding Torque</td><td>390 mN • m</td></tr><tr><td>Insulation Resistance</td><td>Not specified</td></tr><tr><td>Insulation Class</td><td>Not specified</td></tr><tr><td>Rotor Inertia</td><td>57 g • cm²</td></tr><tr><td>Weight</td><td>0.28 kg</td></tr></table> Detent torque: 15 mN • m 4.1 V calculated from rated current × phase resistance. Wiring Diagram: Bipolar schematic; pin assignment not specified.  Source refers to wiring diagram on page A-8. Page A-8 is not included in the supplied PDF. <tr><td rowspan="2">B</td><td colspan="7"></td><td></td></tr> <tr><td colspan="7"></td><td></td></tr> <tr><td rowspan="2">C</td><td colspan="7"></td><td></td></tr> <tr><td colspan="7"></td><td></td></tr> <tr><td rowspan="2">D</td><td colspan="7"></td><td></td></tr> <tr><td colspan="7"></td><td></td></tr> <tr><td rowspan="2">E</td><td colspan="7"></td><td></td></tr> <tr><td colspan="7"></td><td></td></tr> <tr><td rowspan="2">F</td><td colspan="7"></td><td></td></tr> <tr><td colspan="7"></td><td></td></tr>					STEP	A+	B+	A-	B-	1	+	+	-	-	2	-	+	+	-	3	-	-	+	+	4	+	-	-	+	PULLEY		TOOTH SPECIFICATION	Not specified	PITCH	Not specified	NUMBER OF TEETH	Not specified	OUT DIAMETER	Not specified	DIA OF PICH CIRCLE	Not specified	ITEMS	SPECIFICATIONS	Rated Voltage	4.1 V (I × R)	Rated Current	DC 1.0 A / phase	Step Angle	1.8°	Phase	2 (bipolar)	Resistance per phase	4.1 Ω / phase	Inductance per phase	8.5 mH / phase	Holding Torque	390 mN • m	Insulation Resistance	Not specified	Insulation Class	Not specified	Rotor Inertia	57 g • cm ²	Weight	0.28 kg	B																	C																	D																	E																	F																
						STEP	A+	B+	A-	B-																																																																																																																																													
1						+	+	-	-																																																																																																																																														
2						-	+	+	-																																																																																																																																														
3						-	-	+	+																																																																																																																																														
4						+	-	-	+																																																																																																																																														
PULLEY																																																																																																																																																							
TOOTH SPECIFICATION						Not specified																																																																																																																																																	
PITCH						Not specified																																																																																																																																																	
NUMBER OF TEETH						Not specified																																																																																																																																																	
OUT DIAMETER						Not specified																																																																																																																																																	
DIA OF PICH CIRCLE						Not specified																																																																																																																																																	
ITEMS						SPECIFICATIONS																																																																																																																																																	
Rated Voltage						4.1 V (I × R)																																																																																																																																																	
Rated Current	DC 1.0 A / phase																																																																																																																																																						
Step Angle	1.8°																																																																																																																																																						
Phase	2 (bipolar)																																																																																																																																																						
Resistance per phase	4.1 Ω / phase																																																																																																																																																						
Inductance per phase	8.5 mH / phase																																																																																																																																																						
Holding Torque	390 mN • m																																																																																																																																																						
Insulation Resistance	Not specified																																																																																																																																																						
Insulation Class	Not specified																																																																																																																																																						
Rotor Inertia	57 g • cm ²																																																																																																																																																						
Weight	0.28 kg																																																																																																																																																						
B																																																																																																																																																							
C																																																																																																																																																							
D																																																																																																																																																							
E																																																																																																																																																							
F																																																																																																																																																							

	Dimensions refer to drawing		Tolerance sheet		17HDN SERIES HYBRID STEPPING MOTOR		
	Unit: mm	Scale: nts	General tolerances:				
	Product Code:		Not specified in source				
	Model: 17HD2024N		Use stated dimensions only		Model: 17HD2024N		
	Source-based drawing				Designed by		
	Model: 17HD2024N				Checked by		
A	Adapted from 17HDN series datasheet		17HDN_series.pdf A-26 / A-27		Approved by		
REV.	Revision Record		Date	Drawing No.:	C17HD2024-01N	Page 1 of 1 Page	Version: A

1	2	3	4	5	6	7	8
---	---	---	---	---	---	---	---