


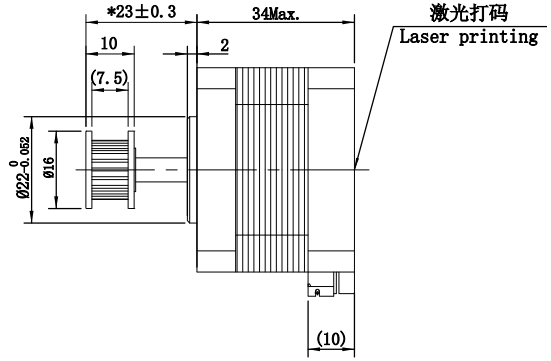


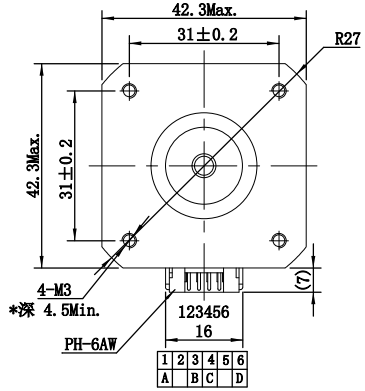

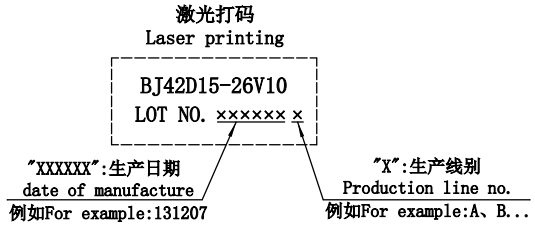

电机特性CHARACTERISTICS	
项目ITEMS	规格SPECIFICATIONS
额定电压Rated Voltage	DC 5.04 V
额定电流Rated Current	DC 0.84 A / 相
步距角Step Angle	1.8° ± 0.09°
相数Phase	2
相电阻Resistance per phase	6.0±15% Ω / 相
相电感Inductance per phase	8.8±20%mH / 相
保持力矩Holding Torque	≥ 280mN.m
绝缘电阻 Insulation Resistance	≥ 100 MΩ (DC 500V)
绝缘等级Insulation Class	B级
转子惯量Rotor Inertia	38 g.cm²
重量Weight	0.22 kg REF.

接线图Wiring Diagram:



励磁顺序vs.旋转方向
Exciting Sequence vs.Direction of rotation

STEP	A	B	C	D
1	+	+	−	−
2	−	+	+	−
3	−	−	+	+
4	+	−	−	+

CW

CCW

从电机的安装端看，按照表格规定的励磁顺序。电机将产生顺时针方向旋转。
Exciting sequence as the table specifies will produce clockwise rotation when vewed from mounting end.

PULLEY 带轮	
TOOTH SPECIFICATION 齿型	2GT
PITCH 节距	2±0.01
NUMBER OF TEETH 齿数	20
OUT DIAMETER 外径	Ø12.22 +0.05 0
DIA OF PICH CIRCLE 节径	Ø12.73

REV.	版本记录Revision Record	日期Date
A	原始版本Original revision	2022.08.26

Dimensions refer to drawing | 未注公差Tolerance sheet

单位Unit: mm | 比例Scale: nts | 0° | 0 | ±0.2

Product Code: | 0.0° | 0.0 | ±0.1

Model: BJ42D15-26V10 | 0.00° | 0.00

SHENZHEN KELI MOTOR LTD.

Model: BJ42D15-26V10

设计 Designed by

审核 Checked by

批准 Approved by

Drawing No.: | Page 1 of 1 Page | 版本Version: A

File No.: KL-JS-BJ42D15S26V10-1.0*WX