



Tracks represent hand wiring. No copper fabrication. Header / IC pin 1 marked by a square pad.



2 / 4 TOP JUMPERS — COMPONENT SIDE

Tracks represent hand wiring. No copper fabrication. Header / IC pin 1 marked by a square pad.

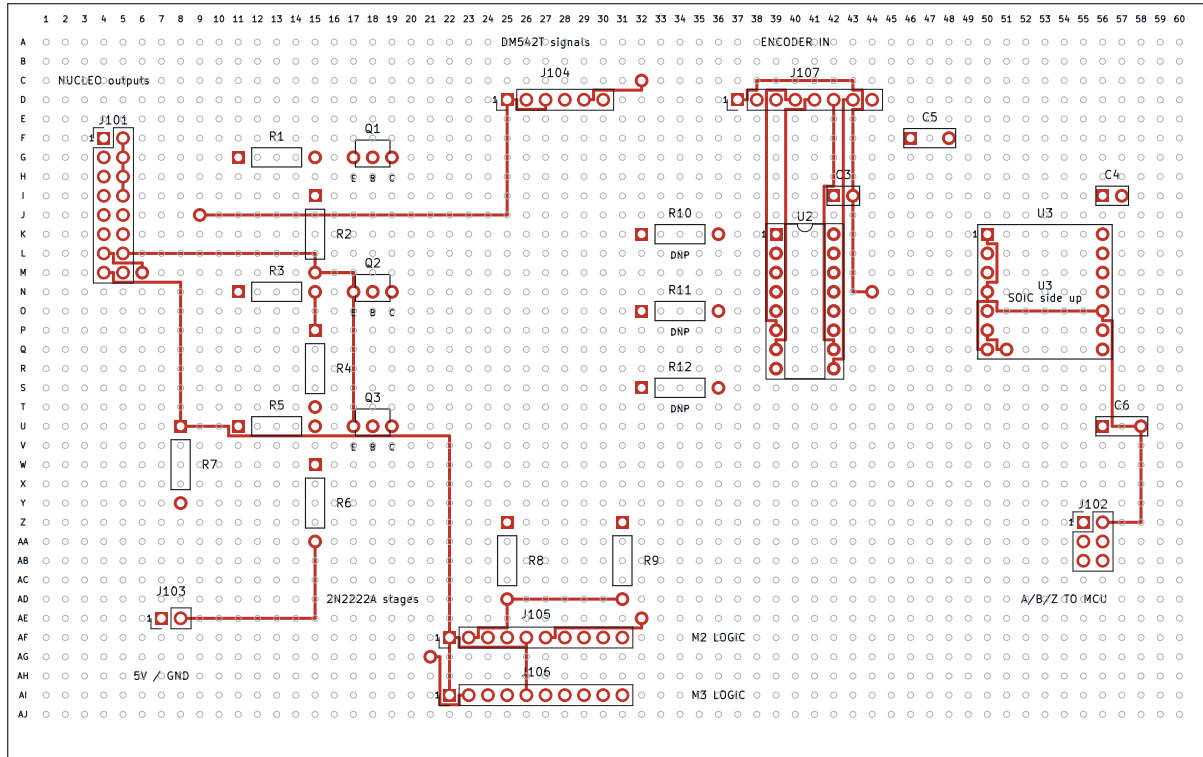


TOP: component view. B.Cu = solder-side wires; F.Cu = component-side jumpers.

U3: Adafruit 1210, 15.24 mm rows, SOIC face UP. Q1-Q3: Diotec E1/B2/C3; flat face DOWN.

R10-R12: DNP. Drivers, buck, Nucleo and storage stay off this board. NO 24 V on this board.

3 / 4 BOTTOM WIRES – SOLDER SIDE, ALREADY MIRRORED

Tracks represent hand wiring. No copper fabrication. Header / IC pin 1 marked by a square pad.

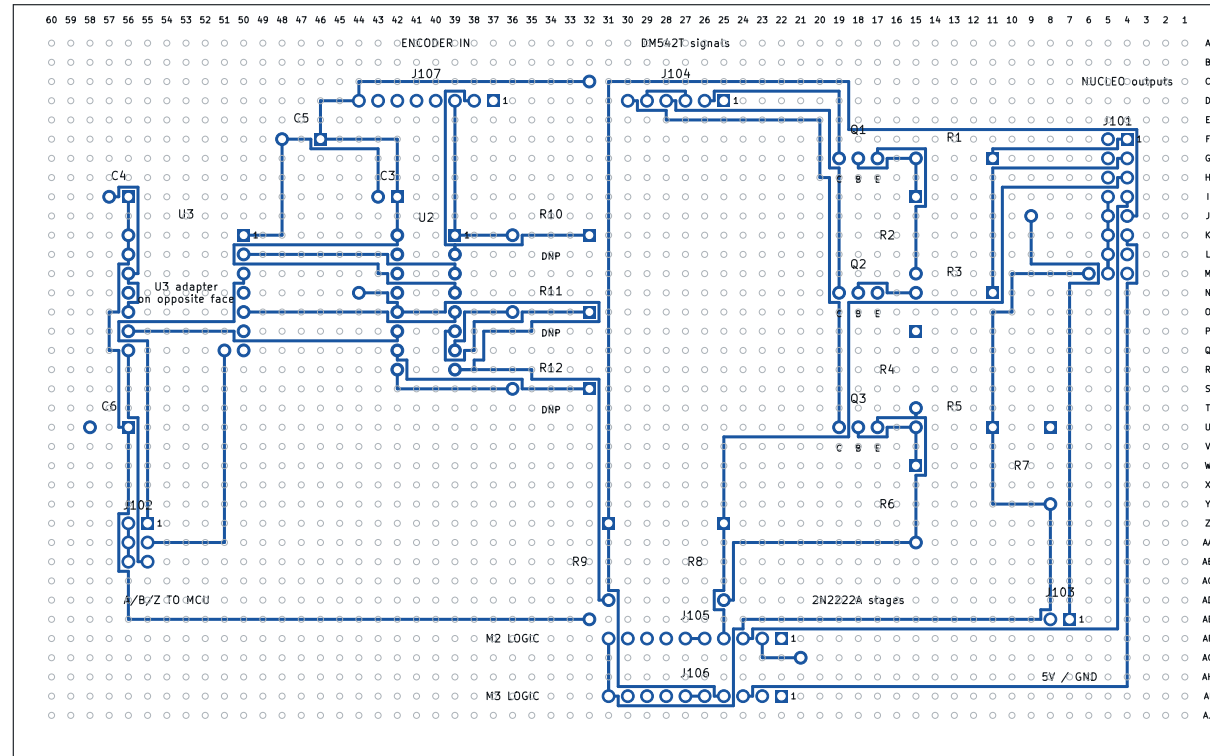


BOTTOM: solder-side view. Flip LEFT / RIGHT; row A stays at the top. Blue = bottom wires.

Parts are on the other face. Hole names remain unchanged; columns run 60 to 1 here.

R10–R12: DNP. Drivers, buck, Nucleo and storage stay off this board. NO 24 V on this board.

4 / 4 BOTH WIRE LAYERS – TOP VIEW

Tracks represent hand wiring. No copper fabrication. Header / IC pin 1 marked by a square pad.

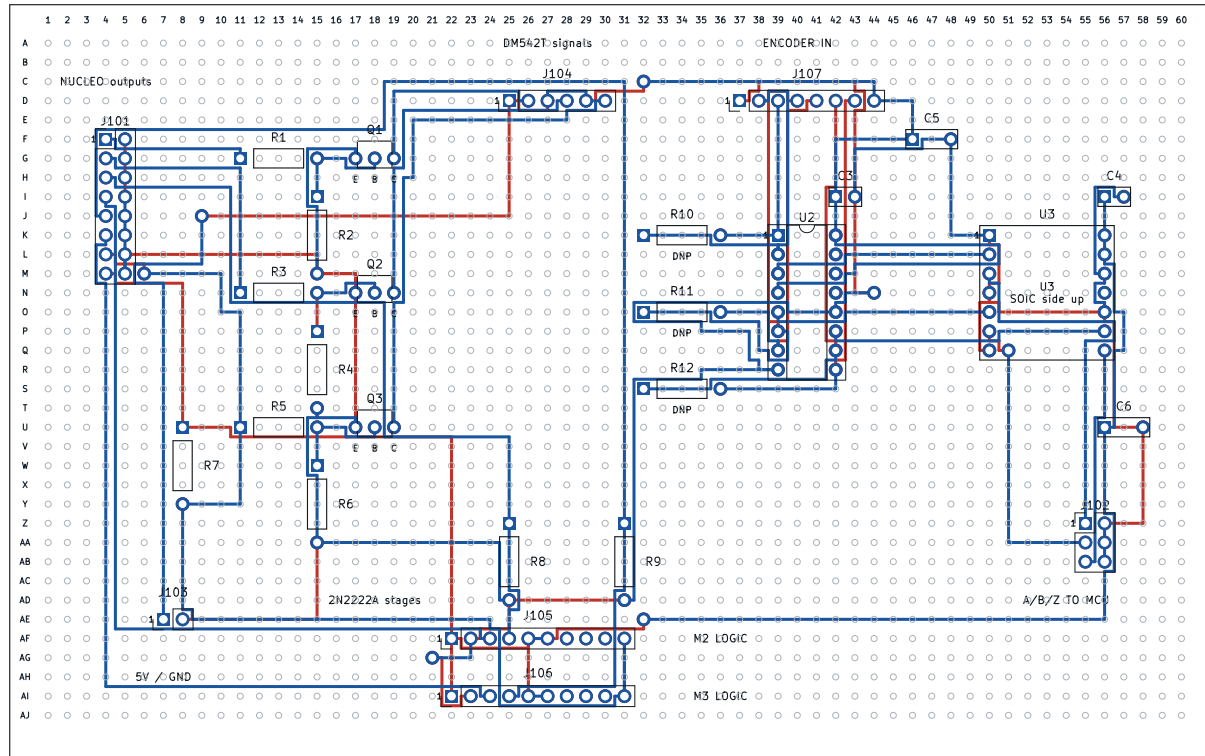

TOP: component view. B.Cu = solder-side wires; F.Cu = component-side jumpers.

U3: Adafruit 1210, 15.24 mm rows, SOIC face UP. Q1–Q3: Diotec E1/B2/C3; flat face DOWN.

R10–R12: DNP. Drivers, buck, Nucleo and storage stay off this board. NO 24 V on this board.