

Tracks represent hand wiring. No copper fabrication. Header / IC pin 1 marked by a square pad.



R10–R12: DNP. Buck on J103; VIN supports LIVE / no wires. Driver 24 V / motor cables stay on modules.

J101 to Nucleo CN10: 1->29 3->26 5->32 7->10 9->34 11->8 13->30

STEP: PA0 / PB10 / PB11, TIM2 AF1. DIR: PE12 / PE13 / PE14. EN\_N: PE15. Pin 15 -> CN8.7 (3V3).

Tracks represent hand wiring. No copper fabrication. Header / IC pin 1 marked by a square pad.




U3: SN74HC126N DIP-14, 7.62 mm rows, notch UP. Q1-Q6: Diotec E1/B2/C3; flat face DOWN.

R10–R12: DNP. Buck on J103; VIN supports LIVE / no wires. Driver 24 V / motor cables stay on modules.

J101 to Nucleo CN10: 1->29 3->26 5->32 7->10 9->34 11->8 13->30

STEP: PA0 / PB10 / PB11, TIM2 AF1. DIR: PE12 / PE13 / PE14. EN\_N: PE15. Pin 15 -> CN8.7 (3V3).

Tracks represent hand wiring. No copper fabrication. Header / IC pin 1 marked by a square pad.



Parts are on the other face. Hole names remain unchanged; columns run 60 to 1 here.


R10–R12: DNP. Buck on J103; VIN supports LIVE / no wires. Driver 24 V / motor cables stay on modules.

J101 to Nucleo CN10: 1->29 3->26 5->32 7->10 9->34 11->8 13->30

STEP: PA0 / PB10 / PB11, TIM2 AF1. DIR: PE12 / PE13 / PE14. EN\_N: PE15. Pin 15 -> CN8.7 (3V3).

# 4 / 4 BOTH WIRE LAYERS – TOP VIEW

Tracks represent hand wiring. No copper fabrication. Header / IC pin 1 marked by a square pad.

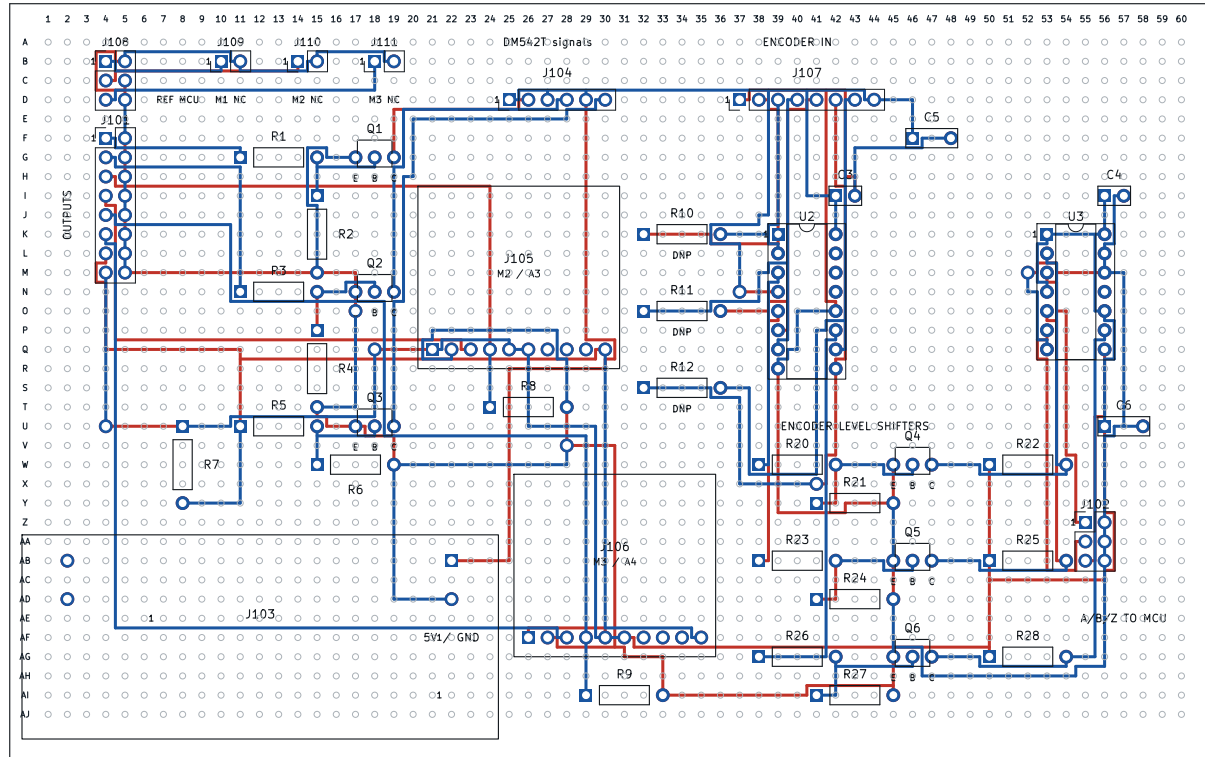

TOP: component view. B.Cu = solder-side wires; F.Cu = component-side jumpers.

U3: SN74HC126N DIP-14, 7.62 mm rows, notch UP. Q1-Q6: Diotec E1/B2/C3; flat face DOWN.

R10-R12: DNP. Buck on J103; VIN supports LIVE / no wires. Driver 24 V / motor cables stay on modules.

J101 to Nucleo CN10: 1->29 3->26 5->32 7->10 9->34 11->8 13->30

STEP: PA0 / PB10 / PB11, TIM2 AF1, DIR: PE12 / PE13 / PE14, EN\_N: PE15, Pin 15 -> CN8.7 (3V3).