24V input on GIGA shield | Local 3.3V display conversion | <=100 mm Type-A 80-way FFC

display

Datei: display.kicad_sch

ribbon

Datei: ribbon.kicad_sch

power


Datei: power.kicad_sch

Supply present

Supply present

ProtoMate		
Sheet: /		
File: display-adapter.kicad_sch		
Title: display-adapter / Smartwin display interface		
Size: A3	Date: 2026-10-15	**Rev: C**
KiCad E.D.A. 10.0.6		Id: 1/4

Bottom-mounted DF23 plug. Pin orientation follows Smartwin mechanical drawing Detail A. All supply/GND pins used.

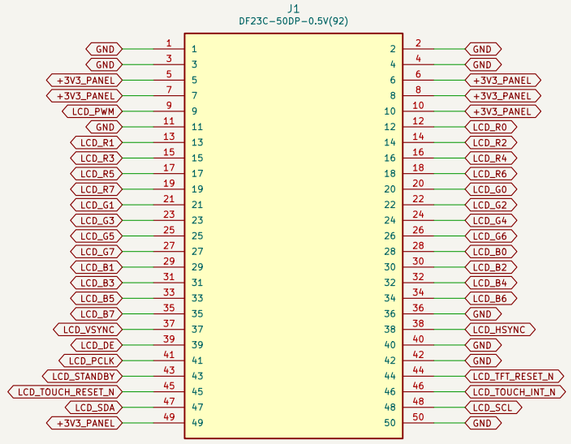


ProtoMate

Sheet: /display/
File: display.kicad_sch

Title: display-adapter / display


Size: A3	Date: 2026-10-15	**Rev: C**
KiCad E.D.A. 10.0.6		Id: 2/4


80-way Type-A (same-side contacts), 0.5mm pitch, 0.30mm mating thickness. GIGA pin n <-> display socket pin 81-n.

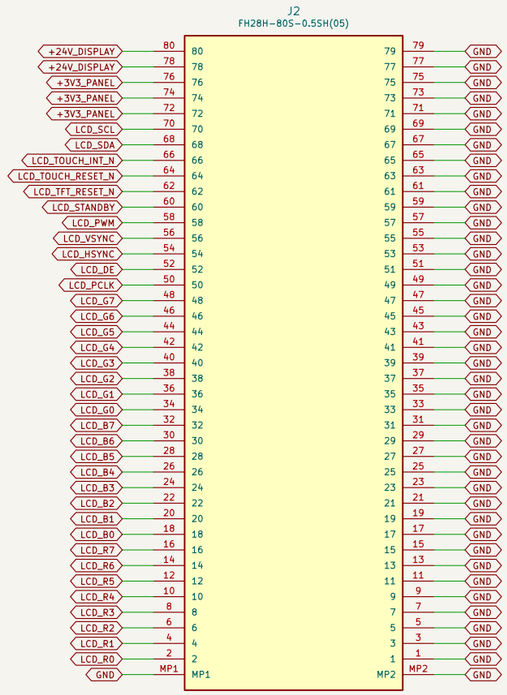



ProtoMate	
Sheet: /ribbon/	
File: ribbon.kicad_sch	
Title: display-adapter / ribbon	
Size: A3	Date: 2026-10-15
KiCad E.D.A. 10.0.6	**Rev: C**
	Id: 3/4


U1: 24V from ribbon -> 3.3V / 2A. Never join panel 3.3V to GIGA 3.3V. Module is hand soldered; trim leads.





















































ProtoMate

Sheet: /power/
File: power.kicad_sch

Title: display-adapter / power

Size: A3	Date: 2026-10-15	**Rev: C**
KiCad E.D.A. 10.0.6		Id: 4/4