
1 / 4 COMPONENT PLACEMENT — TOP VIEW

One continuous grid: A1:BM47. Hole-centre span: 116.84 x 162.56 mm.

Nominal outline: 119.38 x 165.10 mm. Print at 100%; ten intervals = 25.4 mm.

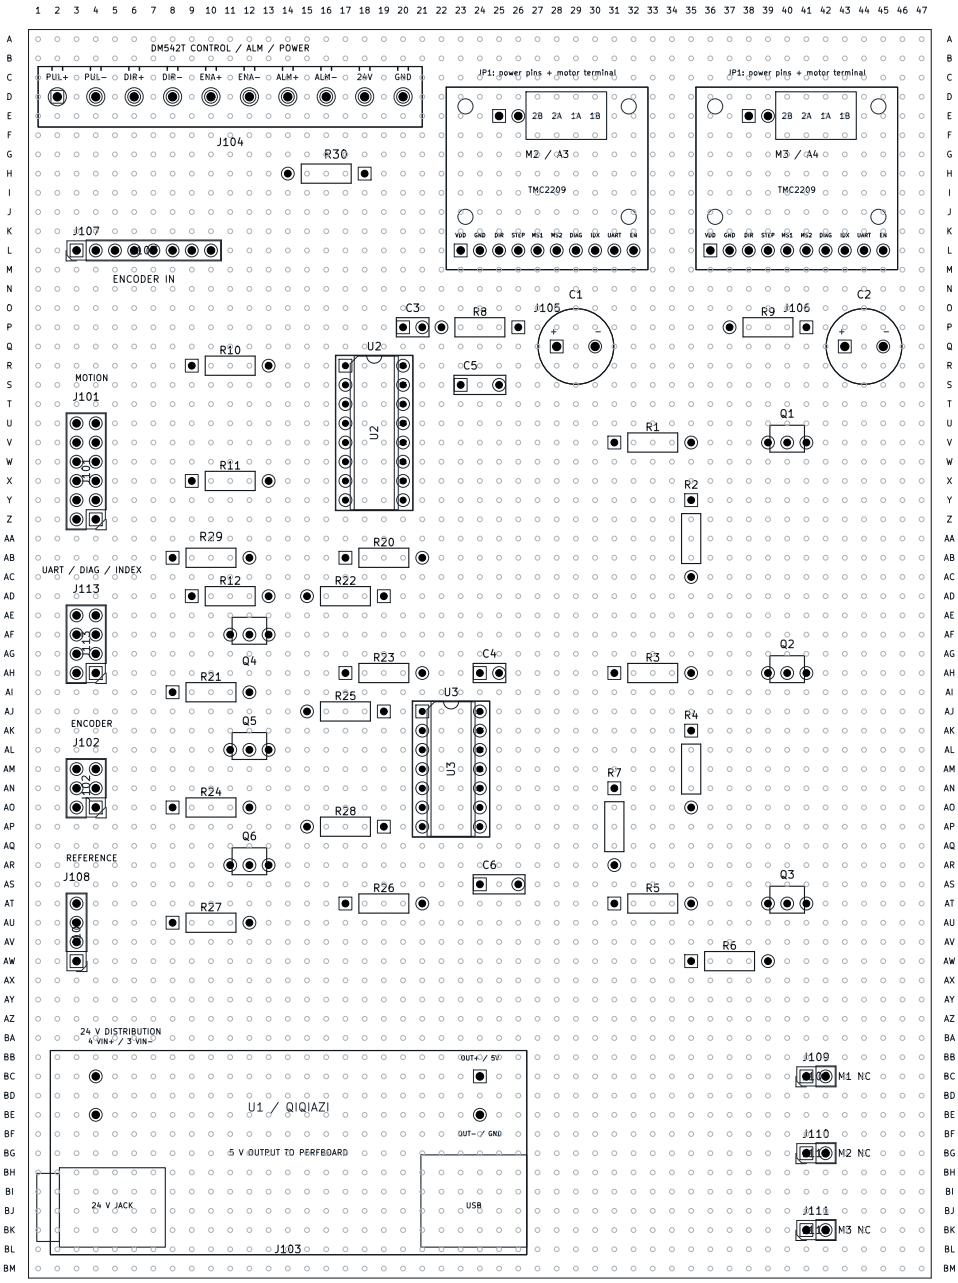

TOP: component view. Red = top jumpers; blue = bottom wires.

U2/U3 notch UP. Q1–Q6 Diotec E/B/C left to right; flat face DOWN.

Modules >=6 mm above board. Buck VIN -> J104.9/10 -> separate 24 V / GND driver branches.

J101 pins 1/3/5/7/9/11/12 -> GIGA A7/D4/D3/D6/D2/D16/D15.

J101.8 -> GIGA 3V3; .4 -> A3 (ALM); GND .2/.6/.10. R10–R12 DNP.


Solder all wire ends underneath. Red crossovers use free holes; keep their insulation intact.

Power: dedicated insulated 0.5 mm2 copper branches on underside. Capacitors C1/C2: observe + polarity.

2 / 4 TOP JUMPERS — COMPONENT SIDE

One continuous grid: A1:BM47. Hole-centre span: 116.84 x 162.56 mm.

Nominal outline: 119.38 x 165.10 mm. Print at 100%; ten intervals = 25.4 mm.

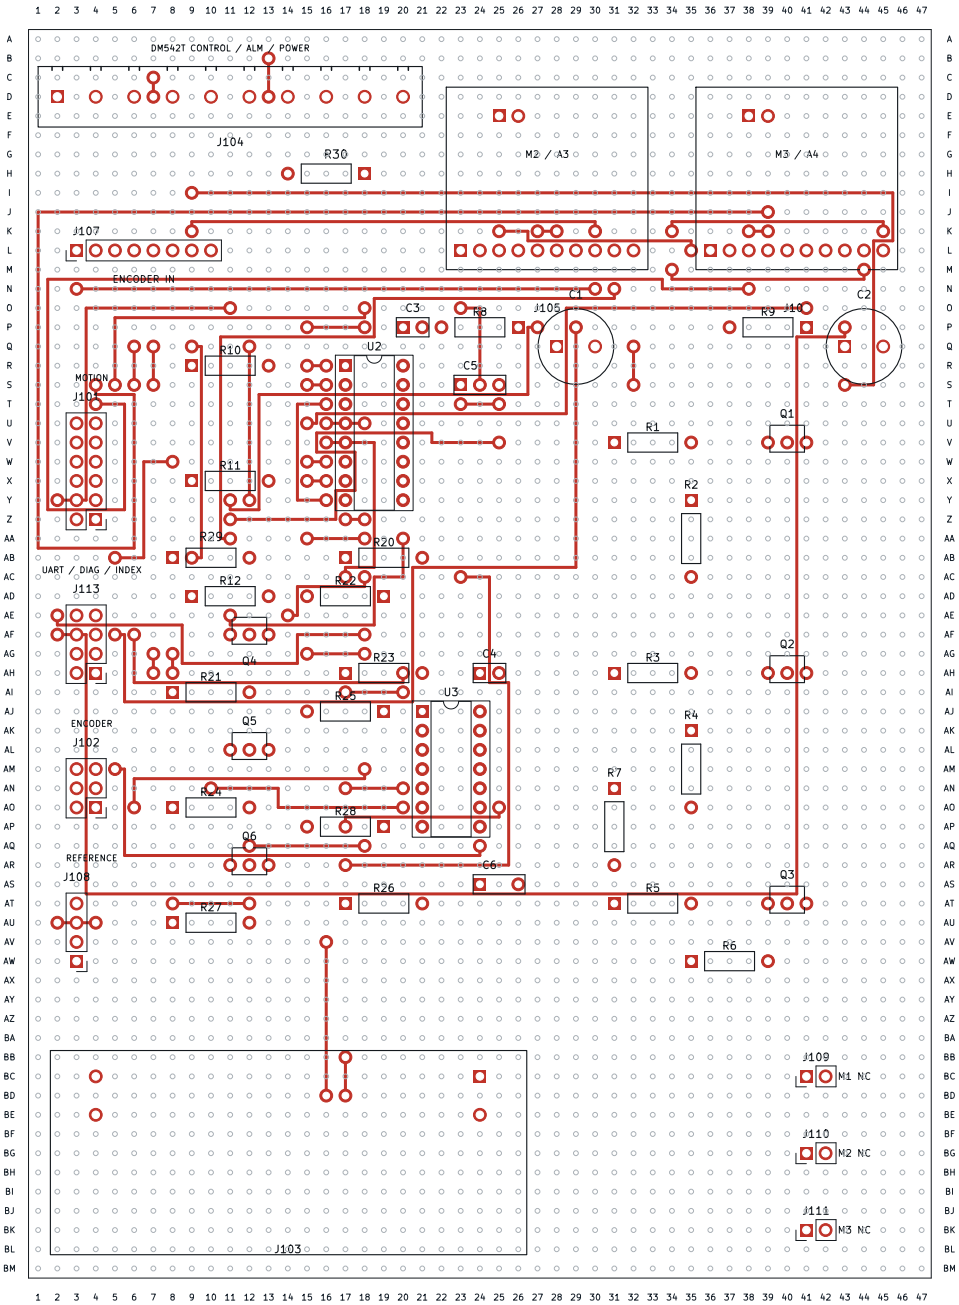

TOP: component view. Red = top jumpers; blue = bottom wires.

U2/U3 notch UP. Q1–Q6 Diotec E/B/C left to right; flat face DOWN.

Modules >=6 mm above board. Buck VIN -> J104.9/10 -> separate 24 V / GND driver branches.

J101 pins 1/3/5/7/9/11/12 -> GIGA A7/D4/D3/D6/D2/D16/D15.

J101.8 -> GIGA 3V3; .4 -> A3 (ALM); GND .2/.6/.10. R10–R12 DNP.


Solder all wire ends underneath. Red crossovers use free holes; keep their insulation intact.

Power: dedicated insulated 0.5 mm2 copper branches on underside. Capacitors C1/C2: observe + polarity.

3 / 4 BOTTOM WIRES — SOLDER SIDE, ALREADY MIRRORED

One continuous grid: A1:BM47. Hole-centre span: 116.84 x 162.56 mm.

Nominal outline: 119.38 x 165.10 mm. Print at 100%; ten intervals = 25.4 mm.

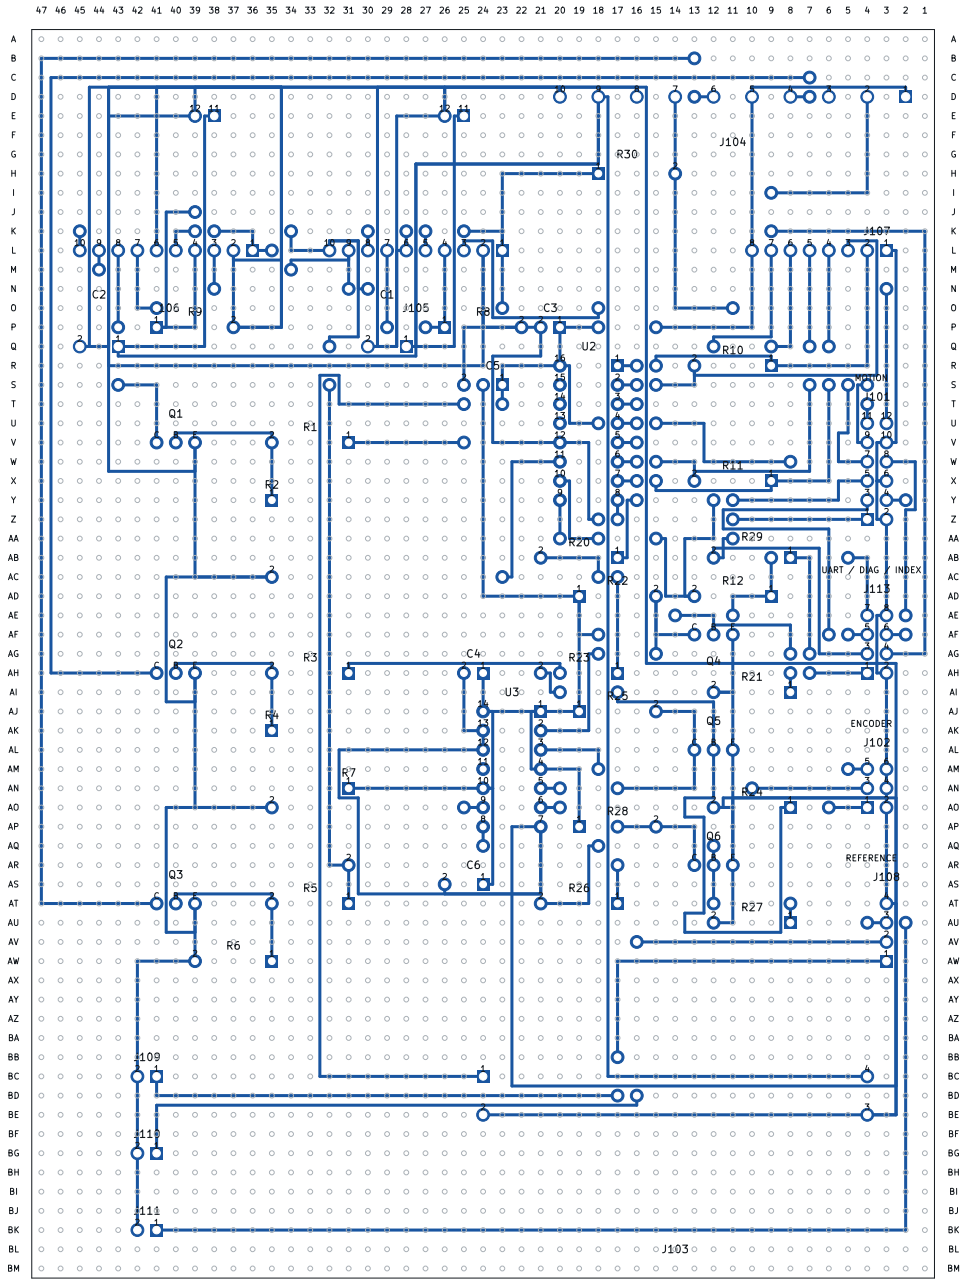

47 46 45 44 43 42 41 40 39 38 37 36 35 34 33 32 31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1

BOTTOM: solder side. Flip LEFT / RIGHT; row A stays at the top.

U2/U3 notch UP. Q1–Q6 Diotec C/B/E left to right on this face; flat face DOWN.

Modules >=6 mm above board. Buck VIN -> J104.9/10 -> separate 24 V / GND driver branches.

J101 pins 1/3/5/7/9/11/12 -> GIGA A7/D4/D3/D6/D2/D16/D15.

J101.8 -> GIGA 3V3; .4 -> A3 (ALM); GND .2/.6/.10. R10–R12 DNP.

Solder all wire ends underneath. Red crossovers use free holes; keep their insulation intact.


Power: dedicated insulated 0.5 mm2 copper branches on underside. Capacitors C1/C2: observe + polarity.

J113 1/3/5/7 -> GIGA D18/D19/A4/A6; 4/6 -> D8/D9 (INDEX); GND 2/8.

4 / 4 BOTH WIRE LAYERS — TOP VIEW

One continuous grid: A1:BM47. Hole-centre span: 116.84 x 162.56 mm.

Nominal outline: 119.38 x 165.10 mm. Print at 100%; ten intervals = 25.4 mm.

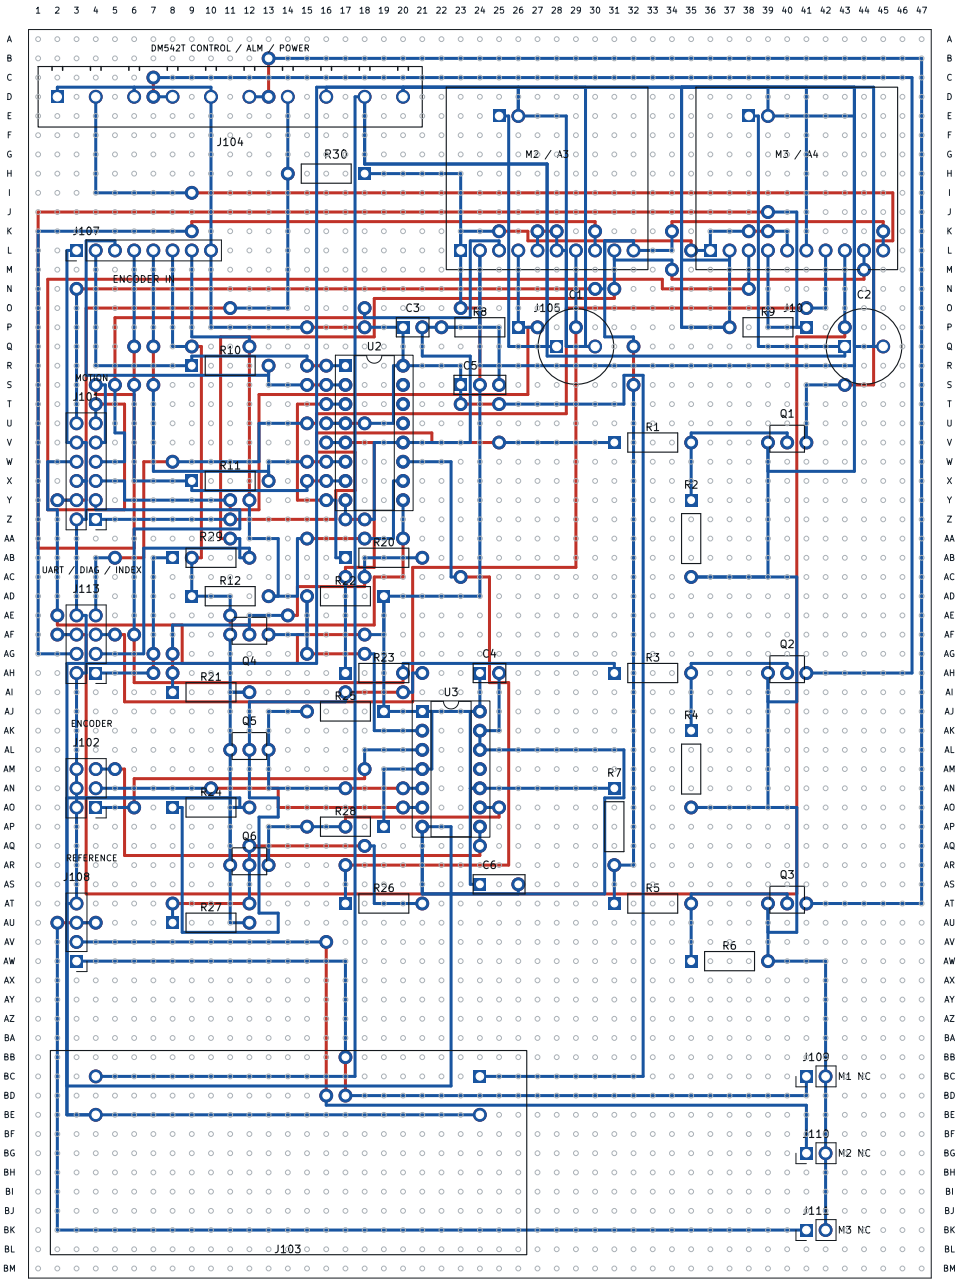

TOP: component view. Red = top jumpers; blue = bottom wires.

U2/U3 notch UP. Q1–Q6 Diotec E/B/C left to right; flat face DOWN.

Modules >=6 mm above board. Buck VIN -> J104.9/10 -> separate 24 V / GND driver branches.

J101 pins 1/3/5/7/9/11/12 -> GIGA A7/D4/D3/D6/D2/D16/D15.

J101.8 -> GIGA 3V3; .4 -> A3 (ALM); GND .2/.6/.10. R10–R12 DNP.

Solder all wire ends underneath. Red crossovers use free holes; keep their insulation intact.

Power: dedicated insulated 0.5 mm2 copper branches on underside. Capacitors C1/C2: observe + polarity.