


REV.	DESCRIPTION	DATE
Α	NEW DRAWING	10/14/2005

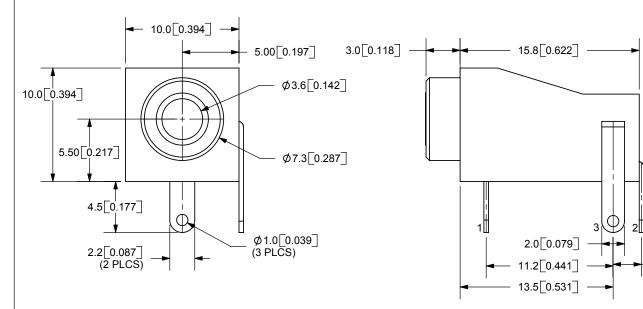





MODEL NO.	MJ-3536NG	
SCHEMATIC	°1 °3 °2	

SPECIFICATIONS: RATING: 12V DC @ 1A CONTACT RESISTANCE: 30m OHMS MAX INSULATION RESISTANCE: 50M OHMS MIN: 100V DC VOLTAGE WITHSTAND: 500V AC R.M.S. FOR 1 MINUTE LIFE: 5,000 CYCLES OPERATING TEMP: -25° ~ +85°C

INSULATION CAP

HOUSING

	MATERIAL	PLATING	
BUSHING	Brass	Nickel	TI
TERMINAL 1	Brass	Tin]''
TERMINAL 2	Copper Alloy	Tin	P
TERMINAL 3	Brass	Tin	

PC

PBT

9615 SW Allen, Suite 103 Beaverton, OR 97005 Phone: (503) 643-4899 800-275-4899

Fax: (503) 372-1266 Website: www.cui.com

3.5mm AUDIO JACK-MONO

PART NO. UNITS: MJ-3536NG MM [INCHES] APPROVED BY: SCALE: DRAWN BY: 3:1 ZRJ

PC FILE NAME:

MJ-3536NG COPYRIGHT 2005 BY CUI INC



TOLERANCE: X.X ±0.2mm

X.XX ±0.1mm X.XXX ±0.05mm

2.5 0.098

CUI INC

RoHS

Compliant

REV: