


BlinkM / I2C

status LED

USB


-
+
D
C

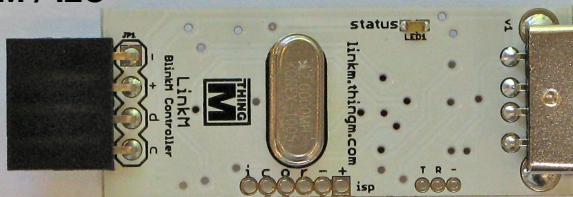

ISP header

serial port

top view

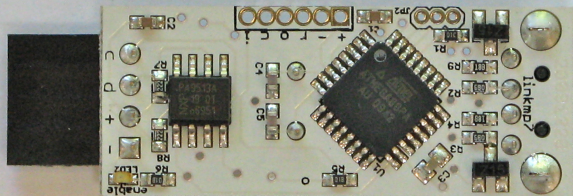

enable LED

bottom view