


coolant outlet conditions:

▲ water carry over
○ coolant temperature
□ coolant pressure

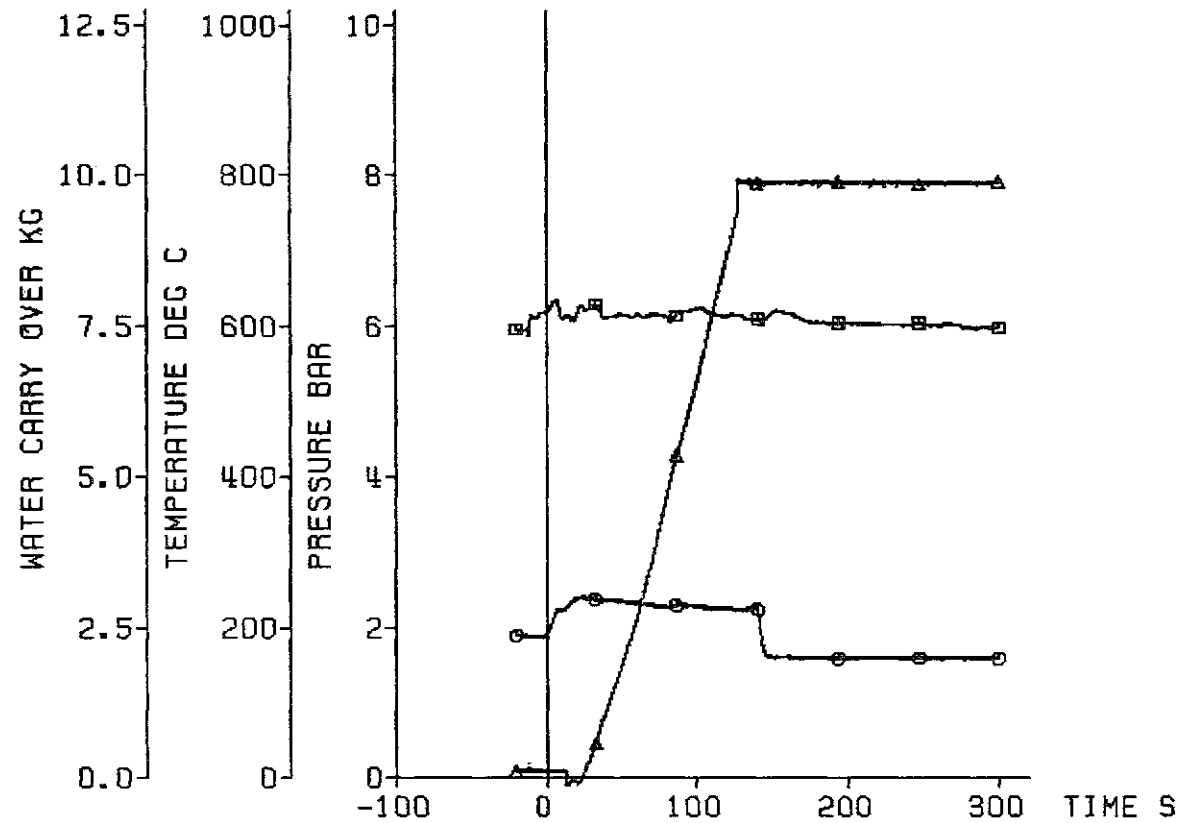

decay heat
flooding rate (cold)
system pressure
feedwater temperature

120% ANS standard
5.77 cm/s
6.15 bar
40 deg C

KfK
IRB

Fig. 192 FEBA: 5x5 ROD BUNDLE, TEST SERIES 2, TEST-No. 230