


coolant outlet conditions:

▲ water carry over
○ coolant temperature
■ coolant pressure

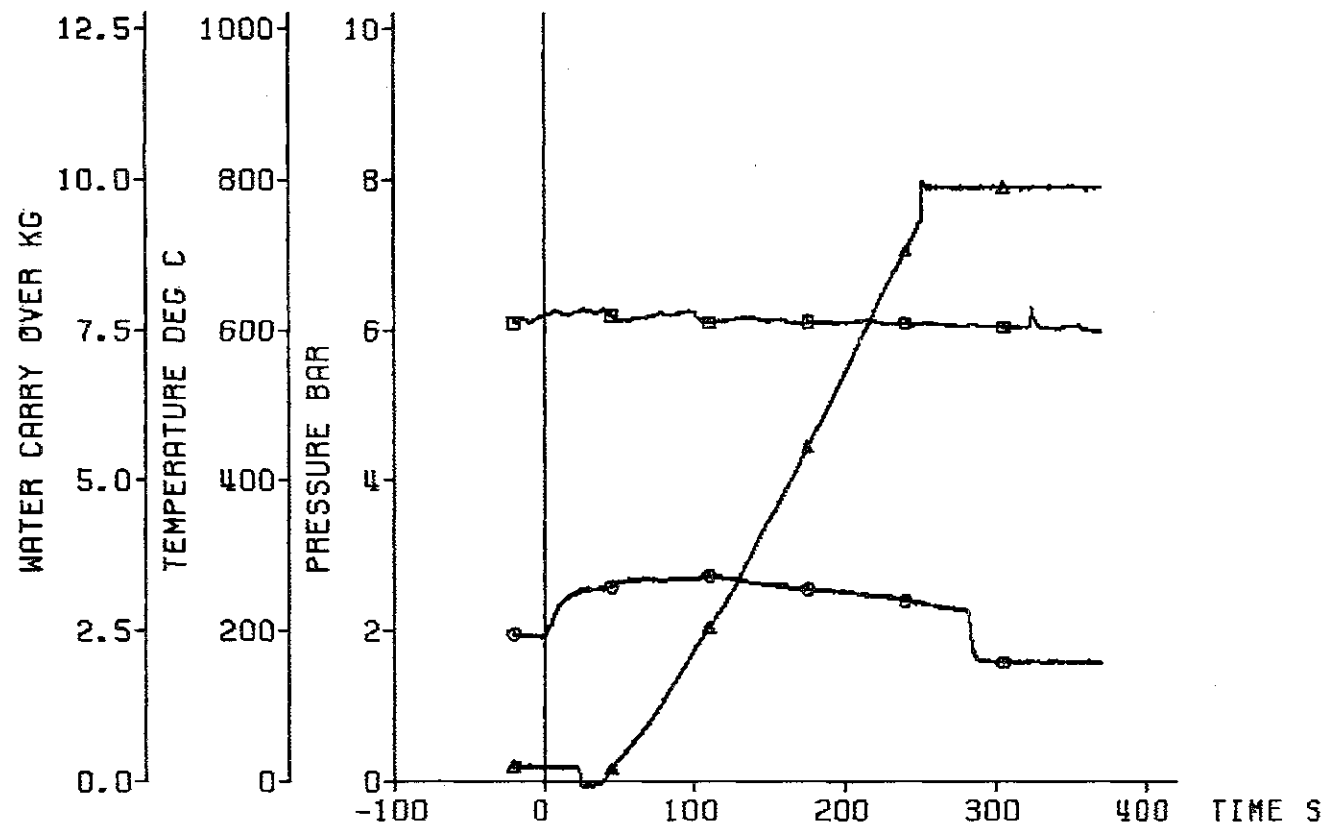

decay heat 120% ANS standard
flooding rate (cold) 3.80 cm/s
system pressure 6.19 bar
feedwater temperature 40 deg C

KfK
IRB

Fig. 147 FEBA: 5x5 ROD BUNDLE, TEST SERIES 2, TEST-No. 231