


coolant outlet conditions:

▲ water carry over
 ○ coolant temperature
 □ coolant pressure

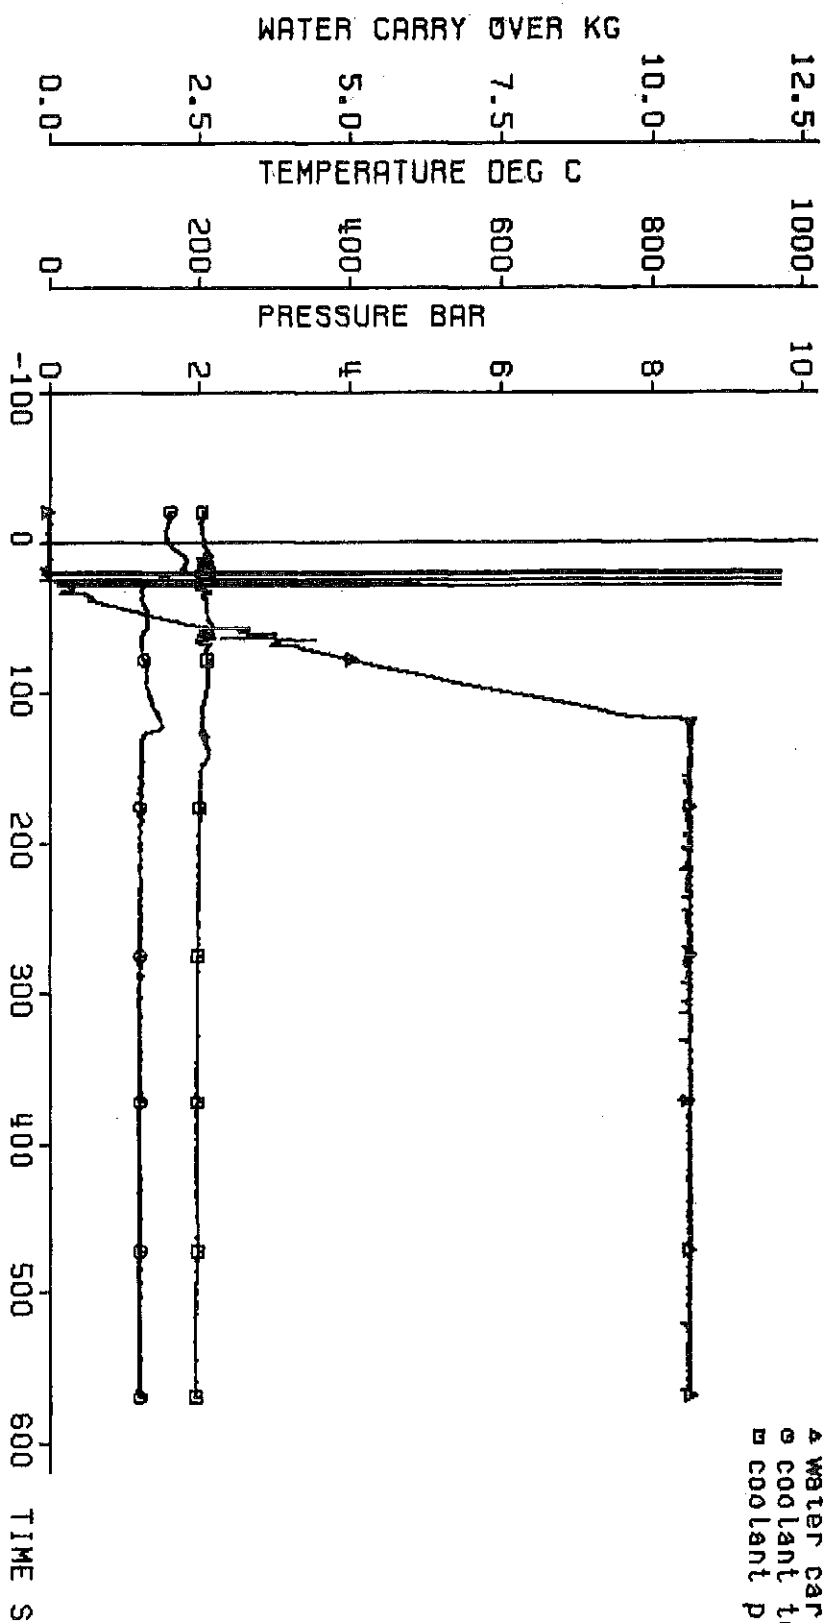

decay heat
 flooding rate (cold)
 system pressure
 feedwater temperature

120% ANS standard
 5.82 cm/s
 1.99 bar
 40 deg C

KIRB

Fig. 162 FEBRA: 5x5 ROD BUNDLE, TEST SERIES 2, TEST-NO. 233