


coolant outlet conditions:

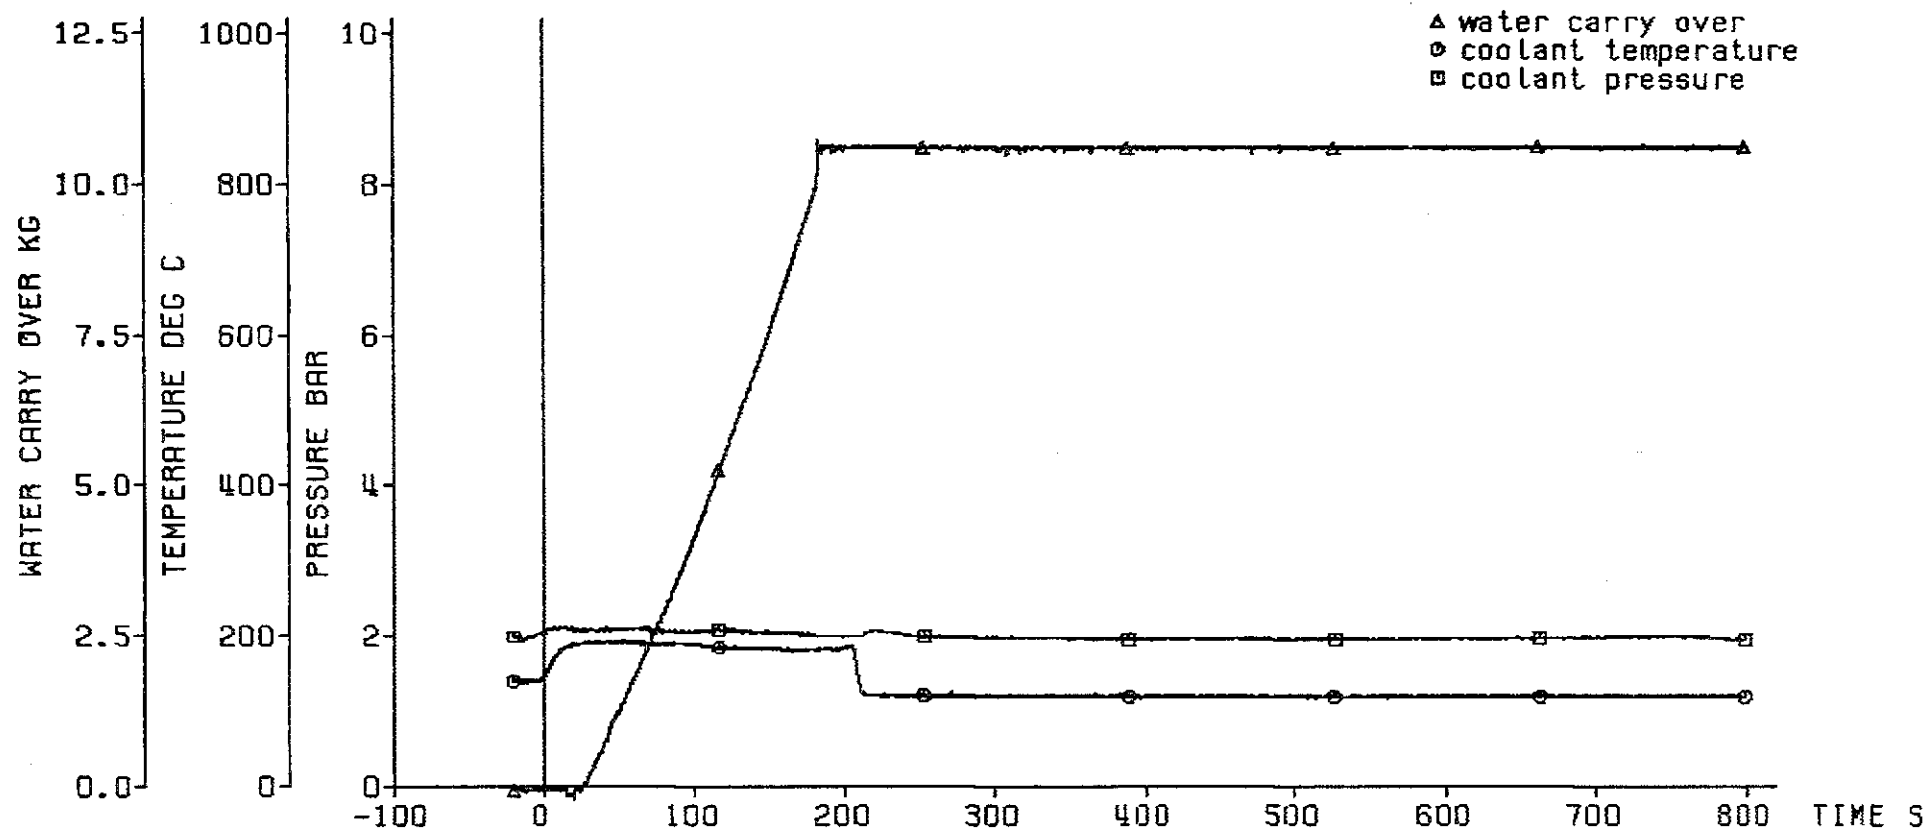

decay heat
flooding rate (cold)
system pressure
feedwater temperature

120% ANS standard
3.80 cm/s
2.02 bar
40 deg C

KJK
IRB

Fig. 117 FEBA: 5x5 ROD BUNDLE, TEST SERIES 2, TEST-No. 234