


cladding temperature

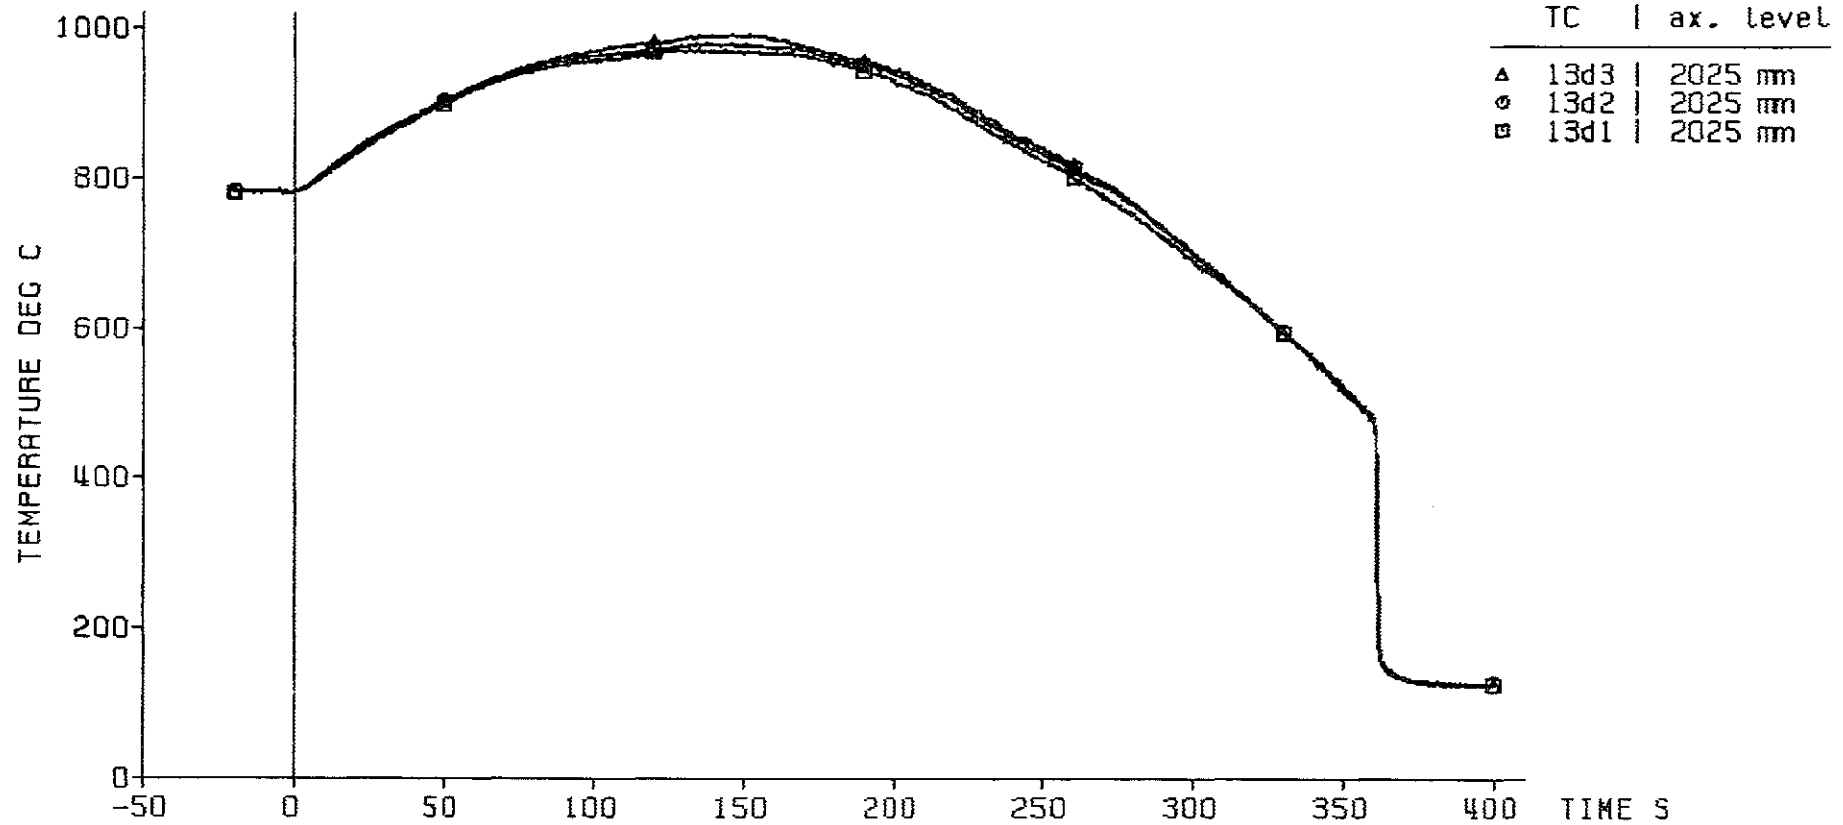

decay heat 120% ANS standard
 flooding rate (cold) 3.80 cm/s
 system pressure 2.02 bar
 feedwater temperature 40 deg C

KIRB

Fig. 110 FEBA: 5x5 ROD BUNDLE, TEST SERIES 2, TEST-No. 234