


cladding temperature

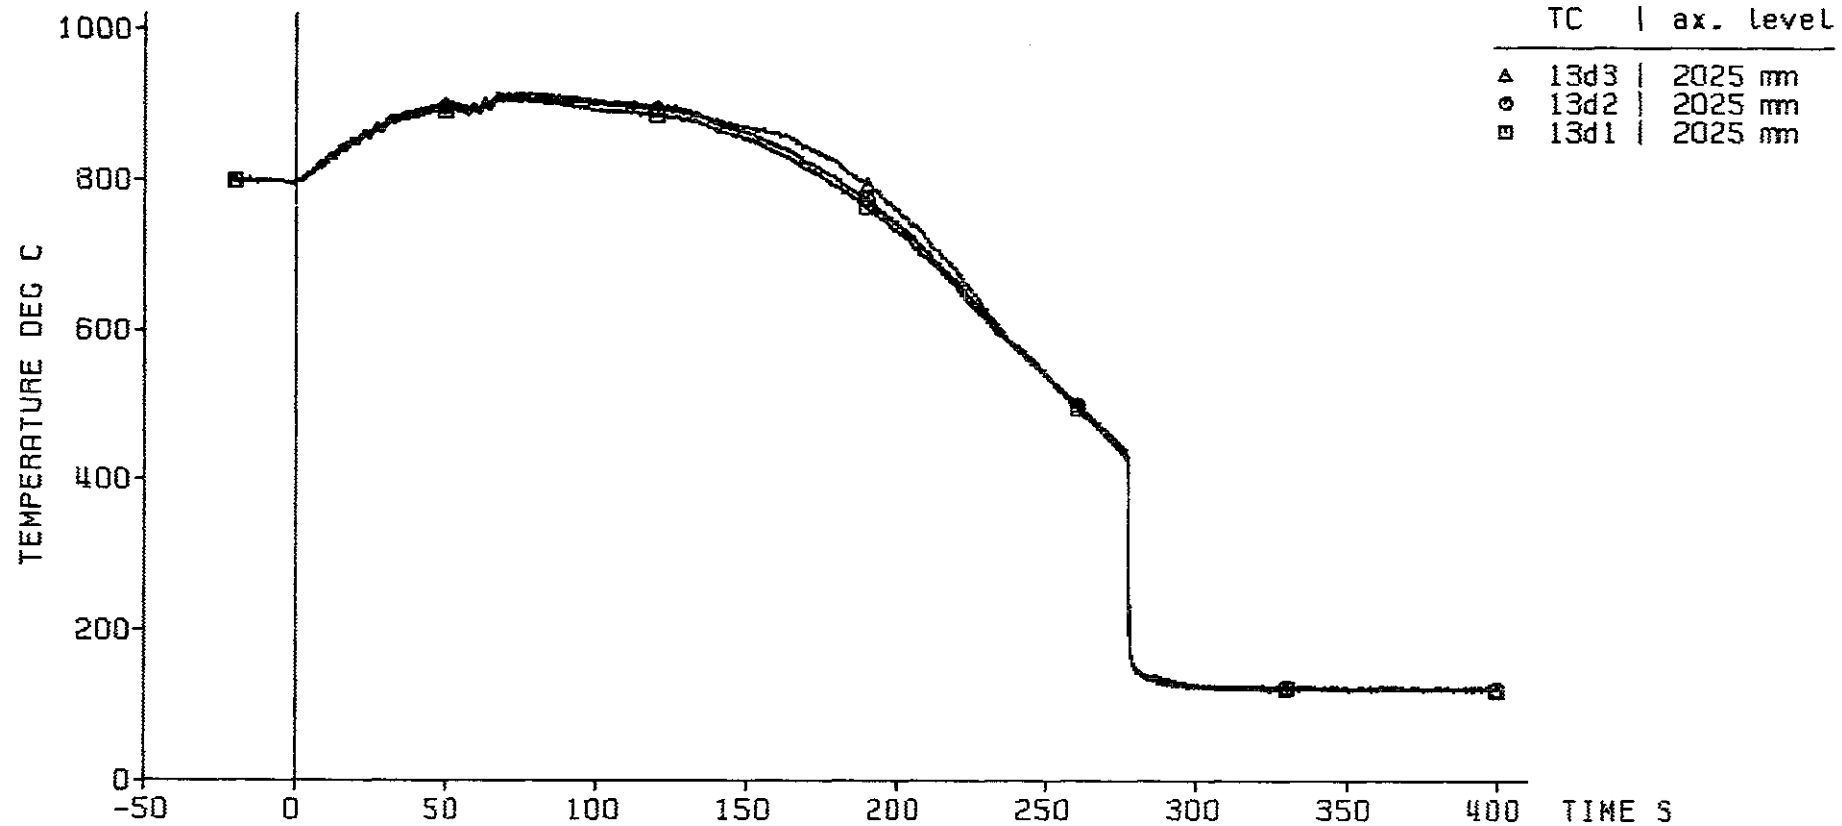

decay heat 120% ANS standard
 flooding rate (cold) 5.82 cm/s
 system pressure 1.99 bar
 feedwater temperature 40 deg C

KfK
 ITRB

Fig. 155 FEBA: 5x5 ROD BUNDLE, TEST SERIES 2, TEST-No. 233