


axial level: 1625 mm

△ cladding temperature (19g1)
○ fluid temperature
□ housing temperature

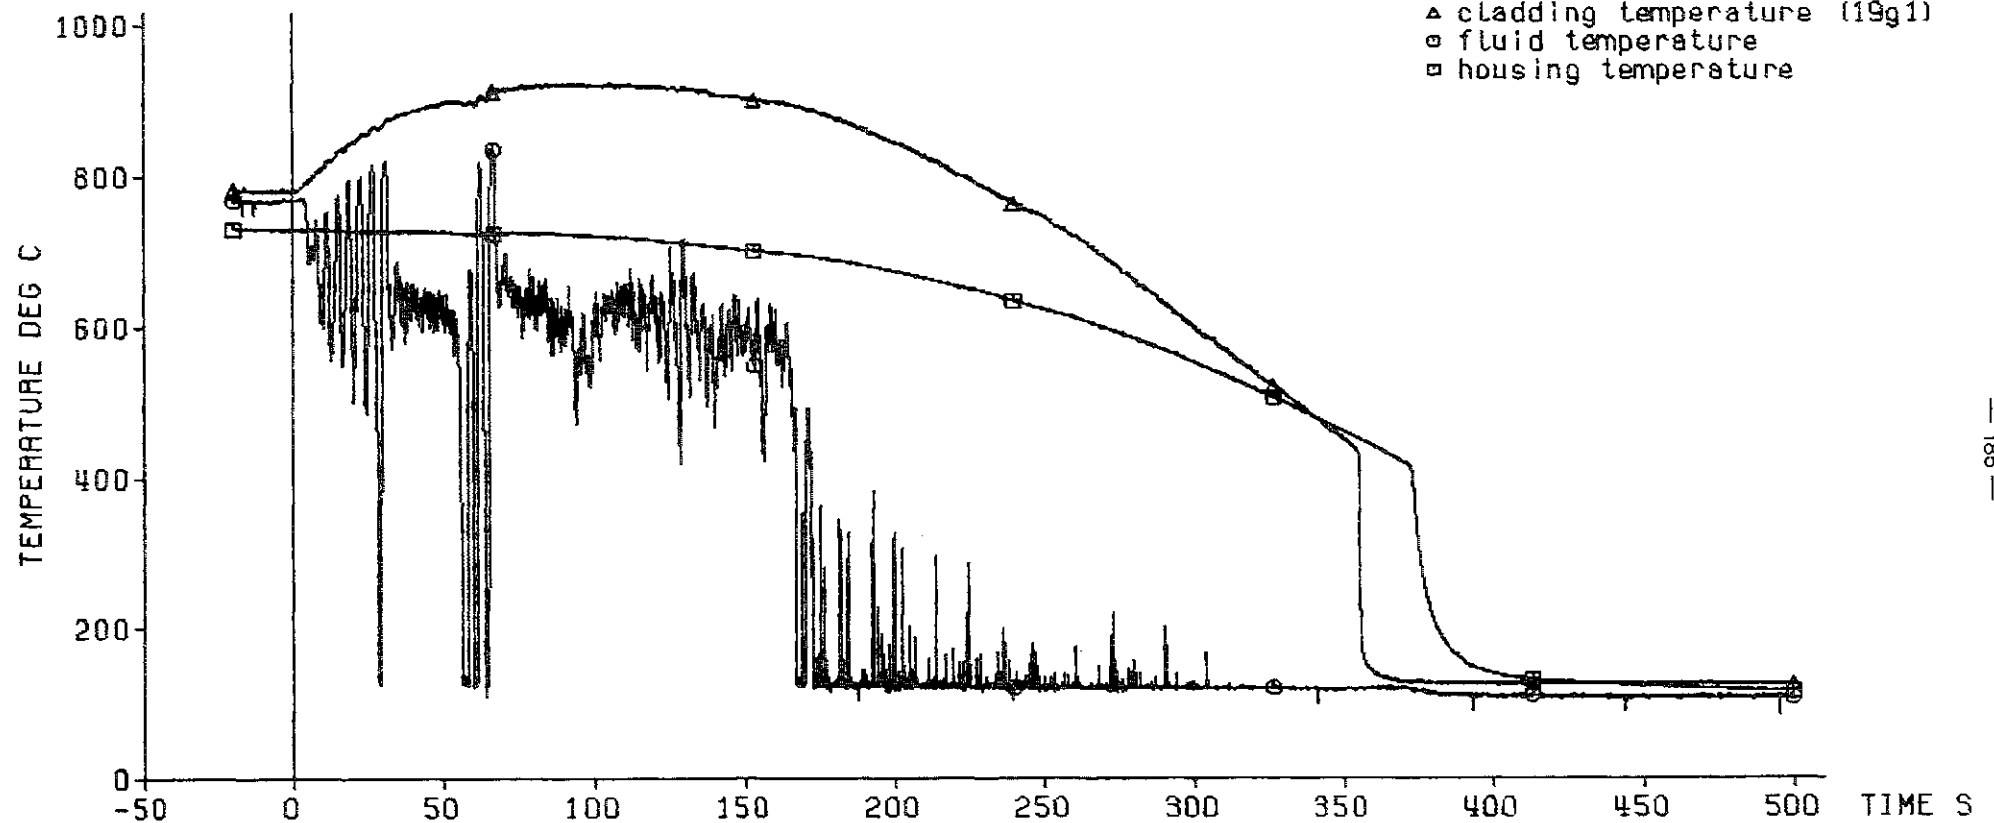

decay heat 120% ANS standard
flooding rate (cold) 5.82 cm/s
system pressure 1.99 bar
feedwater temperature 40 deg C

KfK
KITB

Fig. 160 FEBA: 5x5 ROD BUNDLE, TEST SERIES 2, TEST-No. 233