


cladding temperature

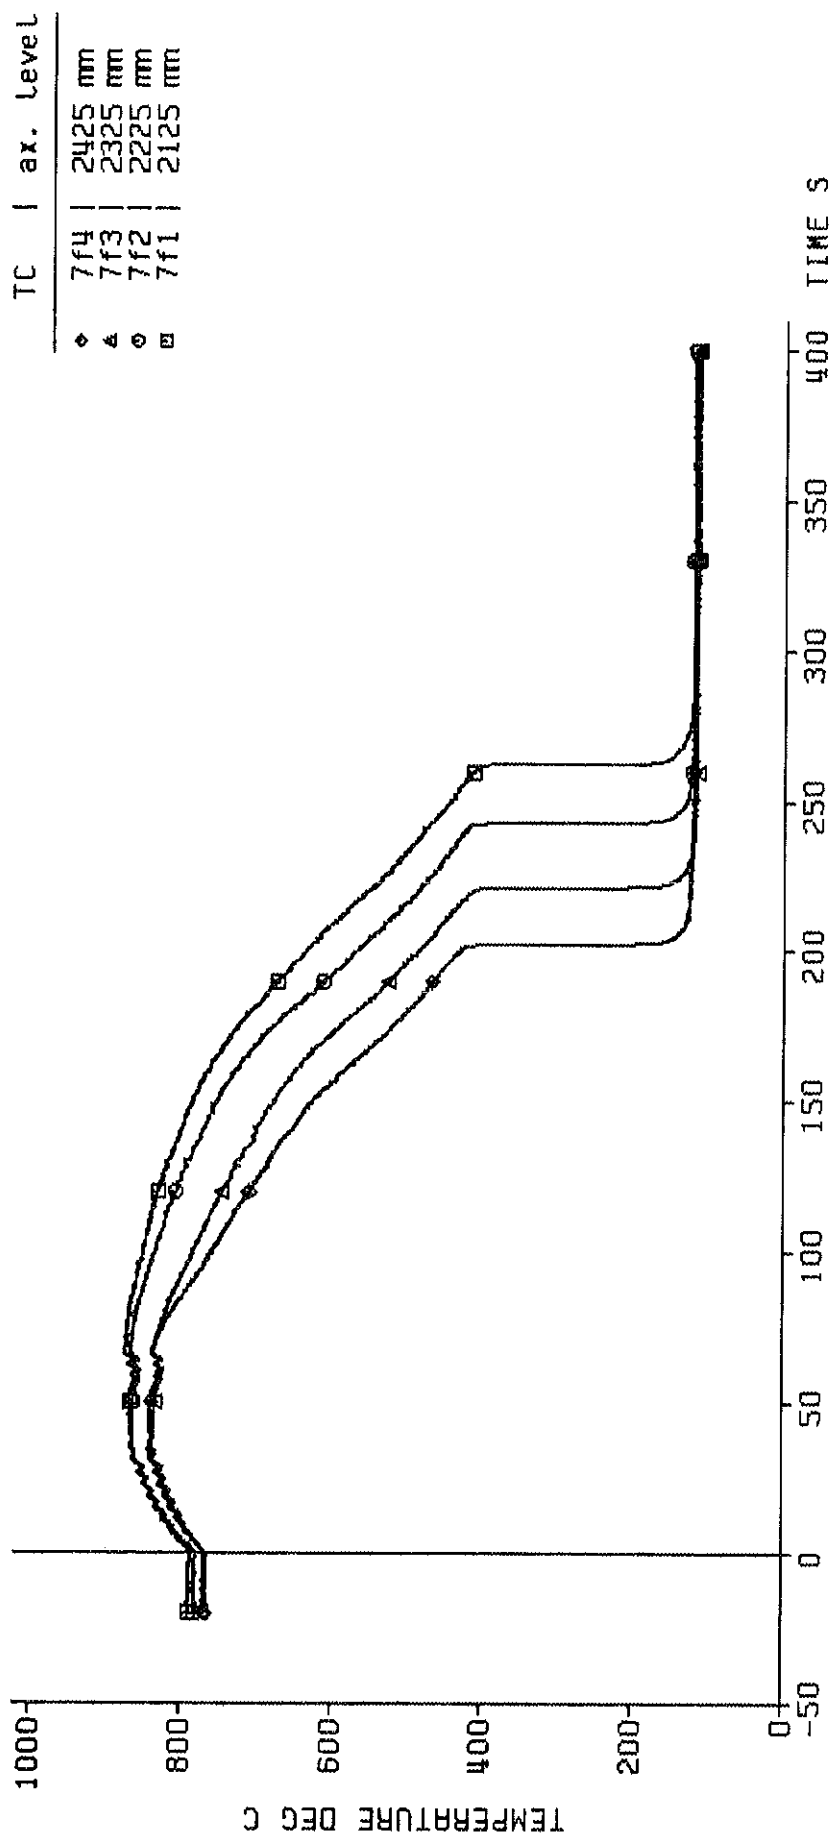

decay heat 120% RMS standard  
 flooding rate (cold) 5.82 cm/s  
 system pressure 1.99 bar  
 feedwater temperature 40 deg C

KITRB

Fig. 153 FEBRA: 5x5 ROD BUNDLE, TEST SERIES 2, TEST-NO. 233