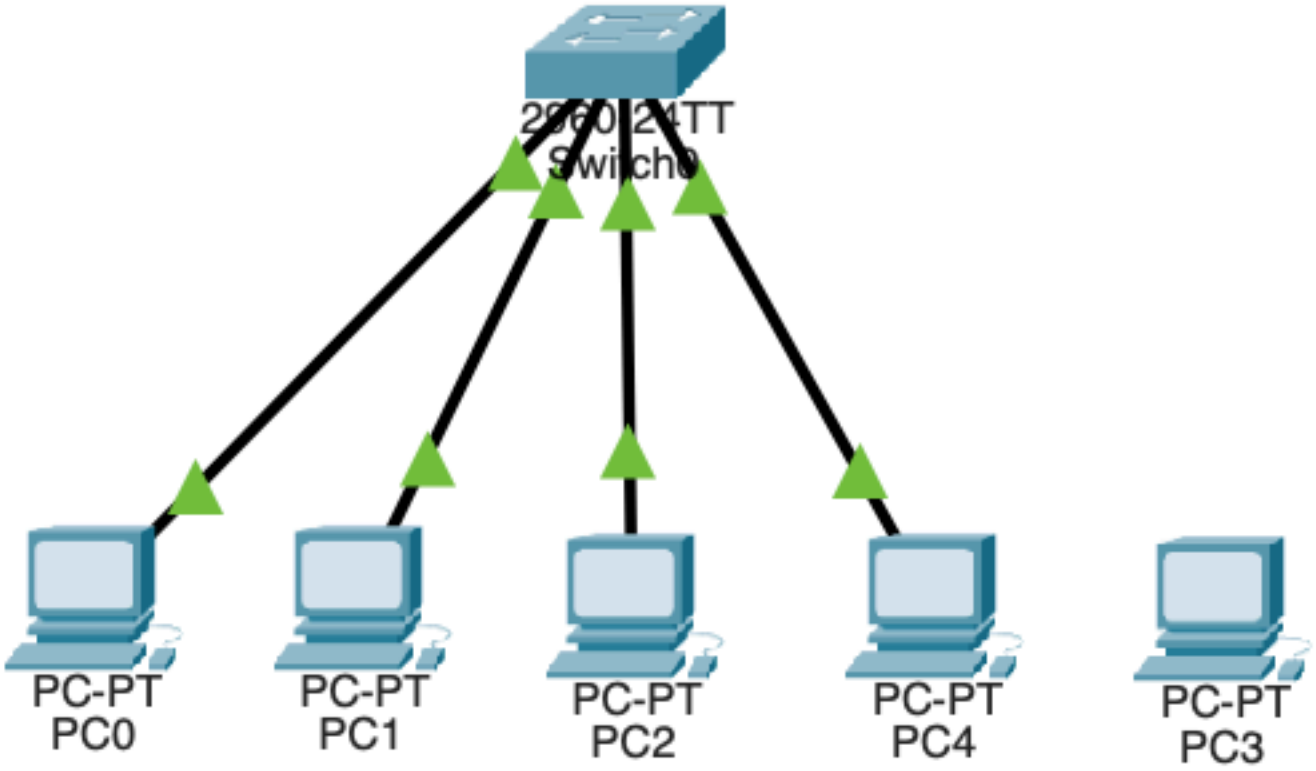


- Built a network with one Cisco 2960 switch and five PCs.
- Connected all 5 PCs to the switch using straight-through cables.
- Assigned static IP addresses in the same subnet.
- Verified connectivity between All PCs using ping.
- Configured port security on Fa0/3 to allow one MAC address.
- Enabled sticky MAC learning to learn PC2's MAC address automatically.
- Set the violation mode to shut down the port.
- Verified the learned MAC address and port-security status.
- Replaced PC2 with unauthorized PC3 and generated traffic.
- Confirmed the security violation err-disabled the port.
- Reconnected PC2 and restored the port using shutdown and no shutdown.
- Verified connectivity again and saved the switch configuration and Packet Tracer file.