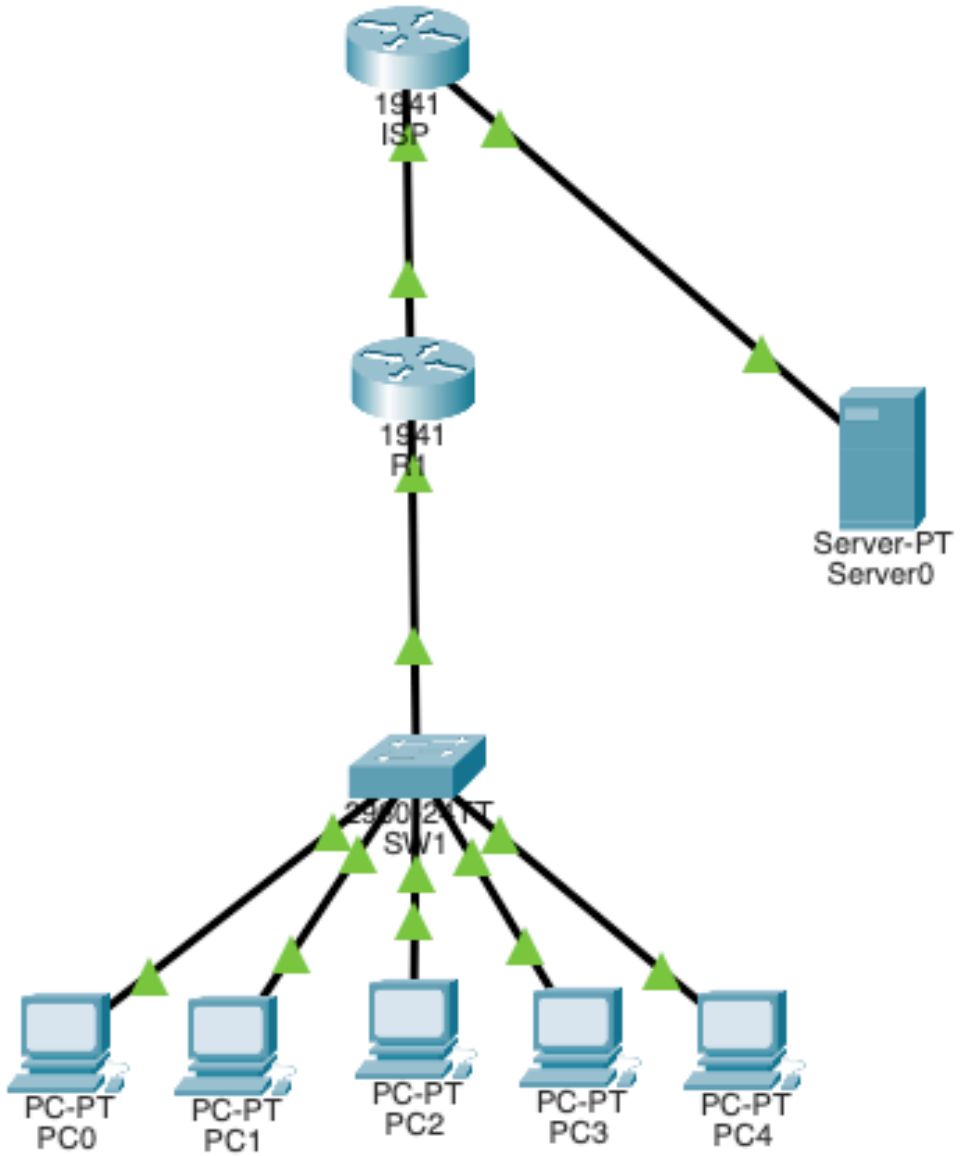

- Built a topology with five PCs, one switch, two routers, and a server.
- Connected the devices using crossover cables and assigned IP addresses, subnet masks, and default gateways.
- Enabled the router interfaces using no shutdown and assigning appropriate IP addresses
- Verified connectivity between directly connected devices.
- Added a default route on R1 pointing toward ISP.
- Tested server access before NAT to establish a baseline.
- Created ACL 1 to select the 192.168.10.0/24 network for translation.
- Marked R1's LAN interface as NAT inside (192.168.10.1) and its ISP-facing interface as NAT outside (198.51.100.1).
- Configured NAT overload so both PCs could share R1's outside IP address.
- Tested server access from both PCs using ping and a web browser.
- Checked translations using show ip nat translations and show ip nat statistics.
- Saved the router configurations and Packet Tracer project.