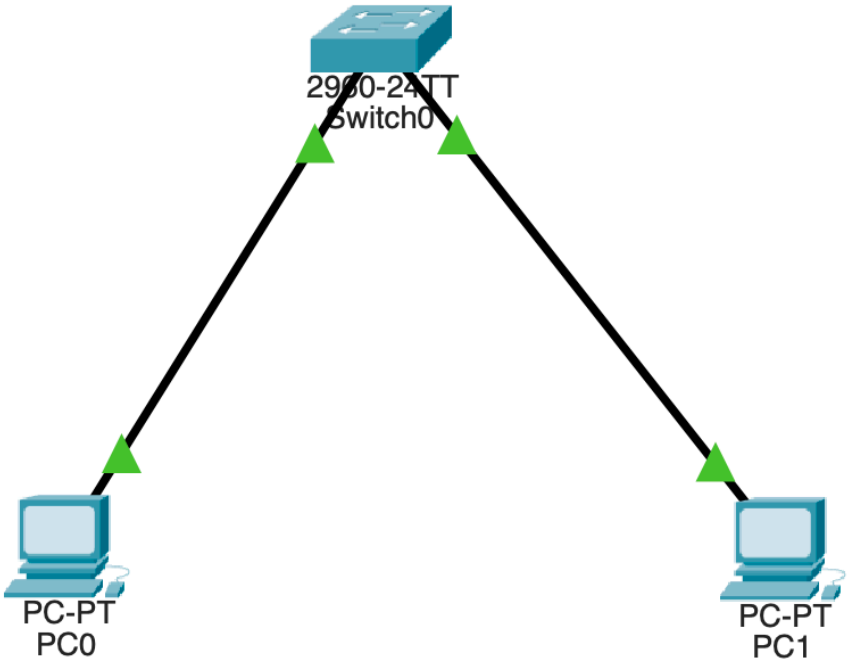


Created VLAN 10 and named it SALES to logically segment the network.
Configured switch ports Fa0/1 and Fa0/2 as access ports.
Assigned both switch ports to VLAN 10 using switchport access vlan 10.
Configured PC1 and PC2 with IP addresses in the same subnet (192.168.10.0/24).
Verified VLAN assignments using show vlan brief.
Tested connectivity between PCs using the ping command.
Moved PC2's port to VLAN 20 to observe how VLAN segmentation affects communication between devices.
Learned that devices in different VLANs generally require inter-VLAN routing to communicate, even if they have IP addresses in the same subnet.