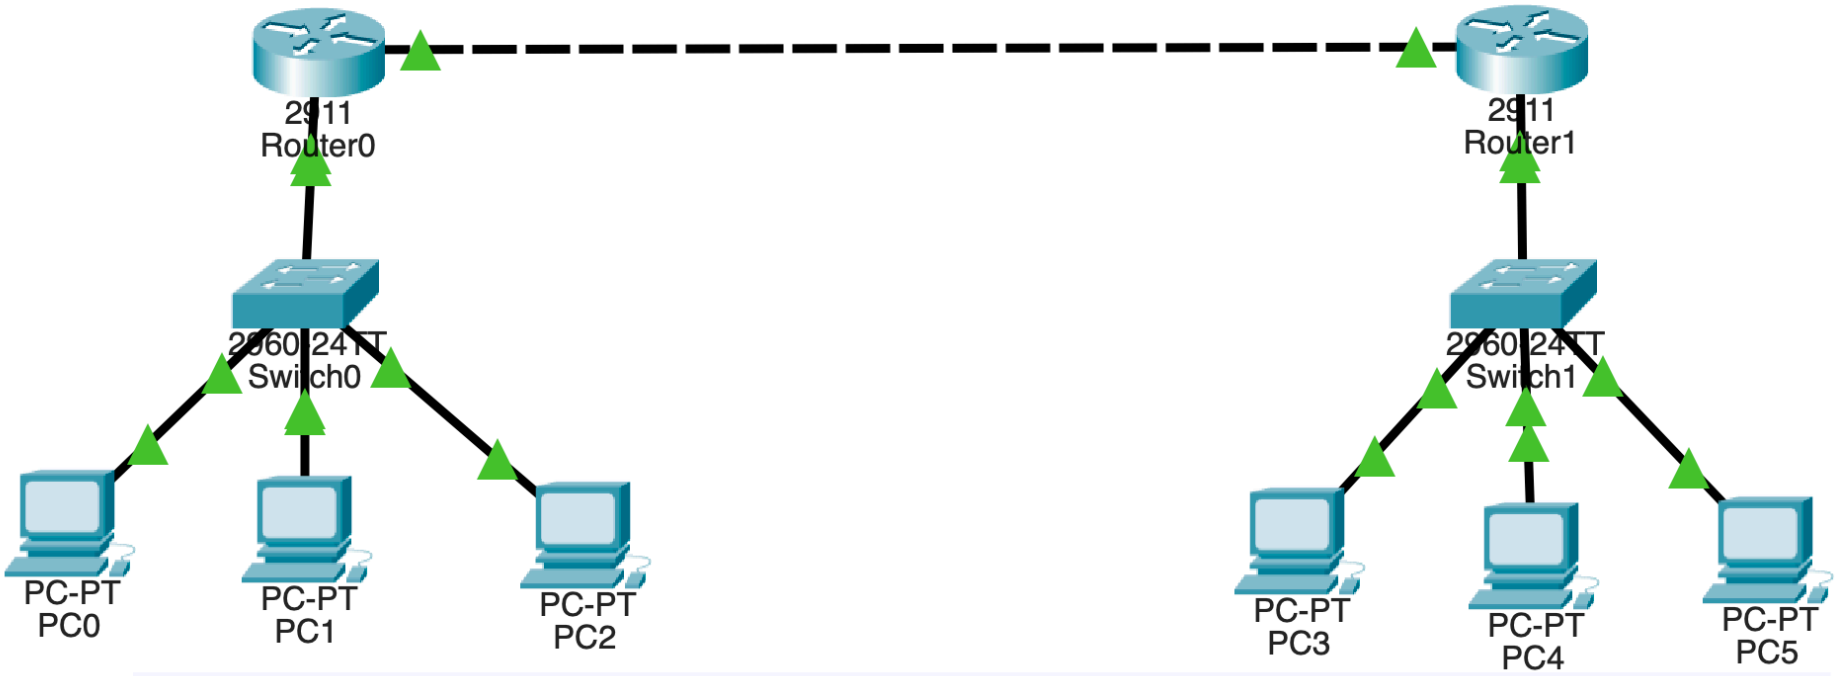



- Built a network topology using two Cisco routers, two switches, and two PCs.
- Configured IPv4 addresses on router interfaces to connect two separate LANs.
- Enabled router interfaces using the no shutdown command.
- Configured PC IP addresses, subnet masks, and default gateways.
- Created static routes on both routers using the ip route command to reach remote networks.
- Verified router interface status using show ip interface brief.
- Inspected routing tables using show ip route to confirm route entries.
- Tested connectivity between routers and end devices using the ping command.
- Practiced removing static routes using the no ip route command.
- Learned the difference between a PC default gateway, a Layer 2 switch default gateway, and a router default route.
- Saved router configurations using copy running-config startup-config.