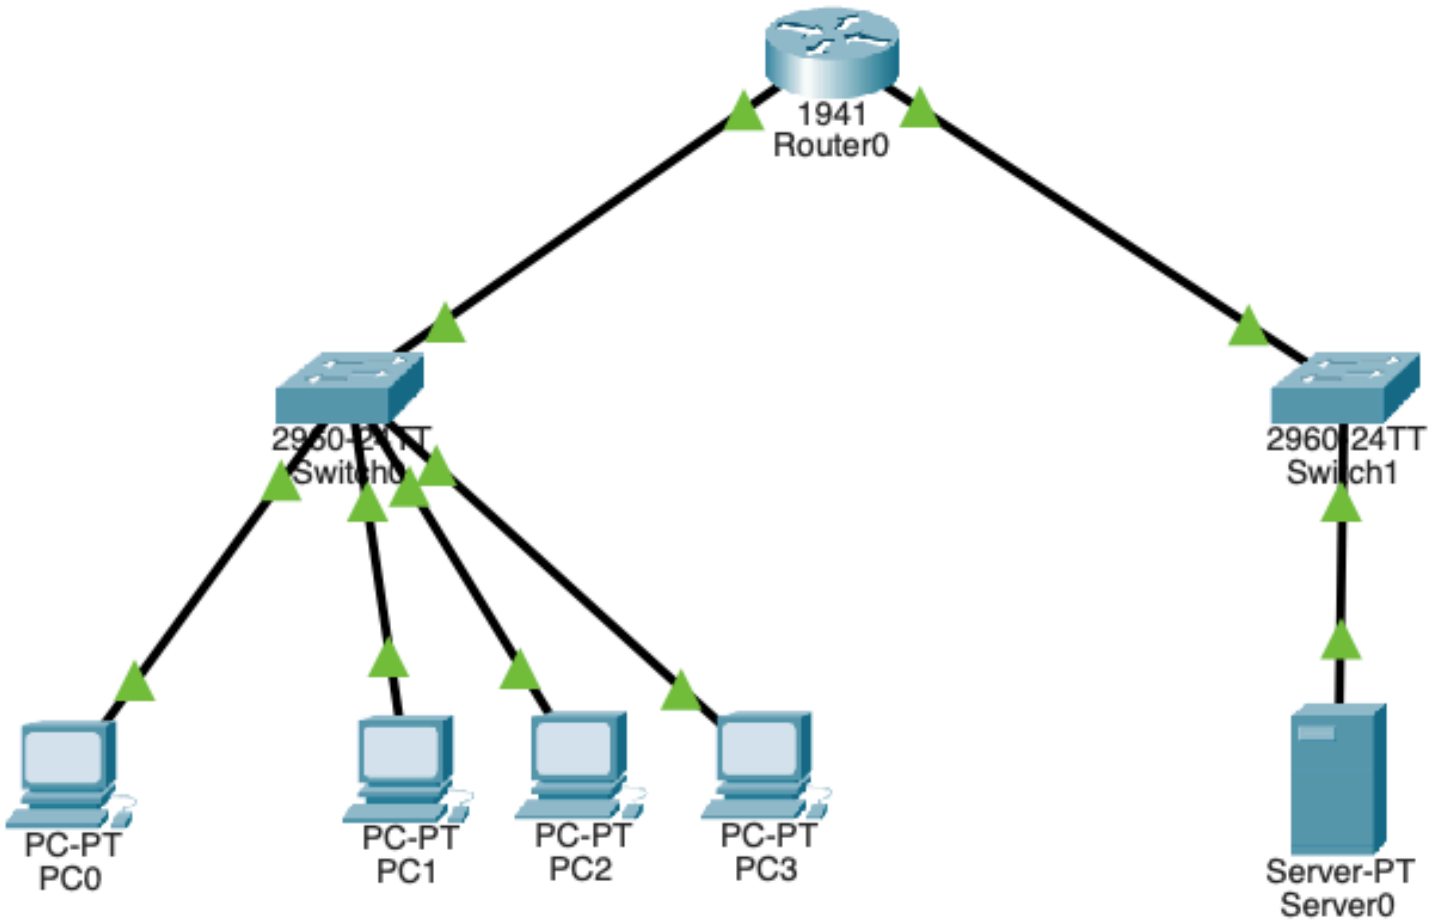


- Built a simple network with ACLs using one router, two switches, four PCs, and a server.
- Assigned IP addresses, subnet masks, and default gateways across two subnets (192.168.10.0/24 & 192.168.20.0/24 subnets)
- Configured and enabled the router interfaces (Gig0/0 and Gig0/1)
- Tested connectivity before applying filtering using ping command between all devices.
- Created an extended ACL to block IPs 192.168.10.11-192.168.10.13 from reaching the server while allowing other traffic (ip any any)
- Applied the ACL inbound on the router's client-facing interface (Gig0/0)
- Verified that PC1-3 were blocked while PC0 could still reach the server by using ping command.
- Used show access-lists and show ip interface to check the ACL rules and placement.
- Reviewed first-match processing, rule order, and the implicit deny.
- Practiced writing rules to block three specific host addresses while allowing others.
- Saved the router configuration and Packet Tracer project.