

## THE FACEPLATE



- HEADER** — presets · Bypass · Output trim (−24...+12 dB)
- VALVE** (*new*) — triode preamp: Drive, Bias (even harmonics), Sag (tube compression), Tone (transformer), Mix. Switches: on/off, Output (move to end of chain), Echo Amp (valve inside the tape machine). The lamp glows with the drive.
- FILTER** — the Big Dial (11 steps, 18 dB/oct high-pass) + Impedance, Magnetism, Character, Dynamics, Artefacts, Gain. Switches: on/off, Bank B, Post.
- ECHO** — Time, Feedback, Input, Output, Hiss, Mix, Wear. Switches: on/off, Sync, Dub Send.
- MOD** — LFO (5 shapes, free or synced) and envelope follower, both steering the Big Dial in ±3 octaves.
- SPRING** — Spring (amount), Tension (decay), Drive (crash).


## DIAL POSITIONS (HZ)

| STEP   | 1  | 2   | 3   | 4   | 5   | 6   | 7   | 8    | 9    | 10   | 11   |
|--------|----|-----|-----|-----|-----|-----|-----|------|------|------|------|
| Bank A | 70 | 100 | 150 | 220 | 330 | 500 | 750 | 1.1k | 1.8k | 3.5k | 7.5k |
| Bank B | 50 | 80  | 120 | 170 | 240 | 350 | 520 | 800  | 1.3k | 2.4k | 5.0k |

## INSTALL

**macOS:** run `OLIVERB-macOS.pkg` (right-click → Open the first time).  
**Windows:** run `OLIVERB-Windows-Setup.exe` (SmartScreen: More info → Run anyway).  
**Linux:** copy `OLIVERB.vst3` to `~/vst3/`. Then rescan plug-ins — it's under **Deestech**. Installs over v1.

## SIGNAL FLOW

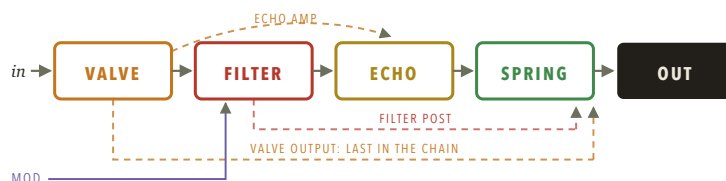

**Valve** first (default) colours everything after it; **Output** makes it a master tube stage after the spring. Filter **Pre**: repeats inherit the dial — sweeps drag the tail. **Post**: the filter carves the finished signal, tails included.

## FIRST SOUND IN 60 SECONDS

- Insert on a drum loop; load preset **Waterhouse Rockers**.
- Turn valve **Drive** up, watch the glow: thicker, compressed, not louder.
- Sweep the big **Frequency** dial — hear the corner peak and the clacks.
- Push **Feedback** past 80 %; the repeats build toward self-oscillation.
- Tap **Dub Send** — the input stops, the loop keeps circling. Dub-out. Tap it back.

**The numbers that matter:** Valve drive up to +36 dB, level-compensated; zero drive ≈ 1 % 2nd harmonic. Feedback unity = 80 % (beyond it the machine self-oscillates, safely). Echo time **20–2000 ms**, tape-style pitch bend on changes. Mod range ±3 octaves around the dial. Output is hard-limited — it cannot run away.

## THE SIX MOVES

|                        |                                                                                                                                                             |
|------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Tube glue</b>       | Preset <i>Valve Warmth</i> . Drive 30–50 %, Bias 60 %, Sag 20 %: weight without obvious distortion. Sag up for bloom; <i>Output</i> to round off the tails. |
| <b>Dub throw</b>       | Feedback + Mix high. Un-mute one hit, flip <i>Dub Send</i> to hold it, let it circle and decay.                                                             |
| <b>Ride the dial</b>   | Filter <i>Pre</i> , sweep Frequency mid-tail — every repeat bends with you. Add <i>Artefacts</i> for the clack.                                             |
| <b>Pitch-bend echo</b> | Automate <i>Time</i> : small moves warble, big jumps dive-bomb.                                                                                             |
| <b>Siren</b>           | Feedback past unity, no input. Tune with <i>Time</i> , filter with the dial, crash the spring.                                                              |
| <b>Auto-wah</b>        | <i>Env Depth</i> positive, step 4–6, Impedance up. Negative depth ducks instead — an ungate.                                                                |

## IF SOMETHING'S WRONG

|                        |                                                                                           |
|------------------------|-------------------------------------------------------------------------------------------|
| <b>Not in the DAW</b>  | Rescan; check the VST3 folder; macOS: clear quarantine (see manual §2).                   |
| <b>Thicker than v1</b> | That's the valve at its default 35 %. Switch it off for the v1 sound.                     |
| <b>Tail never dies</b> | Feedback ≥ 80 % — that's the instrument. Pull it down.                                    |
| <b>Too loud</b>        | Open Impedance + hot feedback adds real level: trim filter <i>Gain</i> or <i>Output</i> . |