


# Introduction network:

Who connects to the network?

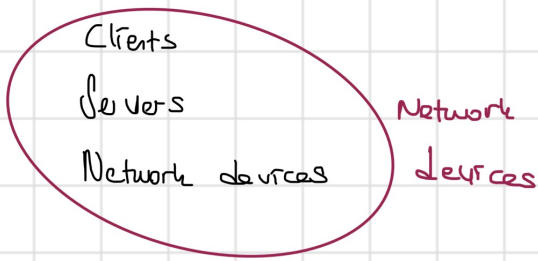


Hosts  $\Rightarrow$  network devices with an IP

## Hub:

I layer of ISO/OSI model

Hubs form collision domains

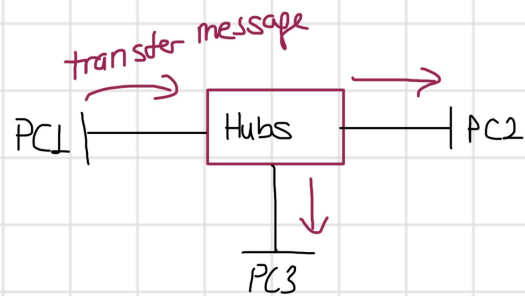


Hub transmit messages all devices on active.

## Switch:

II layer of OSI/ISO model

MAC addresses

Separate collision domains

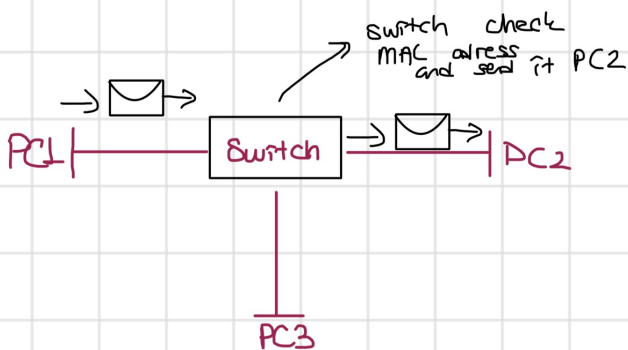


## Router:

III layer of ISO/OSI model

IP address

Routing

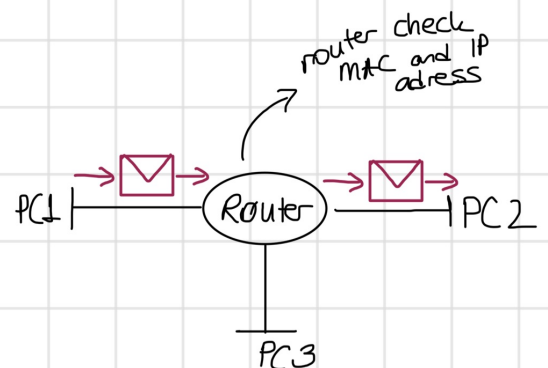

## Broadcast domains vs collision domains

▽ This is the part of the test

Broadcast messages are domestic. Transmit in

Buna bak

Inside CISCO network

Access via console port, Telnet or SSH, AUX port, USB, other...

We'll use PUTTY program to connect the devices via telnet protocol

\* Physical construction of devices CISCO

Router contains;

Processor,

ASIC (electronic component, perform calculation, dedicated for networking)

↳ buna bak

hardware (link layer and physical layer use)

System Internetwork open source (IOS)

CISCO Packet Tracer uygulama

Show running-config } 2 important  
show startup-config } code

They don't have configuration. [The networking devices on lab] check

MAC table of Switch?

show mac-address-table