



REV.	DESCRIPTION	ECN NO.	NAME	DATE




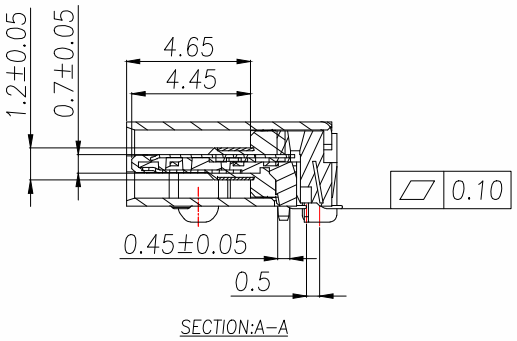


SECTION:A–A

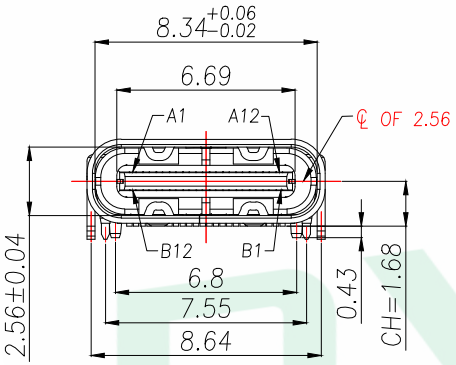

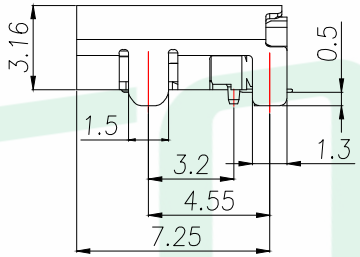

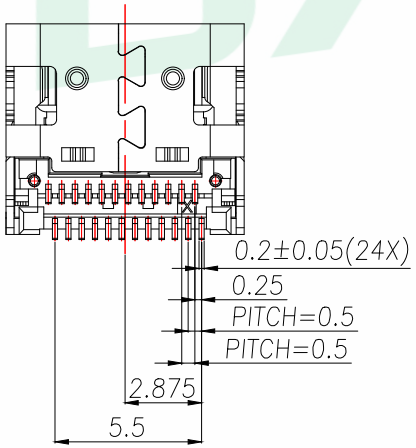



NOTE:

1.MATERIAL SPECIFICATION:
- 1.HOUSING:HIGH TEMPERATURE RESISTANT PLASTIC,UL94 V–0.
- 2.CONTACTS:COPPER ALLOY
- 3.MID PLATE: STAINLESS STEEL
- 4.FRONT SHELL: STAINLESS STEEL
- 5.EMI PLATE: STAINLESS STEEL

2.PLATING SPECIFICATION:
- 2–1.CONTACTS:
  - Ni 50u" MIN. UNDER PLATED OVER ALL.
  - Au PLATED ON THE FUNCTIONAL AREA OF CONTACT.
  - CONTACT FUNCTIONAL AREA PLATED : Au G/F
  - CONTACT SOLDER AREA PLATED : Au G/F
- 2–2.FRONT SHELL:
  - Ni 30u" MIN. UNDER PLATED OVER ALL.
- 2–3.MID PLATE:
  - Ni 30u" MIN. UNDER PLATED OVER ALL.
  - Sn 80u"MIN. PLATED OVER ALL
- 2–4.EMI PLATE:
  - CLEAR ONLY

3.MECHANICAL PERFORMANCE,
- 3–1.INSERTION FORCE: 0.5~2.0kgf.
- 3–2.REMOVAL FORCE: 0.8kgf~2.0kgf.
- 3–3.DURABILITY: 10000 CYCLES.


4.ELECTRICAL PERFORMANCE,
- 4–1. CURRENT RATING:5.0A
  VOLTAGE RATING:30V
- 4–2. LLCR:
  - VBUS & GND PINS AND OTHER PINS: 40mΩ/PIN MAX.
  - SHIELD: 50mΩ/MAX.
  - LLCR MAX. CHANGE OF ALL PINS: 10mΩ.
- 4–3.INSULATION RESISTANCE: 100MΩ MIN
- 4–4.DIELECTRIC WITHSTAND VOLTAGE,AC 100V FOR 1 MINUTE.

5. ENVIRONMENTAL PERFORMANCE:
   OPERATING TEMPERATURE: –40°C~+85°C.


6.IR REFLOW:
   THE PEAK TEMPERATURE ON THE BOARD SHALL BE MAINTAINED FOR 10 SECONDS AT 260°C.

GENERAL TOLERANCE	DONGGUAN BAOXUN PRECISION TECHNOLOGY CO., LTD	BXCONN®
DIM. TOL. x. ±0.30 x.x ±0.20 x.xx ±0.10 GENERAL ANGLE: x.° ±10° x.x° ±8° x.xx° ±5°	TITLE: USB CF 24PIN SMT TYPE TOP MOUNT WITH POST	
	DWG. NO.: TYPE–C–24P–SMD	CHECKED: MAX
	PART NO.: TYPE–C–24P–SMD	DRAWN: ELLA
	UNIT: mm / SCALE: none / SHEET: 1of 1 / DWG. SIZE: A4 / LAYER: bxconn	APPROVED: WILL

REV.	DESCRIPTION	ECN NO.	NAME	DATE

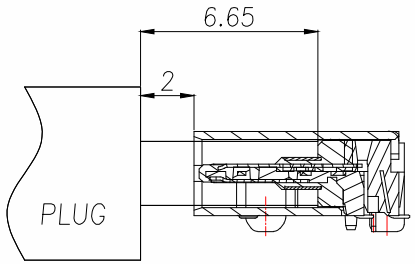

AFTER MATING

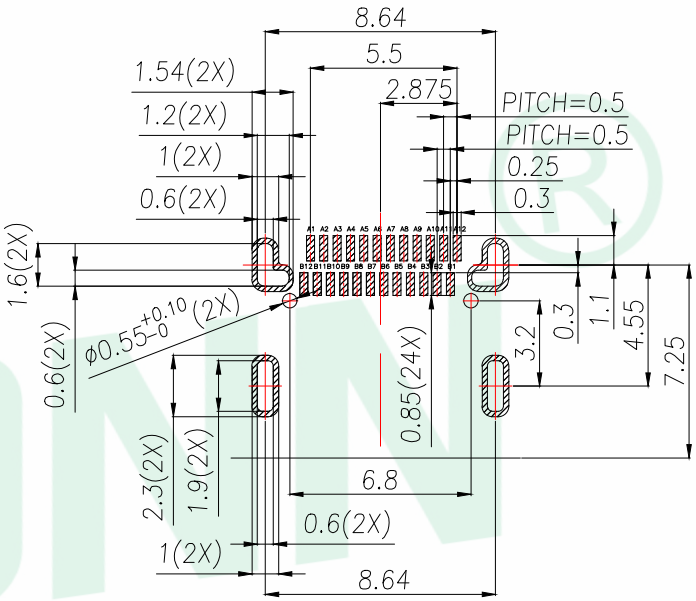

RECOMMENDED PCB LAYOUT(TOP VIEW)

THICKNESS 0.60MM;DEFAULT TOLERANCE:±0.05


USB TYPE-C PIN ASSIGNMENTS


PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
A1	GND	B12	GND
A2	SSTXp1	B11	SSRXp1
A3	SSTXn1	B10	SSRXn1
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	Dp1	B7	Dn2
A7	Dn1	B6	Dp2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10	SSRXn2	B3	SSTXn2
A11	SSRXp2	B2	SSTXp2
A12	GND	B1	GND


GENERAL TOLERANCE		DONGGUAN BAOXUN PRECISION TECHNOLOGY CO., LTD					BXCONN®
DIM.	TOL.	TITLE: USB CF 24PIN SMT TYPE TOP MOUNT WITH POST					
x.	±0.30						
x.x	±0.20						
x.xx	±0.10						
GENERAL ANGLE:		DWG. NO.: TYPE-C-24P-SMD				CHECKED: MAX	
x.°	±10°						
x.x°	±8°	PART NO.: TYPE-C-24P-SMD				DRAWN: ELLA	
x.xx°	±5°						
		UNIT: mm	SCALE: none	SHEET: 1of 1	DWG. SIZE: A4	LAYER: bxconn	APPROVED: WILL

WWW.BXCONN.COM 东莞市宝讯精密技术有限公司 ARTICLE: BX-CN-001-A

REV.	DESCRIPTION	ECN NO.	NAME	DATE

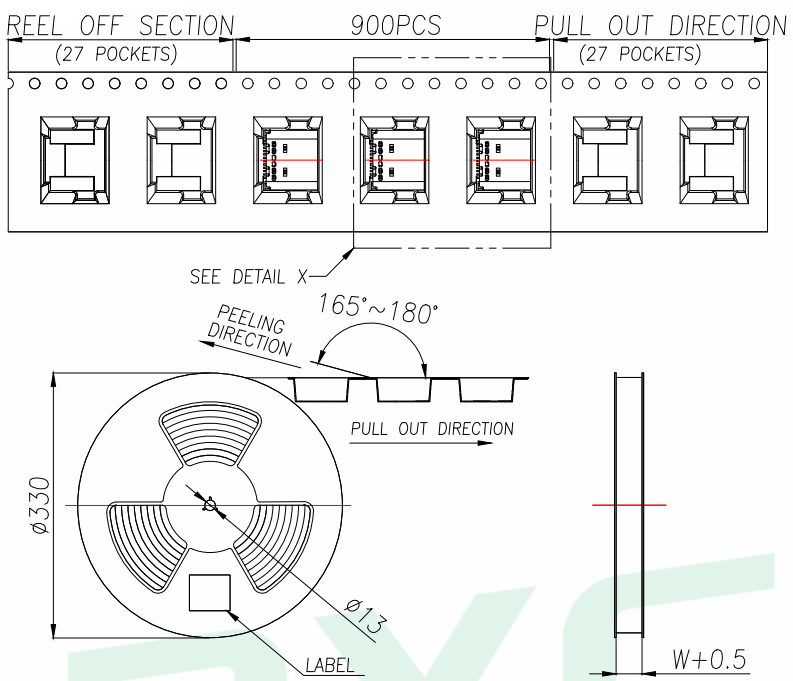

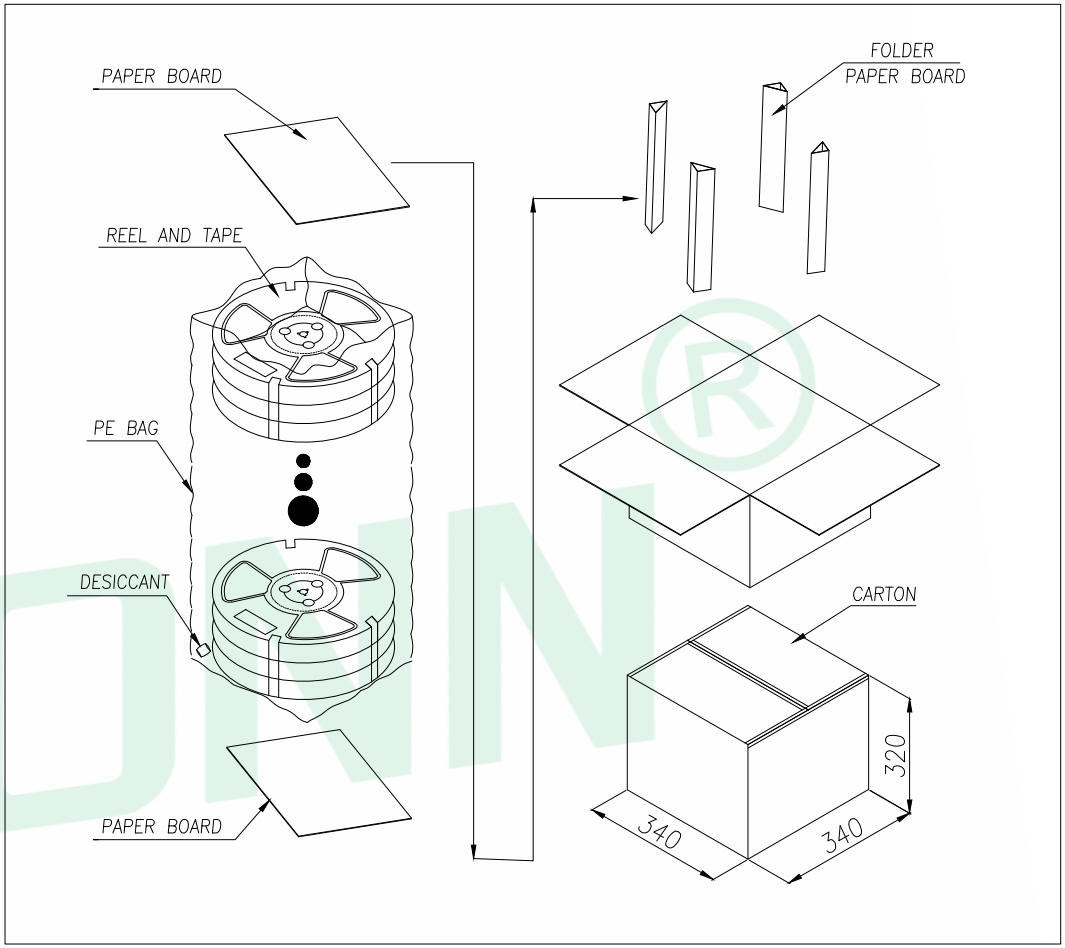

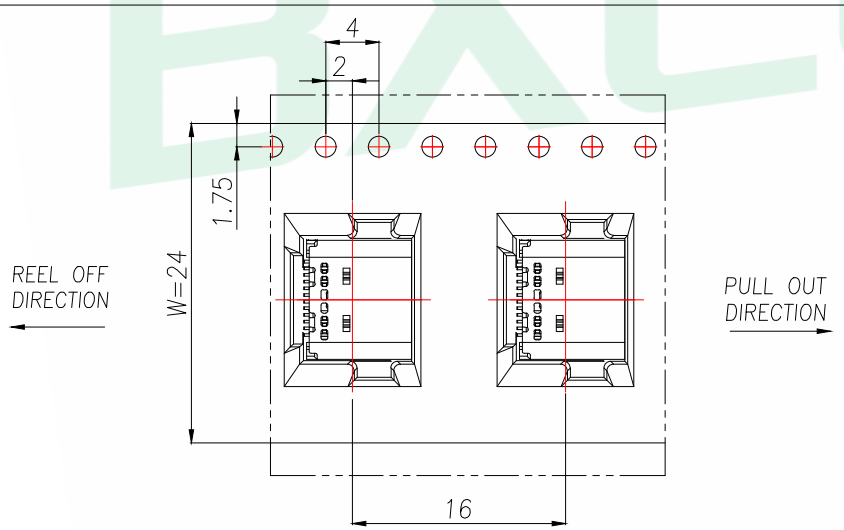

	REEL	CARTON
CONNECTOR (PCS)	900	9000

GENERAL TOLERANCE						
DIM.	TOL.					
x.	±0.30					
x.x	±0.20					
x.xx	±0.10					
GENERAL ANGLE:						
x.°	±10°					
x.x°	±8°					
x.xx°	±5°					

DONGGUAN BAOXUN PRECISION TECHNOLOGY CO., LTD

TITLE: USB CF 24PIN SMT TYPE TOP MOUNT WITH POST

DWG. NO.: TYPE-C-24P-SMD | CHECKED: MAX

PART NO.: TYPE-C-24P-SMD | DRAWN: ELLA

UNIT:	SCALE:	SHEET:	DWG. SIZE:	LAYER:	APPROVED: WILL
mm	none	1of 1	A4	bxconn	

BXCONN®