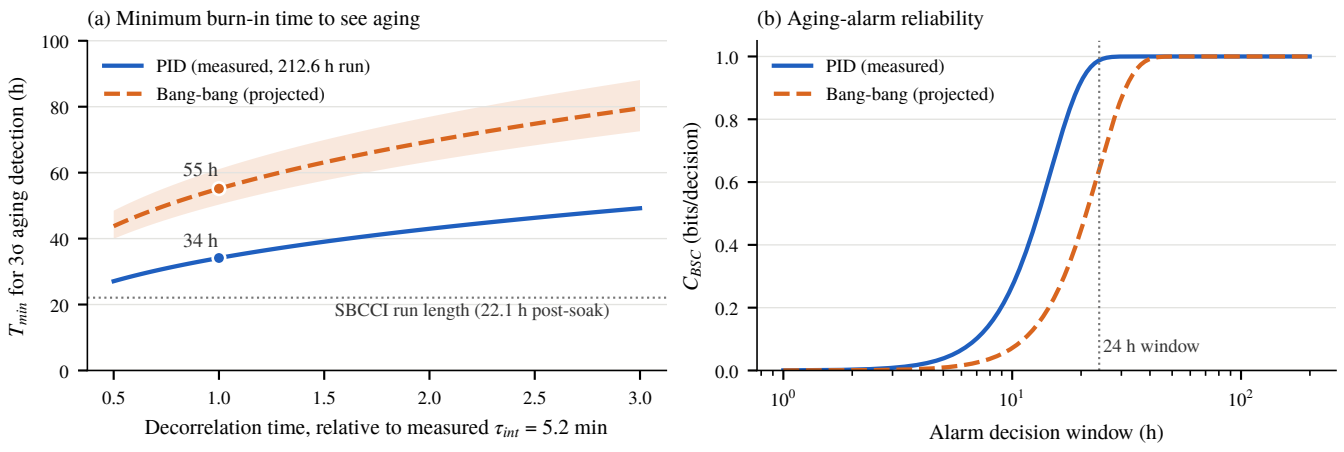
(a) Minimum burn-in time to see aging
PID (measured, 212.6 h run)
Bang-bang (projected)
55 h
34 h
SBCCI run length (22.1 h post-soak)
T_{min} for 3σ aging detection (h)
Decorrelation time, relative to measured τ_{int} = 5.2 min
(b) Aging-alarm reliability
PID (measured)
Bang-bang (projected)
24 h window
C_{BSC} (bits/decision)
Alarm decision window (h)