


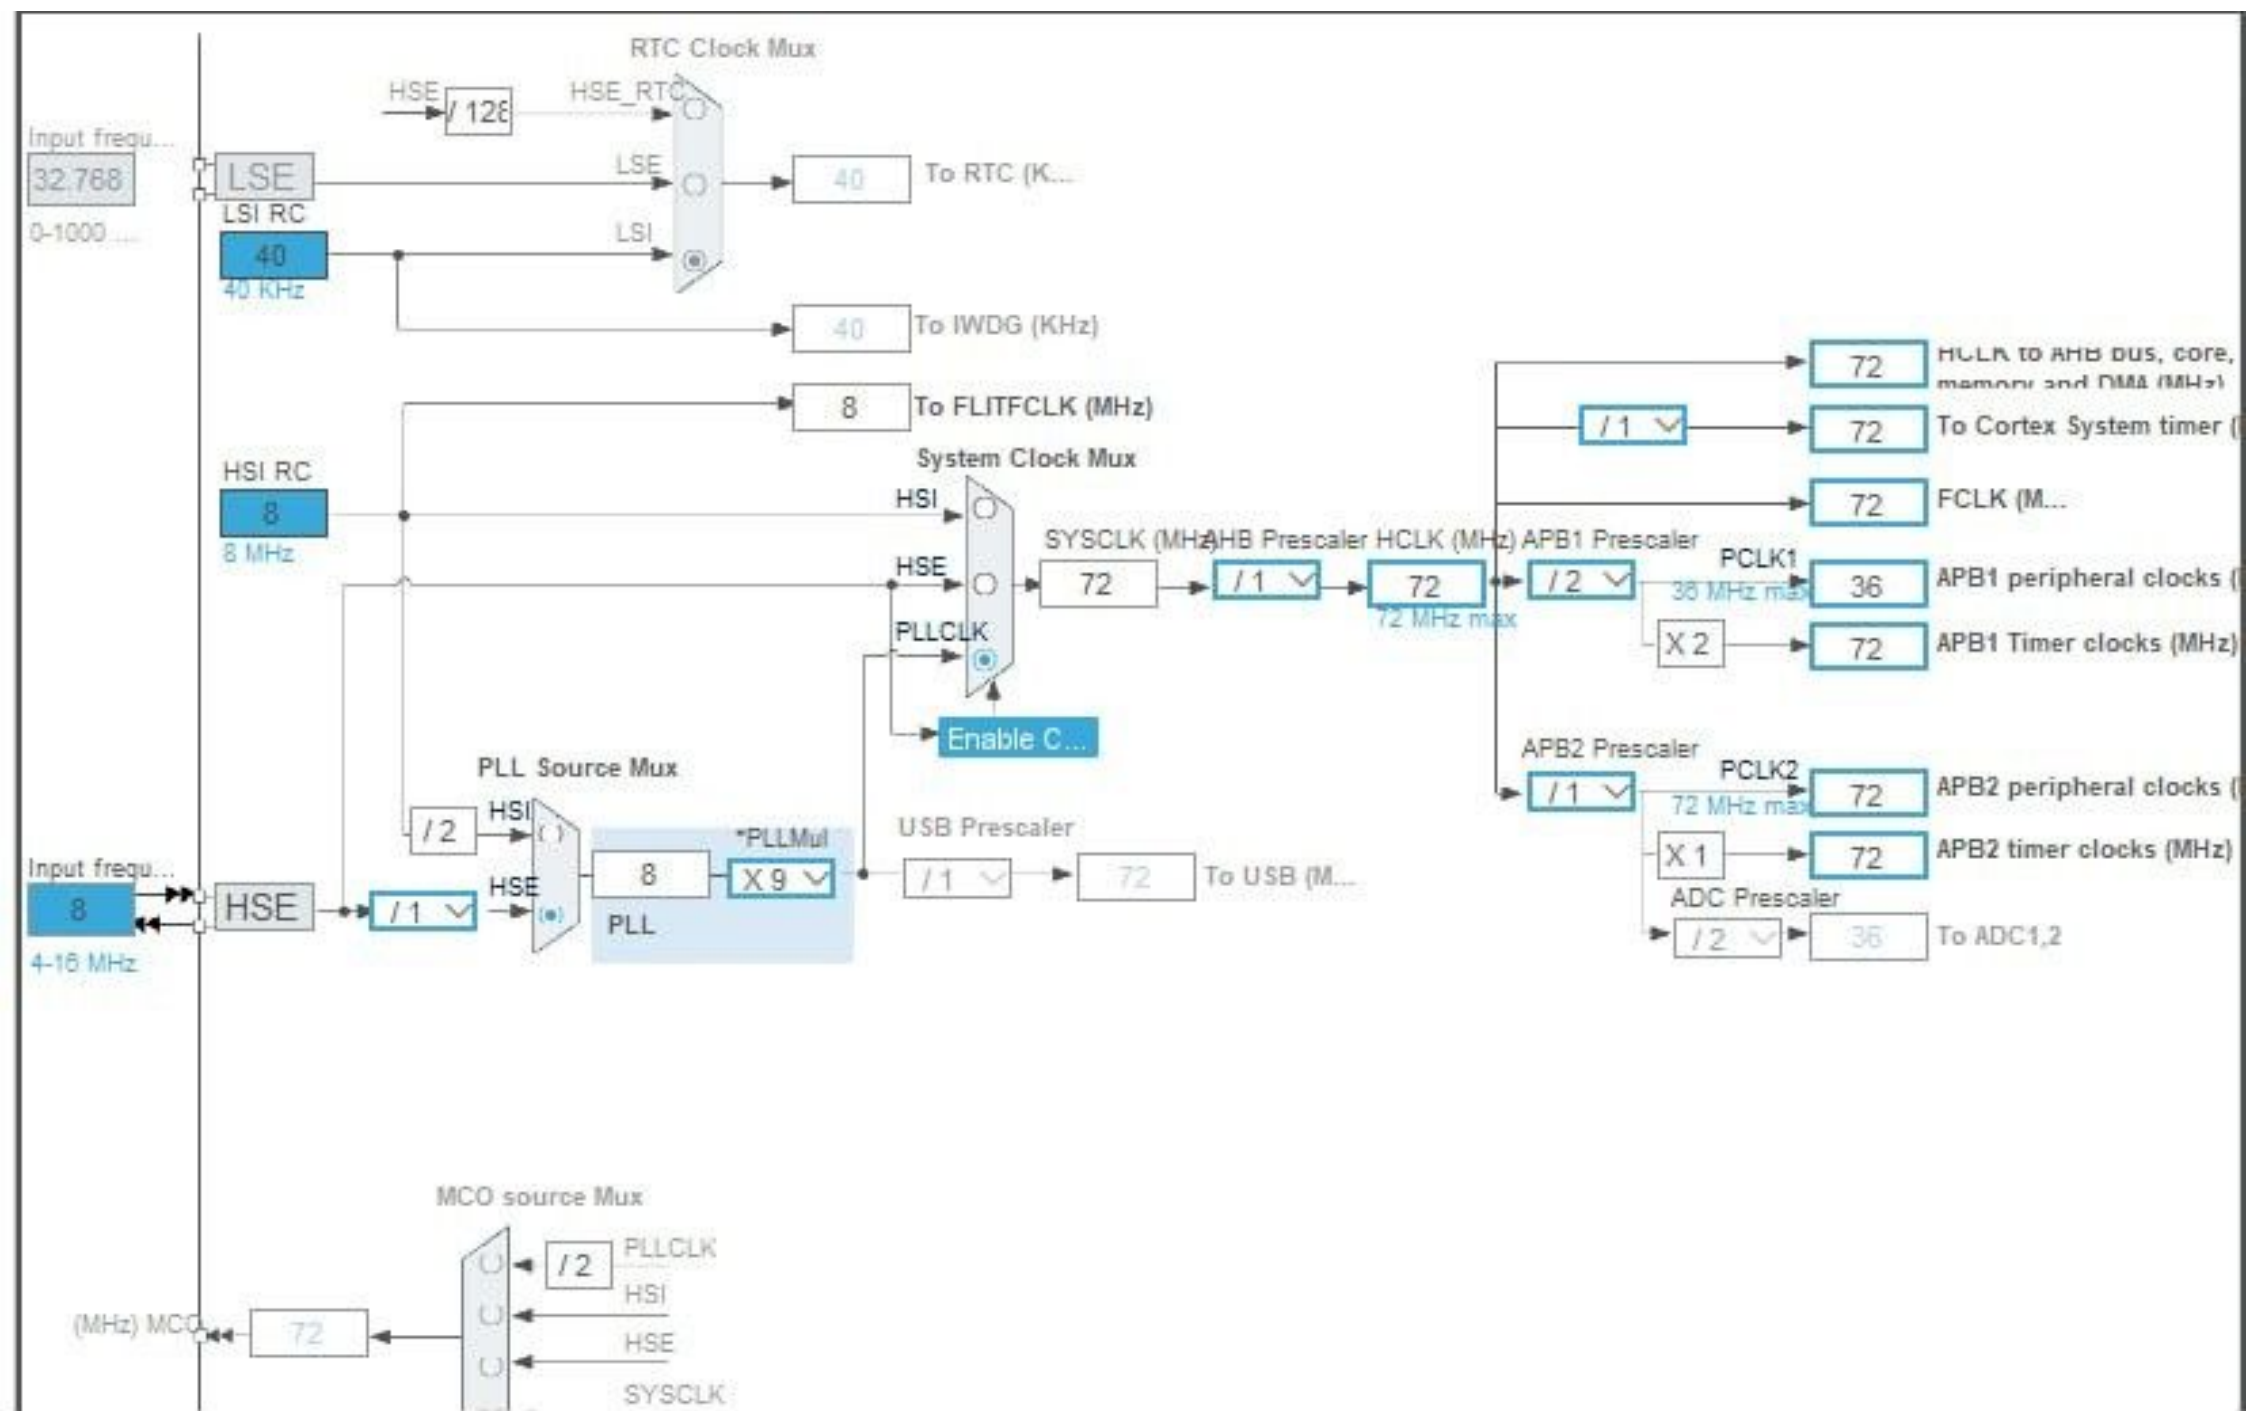

NVIC

✓ RCC

▲ SYS

WWDG

Analog



Timers



RTC

TIM1

TIM2

✓ TIM3

▲ TIM4

Connectivity



Computing



Middleware and Software Pa...



TIM3 Mode and Configuration

Mode

Slave Mode

Disable



Configuration

Reset Configuration

✓ NVIC Settings

✓ DMA Settings

✓ Parameter Settings

✓ User Constants

Configure the below parameters :



Search (Ctrl+F)



Prescaler (PS... 7199

Counter Mode Up

Counter Period... 4999

Internal Clock ... No Division

auto-reload pre... Disable


▼ Trigger Output (TRGO)...

Master/Slave ... Disable (Trigger input effe...

Trigger Event S... Reset (UG bit from TIMx_...

Counter Period (AutoReload Register - 16 bits value)

Counter Period (AutoReload Register - 16 bits value)

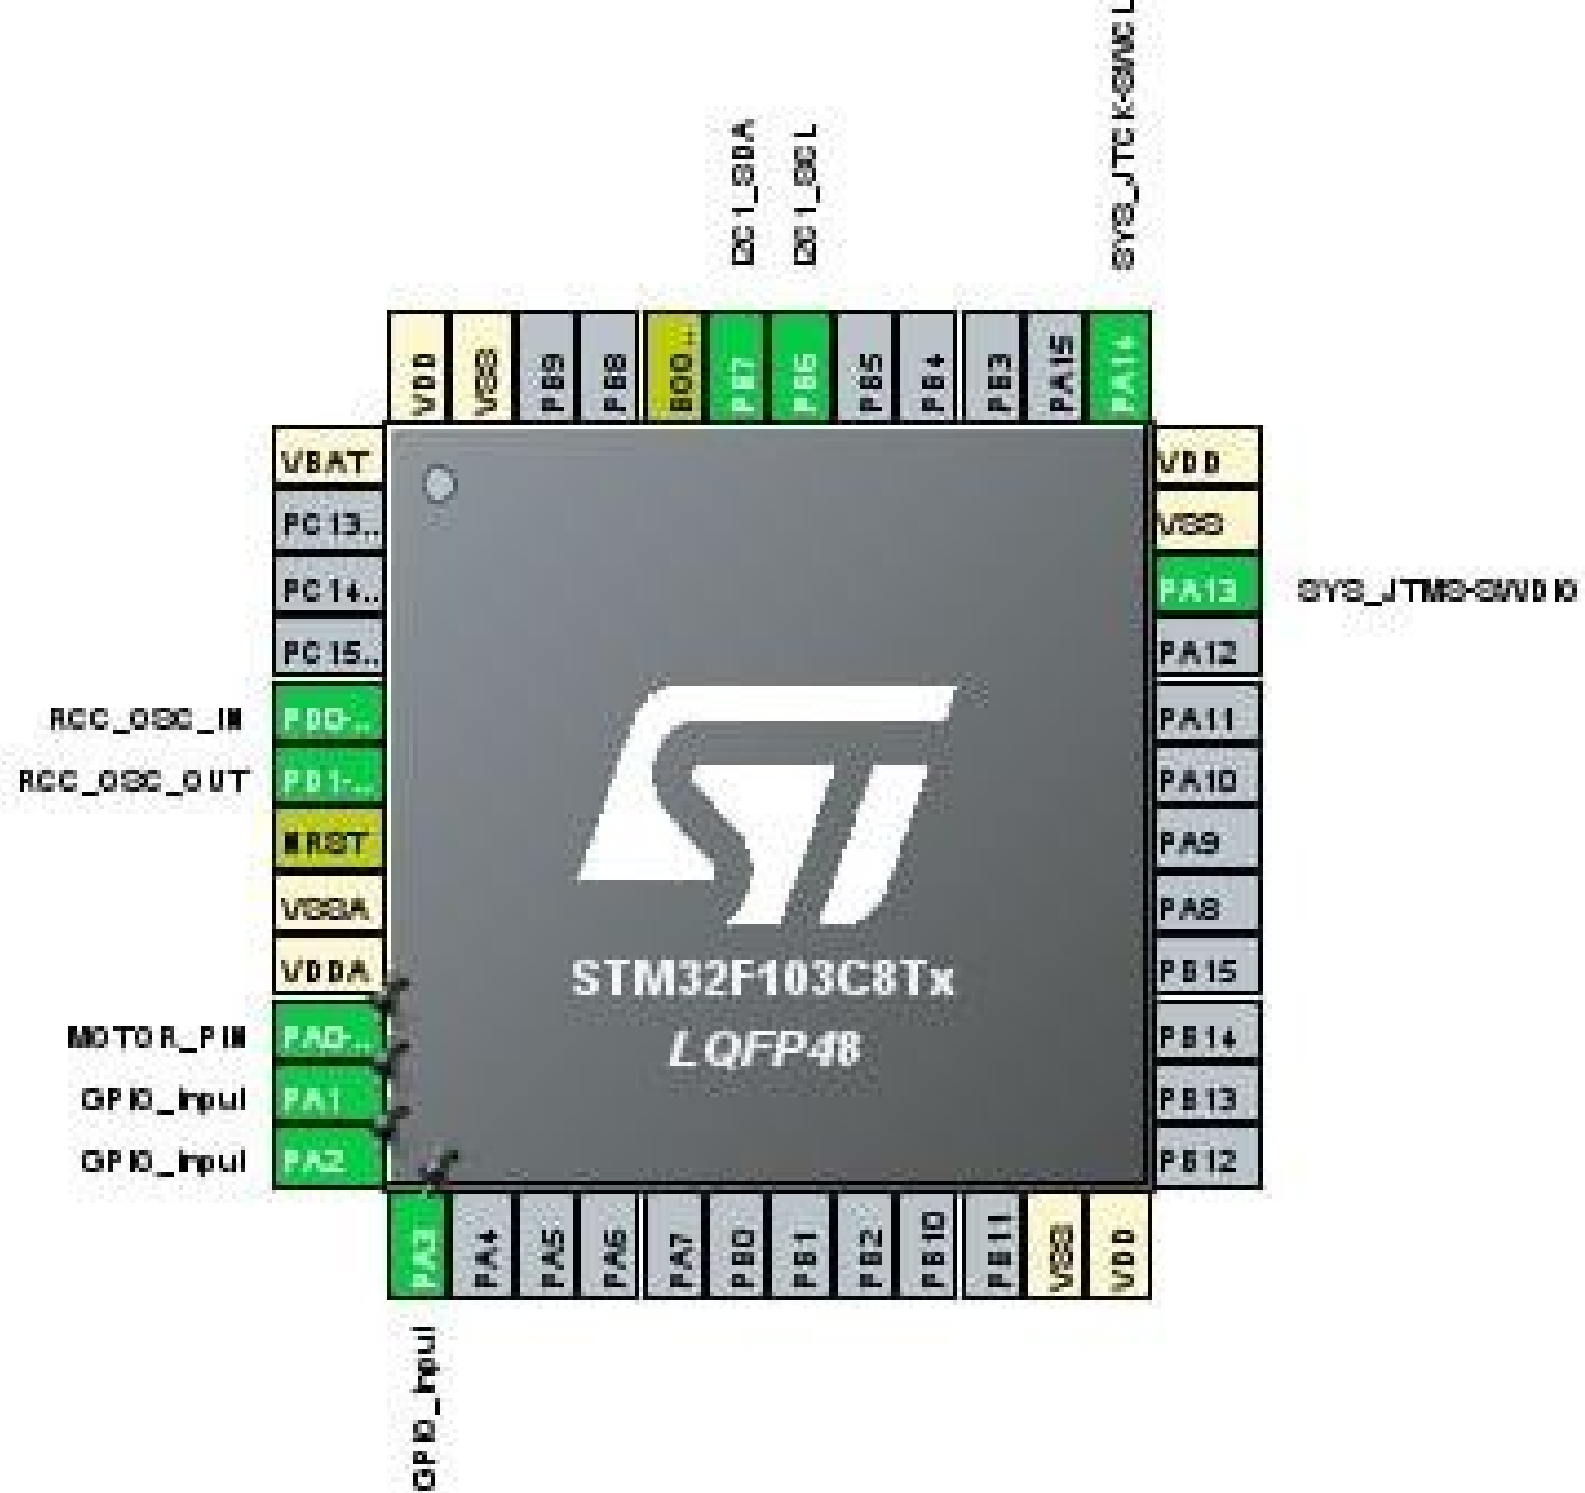

Configuration

Reset Configuration

 NVIC Settings

 DMA Settings

 Parameter Settings

 User Constants

NVIC Interrupt Table

Enabled

Preemption Prior

TIM3 global interrupt



0

I2C1 Mode and Configuration

Mode

I2C I2C



Configuration

Reset Configuration

- ☒ NVIC Settings
- ☒ DMA Settings
- ☒ GPIO Settings
- ☒ Parameter Settings
- ☒ User Constants

Configure the below parameters :

Master Features

I2C Speed Mode	Standard Mode
I2C Clock Speed (Hz)	100000

Slave Features

Clock No Stretch Mode	Disabled
Primary Address Length s...	7-bit
Dual Address Acknowledg...	Disabled
Primary slave address	0
General Call address dete...	Disabled