


JMT AD-R SERIES

TECHNICAL DIMENSIONS

| AD-R SERIES Model | Bending Length [A] | Bending Force (Tons) | Between Frames [B] | Speeds (Inches per Minute) | | | Daylight [D] | Bed Cap Width [G] | Bed Height [F] | Stroke [C] | Throat Depth [E] | Sliding Support Arms | B.G. Finger Blocks | X-Axis (Gauging) | | Motor Power (HP) | Oil Tank Capacity (Gallons) | Overall Dimensions | | | Weight (Approx. Lbs.) |
|----------------------|-----------------------|----------------------------|-----------------------|----------------------------|----------------------------|---------------------------|-----------------|----------------------|----------------------|---------------|------------------------|----------------------------|--------------------------|--------------------------|------------------|------------------------|-----------------------------------|--------------------|-----------|------------|-----------------------------|
| | | | | Y-Axis Rapid Speed | Y-Axis Working Speed | Y-Axis Return Speed | | | | | | | | X-Axis Speed (IPM) | X-Axis Travel | | | Length [L] | Width [W] | Height [H] | |
| AD-R 2060 | 6' 8" | 66 | 5' 7" | 472 | 23 | 283 | 20.87" | 4" | 35.4" | 10.4" | 16" | 2 | 2 | 590 | 17" | 10 | 27 | 10' 10" | 5' 5" | 9' | 13,450 |
| AD-R 25100 | 8' 4" | 110 | 7' 2" | 425 | 23 | 283 | 20.87" | 4" | 35.4" | 10.4" | 16" | 2 | 2 | 590 | 25.6" | 15 | 27 | 12' 6" | 5' 6" | 9' | 19,070 |
| AD-R 30100 | 10' | 110 | 8' 6" | 425 | 23 | 283 | 20.87" | 4" | 35.4" | 10.4" | 16" | 2 | 2 | 590 | 25.6" | 15 | 27 | 13' 10" | 5' 6" | 9' | 20,935 |
| AD-R 30135 | 10' | 150 | 8' 6" | 378 | 23 | 283 | 20.87" | 4" | 35.4" | 10.4" | 16" | 2 | 2 | 590 | 25.6" | 20 | 40 | 13' 10" | 5' 6" | 9' | 22,600 |
| AD-R 30175 | 10' | 192 | 8' 6" | 283 | 23 | 236 | 20.87" | 4" | 35.4" | 10.4" | 16" | 2 | 2 | 590 | 25.6" | 25 | 66 | 14' 3" | 5' 7" | 9' | 24,800 |
| AD-R 30220 | 10' | 242 | 8' 6" | 283 | 23 | 236 | 20.87" | 4" | 35.4" | 10.4" | 16" | 2 | 2 | 590 | 25.6" | 30 | 66 | 13' 11" | 5' 10" | 9' 6" | 27,000 |
| AD-R 30320 | 10' | 352 | 8' 6" | 283 | 23 | 236 | 24.8" | 6" | 35.4" | 14.37" | 16" | 2 | 2 | 590 | 25.6" | 50 | 66 | 14' 1" | 6' | 10' 7" | 38,030 |
| AD-R 37175 | 12' 1" | 192 | 10' 2" | 283 | 23 | 236 | 20.87" | 4" | 35.4" | 10.4" | 16" | 2 | 2 | 590 | 25.6" | 25 | 66 | 16' 3" | 5' 7" | 9' 6" | 27,830 |
| AD-R 37220 | 12' 1" | 242 | 10' 2" | 283 | 23 | 236 | 20.87" | 4" | 35.4" | 10.4" | 16" | 2 | 2 | 590 | 25.6" | 30 | 66 | 16' 3" | 5' 10" | 9' 6" | 31,020 |
| AD-R 40175 | 13' 3" | 192 | 11' 9" | 283 | 23 | 236 | 20.87" | 4" | 35.4" | 10.4" | 16" | 2 | 2 | 590 | 25.6" | 25 | 66 | 17' 3" | 5' 7" | 9' | 28,270 |
| AD-R 40220 | 13' 3" | 242 | 11' 9" | 283 | 23 | 236 | 20.87" | 4" | 35.4" | 10.4" | 16" | 2 | 2 | 590 | 25.6" | 30 | 66 | 17' 3" | 5' 10" | 9' 6" | 32,450 |
| AD-R 40320 | 13' 3" | 352 | 11' 9" | 236 | 23 | 236 | 24.8" | 6" | 35.4" | 14.37" | 16" | 2 | 2 | 590 | 25.6" | 50 | 66 | 17' 5" | 6' 3" | 10' 7" | 45,650 |
| AD-R 40400 | 13' 3" | 440 | 11' 2" | 236 | 19 | 189 | 24.8" | 12" | 40.9" | 14.37" | 20" | 2 | 2 | 590 | 29.5" | 50 | 120 | 18' 10" | 6' 11" | 11' 7" | 58,550 |
| AD-R 43175 | 14' | 192 | 12' 2" | 283 | 23 | 236 | 20.87" | 4" | 35.4" | 10.4" | 16" | 2 | 2 | 590 | 25.6" | 25 | 66 | 18' 3" | 5' 7" | 9' 6" | 29,850 |
| AD-R 43220 | 14' | 242 | 12' 2" | 283 | 23 | 236 | 20.87" | 4" | 35.4" | 10.4" | 16" | 2 | 2 | 590 | 25.6" | 30 | 66 | 19' 4" | 5' 10" | 9' 6" | 32,525 |
| AD-R 43320 | 14' | 352 | 12' 2" | 236 | 23 | 236 | 24.8" | 6" | 35.4" | 14.4" | 16" | 2 | 2 | 590 | 25.6" | 50 | 66 | 19' 11" | 6' 4" | 10' 8" | 47,650 |
| AD-R 43400 | 14' | 440 | 12' 2" | 236 | 19 | 189 | 24.8" | 12" | 40.9" | 14.37" | 20" | 2 | 2 | 590 | 29.5" | 50 | 120 | 20' | 7' 10" | 11' 7" | 59,875 |
| AD-R 60220 | 20' | 242 | 16' 8" | 236 | 23 | 236 | 20.87" | 6" | 43.3" | 10.4" | 16" | 4 | 4 | 590 | 29.5" | 30 | 66 | 24' 7" | 5' 10" | 10' 8" | 45,298 |
| AD-R 60320 | 20' | 352 | 16' 8" | 236 | 23 | 236 | 24.8" | 6" | 43.3" | 14.37" | 16" | 4 | 4 | 590 | 29.5" | 50 | 66 | 24' 7" | 6' 3" | 11' 4" | 62,150 |
| AD-R 60400 | 20' | 440 | 16' 8" | 236 | 19 | 189 | 24.8" | 12" | 48" | 14.37" | 20" | 4 | 4 | 590 | 29.5" | 50 | 132 | 24' 7" | 6' 11" | 12' 2" | 78,815 |

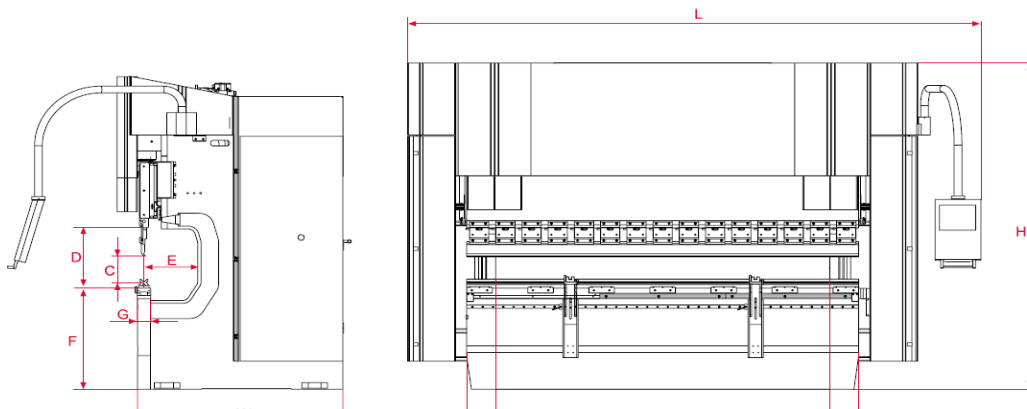

The above are standard specifications.*

Please contact us for other sizes and options :

- Bed lengths to your specifications
- Custom distance between frames
- Extra throat depth
- Extra open height
- Extra stroke
- Longer back gauge travel
- Tandem machine configurations for increased bending length

All readily available.

*Due to ongoing product development, specifications are subject to change.