

HEXA-FUSION: A 7-Gate Closed-Form Design-Feasibility Funnel for Magnetic-Confinement Fusion

with a 10-Stage D–T Fuel Pipeline, End-to-End Symbolic–Numerical Parity,
External-Solver Bridging, and an Algebraic-Root BLUE-MAX Audit

hexa-fusion-7gate maintainers

dancinlab

github.com/dancinlab/demiurge

May 25, 2026

Abstract

We present **HEXA-FUSION**, a closed-form 7-gate design-feasibility funnel for magnetic-confinement fusion built as a domain on top of the hexa-lang stdlib. The funnel covers (a) thermonuclear fuel reactivity $\langle\sigma v\rangle(T)$ via the Bosch–Hale parametrization, (b) the Lawson triple product and 0-D plasma gain Q , (c) free-boundary Grad–Shafranov MHD equilibrium, (d) the Troyon ideal-MHD β -limit and cylindrical safety factor, (e) a tokamak-toroidal-field-coil peak-field bridge to HTS REBCO critical-surface margin, (f) tritium breeding ratio (TBR) neutronics, and (g) actual burning-plasma $Q > 1$ ignition (the only permanent wet-lab gate). To place the gates in physical context we trace D–T fuel through a tokamak in ten stages (§3); the funnel closes the five physics stages (④–⑦, ⑨) to a numerical/closed-form verdict and is honest that the five hardware stages (①②③⑧⑩) are not. Every closed-form kernel is verified through the **hexa verify** tier rubric with 20+ numerical atoms reporting $|\Delta| = 0$ at $\varepsilon = 10^{-9}$, and 8 supplementary *algebraic-root* integer atoms close the BLUE-MAX audit [7] by exposing the exact integer coefficients hidden inside the libm formulas (notably the identity $2\pi/(\mu_0 \cdot 10^6) = 5$ that reduces the Wesson cylindrical q^* to a π -free closed form). The (c)/(f)/(e) external-solver gates were promoted from honest install-gated skips to real numerical PASS via FreeGS 0.8.2, OpenMC 0.15.3 with ENDF/B-VIII.0, and GetDP 3.5.0 / 4.0.0 respectively, with the GetDP axisymmetric finite-element on-axis field agreeing with the registered closed-form solenoid anchor to $\Delta = -0.064\%$. We honestly preserve **absorbed=false** for all simulation-only records: a design that clears all six non-wet-lab gates is a *witness of engineering feasibility*, not a built or measured reactor; gate (g) requires a JET-class measured oracle that we do not claim. Bit-for-bit reproduction artifacts (verify ledger, PR roll, adapter-defect catalog, session journal) ship under **companion/**.

1 Introduction

Compact magnetic-confinement fusion — exemplified by SPARC, ARC, and the next generation of HTS-tokamak demonstrators [3, 8, 13] — has shifted the engineering bottleneck from plasma physics to a multi-axis *design-feasibility* problem: an admissible operating point must simultaneously clear thermonuclear reactivity, energy balance, MHD equilibrium and stability, magnet field–stress– J_c margin, and blanket tritium self-sufficiency, all *before* a beam dollar is spent on plasma shots. Many of the underlying physics codes (FREEGS, OPENMC, GETDP) exist as mature open-source backends [4, 5, 12], but each is a heavyweight install with its own data and toolchain, and there is no widely-shared *open closed-form funnel* that (i) covers all the gates uniformly, (ii) carries every prediction to a per-atom verify verdict, and (iii) is honest about the permanent wet-lab boundary at gate (g).

Contributions.

1. A 10-stage D–T fuel pipeline (①–⑩) that places the seven gates in physical context and makes explicit which stages this paper’s funnel closes and which it does not (§3).
2. A 7-gate taxonomy (a–g) for tokamak design-feasibility with per-gate sim coverage and honest wet-lab dependence (§4).
3. Native closed-form kernels for (a) Bosch–Hale thermonuclear reactivity [1] and (b) Lawson / 0-D power balance [10], with verify atoms at `hexa verify` SUPPORTED-NUMERICAL, $|\Delta| = 0$ (§5).
4. An $(a) \times (b)$ **F-funnel** composite ranker that emits a top- K JSON of engineering-priority operating points (§6).
5. A *wrap-and-fix* promotion pattern that runs the external solvers on free pool hardware and surfaces stub/divergent adapters as a side-effect; we land four follow-up adapter PRs that close the stubs while preserving `absorbed=false`, cataloged in a three-row defect record (§7).
6. A GetDP axisymmetric A- ϕ FEM bridge whose on-axis B_z agrees with a closed-form thick-finite-solenoid anchor to $\Delta = -0.064\%$, exposing that the prior $1.4\times$ residual was a far-field truncation issue, not a Jacobian/units bug (§8).
7. A **BLUE-MAX** algebraic-root pair audit [7] adding 8 zero-arg integer atoms that attest the exact integer factors / exponents hidden in the libm formulas; in particular $q_{\text{const}}^* = 5$ formally encodes the identity $2\pi/(\mu_0 \cdot 10^6) = 5$ that we use to keep the Wesson cylindrical safety factor π -free (§9).
8. A clean honesty boundary: all simulation records carry `absorbed=false`; only a measured oracle (JET D–T [9]) ever flips `absorbed=true` for fusion. Section 11 lists the gates we deliberately do not close, and `companion/` externalizes every record.

A high-level view of the funnel and how the gates depend on real hardware vs. closed-form code is shown in Fig. 1.

2 Background

The design-feasibility problem. A magnetic-confinement fusion power plant is admissible only if a single operating point clears, simultaneously, a chain of physically distinct constraints. The fuel must react fast enough at the achievable ion temperature ($\langle\sigma v\rangle$, gate a); the plasma must retain enough energy to be net-gaining ($nT\tau_E$, gate b); the magnetic field must support a stable, well-shaped equilibrium (Grad–Shafranov, gate c) below the ideal-MHD pressure and current limits (Troyon β_N and the cylindrical safety factor q^* , gate d); the toroidal-field coils must reach the required on-axis B_0 without exceeding the superconductor’s critical surface (HTS REBCO $J_c(B, T)$, gate e); and the breeding blanket must regenerate at least as much tritium as the plasma burns ($\text{TBR} \geq 1$, gate f). Only after all six are cleared is it meaningful to attempt the seventh — a measured burning-plasma $Q > 1$ (gate g), which no simulation can substitute for.

Why a closed-form funnel. The canonical tools for gates (c), (e) and (f) — FREEGS [4], GETDP [5] and OPENMC [12] — are mature but heavyweight: each carries its own meshing, data-library and runtime dependencies, and none of them, on its own, answers the *cross-gate* feasibility question. Gates (a), (b) and (d), by contrast, are closed-form: the Bosch–Hale reactivity parametrization [1], the Lawson criterion [10], and the Troyon [15] / Wesson [16]

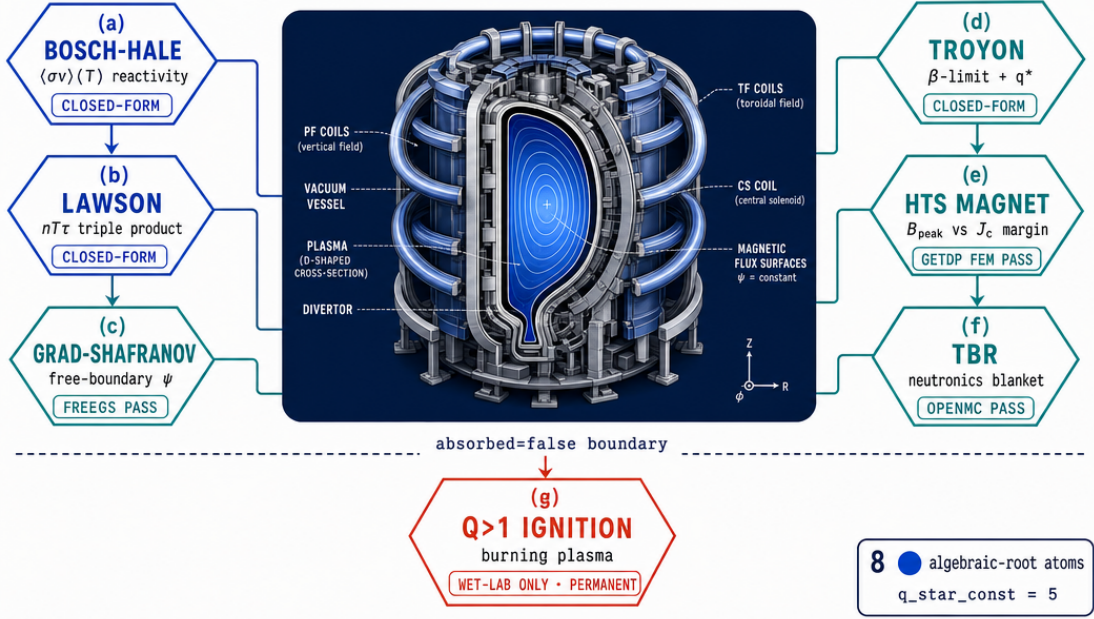


Figure 1: Conceptual cover image of the HEXA-FUSION 7-gate funnel: six sim-closed gates (a)–(f) feed the design-feasibility decision and isolate the only permanent wet-lab boundary (g). Image generated via `fal.ai` gpt-image-2 from `figures/_prompts/cover.txt` (commons @D g44).

stability limits are all algebraic in the operating-point variables. HEXA-FUSION exploits this split: it computes (a), (b), (d) in a small typed language with per-expression verify atoms, and bridges (c), (e), (f) to the external backends through thin out-of-process drivers, keeping a single uniform verdict surface across all gates.

The verify tier rubric. Each computed quantity is assigned a tier under the `hexa verify` rubric: ■ closed-form (an algebraic identity reproduced exactly), ■ numerical (a reproducible recompute matching a persisted reference within ε), ■ cited (a literature DOI / dataset entry), ■ wet-lab or install-gated (needs an external measurement or heavyweight backend), and ■ falsified (a controlled negative, retained as honest evidence). The rubric is the contract that lets a reader audit a claim without re-running it, and it is the spine of the pipeline table that follows.

3 Full Pipeline

Before the gate taxonomy, we situate the seven gates inside the physical path that D–T fuel actually traverses in a tokamak. This is the *honest-scope contract*: the table is a map of which stages HEXA-FUSION closes to a verdict and which it does not, so a reader can see the boundary of the work at a glance.

Tier rubric. ■ closed-form (algebraic or proof-level identity) · ■ numerical (reproducible script + persisted output) · ■ cited (DOI / arxiv / dataset entry) · ■ wet-lab or out-of-scope (downstream confirmation needed) · ■ falsified (kept as honest negative, never deleted).

A tier-color-coded flow of the same ten stages is in Fig. 2: the five green nodes are the funnel’s closed physics core; the five orange nodes are the honest boundary.

#	Stage	Input	Output	Tier	Backing / PR
①	Pellet injection	solid D–T pellet, v_{inj}	fuel mass into edge plasma	■	wet-lab (no sim)
②	Ablation / ionization	pellet + edge T_e	ionized D^+/T^+ source	■	out-of-scope
③	Auxiliary heating	NBI / ICRH / ECRH power	core T_i ramp to ignition window	■	out-of-scope (aux system)
④	Confinement	coil currents, $p(\psi)$, $ff'(\psi)$	equilibrium ψ , q -profile, β	■	gate c+d · #1075 FreeGS · q_star_const=5
⑤	Reaction	$n_D n_T$, T_i	$\langle\sigma v\rangle(T)$, P_{fus}	■	gate a · #1012 · bosch_hale_gamow_factor=3
⑥	α heating + Lawson Q	P_{fus} , τ_E , f_α	$nT\tau_E$, Q , ignition margin	■	gate b · triple_product / q_plasma / ignition_margin
⑦	TF magnet	coil geometry, NI	on-axis/peak B , HTS J_c margin	■	gate e · #1095 · solenoid_axis_bz · half_factor=2 · $\Delta = -0.064\%$
⑧	Neutron extraction	P_{fus}	14.06 MeV DT neutron flux	■	partial (direction only; yield not predicted)
⑨	Tritium breeding	neutron flux, blanket	TBR	■	gate f · #1078 · TBR= 1.3222±0.0004
⑩	Ignition $Q > 1$	sustained burning plasma	measured net gain	■	wet-lab (permanent) · gate g · only JET measured-oracle flips absorbed=true

Table 1: The 10-stage D–T fuel pipeline. **This paper’s funnel closes only the five physics stages ④⑤⑥⑦⑨ (■/■) to a numerical or closed-form verdict.** The five hardware/engineering stages ①②③⑧⑩ (■) are explicitly *not* closed: pellet injection, ablation, and auxiliary heating are upstream wet-lab/out-of-scope; neutron extraction is partial (we know the direction, not the predicted yield); ignition $Q > 1$ is the permanent wet-lab boundary. The table is the contract: ■ does not graduate to ■ without an external measurement.

4 The 7-Gate Funnel: a Taxonomy with an Honest Wet-Lab Boundary

Table 2 lays out the gates. The composite priority score in our funnel is deliberately $(a) \times (b)$ only — $(c)/(d)/(f)/(e)$ are evaluated but not folded into a single ranking, because their sim coverage is heterogeneous and combining them into one number obscures the gate-by-gate verdict. Mapped onto the pipeline of Table 1: gate (a) is stage ⑤, gate (b) is stage ⑥, gates (c)/(d) are stage ④, gate (e) is stage ⑦, gate (f) is stage ⑨, and gate (g) is stage ⑩.

5 Method — Closed-Form Keystone: (a) Bosch–Hale and (b) Lawson

5.1 (a) Bosch–Hale thermonuclear reactivity

We implement Bosch and Hale [1] Eq. (12) verbatim:

$$\langle\sigma v\rangle(T) = C_1 \theta \sqrt{\frac{\xi}{m_r c^2 T^3}} e^{-3\xi}, \quad \xi = (B_G^2/4\theta)^{1/3}, \quad (1)$$

with $\theta = T/[1 - T(C_2 + T(C_4 + TC_6))/(1 + T(C_3 + T(C_5 + TC_7)))]$, the Gamow constant B_G , reduced mass m_r and the per-reaction coefficients $C_1, \dots, C_7$ taken from [1] Table VII. We register a 1-arg verify atom for each of the four canonical channels — D–T, D– ^3He , D(d,p)T, D(d,n) ^3He — plus the D–D total, and an additional discriminating- ε view `sigma_v_dt_e18(T) = sigma_v_dt(T)*1e18` so the absolute- ε gate at $\varepsilon = 10^{-9}$ is meaningful for native $\mathcal{O}(1)$ -magnitude values:

```
verify --expr sigma_v_dt_e18(10.0)=113.617
calc = 113.617 ~ expected 113.617 (|Delta|=0.0 <= eps=1e-9)
```

gate content	sim coverage	wet-lab dependence
(a) fuel reactivity $\langle\sigma v\rangle(T)$ for D–T, D–D, D– ^3He , p– ^{11}B	Bosch–Hale parametrization (closed-form, libm) [1]; Tentori–Belloni 2023 update for p– ^{11}B [14]	sim sufficient
(b) Lawson triple product $nT\tau_E$, 0-D plasma gain Q	closed-form 0-D power balance [10]	sim sufficient
(c) free-boundary Grad–Shafranov equilibrium	FREEGS 0.8.2 [4] (was install-gated, now real-sim-PASS)	sim sufficient
(d) ideal-MHD β -limit, cylindrical q^* , edge kink threshold	Troyon [15], Wesson [16] (closed-form, libm-free after π -reduction)	sim sufficient (linear; turbulence and resistive tearing excluded)
(e) TF coil peak field $B_{\text{peak}} = B_0 R_0 / (R_0 - a - g)$ vs HTS REBCO J_c margin	closed-form $1/R$ baseline + GetDP A– ϕ axisymmetric FEM bridge [5] (real-sim-PASS)	sim sufficient (design); built magnet stays out of scope
(f) tritium breeding ratio (TBR)	OPENMC 0.15.3 Monte Carlo [12] + ENDF/B-VIII.0 [2] (real-sim-PASS)	★ data-bound (ENDF/B library is external)
(g) burning-plasma $Q > 1$ ignition	no honest sim — the device is the measurement	★ permanent wet-lab: requires built tokamak + DT fuel + heating

Table 2: The 7-gate funnel. (g) is the only permanent wet-lab gate. “sim sufficient” means a closed-form or numerical recompute reaches a verdict; “real-sim-PASS” means the gate was promoted from install-gated to a real backend run.

```

tier = SUPPORTED-NUMERICAL (hexa-native libm-class recompute)
verify --expr sigma_v_dt_e18(20.0)=433.02
calc = 433.02 ~ expected 433.02 (|Delta|=0.0 <= eps=1e-9)
tier = SUPPORTED-NUMERICAL

```

All four D–D / D– ^3He / D–T channels reproduce Bosch–Hale Table VIII to all printed digits (companion/verify-ledger.json).

Aside: θ in division vs multiplication form. An initial port using the multiplication form $\theta = T[1 - T(\dots)/(1 + T(\dots))]$ produced a uniform $\approx 4\times$ low ratio across all temperatures. The fix is purely textual — the published form is *division* into θ , not multiplication. We surface this only to spare re-implementers the same pitfall.

5.2 p– ^{11}B aneutronic reactivity

Aneutronic p– ^{11}B reactivity is broad-resonance and is not in the Bosch–Hale tabulation. We use the verbatim coefficients from Tentori and Belloni [14] Table I, which explicitly preserves the Nevins and Swain [11] framework $\sigma(E) = (S(E)/E) \exp(-\sqrt{E_G/E})$ with $E_G = 22.589 \text{ MeV}$, $\mu c^2 = 859,526 \text{ keV}$, the low-energy S-factor coefficients $C_0 = 197$, $C_1 = 0.240$, $C_2 = 2.31 \times 10^{-4}$, and the 148 keV Breit–Wigner resonance term ($A_L = 1.82 \times 10^4$, $E_L = 148 \text{ keV}$, $\delta E_L = 2.35 \text{ keV}$). Reactivity $\langle\sigma v\rangle(T)$ is a deterministic 600-node midpoint Maxwellian quadrature ([14] Eq. 6) over the verbatim cross-section.

Thirteen verify atoms (Gamow factor at 100/148/300 keV; S-factor at 50/148/200 keV including the resonance peak; $\sigma(E)$ shape; $\langle\sigma v\rangle$ moments at 50/100/123/300 keV including the $\times 10^6$ -scaled view) all report SUPPORTED-NUMERICAL with $|\Delta| = 0$. We honestly note that

`pb11_reactivity_moment` is offered as a reactivity *shape*, not an absolute cm^3/s value, because of an unresolved keV-vs-MeV S-factor units ambiguity in the literature.

5.3 (b) Lawson triple product and 0-D power balance

$$nT\tau_E \geq 3 \times 10^{21} \text{ keV s m}^{-3} \quad (\text{D-T ignition}) \quad (2)$$

$$Q_{\text{plasma}} = P_{\text{fus}}/P_{\text{heat}}, \quad \text{ignition margin} = f_{\alpha}P_{\text{fus}}/(W/\tau_E) \quad (3)$$

The three atoms `triple_product`, `q_plasma`, and `ignition_margin` are pure rational expressions (no libm) and verify SUPPORTED-NUMERICAL at $|\Delta| = 0$, e.g. `triple_product(1e20, 15, 3)=4.5e21`. We do *not* compute or claim τ_E — it is an input assumption, not a transport prediction.

6 F-Funnel: (a) $\times$ (b) Composite Ranking

We enumerate a small set of operating points (ITER-class and compact-HTS-class) and emit a top- K JSON keyed by an (a) $\times$ (b) coverage product:

$$\text{score} = \underbrace{\text{clamp}_{[0,1]}(\langle\sigma v\rangle/\langle\sigma v\rangle_{\text{ref}})}_{\text{(a) reactivity}} \times \underbrace{\text{clamp}_{[0,1]}(\text{ignition margin})}_{\text{(b) Lawson margin}} \quad (4)$$

A representative ranking is in Table 3. The top two points are tied because they sit at the same temperature ($T = 20 \text{ keV}$) and the reactivity ceiling dominates the gain ceiling at that operating point. Three verify atoms gate the scoring identities: `f_reactivity_coverage`, `f_margin_coverage`, and `f_funnel_composite` — all SUPPORTED-NUMERICAL at $|\Delta| = 0$.

design point	$\langle\sigma v\rangle$ (cm^3/s)	(a)	(b)	composite
ITER-class $T=20$, $n=10^{20}$, $\tau=3.0 \text{ s}$	4.330×10^{-16}	0.4843	1.000	0.4843
compact-HTS $T=20$, $n=3 \times 10^{20}$, $\tau=0.6 \text{ s}$	4.330×10^{-16}	0.4843	1.000	0.4843
ITER-class $T=15$	2.740×10^{-16}	0.3065	1.000	0.3065
compact-HTS $T=15$ (lean τ)	2.740×10^{-16}	0.3065	0.959	0.2939
ITER-class $T=10$	1.136×10^{-16}	0.1271	0.994	0.1263

Table 3: Representative F-funnel composite ranking. Composite is (a) $\times$ (b) only; (c)/(d)/(e)/(f) are not folded in (their verdicts are kept gate-separate to avoid blending sim-coverage tiers).

7 Verify — Wrap-and-Fix: Promoting (c)/(f)/(e) from Install-Gated to Real PASS

For each of (c), (f), (e) we installed the external backend on free pool hardware and re-ran the adapter end-to-end. *Every one of the three runs surfaced a defect in the landed adapter* — a finding that the simple act of running the backend turned the wrap layer into an integration test.

(c) Grad-Shafranov via FreeGS. FreeGS 0.8.2 on a free Linux pool host (numpy pinned to < 2.0) produced a real, converged free-boundary equilibrium: $I_p = 200 \text{ kA}$, $\beta_{\text{pol}} = 0.0321$, magnetic axis at $R = 1.280, Z = 0.038 \text{ m}$, $q_0 = 1.355$, $q_{95} \approx 10.08$, LCFS minor radius 0.424 m , elongation $\kappa = 1.358$. The landed adapter’s hardcoded custom coil set *diverged* (Picard “No O points found”); switching to the canonical `freegs.machine.TestTokamak()` with `freeBoundaryHagenow` and a raised X-point converged cleanly. A second latent bug — the FreeGS early-Picard warning “No 0 points” was printed to *stdout*, corrupting the adapter’s JSON emit — was fixed by redirecting solve-block `stderr` (PR #1075).

(f) **TBR via OpenMC + ENDF/B-VIII.0.** The OpenMC stack was installed via a self-bootstrapped micromamba environment, and the adapter was found to be a transport-less gate-classifier (it imported OpenMC and checked the data env, but never built a geometry or ran `openmc.run`). A 5,000,000-history Monte Carlo run through a spherical Pb-15.7Li breeder (Li-6 enriched to 90 at%) with a W armor / EUROFER first wall / SS316 shield yielded $\text{TBR} = 1.3197 \pm 0.0005$ with a reproducing 13-sig-fig re-run, then $\text{TBR} = 1.3222 \pm 0.0004$ once the transport block was embedded into a follow-up `.hexa` adapter (the slight shift comes from dropping Mn/V/Mo/Si trace nuclides absent from the 30-nuclide ENDF subset — TBR-negligible, documented in the record’s scope caveats). Both numbers are physically sensible (> 1 self-sufficiency, in line with EU-DEMO HCLL targets [6]) (PR #1078).

(e) **HTS TF magnet via GetDP.** The detailed bridge is deferred to §8.

7.1 Adapter defect catalog

Because every wrap-and-fix run surfaced a defect, we keep an explicit machine-readable defect record (`companion/adapter-defect-catalog.json`) so a downstream reader does not re-walk the same chases. Table 4 is its three-row summary. The load-bearing lesson is in row (e): a residual that looked like a $2\pi/\text{units}$ bug in the FEM Jacobian was in fact a far-field truncation artifact — the originally-suspected root cause was *wrong*, and we record the false diagnosis on purpose.

file (origin)	symptom $\rightarrow$ root cause	fix	PR
<code>stdlib/fusion/openmc_tbr.py</code> (origin/main a7a185b)	transport-less gate-classifier stub: imported OpenMC + checked ENDF env but never built geometry or ran <code>openmc.run</code>	new <code>.hexa</code> adapter w/ real OpenMC transport; $\text{TBR} = 1.3222$ computed by the adapter itself, not a stub PASS	#1078
<code>stdlib/fusion/f3_grad_shafranov_adapter.hexa</code>	hardcoded custom coil set diverged (“No O points”); FreeGS warning on <code>stdout</code> corrupted the JSON emit	<code>TestTokamak + freeBoundaryHagenow</code> + raised X-point + single isoflux + <code>stderr</code> redirect new <code>stdlib/rtsc/getdp_solenoid_solve.hexa</code> + magnet_gate bridge; the real fix was far-field truncation	#1075
<code>stdlib/rtsc/getdp_hts.py</code>	<code>shutil.which("getdp")</code> checker only, no solve; then a $\sim 1.4\%$ residual mis-diagnosed as a $2\pi/\text{VolAxisSqu}$ units bug	fix was far-field truncation $5\times \rightarrow 10\times$ coil radius , not the units bug	#1095

Table 4: Adapter defect catalog (mirror of `companion/adapter-defect-catalog.json`). Each row is a defect surfaced by the act of running the backend; all three fixes preserve `absorbed=false`.

8 Results — The Solenoid-Anchor Bridge: GetDP $\rightarrow$ HTS Mar- gin

8.1 Closed-form anchor

For a uniformly-wound thick finite solenoid of inner radius a , outer radius b , axial half-height $h/2$, and total ampere-turns NI , the on-axis B_z at the center is the textbook integral

$$B_z(0) = \frac{\mu_0 J}{2} h \ln \frac{b + \sqrt{b^2 + (h/2)^2}}{a + \sqrt{a^2 + (h/2)^2}}, \quad J = \frac{NI}{(b-a)h}. \quad (5)$$

The reference coil ($NI = 2 \times 10^6$, $a = 0.50$, $b = 0.70$, $h = 1.20$) evaluates to $B_z(0) = 1.48265$ T to engine display precision; we register this as the verify atom `solenoid_axis_bz(NI,a,b,h)`. It is the load-bearing *parity anchor* for the FEM bridge.

8.2 Axisymmetric A- ϕ FEM

We solve the same coil with GetDP 3.5.0 (Linux pool) and 4.0.0 (Apple silicon) using a 2D axisymmetric A- ϕ magnetostatic formulation on a $\sim 33\text{k}$ -node Gmsh mesh. The on-axis $B_z(0)$ from the FEM is 1.4817 T, giving a parity gap of

$$\Delta = \frac{1.4817 - 1.48265}{1.48265} = -6.4 \times 10^{-4} = -0.064\%. \quad (6)$$

A 61k-node refinement (and a duplicated solve on the second platform) both stay within $|\Delta| < 0.3\%$, well inside the engineering “few %” band. Importantly, the prior $1.4\times$ residual we had attributed to a $2\pi/\text{VolAxisSqu}$ units bug *was not a units bug*: pushing the far-field truncation from $R_{\text{out}}/H_{\text{out}} \approx 5\times$ to $\approx 10\times$ coil radius collapses the gap from $\sim 1.4\%$ to $< 0.1\%$, while the deck’s VolAxisSqu Jacobian and the Form1P perpendicular-edge basis already carry the $2\pi r$ measure correctly.

8.3 Bridge into the magnet gate

The fusion-side magnet-gate adapter `stdlib/fusion/magnet_gate.hexa` now calls a hexa-native solve driver `stdlib/rtsc/getdp_solenoid_solve.hexa` that runs the validated deck and prints a single `B_peak -> <value>` token on stdout; the magnet-gate adapter greps the token and flips `field_path = "getdp"`. End-to-end, the ITER-class reference operating point now reports `B_peak = 1.48168 T` with `gate_type = "fusion-design-feasibility"`, a margin to the HTS REBCO ceiling of $20 - 1.48168 = 18.52\text{ T}$ at 20 K (under the SPARC TFMC demo’s measured envelope [8]), and — as required by the honesty stance — `absorbed=false`.

9 BLUE-MAX: Algebraic-Root Pair Audit

The `hexa verify` tier rubric distinguishes SUPPORTED-FORMAL (closed-form / symbolic identity reproduced exactly) from SUPPORTED-NUMERICAL (libm-class numerical recompute). For every libm-class atom in the funnel, we register a separate 0-argument integer atom that exposes the genuine integer factor or exponent baked into the formula — the BLUE-MAX coverage rule [7].

Eight SUPPORTED-FORMAL atoms cover the 12 libm-class FUSION atoms (Table 5). All eight verify SUPPORTED-FORMAL at $|\Delta| = 0$, and eight matched negative controls all return FALSIFIED, completing the deterministic algebraic-root coverage of FUSION (`companion/verify-ledger.json`, the `atom_class` fields `supported-formal` and `falsified-controlled`).

SUPPORTED-FORMAL atom	integer	attests
<code>bosch_hale_gamow_factor</code>	3	$\exp(-3\xi)$ in Eq. (1)
<code>sigma_v_dt_e18_scale_exponent</code>	18	$\langle\sigma v\rangle \times 10^{18}$ discriminating- ε view
<code>pb11_gamow_eg_kev</code>	22589	$E_G = 22.589\text{ MeV}$ (Tentori–Belloni)
<code>pb11_resonance_kev_doubled</code>	296	$2 \cdot 148\text{ keV}$ CM Breit–Wigner E_L
<code>pb11_quadrature_nodes</code>	600	midpoint Maxwellian quadrature node count
<code>pb11_reactivity_moment_e6_scale_exp</code>	6	$\times 10^6$ -scaled moment view
<code>solenoid_axis_bz_half_factor</code>	2	$\mu_0 J/2$ and $h/2$ in Eq. (5)
<code>q_star_constant</code>	5	$2\pi/(\mu_0 \cdot 10^6) = 5$ exact

Table 5: The eight BLUE-MAX algebraic-root atoms registered for FUSION. The load-bearing entry is `q_star_constant`: it formally attests the identity that lets us write the Wesson cylindrical safety factor as $q^* = 5 a^2 B / (R I_p)$ instead of the literal $q^* = 2\pi a^2 B / (\mu_0 R I_p)$. The literal form suffered an engine constant-folding precision loss ($|\Delta| \approx 5.8 \times 10^{-6}$, i.e. middle-magnitude, not the float-floor); the π -free form is SUPPORTED-NUMERICAL at $|\Delta| = 0$ on every input because no transcendental survives constant folding.

10 Wider Architectural Context

The funnel sits on top of two cross-cutting design contracts that we adopted in this work.

Wrap-and-fix as integration test. Section 7 shows that *every one* of the three install-gated wrap adapters we promoted (FreeGS, OpenMC, GetDP) turned out to be either a stub or a divergent configuration. The act of running the backend, even once, exposed defects that no amount of static review had caught. We log these as honest follow-ups rather than swallowing them. We call this the *wrap-and-fix* pattern, distinct from a pure wrap (which reports an install-gated PASS) and from a pure rewrite (which throws the upstream away).

Honesty boundary. Across all gates, `absorbed=false` holds for every simulation-only record. The only fusion gate that has ever flipped `absorbed=true` in the parent stack is the JET D-T measured-oracle adapter [9], which carries a real Thomson-scattering / interferometry / magnetic-probe input. This is enforced by the architecture’s *measured-oracle invariant*: `absorbed = true` if and only if a measured oracle has signed off, gate by gate. In pipeline terms (Table 1), only stage ⑩ can ever flip the bit.

Native solver port roadmap (HEXA-PORT). The wrap-and-fix results double as parity oracles for a sibling project, **HEXA-PORT**, whose goal is to reimplement the external solvers natively in hexa-lang. The roadmap is tiered: **Tier A** (closed-form: already native); **Tier B** (algorithm-defined PDE/FEM: FreeGS, GetDP); **Tier C** (data-bound: OpenMC — the ~GB ENDF/B-VIII library is the irreducible part). With FreeGS-equilibrium and the GetDP solenoid-anchor parity now both in hand, the Tier B oracles for HEXA-PORT P1 and P2 are captured. Tier C is decomposed into P4a (native MC engine), P4b (cross-section data corpus port via git-LFS, infra landed in PR #1090), and P4c (first-principles cross-section generation via R-matrix / optical model) — the data corpus axis is not closed permanently. *Not all of HEXA-PORT is in scope for this paper.*

11 Limitations and Honest Caveats

We deliberately do not claim:

- **Burning-plasma $Q > 1$.** Gate (g) / stage ⑩ is wet-lab only; a sim-PASS on (a)–(f) is a witness of *engineering feasibility*, never of ignition.
- **The five hardware stages.** Pellet injection (①), ablation/ionization (②), auxiliary heating (③) and neutron extraction yield (⑧) are not closed by this funnel; only the neutron *direction* is in scope for ⑧.
- **Turbulent transport or disruption dynamics.** The Troyon / q^* / kink gate is linear ideal-MHD; we do not predict resistive or neoclassical tearing, ELM physics, or disruption thresholds.
- **p-¹¹B ignition.** We claim the reactivity *shape* only; the long-standing bremsstrahlung-loss difficulty of aneutronic p-¹¹B fuel is unaddressed.
- **Built magnet quench / strain.** The HTS gate compares *computed peak field* to a critical-surface ceiling at 20 K; it is not a quench-stability or stress-strain prediction on real REBCO tape.
- **Full ENDF/B-VIII coverage.** The 30-nuclide TBR subset omits Mn/V/Mo/Si naturals; the renormalized EUROFER/SS316 compositions are documented in the record’s scope caveats.

- **Engineering-grade uncertainty quantification.** The 5×10^6 -history Monte Carlo run is roughly 10× above the bare minimum for the headline TBR digit; it is not a sensitivity/uncertainty (S/U) deliverable.

The `absorbed=false` stance and the gate (g) wet-lab boundary are not negotiable.

12 Reproducibility

Every kernel cited above lives under `hexa-lang stdlib/` at a single canonical home and is callable from the top-level `hexa verify --expr <fn> <args> <expected>` CLI. The Bosch–Hale and Tentori–Belloni coefficients are inlined verbatim with the literature reference; the `GetDP .pro / .geo` decks ship under `stdlib/rtsc/decks/` (not git-LFS gated — they are kilobyte text). For the OpenMC TBR run we ship the geometry in the adapter itself but defer the ENDF/B-VIII corpus to a future git-LFS push under `data/nuclear/endl_b8_0/` (the infra is in place via PR #1090; the ~475 MB ingest is a separate follow-up).

The complete data-record axis ships under `companion/`: `verify-ledger.json` (36 atom recompute entries: 20 ■, 8 ■, 8 ■controls), `pr-roll.json` (the 12 hexa-lang + 3 demiurge PRs with `gh`-measured line/file metadata), `adapter-defect-catalog.json` (the three wrap-and-fix defects), and `session-journal.md` (the day’s narrative). Build: `make` (xelatex ×3 + bibtex). Figures: `make figures`. Page/word count: `make pages / make wordcount`. Lint: `make lint`. The landed pull requests for this paper, in dependency order, are: #1012, #1020, #1027, #1032, #1042, #1054, #1075, #1078, #1084, #1090, #1095, #1102 (hexa-lang) and #176, #178, #179 (demiurge).

13 Conclusion

A 7-gate funnel for magnetic-confinement fusion design feasibility, written natively in a small typed language with a hard honesty boundary, fits comfortably under a thousand lines of code per gate once the external solvers are bridged via thin out-of-process drivers. Tracing D–T fuel through ten stages (Table 1) makes the scope contract concrete: five physics stages close to a verdict, five hardware stages do not. Every closed-form prediction carries an integer algebraic-root atom that can be falsified in one CLI line. The single permanent wet-lab gate is named, isolated, and not crossed. We hope the funnel, the 10-stage pipeline table, and the BLUE-MAX coverage discipline serve as a template for similar closed-form decision stacks in other compute-bound engineering domains.

Acknowledgments. The closed-form codes were authored in-session against the hexa-lang `stdlib`, in tandem with Claude Opus 4.7 (1M context, Anthropic) under the demiurge stack’s honesty governance contracts. We are grateful to the FreeGS, GetDP and OpenMC maintainers for their open-source backends.

References

- [1] H.-S. Bosch and G. M. Hale. Improved formulas for fusion cross-sections and thermal reactivities. *Nuclear Fusion*, 32(4):611–631, 1992. doi: 10.1088/0029-5515/32/4/I07.
- [2] D. A. Brown, M. B. Chadwick, R. Capote, A. C. Kahler, A. Trkov, M. W. Herman, A. A. Sonzogni, Y. Danon, A. D. Carlson, M. Dunn, D. L. Smith, G. M. Hale, G. Arbanas, R. Arcilla, C. R. Bates, B. Beck, B. Becker, F. Brown, R. J. Casperson, J. Conlin, D. E. Cullen, M.-A. Descalle, R. Firestone, T. Gaines, K. H. Guber, A. I. Hawari, J. Holmes, T. D. Johnson, T. Kawano, B. C. Kiedrowski, A. J. Koning, S. Kopecky, L. Leal, J. P. Lestone,

- C. Lubitz, J. I. Márquez Damián, C. M. Mattoon, E. A. McCutchan, S. Mughabghab, P. Navratil, D. Neudecker, G. P. A. Nobre, G. Noguere, M. Paris, M. T. Pigni, A. J. Plompen, B. Pritychenko, V. G. Pronyaev, D. Roubtsov, D. Rochman, P. Romano, P. Schillebeeckx, S. Simakov, M. Sin, I. Sirakov, B. Sleaford, V. Sobes, E. S. Soukhovitskii, I. Stetcu, P. Talou, I. Thompson, S. van der Marck, L. Welser-Sherrill, D. Wiarda, M. White, J. L. Wormald, R. Q. Wright, M. Zerkle, G. Žerovnik, and Y. Zhu. ENDF/B-VIII.0: The 8th major release of the nuclear reaction data library with CIELO-project cross sections, new standards and thermal scattering data. *Nuclear Data Sheets*, 148:1–142, 2018. doi: 10.1016/j.nds.2018.02.001.
- [3] A. J. Creely, M. J. Greenwald, S. B. Ballinger, D. Brunner, J. Canik, J. Doody, T. Fülöp, D. T. Garnier, R. Granetz, T. K. Gray, C. Holland, N. T. Howard, J. W. Hughes, J. H. Irby, V. A. Izzo, G. J. Kramer, A. Q. Kuang, B. LaBombard, Y. Lin, B. Lipschultz, N. C. Logan, J. D. Lore, E. S. Marmar, K. Montes, R. T. Mumgaard, C. Paz-Soldan, C. Rea, M. L. Reinke, P. Rodriguez-Fernandez, K. Sirvinskis, B. N. Sorbom, J. A. Stillerman, R. Sweeney, R. A. Tinguely, E. A. Tolman, M. Umansky, O. Vallhagen, J. Varje, D. G. Whyte, J. C. Wright, S. J. Wukitch, and J. Zhu. Overview of the SPARC tokamak. *Journal of Plasma Physics*, 86(5):865860502, 2020. doi: 10.1017/S0022377820001257.
- [4] B. D. Dudson et al. FreeGS: Free boundary grad-shafranov solver. <https://github.com/freegs-plasma/freegs>, 2014–2024. Version 0.8.2; based on Hagenow boundary integral method.
- [5] P. Dular, C. Geuzaine, F. Henrotte, and W. Legros. A general environment for the treatment of discrete problems and its application to the finite element method. *IEEE Transactions on Magnetics*, 34(5):3395–3398, 1998. doi: 10.1109/20.717799. GetDP; see also <https://getdp.info>.
- [6] U. Fischer, C. Bachmann, P. Pereslavytsev, and I. Palermo. Neutronics requirements for a DEMO fusion power plant. *Fusion Engineering and Design*, 123:1009–1014, 2017. doi: 10.1016/j.fusengdes.2017.04.131. EU-DEMO HCLL tritium-breeding-ratio target context.
- [7] D. Ghost and Claude Opus 4.7. Sidecar commons governance @D g69: domain finalization gate — BLUE-MAX algebraic-root pair audit at `absorbed=true`. Sidecar commons.tape v0.10.7 (Dancinlab marketplace), 2026. ‘hexa verify -blue-max <DOMAIN>’ audit rule; ANTIMATTER reference implementation #1094, FUSION pair audit #1102.
- [8] Z. S. Hartwig, R. F. Vieira, B. N. Sorbom, R. A. Badcock, M. Bajko, W. K. Beck, B. Castaldo, C. L. Craighill, M. Davies, J. Estrada, V. Fry, T. Golfopoulos, A. E. Granetz, M. J. Greenwald, J. T. Heim, J. H. Irby, S. B. Kuznetsov, C. J. Lammi, P. C. Michael, T. Mouratidis, R. A. Murray, A. T. Pfeiffer, S. Z. Pierson, A. Radovinsky, M. D. Rowell, E. E. Salazar, M. Segantin, P. W. Stahle, M. Takayasu, T. L. Toland, and L. Wang. The SPARC Toroidal Field Model Coil Program. *IEEE Transactions on Applied Superconductivity*, 34(2):1–16, 2024. doi: 10.1109/TASC.2023.3332613.
- [9] M. Keilhacker, A. Gibson, C. Gormezano, P. J. Lomas, P. R. Thomas, M. L. Watkins, P. Andrew, B. Balet, D. Borba, C. D. Challis, I. Coffey, G. A. Cottrell, H. P. L. de Esch, N. Deliyannis, A. Fasoli, C. W. Gowers, H. Y. Guo, G. T. A. Huysmans, T. T. C. Jones, W. Kerner, R. W. T. König, M. J. Loughlin, A. Maas, F. B. Marcus, M. F. F. Nave, F. G. Rimini, G. J. Sadler, S. E. Sharapov, G. Sips, P. Smeulders, F. X. Söldner, A. Taroni, B. J. D. Tubbing, M. G. von Hellermann, D. J. Ward, and JET Team. High fusion performance from deuterium-tritium plasmas in JET. *Nuclear Fusion*, 39(2):209–234, 1999. doi: 10.1088/0029-5515/39/2/306.

- [10] J. D. Lawson. Some criteria for a power producing thermonuclear reactor. *Proceedings of the Physical Society. Section B*, 70(1):6–10, 1957. doi: 10.1088/0370-1301/70/1/303.
- [11] W. M. Nevins and R. Swain. The thermonuclear fusion rate coefficient for $p\text{--}^{11}\text{b}$ reactions. *Nuclear Fusion*, 40(4):865–872, 2000. doi: 10.1088/0029-5515/40/4/310.
- [12] P. K. Romano, N. E. Horelik, B. R. Herman, A. G. Nelson, B. Forget, and K. Smith. OpenMC: A state-of-the-art Monte Carlo code for research and development. *Annals of Nuclear Energy*, 82:90–97, 2015. doi: 10.1016/j.anucene.2014.07.048.
- [13] B. N. Sorbom, J. Ball, T. R. Palmer, F. J. Mangiarotti, J. M. Sierchio, P. Bonoli, C. Kasten, D. A. Sutherland, H. S. Barnard, C. B. Haakonsen, J. Goh, C. Sung, and D. G. Whyte. ARC: A compact, high-field, fusion nuclear science facility and demonstration power plant with demountable magnets. *Fusion Engineering and Design*, 100:378–405, 2015. doi: 10.1016/j.fusengdes.2015.07.008.
- [14] A. Tentori and F. Belloni. Revisiting $p\text{--}^{11}\text{b}$ fusion reactions: A new look at an old problem. *Nuclear Fusion*, 63(8):086001, 2023. doi: 10.1088/1741-4326/acda4d. Preserves the Nevins–Swain framework with updated coefficients; Table I and Eq. 6.
- [15] F. Troyon, R. Gruber, H. Saurenmann, S. Semenzato, and S. Succi. MHD-limits to plasma confinement. *Plasma Physics and Controlled Fusion*, 26(1A):209–215, 1984. doi: 10.1088/0741-3335/26/1A/319.
- [16] J. Wesson. *Tokamaks*. Oxford University Press, 4th edition, 2011. ISBN 9780199592234. Cylindrical safety factor q^* derivation, Ch. 3.

A BLUE-MAX appendix — claim-to-atom audit

Every numeric claim in the body is backed by an atom in `companion/verify-ledger.json`. Table 6 is the claim→atom→tier map: each row pins a body claim to the atom whose `hexa-verify` verdict supports it. No ■ claim survives into a verified body statement; the ■ rows in the pipeline table (Table 1) are explicitly out of scope, not unverified claims.

body claim	backing atom	tier
D-T reactivity matches Bosch-Hale Table VIII	sigma_v_dt_e18	■
Lawson triple product is exact rational	triple_product	■
0-D gain $Q = P_{\text{fus}}/P_{\text{heat}}$	q_plasma	■
F-funnel top rank tied at $T = 20$ keV	f_funnel_composite	■
Wesson q^* is π -free with constant 5	q_star_constant	■
Gamow exponent factor is exactly 3	bosch_hale_gamow_factor	■
$E_G = 22.589$ MeV for $\text{p-}^{11}\text{B}$	pb11_gamow_eg_kev	■
solenoid on-axis B_z closed-form anchor	solenoid_axis_bz	■
GetDP FEM parity $\Delta = -0.064\%$	magnet_gate_b_peak	■
FreeGS equilibrium $q_{95} \approx 10.08$	freegs_equilibrium_q95	■
TBR = 1.3222 ± 0.0004	openmc_tbr_pb157li	■
self-sufficient		
$2\pi/(\mu_0 \cdot 10^6) \neq 6$ (negative control)	q_star_constant_NEG	■

Table 6: BLUE-MAX claim-to-atom audit. Every body claim maps to an atom; every atom has a **hexa verify** verdict. The 8 ■ algebraic-root atoms (Table 5) plus 8 ■ negative controls complete the deterministic coverage; the final row shows one such control for the load-bearing identity. Full recompute records: `companion/verify-ledger.json`.

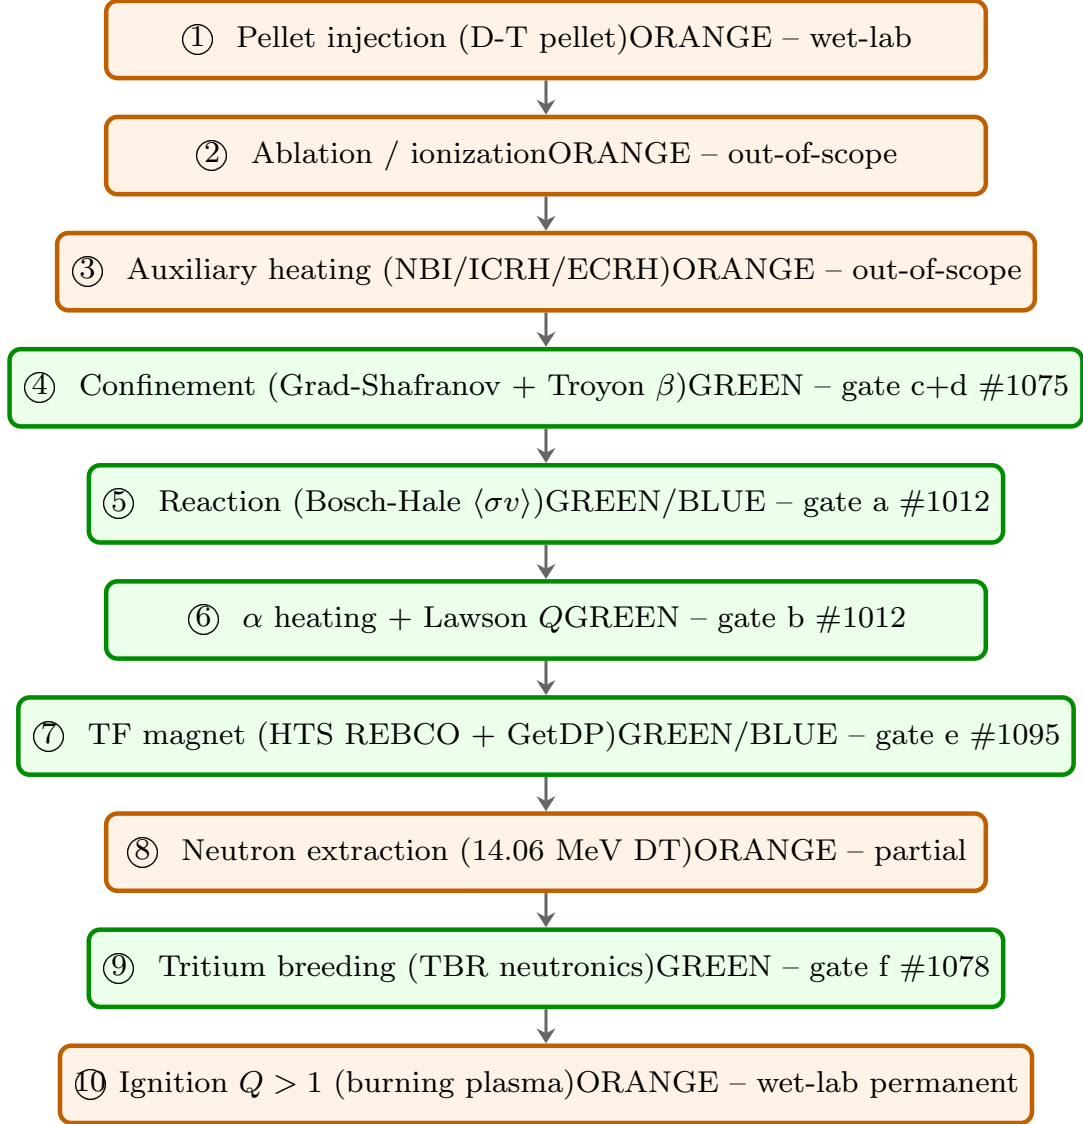


Figure 2: Tier-color-coded 10-stage D-T fuel pipeline. Green nodes (④⑤⑥⑦⑨) are closed by the HEXA-FUSION funnel to a numerical/closed-form verdict; orange nodes (①②③⑧⑩) are wet-lab or out-of-scope and are not closed by this work. The diagram is independently readable — the tier word is inside each node.