

Lecture #11

Thread

Android Things 2020



We're here to help. Talk to a Google Nest expert at (855) 888-8209. [Learn more >](#)

Nest.com has moved to the Google Store.

Nest and Google Home have joined together as Google Nest. Moving forward, you can learn about and buy all Nest products in one place: the Google Store.

[Visit the store](#)



Find the Nest products you're looking for on the Google Store.



Thermostats



Cameras



Doorbell



Alarm system



Lock



Smoke + CO alarm







 casaplex


Nest

Create a home that's thoughtful
– one that takes care of the
people inside it and the world
around it.




Problem

How to **securely** and **scalably** connect an ecosystem of **low-power** products end-to-end, to cloud services, and to consumers?

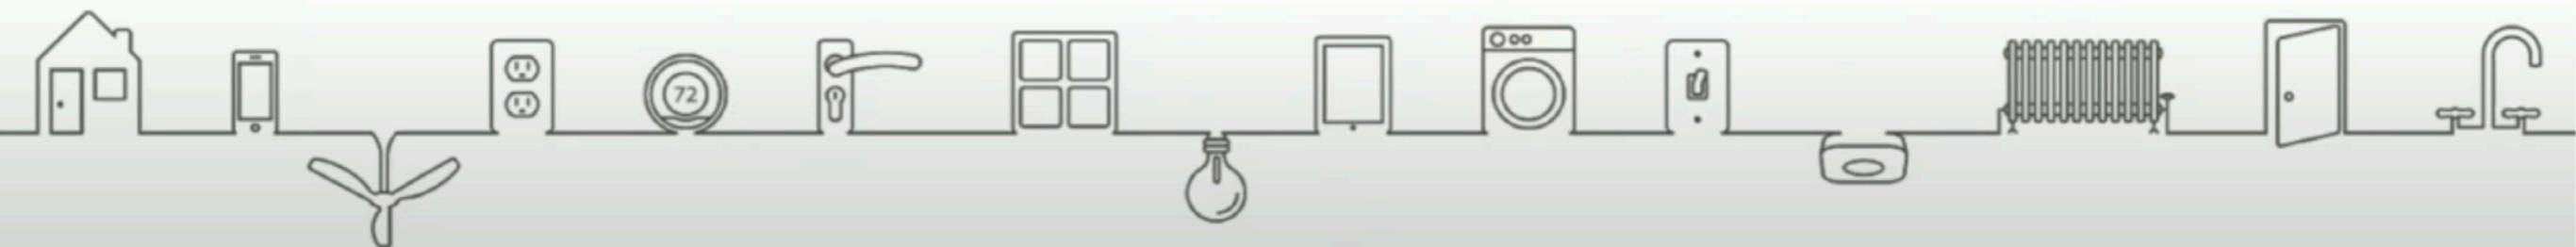

Requirements

- IP-based
- Scalable
- Resilient
- Low power
- Secure

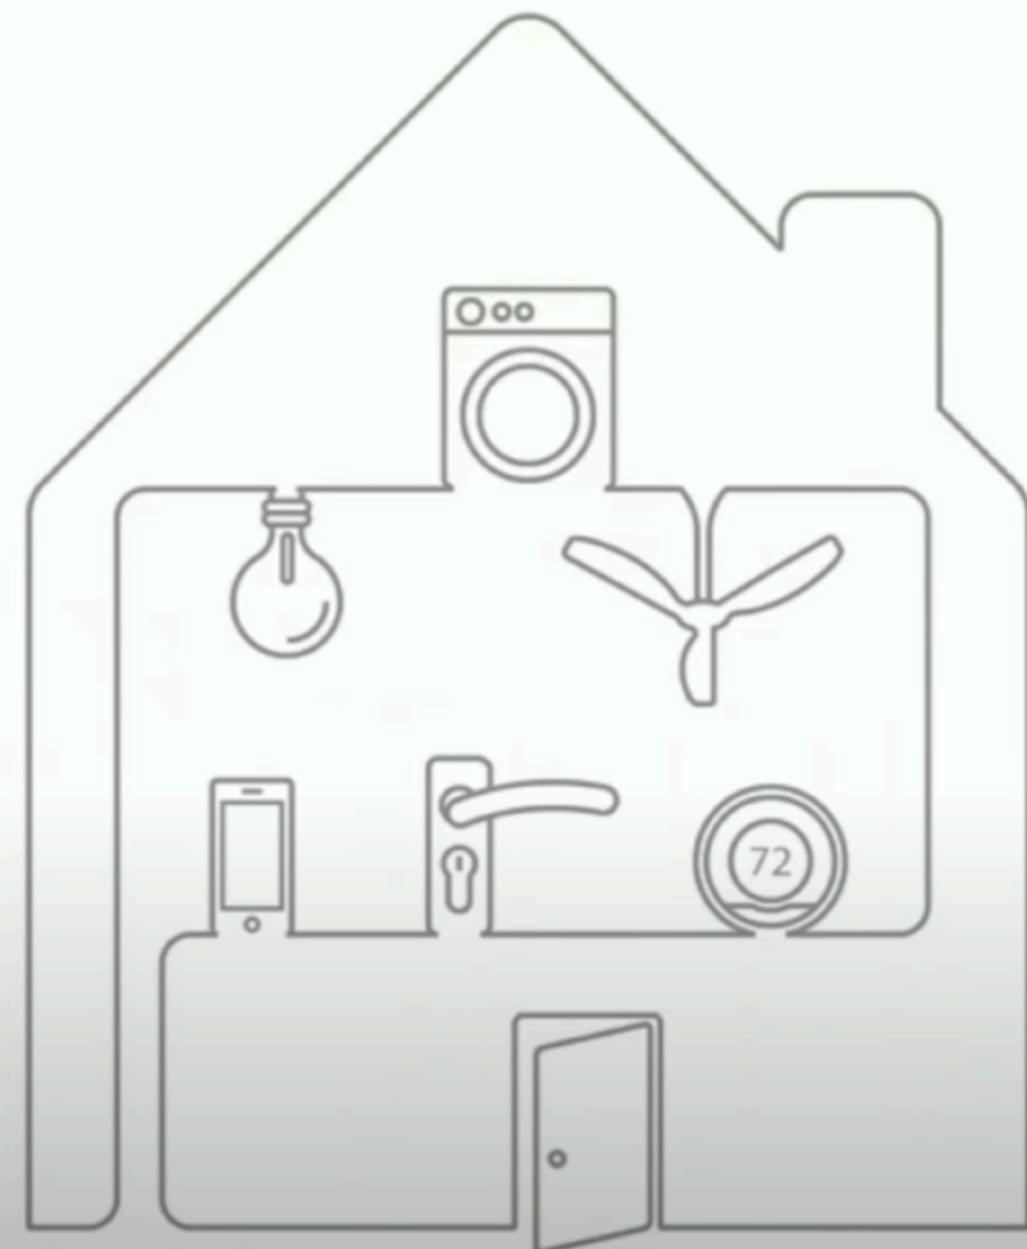

**None of the 2010
technologies were
satisfying the requirements.**

Others agreed

arm



nest

NXP



THREAD
GROUP

DoB: July 2014

Thread Protocol

An open, IPv6-based, low-power, and secure mesh networking technology for IoT products.

Built on the **same IP technology** that drives every Internet-connected device, but designed specifically for the needs of IoT devices.




Builds on Existing Technologies

Same radio used by ZigBee.

Fast time to market.


Low-cost implementations.

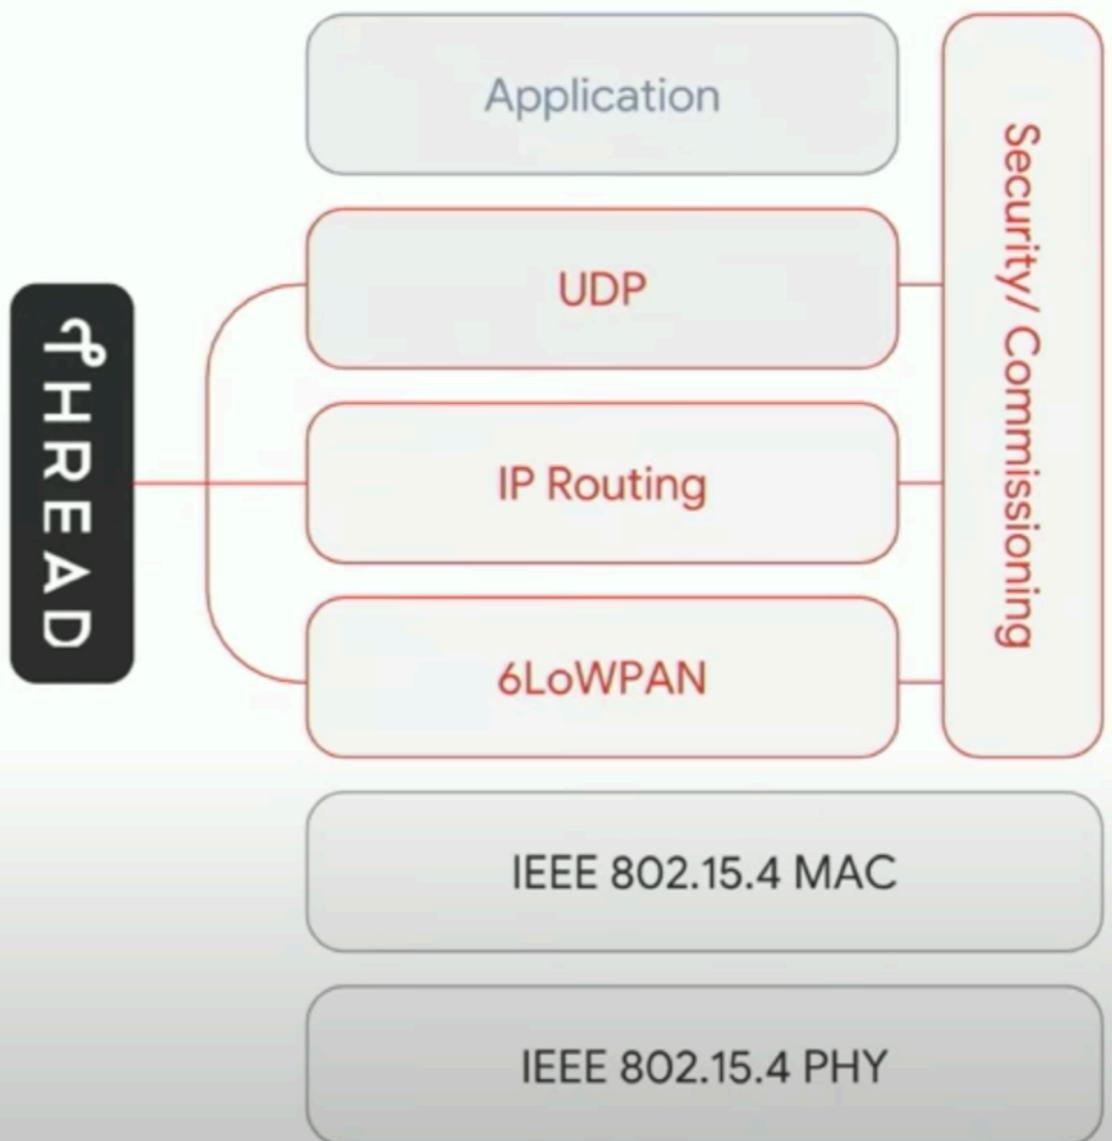

Why IP?

A converged network layer

Build end-to-end applications that utilize multiple link technologies

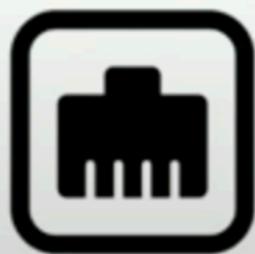

Why IP?

A multi-service network

Host multiple applications using a common network infrastructure



dotdot ≡

Scalable Mesh


Routers forward messages between neighbors

Up to 32 per network

End devices communicate via a router

Up to 511 per router


Hundreds of devices per network

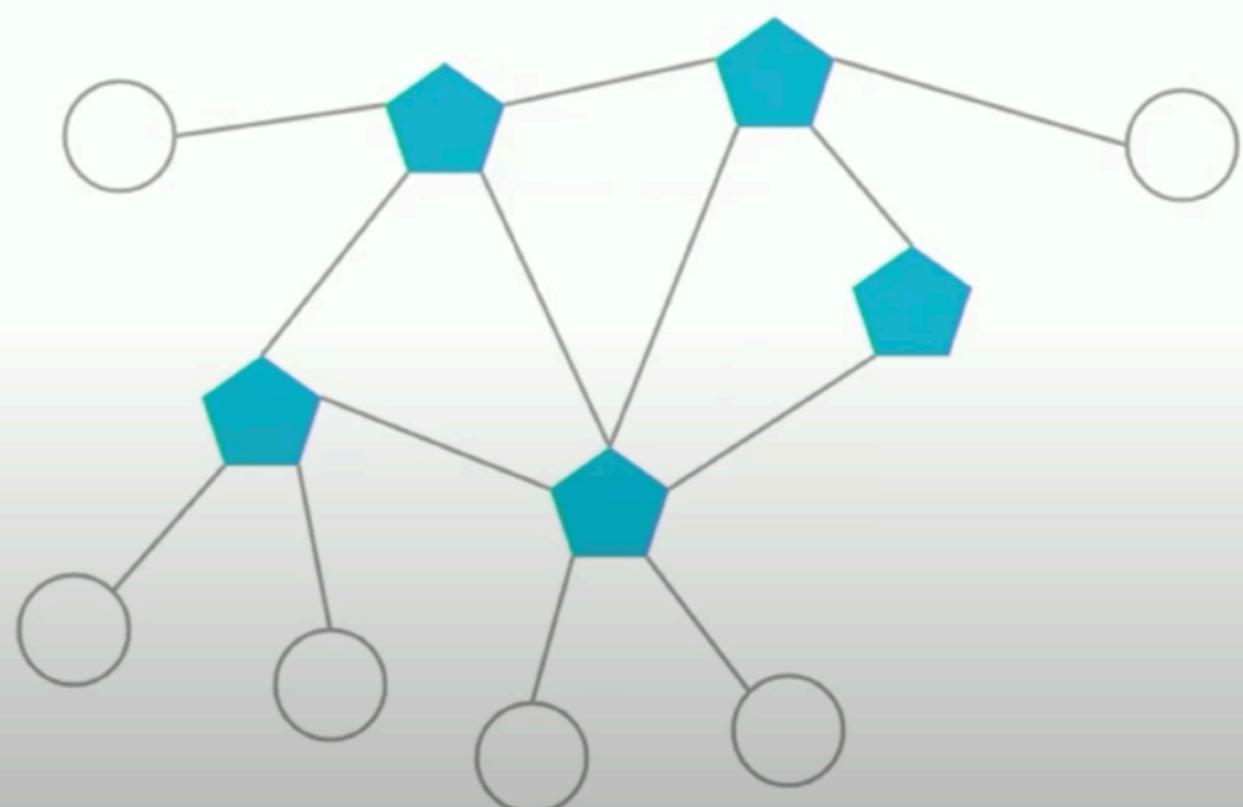

Self-Configuring Routers

Add to **increase connectivity and range**

Remove to **reduce redundant connectivity**

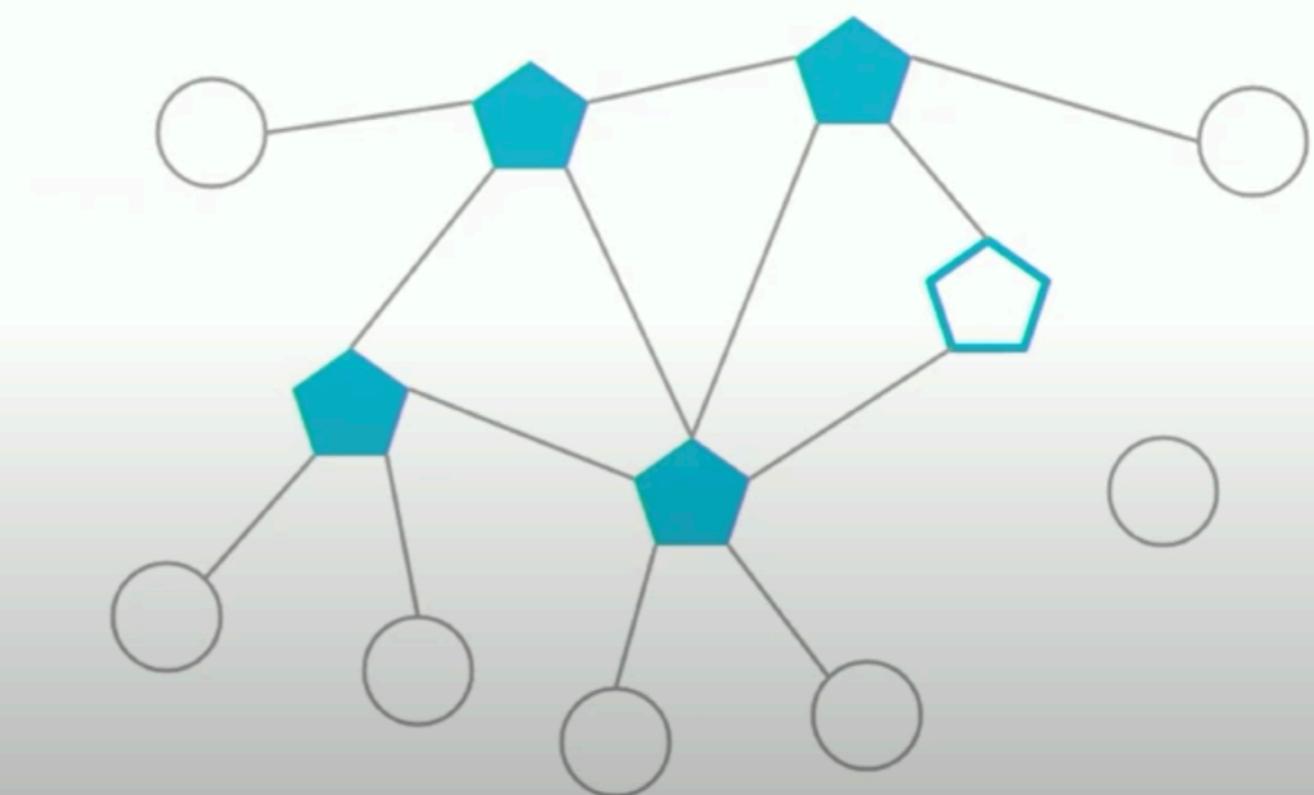

Resilient Mesh Routing


Shortest-path any-to-any routing

Distance-vector routing protocol

Similar to RIP


Maintain and advertise best next hop towards each Thread Router.

Dest	Next	Cost
B	B	1
C	B	2
D	D	1
E	E	1

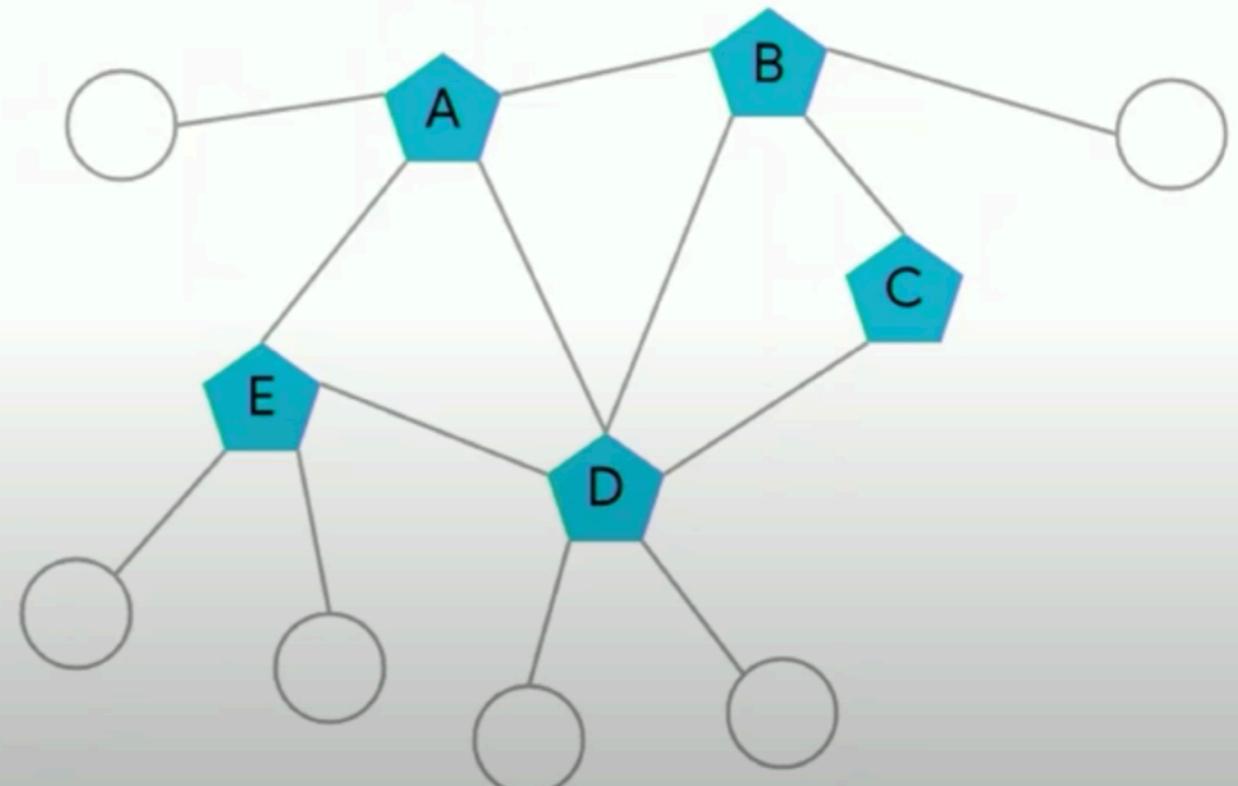

Resilient Border Routing

Multiple border routers to connect Thread to non-Thread networks.

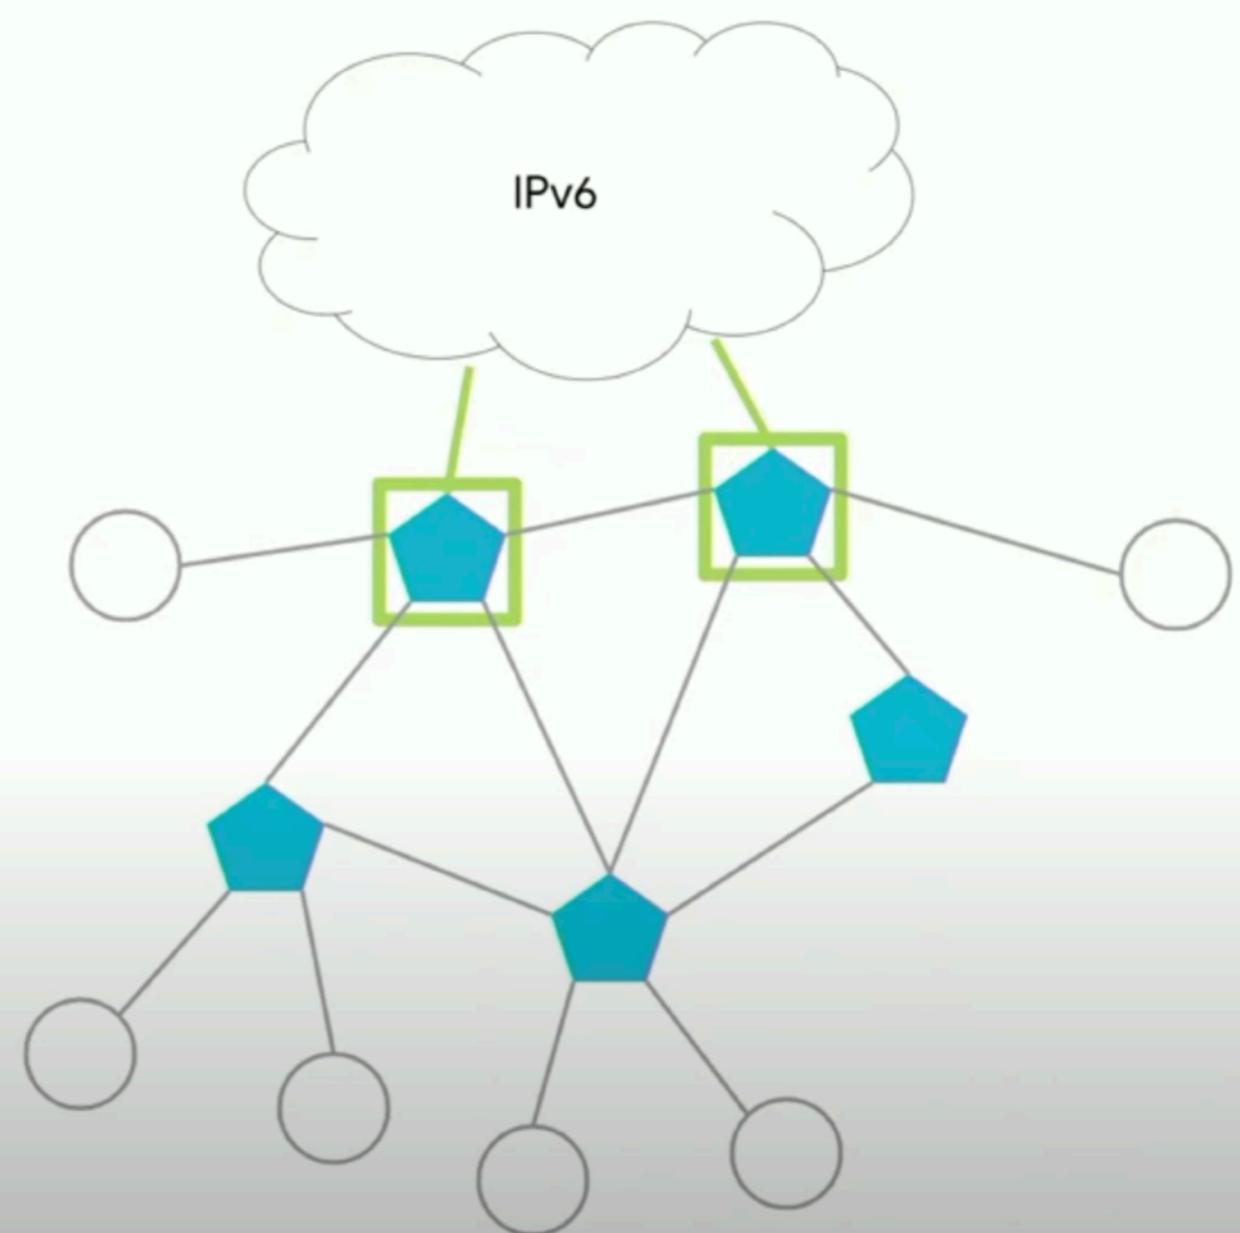


Low Power

Receive power **one-tenth of WiFi**


Sleepy end devices **duty-cycles receiver**

Lifetime in **years** with coin-cells

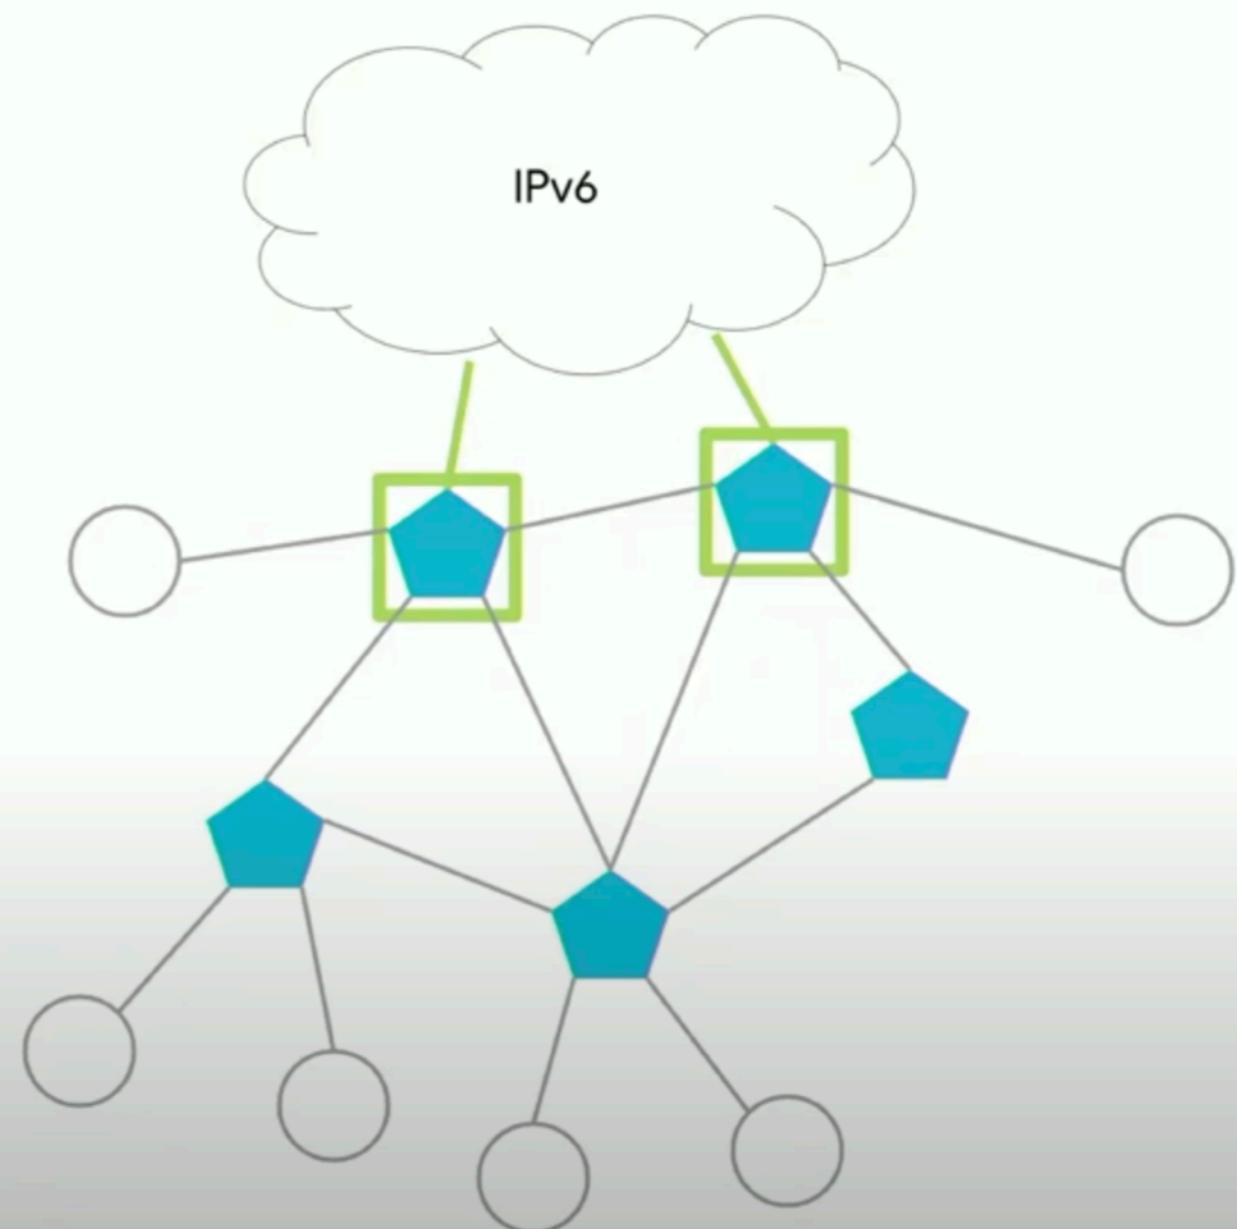

Mandatory Security

All link frames protected using
AES-128 encryption and
**authentication with replay
protection.**

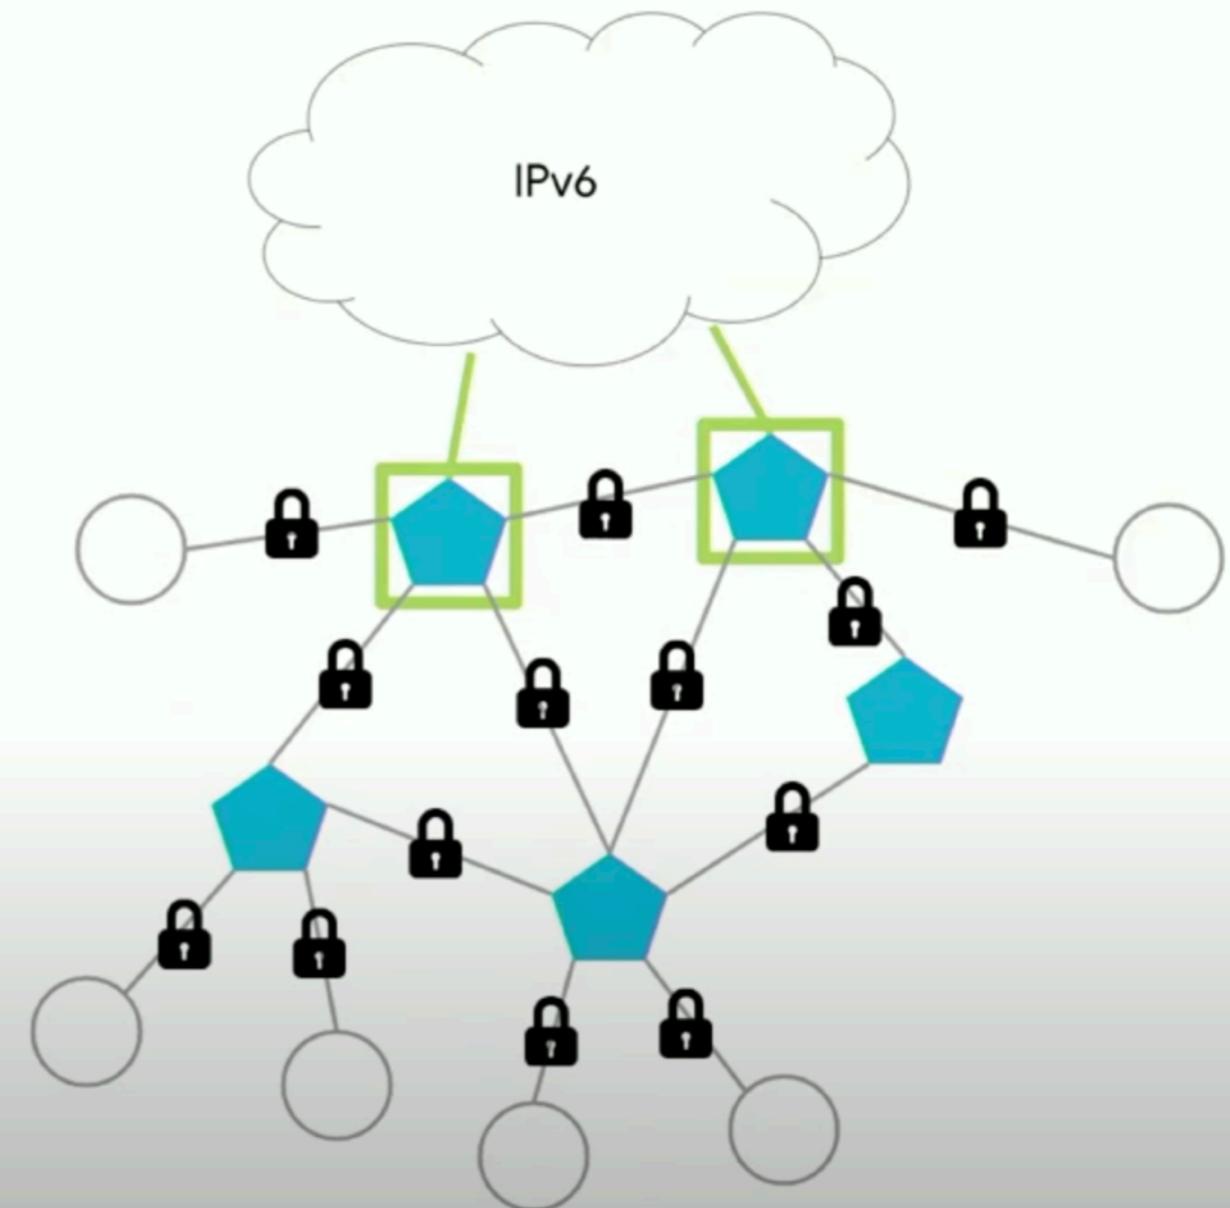


Device Commissioning

User-initiated process involving a physical factor

End-to-end DTLS session via border router

EC J-PAKE ciphersuite for **short pairing codes**

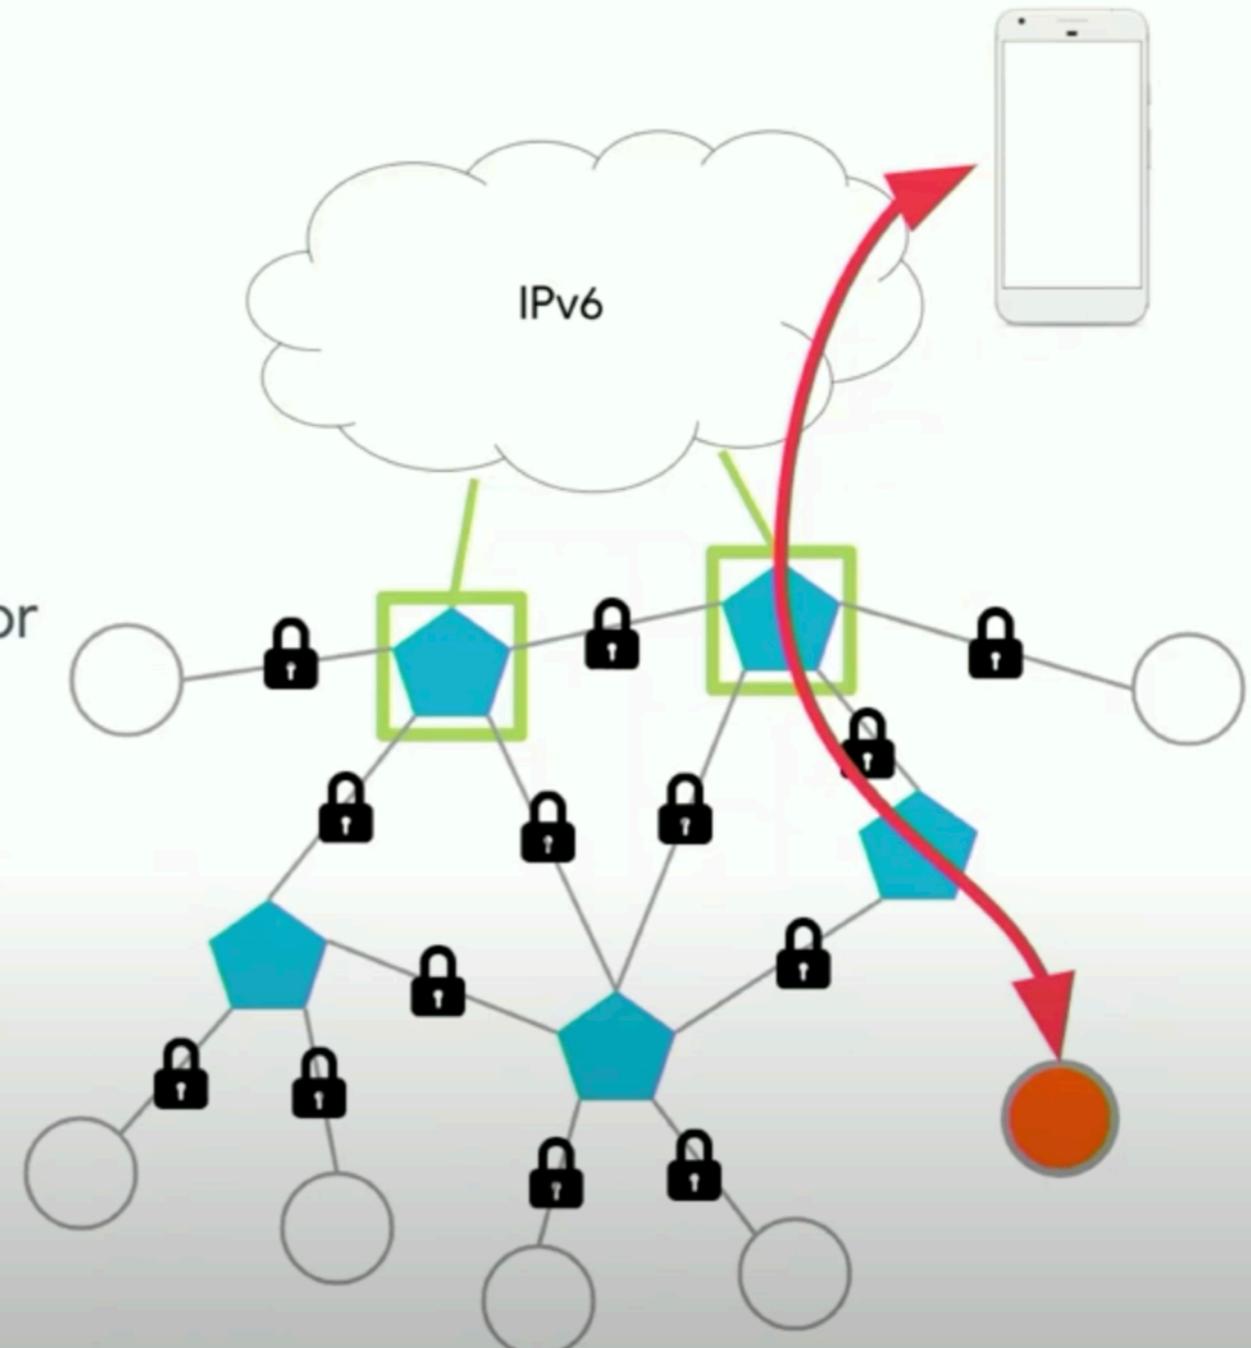

Thread is...

IPv6

Scalable

Resilient

Low power

Secure

No other technology satisfies these requirements.

OPEN THREAD

released by Nest

An **open source** implementation of Thread released by Nest.

To make the networking **technology used in Nest products** more broadly **available to developers**.



openthread/openthread: OpenThread released by Google is an open-source implementation of the Thread networking protocol

github.com/openthread/openthread

Search or jump to... / Pull requests Issues Marketplace Explore

Watch 215 Star 2.1k Fork 695

Code Issues 53 Pull requests 31 Actions Security 0 Insights

OpenThread released by Google is an open-source implementation of the Thread networking protocol <https://openthread.io>

openthread iot google nest wireless mesh-networks ieee-802154 ipv6 internet-of-things embedded

4,296 commits 1 branch 0 packages 4 releases 117 contributors BSD-3-Clause

Branch: master New pull request Create new file Upload files Find file Clone or download

abtink [mle-tlvs] fix method documentation (#4956) Latest commit a272835 2 hours ago

.github [mac-frame] add util functions to generate ack (#4884) 14 hours ago

doc [docs] update Doxygen menu for OTNS and BBR (#4908) 14 days ago

:frame] add util functions to generate ack (#4884) 14 hours ago

:28xx] add `OT_UNUSED_VARIABLE` to avoid compiler warning (#4951) 2 hours ago

:sage] change SetOffset() to return void (#4949) 2 hours ago

:] put transmission AES-CCM* to SubMac layer (#4919) 2 hours ago

Open Source Open Development

Hosted on GitHub

BSD-3 license

Development Kits



IoT Platforms

android
things

 Particle

runtime

 Zephyr™ Project


wpantund

User-space NCP network interface
driver

Standard Linux network interface

Convenient command-line interface

DBus-based management API

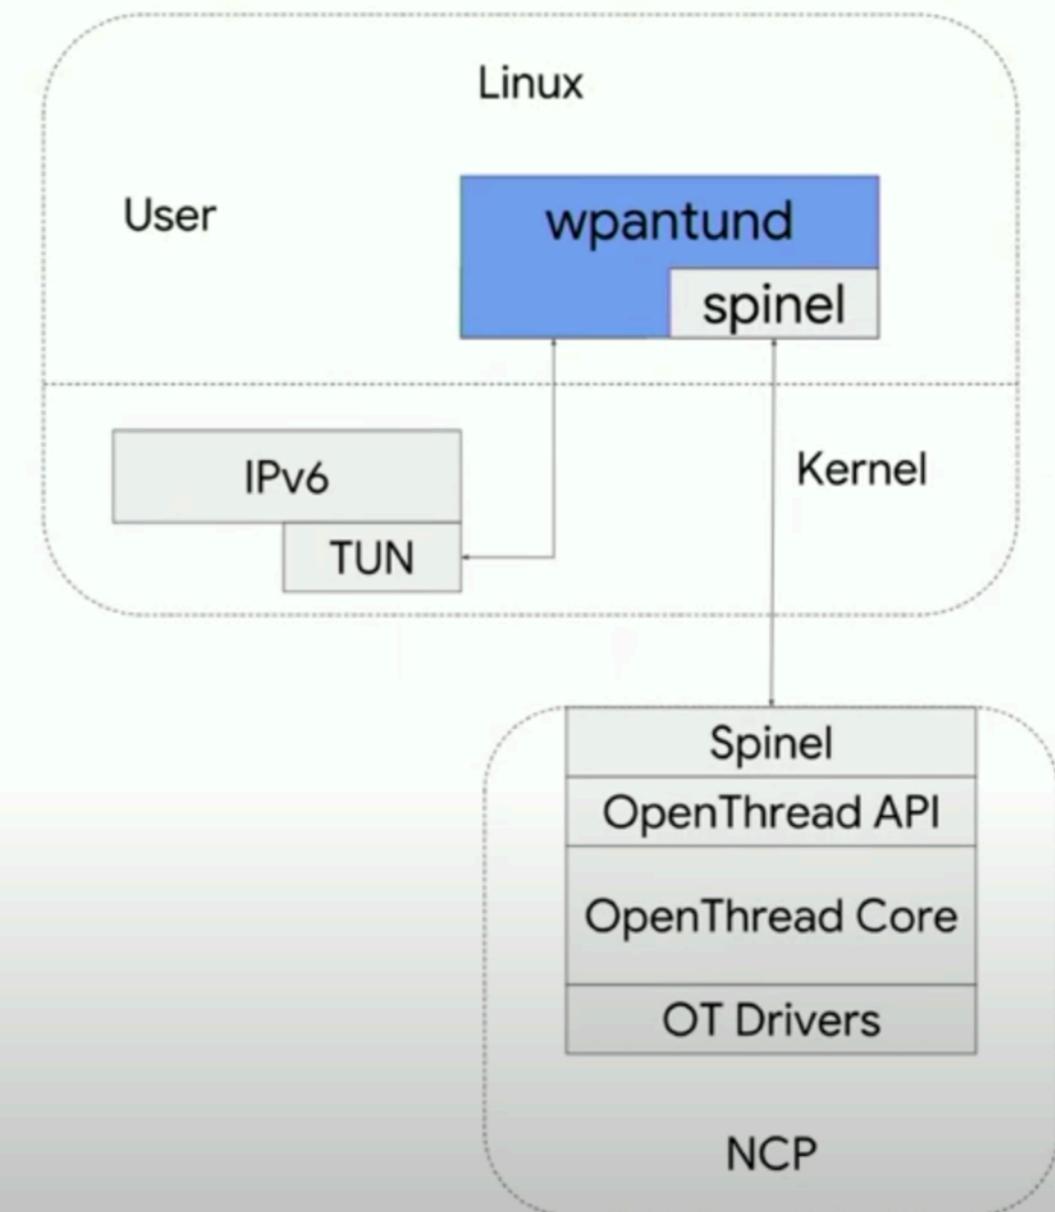

Border Router


Connect Thread network to WiFi/Ethernet

Raspberry Pi 3B or BeagleBone Black

IPv6 autoconfiguration with DHCPv6-PD

IPv4 with NAT64 and DNS64

External Thread Commissioning

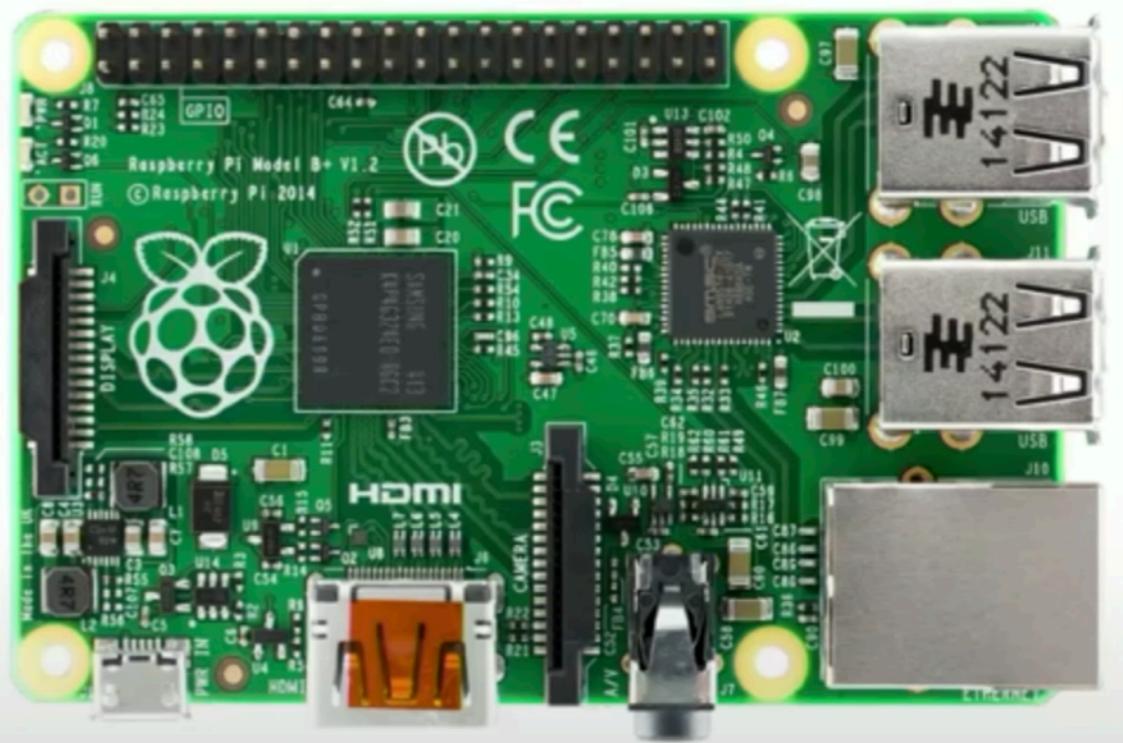

Shipping Today




Nest Detect

Open/close and motion

Thread Sleepy End Device

2-year battery life

CR123 lithium battery

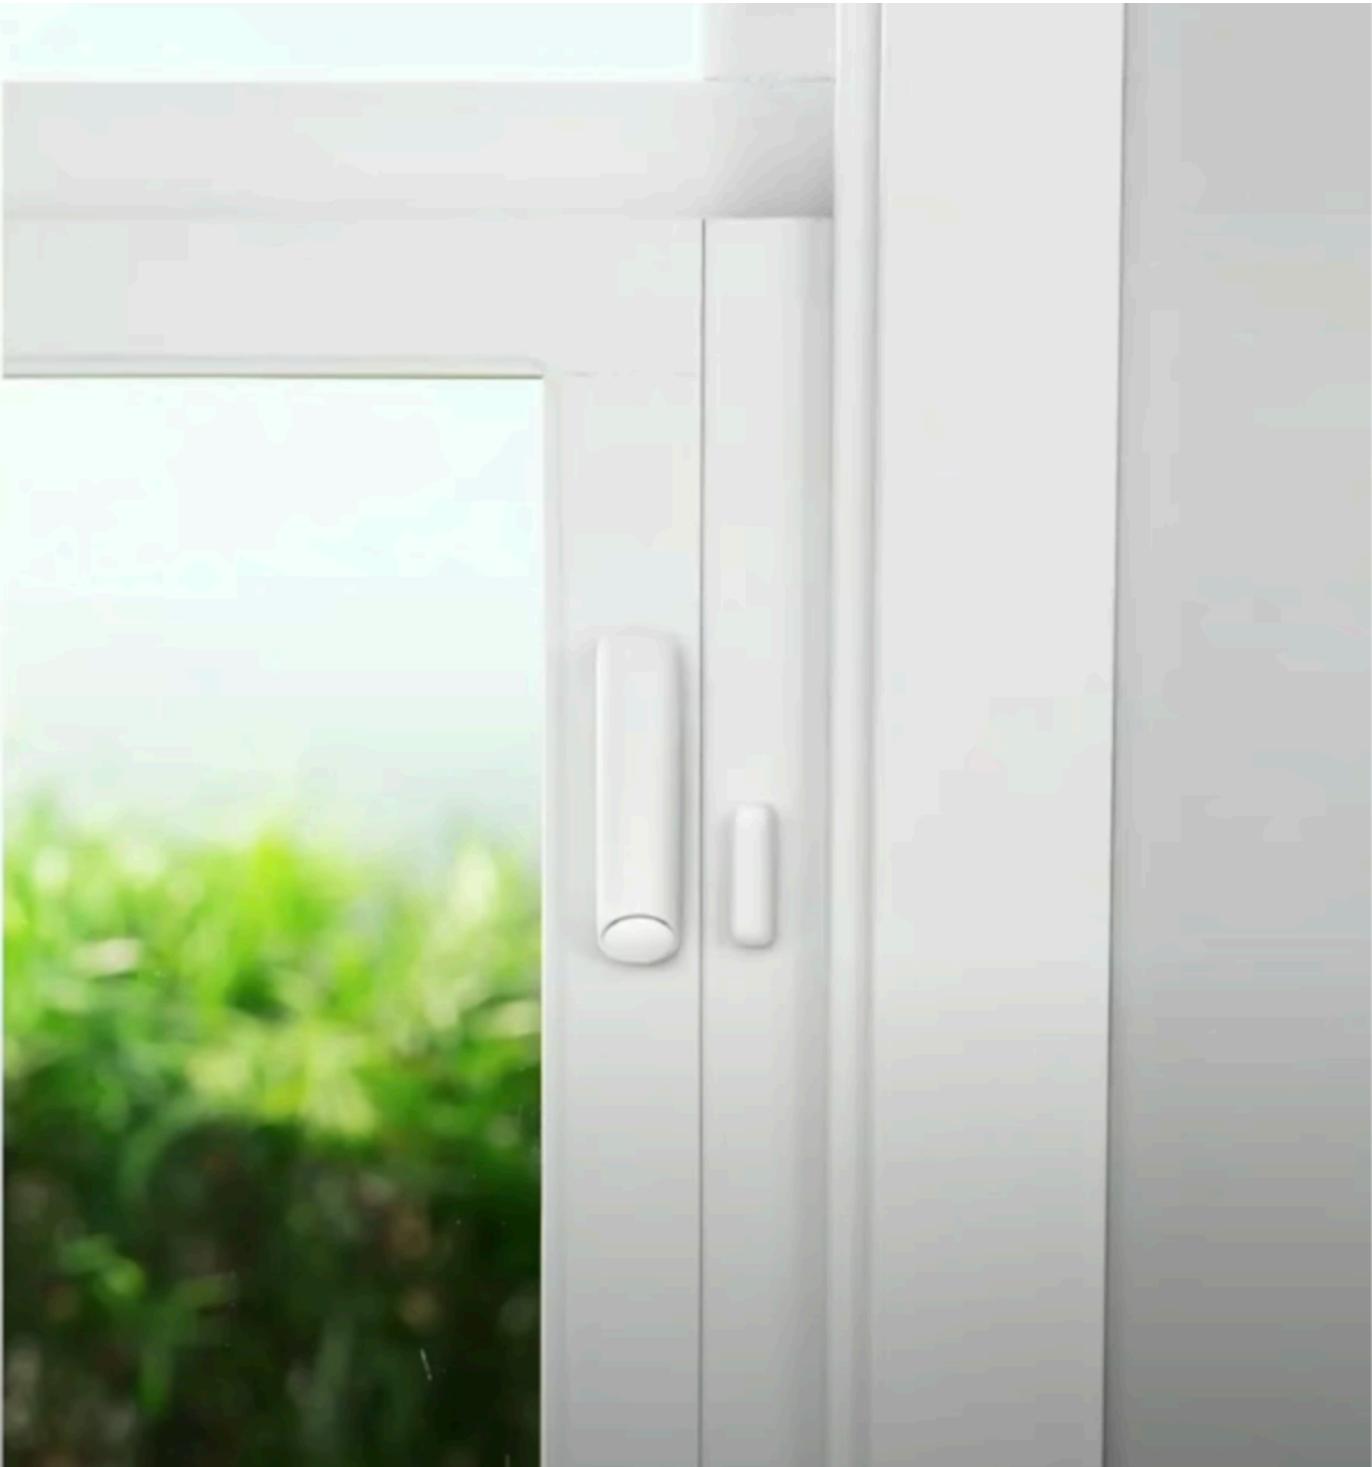

Nest x Yale Lock

Remote lock/unlock in seconds

Secure end-to-end communication

Thread Sleepy End Device

1 year battery life

AA batteries



Nest Guard

Security base

Thread Router and Border Router

Wi-Fi, Cellular, and Thread

12-hour battery backup



Nest Connect

Connectivity for Detect and Lock

Thread Router and Border Router

Wi-Fi and Thread

24-hour battery backup



**How can we use
Thread in our products?**

So many options

Several System Architectures

Several Operating Systems

Several Toolchains

Several Certified Radios




System on Chip

Thread only

Battery powered

Highly integrated

Low cost

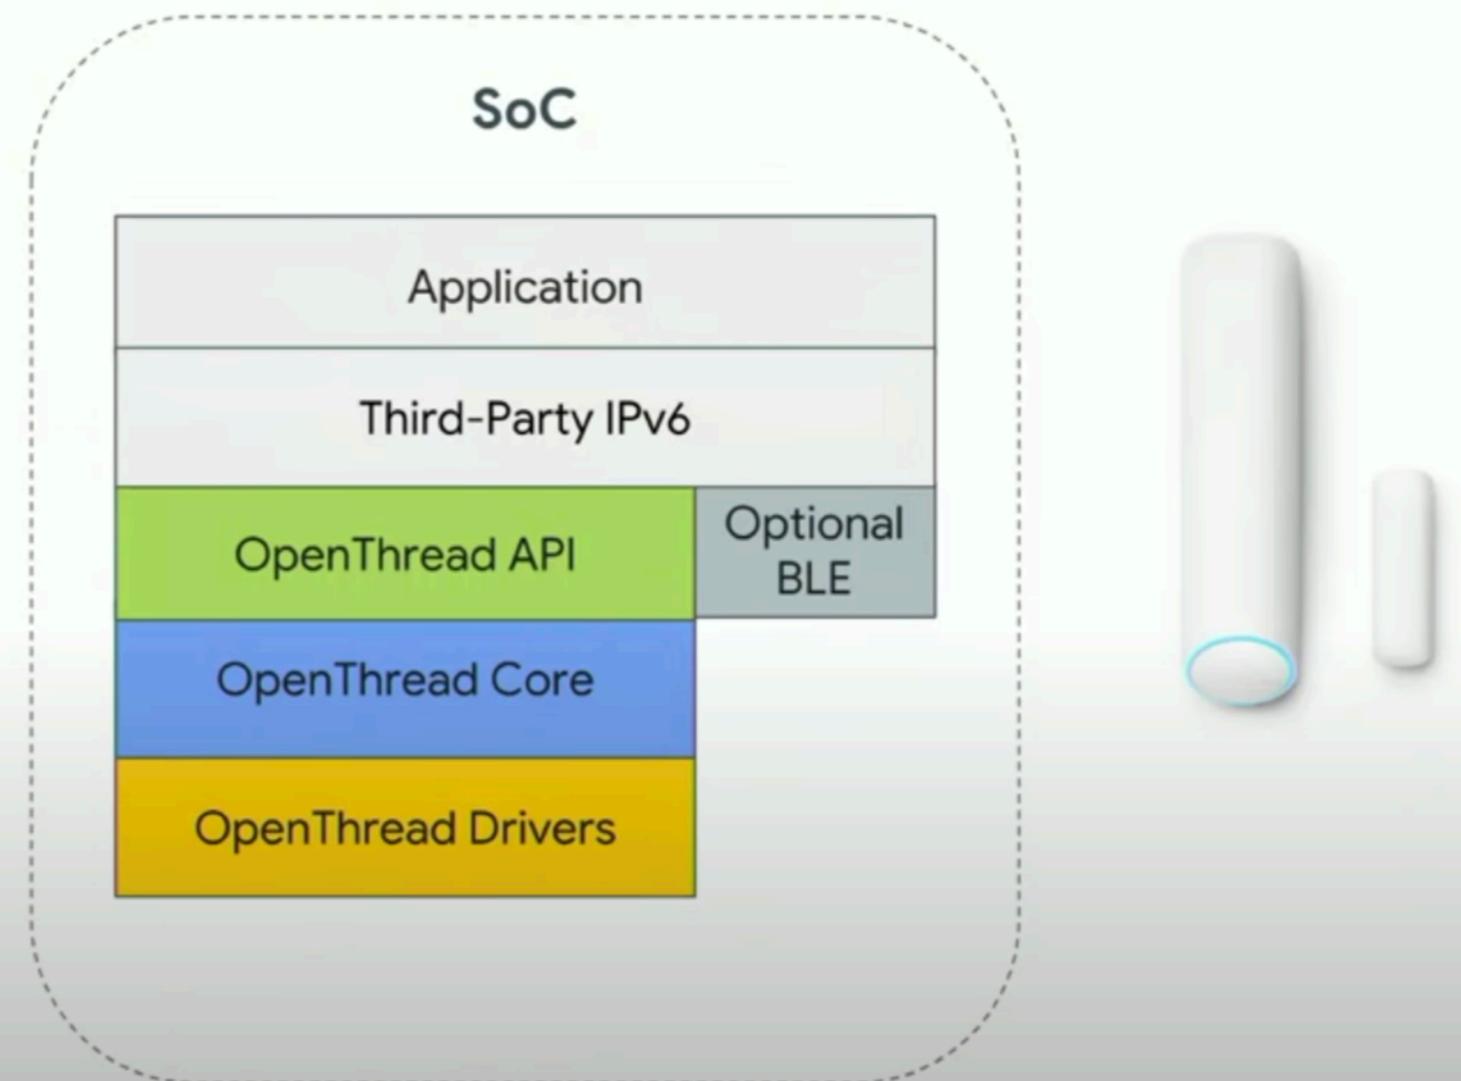


NCP

Thread runs on separate radio

More-capable host processor

Host processor can sleep while maintaining Thread network

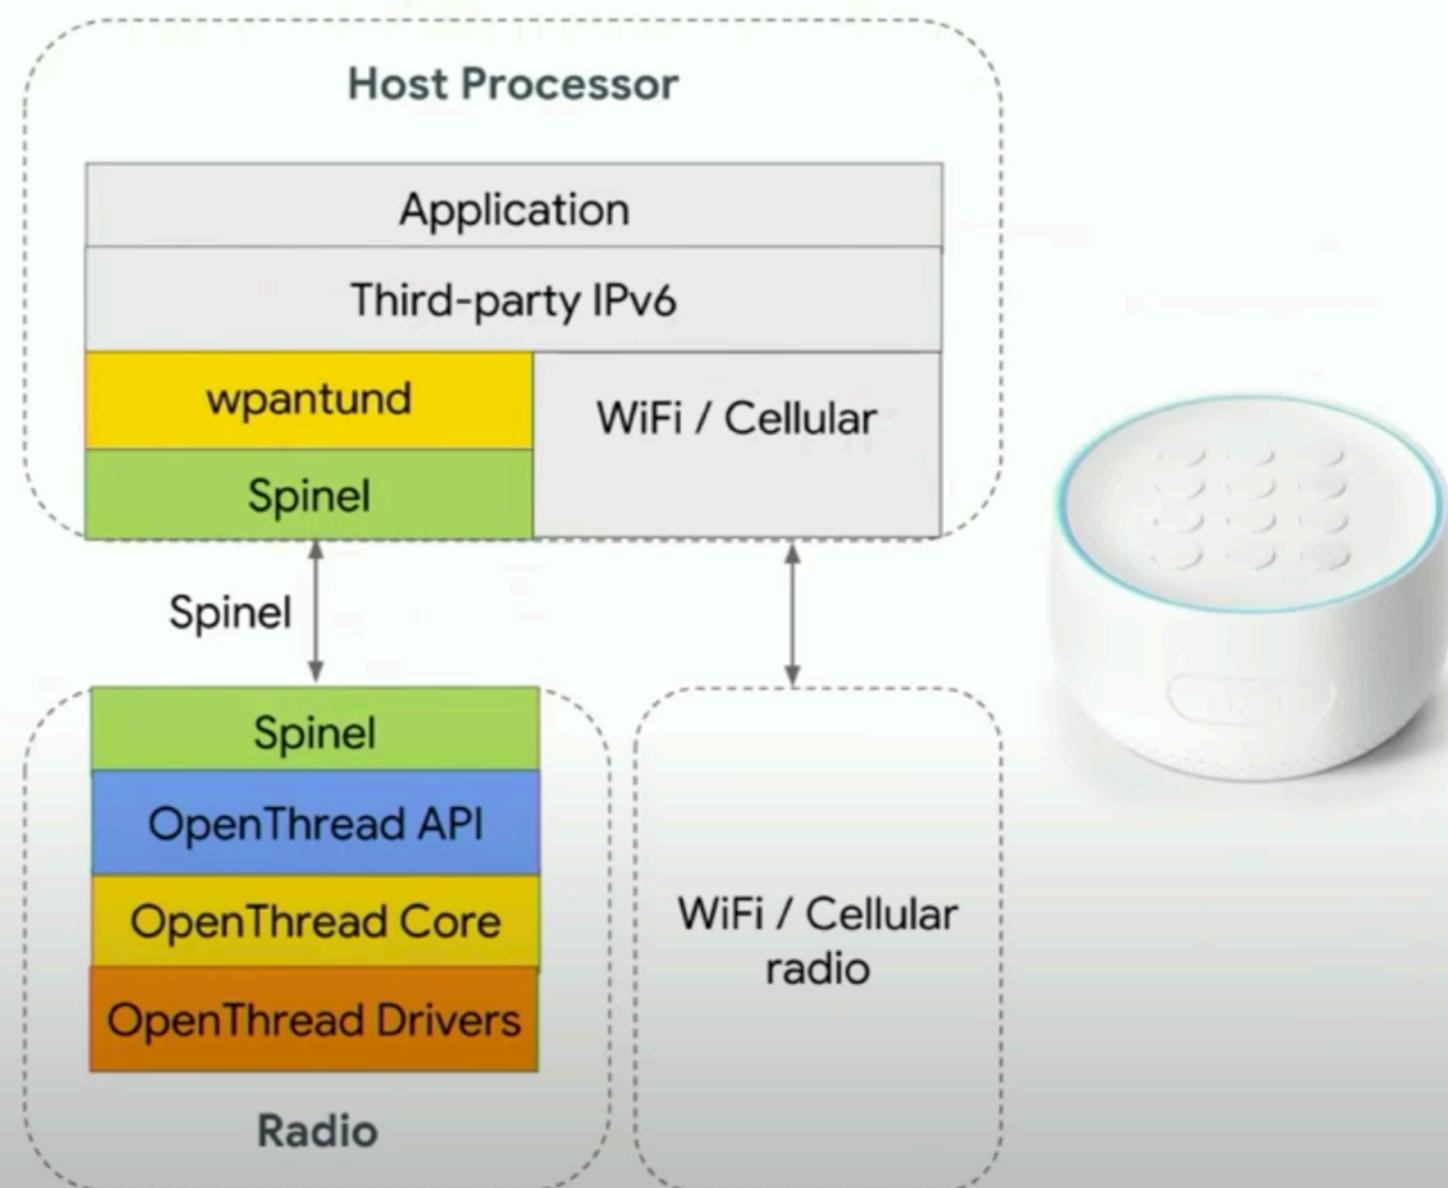


MAC/PHY


OpenThread runs on the host

Addition to existing devices

Router or Sleepy End device

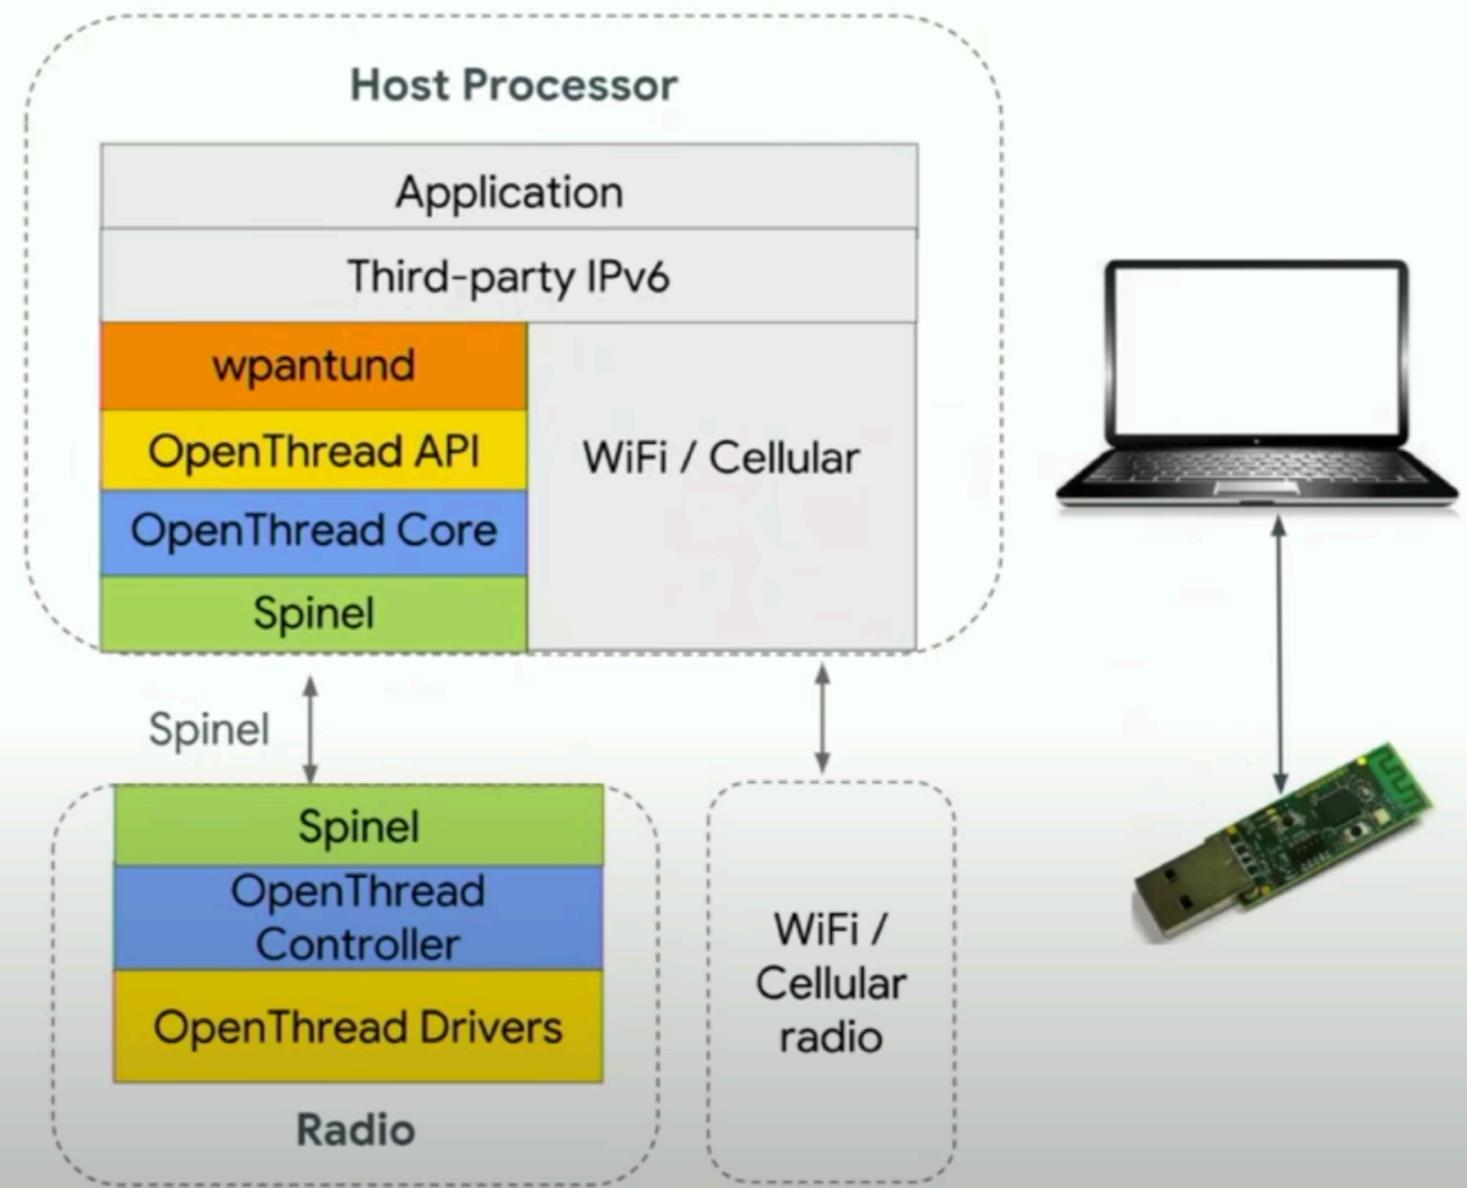

What is the application?


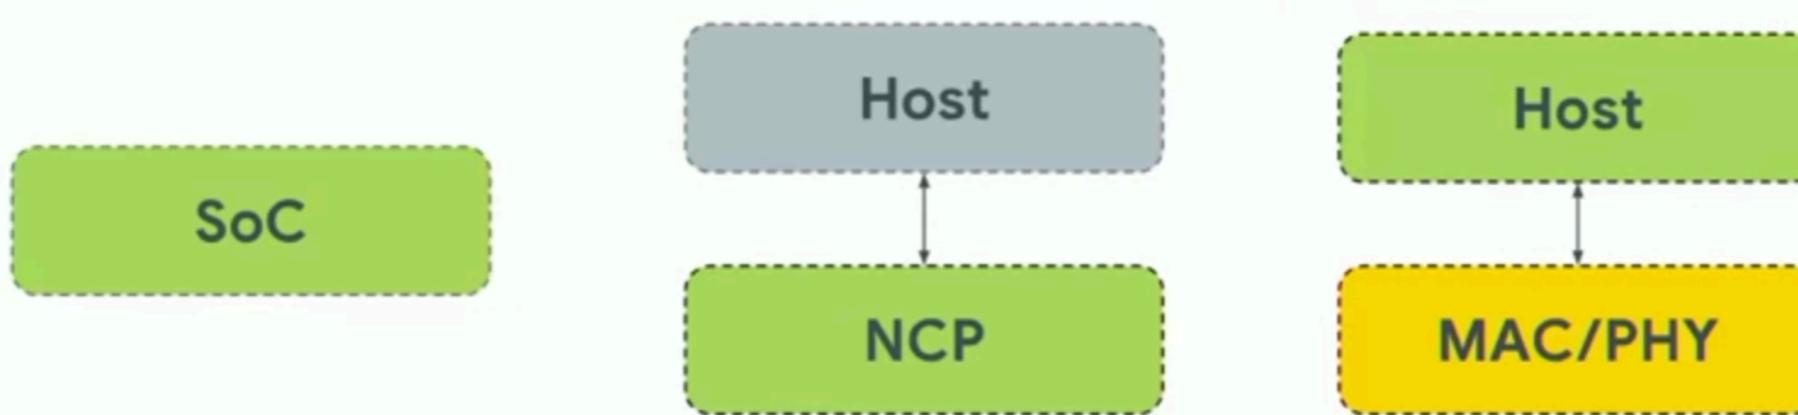


Are there power constraints?

What does the UI look like?

Are there other radios?

Pick the architecture

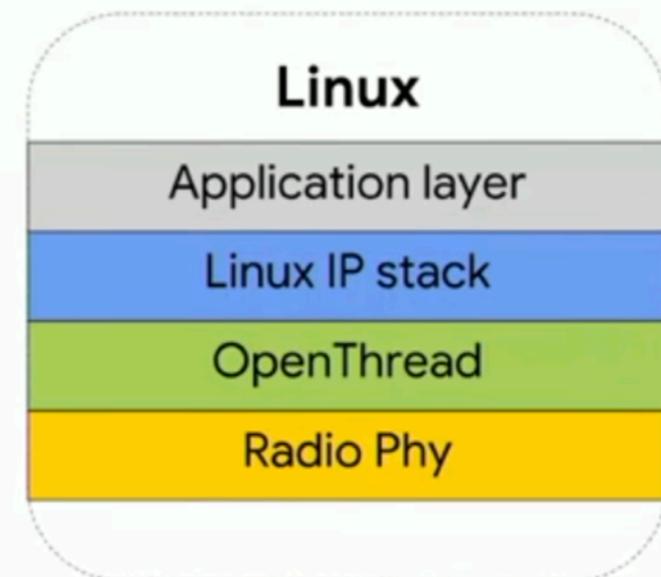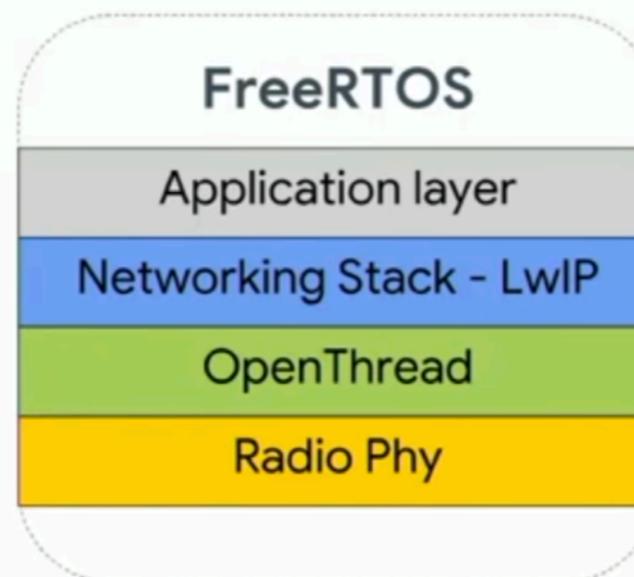

Pick the Operating System

Toolchains

Toolchain agnostic

Narrow platform abstraction

Highly portable

Quick system integration



Non-volatile storage

Alarm

Random

Radio

TI CC2652



TI CC2538



Dialog DA15000



SiLabs EFR32



Nordic
nRF52840



NXP KW41Z



Qorvo GP712



Microchip
ATSAMR21G18A



Pick the radio

Network and memory requirements

Try out the sample app

Samples with CLI

Host tools - wpantund

Codelabs

```
> child table
| ID | RLOC16 | Timeout | Age | LQ In | C_VN |R|S|D|N| Extended MAC |
+-----+-----+-----+-----+-----+-----+-----+
| 1 | 0xe001 | 240 | 44 | 3 | 237 |1|1|1|1| d28d7f875888fccb |
| 2 | 0xe002 | 240 | 27 | 3 | 237 |0|1|0|1| e2b3540590b0fd87 |
Done
> child 1
Child ID: 1
Rloc: 9c01
Ext Addr: e2b3540590b0fd87
Mode: rsn
Net Data: 184
Timeout: 100
Age: 0
Link Quality In: 3
RSSI: -20
Done
> childmax 5
Done
> childmax
5
Done
```


Build your IoT product

Add application support

Add driver support for peripherals

Radio driver support is available from
radio/platform vendors

Add optional cloud support

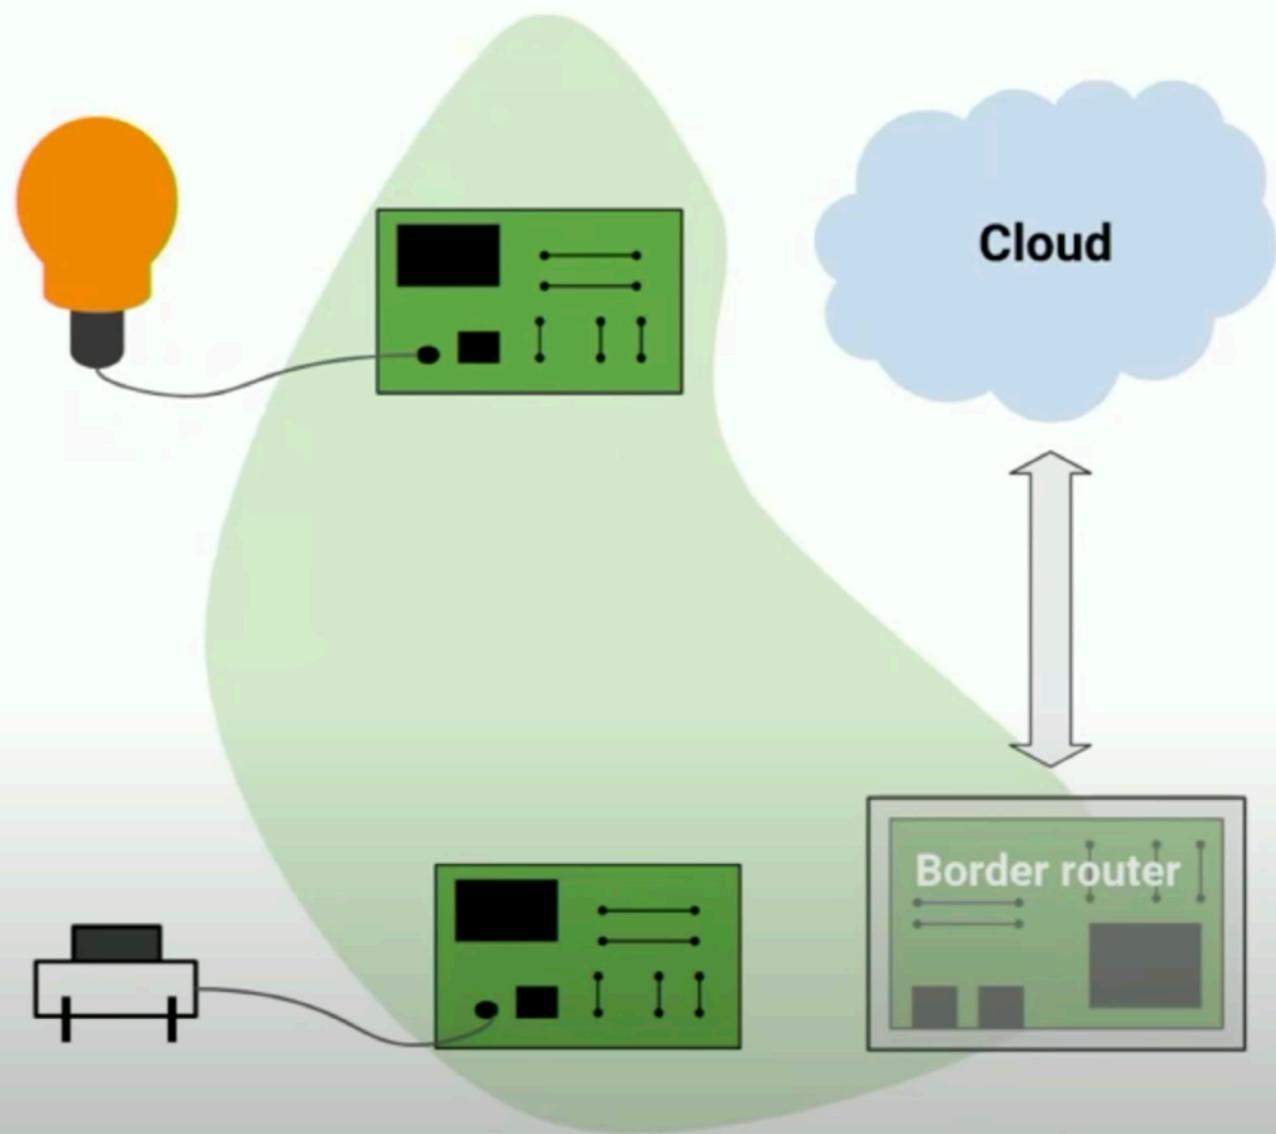


Addressing

Local: Self-organizing (e.g. ULA), centrally managed (e.g. DHCPv6)

Wide-area: Native IPv6 (DHCPv6-PD), IPv4 translations (DNS64, NAT64), custom tunnel, VPNs

Designate border routers

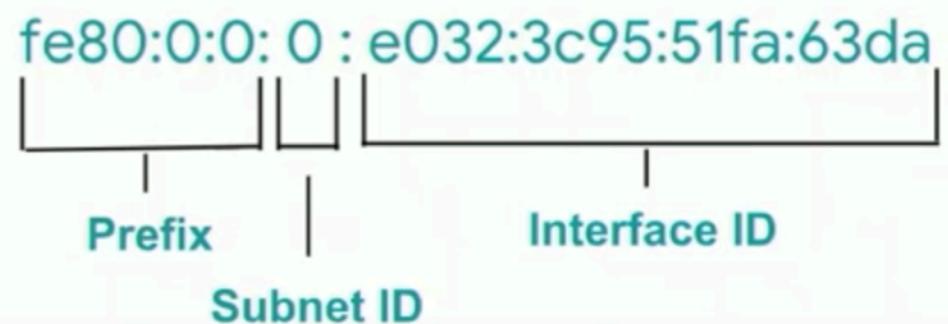

Nest's Application Framework

Selects a naming scheme, addressing, schemas for different applications, application-layer security

Picks a cloud connectivity model

Codelab: Happy and OpenWeave



<https://github.com/openweave>

Happy - tool created by Nest for lightweight orchestration of simulated network topologies

Optimize and Debug

Fine tune network parameters

Logging, configurable run-time

Counters for detailed debugging

```
#define OPENTHREAD_CONFIG_NUM_MESSAGE_BUFFERS 40
#define OPENTHREAD_CONFIG_MESSAGE_BUFFER_SIZE 128
#define OPENTHREAD_CONFIG_MAX_TX_ATTEMPTS_DIRECT 4
#define OPENTHREAD_CONFIG_MAX_TX_ATTEMPTS_INDIRECT_PER_POLL 1
#define OPENTHREAD_CONFIG_ATTACH_DATA_POLL_PERIOD 100
#define OPENTHREAD_CONFIG_ADDRESS_CACHE_ENTRIES 10
#define OPENTHREAD_CONFIG_CLI_UART_RX_BUFFER_SIZE 512
#define OPENTHREAD_CONFIG_CLI_UART_TX_BUFFER_SIZE 1024
#define OPENTHREAD_CONFIG_MAX_CHILDREN 10
#define OPENTHREAD_CONFIG_DEFAULT_CHILD_TIMEOUT 240
#define OPENTHREAD_CONFIG_6LOWPAN_REASSEMBLY_TIMEOUT 5
#define OPENTHREAD_CONFIG_MAX_ENERGY_RESULTS 64
#define OPENTHREAD_CONFIG_COAP_ACK_RANDOM_FACTOR_NUMERATOR 3
#define OPENTHREAD_CONFIG_MAC_FILTER_SIZE 32
#define OPENTHREAD_CONFIG_STORE_FRAME_COUNTER_AHEAD 1000
#define OPENTHREAD_CONFIG_LOG_LEVEL OT_LOG_LEVEL_CRIT
#define OPENTHREAD_CONFIG_NUM_DHCP_PREFIXES 4
#define OPENTHREAD_CONFIG_NUM_SLAAC_ADDRESSES 4
#define OPENTHREAD_CONFIG_NCP_TX_BUFFER_SIZE 512
#define OPENTHREAD_CONFIG_NCP_SPINEL_ENCRYPTER_EXTRA_DATA_SIZE 0
#define OPENTHREAD_CONFIG_PLATFORM_ASSERT_MANAGEMENT 0
#define OPENTHREAD_CONFIG_ENABLE_SOFTWARE_ACK_TIMEOUT 0
#define OPENTHREAD_CONFIG_ENABLE_SOFTWARE_RETRANSMIT 0
#define OPENTHREAD_CONFIG_ENABLE_SOFTWARE_ENERGY_SCAN 0
#define OPENTHREAD_CONFIG_ENABLE_PLATFORM_USEC_TIMER 0
#define OPENTHREAD_CONFIG_ENABLE_AUTO_START_SUPPORT 1
#define OPENTHREAD_CONFIG_ENABLE_BEACON_RSP_WHEN_JOINABLE 0
#define OPENTHREAD_CONFIGMBEDTLS_HEAP_SIZE_NO_DTLS 384
#define OPENTHREAD_CONFIG_ENABLE_STEERING_DATA_SET_OOB 0
#define OPENTHREAD_CONFIG_CCA_FAILURE_RATE_AVERAGING_WINDOW 512
#define OPENTHREAD_CONFIG_ENABLE_TX_ERROR_RATE_TRACKING 1
#define OPENTHREAD_CONFIG_FRAME_TX_ERR_RATE_AVERAGING_WINDOW 1
#define OPENTHREAD_CONFIG_CHANNEL_MONITOR_SAMPLE_INTERVAL 41000
#define OPENTHREAD_CONFIG_CHANNEL_MONITOR_RSSI_THRESHOLD -75
#define OPENTHREAD_CONFIG_CHILD_SUPERVISION_INTERVAL 129
#define OPENTHREAD_CONFIG_INFORM_PREVIOUS_PARENT_ON_REATTACH 0
#define OPENTHREAD_CONFIG_PARENT_SEARCH_RSS_THRESHOLD -65
```


POSIX Emulation

Simulate and test OpenThread networks without hardware.

Faster than real-time.

Codelab: [openthread-simulation](#)

Github: [OpenThread-Simulator-Tutorial](#)

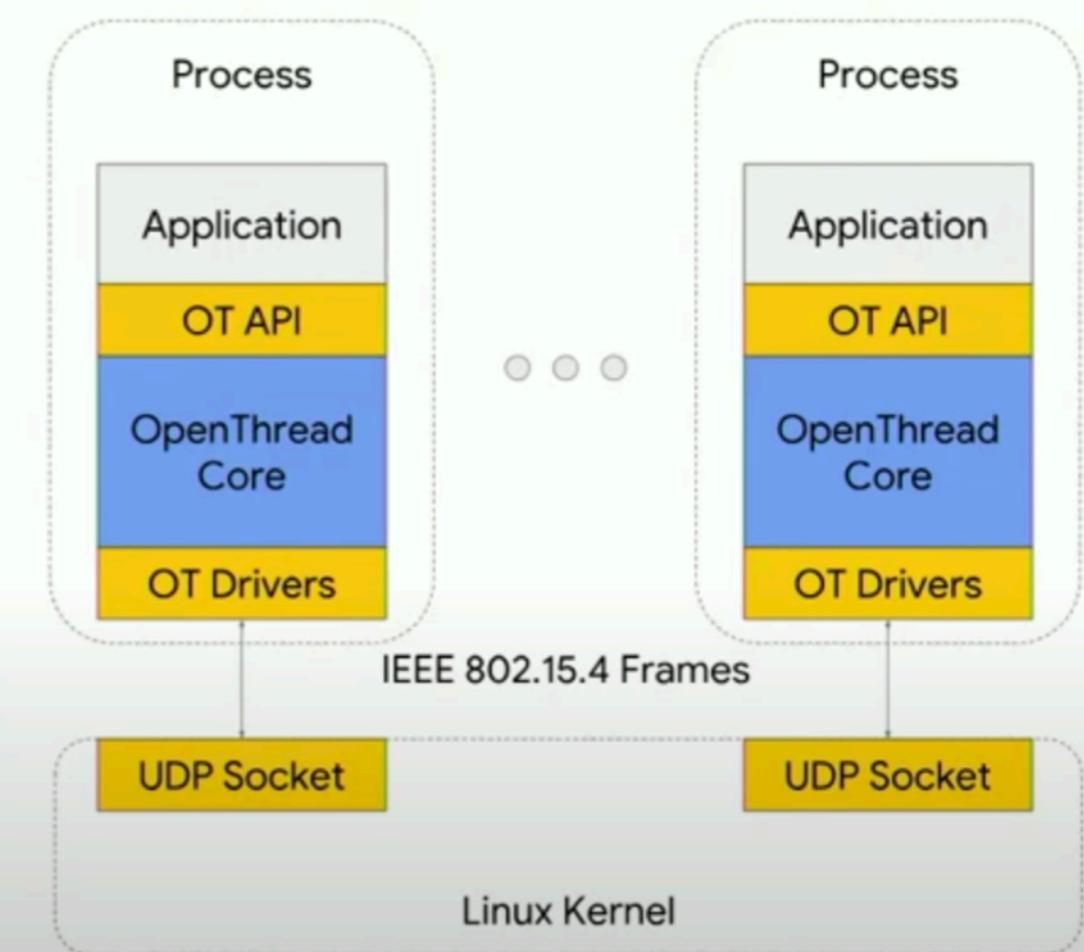

Toranj - Testing framework

Python based test framework

Simulate complex network topologies

Test IPv6 traffic across several nodes

```
>>> import wpan
>>> node1 = wpan.Node()
>>> node2 = wpan.Node()
>>> node3 = wpan.Node()

>>> wpan.Node.init_all_nodes()

>>> node1.form("test-PAN")
'Forming WPAN "test-PAN" as node type "router"\nSuccessfully formed!

>>> node1.whitelist_node(node2)
>>> node2.whitelist_node(node1)

>>> node2.join_node(node1, wpan.JOIN_TYPE_ROUTER)
'Joining "test-PAN" C474513CB487778D as node type "router"\nSuccessfully Joined!

>>> node3.whitelist_node(node2)
>>> node2.whitelist_node(node3)


>>> node3.join_node(node2, wpan.JOIN_TYPE_END_DEVICE)
'Joining "test-PAN" C474513CB487778D as node type "end-device"\nSuccessfully Joined!

>>> print node2.get(wpan.WPAN_THREAD_NEIGHBOR_TABLE)
[
    "EAC1672C3EAB30A4, RLOC16:9401, LQIn:3, AveRssi:-20, LastRssi:-20, Age:30, LinkFC:6,
MleFC:0, IsChild:yes, RxOnIdle:yes, FFD:yes, SecDataReq:yes, FullNetData:yes"
    "A2042C8762576FD5, RLOC16:dc00, LQIn:3, AveRssi:-20, LastRssi:-20, Age:5, LinkFC:21,
MleFC:18, IsChild:no, RxOnIdle:yes, FFD:yes, SecDataReq:no, FullNetData:yes"
]
>>> print node1.get(wpan.WPAN_THREAD_NEIGHBOR_TABLE)
[
    "960947C53415DAA1, RLOC16:9400, LQIn:3, AveRssi:-20, LastRssi:-20, Age:18, LinkFC:15,
MleFC:11, IsChild:no, RxOnIdle:yes, FFD:yes, SecDataReq:no, FullNetData:yes"
]
```

Traffic Sniffer

Wireshark includes dissectors for Thread.

NCP supports packet capture in both monitor and promiscuous modes.

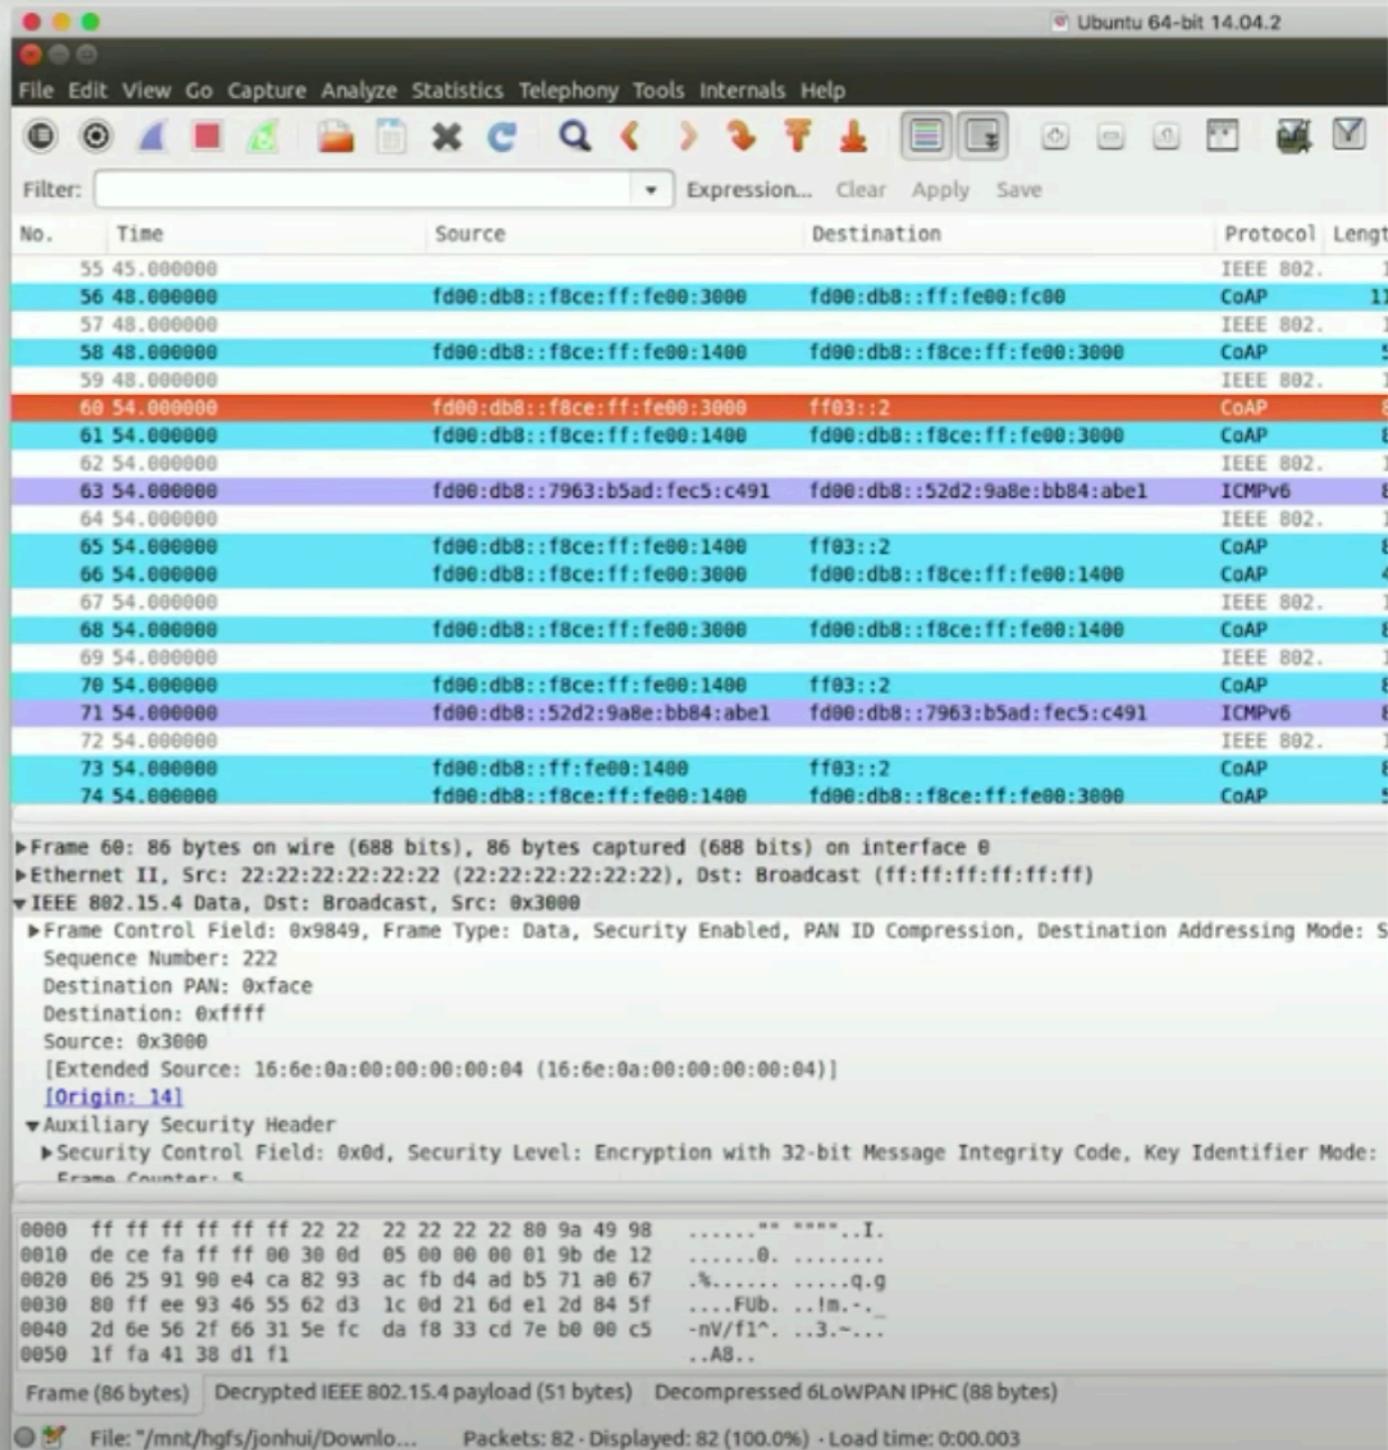

<https://openthread.io>

Thread 1.1 + Tools and features

github.com/openthread

Platforms

<https://github.com/openthread/wpantund>

Guides, samples and codelabs

<https://developer.android.com/things/sdk/apis/lowpan>

Developer community

codelabs.developers.google.com/codelabs/openthread-simulation

Open source

Lecture outcomes

- Learned the key concept that form the OpenThread framework.
- Created a demo that is creating a thread network.

