

2019 F-650 SUPER DUTY DIESEL PRO LOADER (KICK-UP FRAME) ORDER GUIDE



	Page
Model Index	1
Standard Equipment	2-4
Optional Equipment	5-13
Tire Sizes	14
Axle Ratios	15
Wheelbases and Frames	16-21
Cab - Wheelbase - Dimensional Data (Regular Cab)	
Frames (Regular Cab)	
Cab - Wheelbase - Dimensional Data (SuperCab)	
Frames (SuperCab)	
Cab - Wheelbase - Dimensional Data (Crew Cab)	
Frames (Crew Cab)	

Product Changes and Features Availability

Features, options and package content subject to change. Please check www.FMCDealer.com for the most current information.

2019 F-650 SUPER DUTY DIESEL PRO LOADER (KICK-UP FRAME)



FORD
CODE

PEP Code:
600A

MAJOR STANDARD EQUIPMENT

	STD WB is 158"	STD
	01 - FRAME	
537	Single Channel, Straight "C", 10.75 SM, 80,000 PSI, 860,000/520,000 RBM, w/TRANSITION - 9.125 x 3.062 x 0.312" (231.8mm x 77.8mm x 8.0mm) w/ transition to 6.500 x 3.062 x 0.312 (165.1mm x 77.8mm x 8.0mm)	x
766	Bumper Front - Black, full width	x
	Less Frame Extension Package	x
	02 - AXLE, FRONT - SUSPENSION, FRONT	
43A	Axle, Front Non-Driving - Dana D-850F 8,500-lb. capacity (includes Integral Power Steering)	x
61B	Parabolic Taper-leaf Springs - 2-leaf, 8,500-lb. capacity, 62" x 3.15"	x
	Shock Absorbers, Front - Standard duty, dual, double acting	x
	Wheel Seals, Front - Oil lubricated, SKF ScotSeal® PlusXL seals	x
	03 - AXLE, REAR - SUSPENSION, REAR	
471	13,500-lb. Rear Axle Assembly	x
68K	Multi-leaf Springs - 10-leaf, 15,500-lb. capacity with 2,000-lb. auxiliary springs for load stabilization	x
	Wheel Seals, Rear - Oil Lubricated, SKF ScotSeal® PlusXL seals	x
	04 - BRAKES - BRAKE EQUIPMENT	
67J	Hydraulic Brake System - Bosch HydroMax®	x
	05 - ENGINE - ENGINE EQUIPMENT	
99C	6.7L Power Stroke® V8 Turbo Diesel - 270 horsepower @ 2400 rpm, 675 lb.-ft. torque @ 1600 rpm; governed rpm: 3200	x
	Manual Regen Initiation - Driver interface in Message Center	x
57B	Engine Exhaust Brake	x
425	50-State Emissions Requirements	x
	Canada and U.S. Territories get Federal Emissions	x
	Clean Idle Label - U.S., Military & EMS Direct Sales Only	x
	ENGINE EQUIPMENT	
	Air Cleaner - Dry, single-stage Donaldson® single element (includes Restriction Indicator)	x
	Fan Clutch - Bendix® viscous screw-on type	x
	Fuel/Water Separator	x
	Radiator - Aluminum w/in-tank transmission cooler, PremAir® ozone converter	x
	Starting Motor - 12-volt, Comstar, all parallel	x
	Anti-Freeze - OAT, extended life coolant; to -40 degrees F/-40 degrees C freeze protection	x
	06 - TRANSMISSION - DRIVELINE	
44G	Ford 6-Speed TorqShift® HD Automatic - Double overdrive, less PTO provision (PRNDM)	x
	Driveshaft - Dana base	x
	07 - EXHAUST	
91G	Exhaust System - Under Cab Right Side Outlet - Single, horizontal muffler, right side, under cab, outside of frame rail with rear discharge, Switchback-style	x
	08 - ELECTRICAL - ALTERNATOR - BATTERY	
	Alternator - Extra heavy duty 12-volt, 200 amp., Denso SC5	x
	Battery - 12-Volt, Motorcraft® - Two, 750 CCA (1500 CCA total)	x
	Battery Box - RH frame mount under cab step	x
	Body Builder Wiring - Frame mount at back of cab. Includes sealed connectors for 2 ground circuits, with combined left/stop, combined right/stop, stop lamps, park lamps, backup lamps. Also includes 2 additional pass-through wires to cab	x
	Emergency Flasher - Four-way	x
	Fuses, SAE - Blade-type smart fuse box	x

2019 F-650 SUPER DUTY DIESEL PRO LOADER (KICK-UP FRAME)



FORD
CODE

PEP Code:
600A

MAJOR STANDARD EQUIPMENT

	STD WB is 158"	STD
	LIGHTS	
	Aero Headlamps - High series, includes side marker lights with reflectors (front)	x
	Taillamps , Two w/ integral stop, turn, backup and license plate bracket	x
	Side Repeat Flasher	x
	09 - FUEL TANK	
65B	50-U.S. Gallon - Single, LH, aluminum, rectangular - Regular Cab only	x
65E	65-U.S. Gallon - Single, LH, aluminum, rectangular - SuperCab and Crew Cab only	x
	Diesel Fuel - Cold weather anti-gel additive - Gold Eagle 2106	x
	10 - SEATS	
88A	30/0/30 - Fixed driver and fixed passenger with consolette - vinyl	x
87B	60/40 - Rear bench seat with bolster and flip-up cushion - trim will match selected driver seat material (SuperCab)	x
87C	60/40 - Rear bench seat with flip-up cushion and fold-down back - trim will match selected driver seat material (Crew Cab)	x
	11 - CAB EQUIPMENT	
	Regular Cab, SuperCab or Crew Cab - Ford Conventional, steel	x
	CAB EQUIPMENT - EXTERIOR	
	Doors - Two (four with SuperCab or Crew Cab)	x
	Front End Tilting Fiberglass Hood & Fenders Assembly - Tilt type, frame-mounted, torsion bar assist (includes integral noise and inner splash shields and mud flaps)	x
	Glass - Laminated Windshield, Solar Tint All-Around	x
86A	Painted Grille - Plastic, NA with frame extension	x
	Horn - Dual note electric - Level 2	x
	Lights - Roof marker/clearance - amber lenses, 5 lights	x
54H	Mirrors - Dual rectangular Velvac XL2020, integral spot mirrors, sail type, 96" width, manual fold, solid black finish	x
	Tow Hooks, Front (2) - Frame-mounted, painted black	x
	Window, Rear - Fixed	x
	Windshield Wiper Control - Two-speed electric intermittent w/ windshield washers	x
	CAB EQUIPMENT - INTERIOR	
572	Air Conditioning, Manual - Includes integral heater and defroster; radiator-mounted compressor; R-134A refrigerant	x
	Air Registers - Molded-in-color with positive shut-off, color coordinated trim	x
	Assist Handles, Interior A Pillars - Driver and passenger; all cabs	x
	Assist Handles, Interior B Pillars - Grab handle, driver and passenger; Crew Cab only	x
	Auxiliary Power Point - In instrument panel (2)	x
59F	4 Body Builder Switches - Mounted in center instrument panel with connector access located in engine compartment; amperages vary by switch: 10, 15, 25, 25	x
	Back Panel Trim Cover	x
	Coat Hook - RH/LH color-keyed	x
	Cruise Control - Steering Wheel-Mounted Controls	x
	Demisters - LH & RH side windows	x
	Dome Lamp - Rear-mounted with integral map reading lights. (Regular and Crew Cab only)	x
	Door Trim - Color-coordinated molded w/ grab handle	x
	Armrest/grab handle	x
	Soft armrest, grab handle upper and lower map pockets	x
	Floor Covering - Black vinyl	x

2019 F-650 SUPER DUTY DIESEL PRO LOADER (KICK-UP FRAME)



FORD
CODE

PEP Code:
600A

MAJOR STANDARD EQUIPMENT

	STD WB is 158"	STD
	CAB EQUIPMENT - INTERIOR (CONTINUED)	
	Gauge Cluster, Diesel - With electronic speedometer, includes oil pressure, coolant temperature, DEF gauge, fuel gauge, tachometer, and indicator lights. Also included is enhanced 3-button Message Center with odometer, trip odometer, distance-to-empty for fuel, average fuel economy, hour meter and warning messages. Trans Temp in Message Center.	x
	Glove Box - Instrument panel, RH	x
	Headliner - Color-coordinated, molded, cloth	x
	Instrument Panel - Color-coordinated with color-coordinated accents	x
	Intelligent Oil-Life Monitor®	x
588	Radio AM/FM Stereo - With 2 speakers, includes auxiliary audio input jack and clock	x
	Safety Belts - Belt-Minder® (Chime & flashing warning light on instrument panel if belts not buckled)	x
	Safety Belts - Color-coordinated, all position, includes fixed D-rings (Regular Cab)	x
	Safety Belts - Color-coordinated, all position, includes front seat adjustable D-rings (SuperCab or Crew Cab)	x
	Scuff Plates	x
	Steering Column - Tilt	x
	Steering Wheel - Black PVC, with integral cruise control switches	x
	Sunvisor, Single Driver - Vinyl	x
	Sunvisor, Single Passenger - Vinyl with mirror	x
	Tachometer - Electric	x
	Turn Signal Switch, Self Canceling - Multifunction switch	x
	12 - FRONT WHEEL - TIRES	
	Wheels, Front	
645	19.5x6.75 8-hole steel disc, powder-coated white	x
	Tires, Front	
TEA	245/70R 19.5G (14PR) Hankook AH11	x
	13 - REAR WHEEL - TIRES	
	Wheels, Rear	
665	19.5x6.75 8-hole steel disc, powder-coated white	x
	Tires, Rear	
REA	245/70R 19.5G (14PR) Hankook AH11	x
	14 - PAINT	
	Body Color Available - Agate Black (UM), Oxford White (YZ), Ingot Silver (UX), Magnetic (J7), Race Red (PQ), Blue Jeans (N1), Green Gem (W6), Tangier Orange (J8), Bold Yellow (LE), School Bus Yellow (B1), Stone Gray (D1)	x
	Chassis Color - Black	x
	Paint Type - Environmentally friendly, "3-wet system"	x

2019 F-650 SUPER DUTY DIESEL PRO LOADER (KICK-UP FRAME) OPTIONAL EQUIPMENT



Order Code	COMPONENT DESCRIPTION	PEP Code: 600A
		STD
Body Code	Regular Cab SuperCab Crew Cab	F6E X6E W6E
01 - FRAME		
	SINGLE CHANNEL - STRAIGHT "C"	
537	10.75 SM, 80,000 PSI, 860,000/520,000 RBM, w/TRANSITION - 9.125" x 3.062" x 0.312" (231.8mm x 77.8mm x 8.0mm) w/transition to 6.500" x 3.062" x 0.312" (165.1mm x 77.8mm x 8.0mm)	S
766	Bumper, Front, Full Width - Black	S
765	Bumper, Front, Full Width - Chrome-plated steel. Included with Exterior Appearance Group-(90E)	O/I
76X	Bumper, Front Delete Also deletes the Mounting Brackets	O
	Tow Hooks, Front - Inside rail, frame-mounted (2)	S
76Y	Tow Hooks Delete	O
	Square Cut Frame Ends	S
02 - AXLE, FRONT - SUSPENSION, FRONT		
43A	Axle, Front Non-Driving - Dana D-850F 8,500-lb. capacity (includes Integral Power Steering)	S
	TAPER-LEAF SPRINGS	
61B	Parabolic Taper-leaf Springs - 2-leaf, 8,500-lb. capacity, 62" x 3.15"	S
	Shock Absorbers, Front - Double acting	S
15S	Stabilizer Bar, Front	O
	Wheel Seals, Front - Oil lubricated, SKF ScotSeal® PlusXL seals	S
60A	Lube, Front Axle - EmGard® 50W, synthetic oil	O
03 - AXLE, REAR - SUSPENSION, REAR		
NOTE: When specifying an axle ratio, check performance guidelines for startability and gradeability		
471	13,500-lb. Rear Axle Assembly	S
472	17,500-lb. Rear Axle Assembly	O
	Driveshaft - Dana base	S
18P	Driveshaft - Upgrade	O
	MULTI-LEAF SPRINGS	
68K	10-Leaf, 15,500-lb. Capacity - Available with 13,500-lb. rear axle and 17,500-lb. rear axle, includes 2,000-lb. auxiliary springs for load stabilization	S
68M	11-Leaf, 19,000-lb. Capacity - Requires 17,500-lb. rear axle, includes 2,000-lb. auxiliary springs for load stabilization	O
	AIR SUSPENSION	
68C	12,000-lb. Single Axle Air Suspension - Includes Rear Shocks (requires 471) with single air suspension leveling valve	O
68D	19,000-lb. Cap Single Air Ride Suspension - Includes Rear Shocks (requires 472) with single air suspension leveling valve	O
68Z	Air Suspension Dump Valve	O
68Y	Air Suspension Leveling Valve - Dual Air Suspension Leveling Valves; creates L/R ride height	O
961	Shock Absorbers, Rear - Double acting (included in Air Ride Suspension)	O
	Wheel Seals, Rear - Oil lubricated, SKF ScotSeal® PlusXL seals	S
607	Lube, Rear Axle - EmGard® 75W-90, synthetic oil	O

2019 F-650 SUPER DUTY DIESEL PRO LOADER (KICK-UP FRAME) OPTIONAL EQUIPMENT



Order Code	COMPONENT DESCRIPTION	PEP Code: 600A
	04 - BRAKES - BRAKE EQUIPMENT	
67J	Hydraulic Brake System - Bosch HydroMax®	S
674	Hydraulic Brake System with Traction Control - Bosch HydroMax®	O
67C	Air Brakes - Straight truck w/15.0"x8.63" rear pads - 19.5" wheels; Meritor® Q-Plus with ABS (Bendix® anti-lock brake system) (4-Channel) (includes 15" x 4" front brakes, dual direct reading air pressure gauges, brake lines color-coded nylon, Bendix® 13.2 CFM capacity air compressor, instrument panel-mounted yellow knob parking brake control valve, automatic slack adjusters front and rear, two rear spring parking air brake chambers mounted on front of rear axle, three drain valves and two air tanks (reference Body Builders book for location).	O
67D	Air Brakes with Traction Control - Straight truck w/16.5"x7.0" rear pads - 22.5" wheels; Meritor® Q-Plus with ABS (Bendix® Anti-Lock Brake System) (4-channel) (Includes 15" x 4" front brakes, dual direct reading air pressure gauges, brake lines color-coded nylon, Bendix® 13.2 CFM capacity air compressor, instrument panel-mounted yellow knob parking brake control valve, automatic slack adjusters front and rear, two rear spring parking air brake chambers mounted on front of rear axle, three drain valve(s) and two air tanks (reference Body Builders Book for location). (Should NEVER be used with Hi-Rail Train Systems) Required when using (18H) Electronic Stability Control.	O
18H	Electronic Stability Control - Requires Air Brakes with Traction Control (67D). N/A with (158) Trailer Airbrake Pkg. Requires the selection of a Special Build Requirement, for the Type of Center of Gravity, of the Final Upfit	O
	SPECIAL BUILD REQUIREMENT	
98B	Special Build Requirement - LOW - 38" to 48" Center of Gravity (Requires 18H)	O
98C	Special Build Requirement - MEDIUM - 48" to 58" Center of Gravity (Requires 18H)	O
98E	Special Build Requirement - HIGH - 58" to 68" Center of Gravity (Requires 18H)	O
98F	Special Build Requirement - TANKER HIGH - 58" to 68" Center of Gravity (Requires 18H)	O
98J	Special Build Requirement - TANKER MEDIUM - 48" to 58" Center of Gravity (Requires 18H)	O
	BRAKE EQUIPMENT	
62D	Air Dryer (Bendix® AD/IP) with heater - Mounted left frame rail, (NA w/146" WB)	O
152	Trailer Connection Socket, 7-way - Mounted at rear of frame, for Combined trailer stop, tail, turn, marker light circuits; includes Electric Trailer Brake Accommodation Package with cab connections for mounting customer installed electric brake unit (available for Hydraulic Brake Straight Truck). Available with (Standard) Combined Back of Cab Body Builder Wiring or available with (59C) Combined End of Frame Body Builder Wiring.	O
154	Trailer Connection Socket, 7-way - Mounted at rear of frame, for Separate trailer stop, tail, turn, marker light circuits; includes Electric Trailer Brake Accommodation Package with cab connections for mounting customer installed electric brake unit (available for Hydraulic Brake Straight Truck). Available with (59D) Separate Back of Cab Body Builder Wiring or available with (59E) Separate End of Frame Body Builder Wiring.	O
159	Trailer Connection Socket, 7-way - Mounted at rear of frame, for Combined trailer stop, tail, turn, (compatible with trailers that use Combined stop, tail, turn lights) (available for Air Brake Straight Truck) Available with (Standard) Combined Back of Cab Body Builder Wiring or available with (59C) Combined End of Frame Body Builder Wiring. Not available with (18H)	O
158	Trailer Air Brake Package - Includes air lines to rear of frame, hand control valve and tractor protection valve (requires trailer connection socket 7-way, code 159 or 157) (requires Air Brakes) Not available with (18H)	O

2019 F-650 SUPER DUTY DIESEL PRO LOADER (KICK-UP FRAME) OPTIONAL EQUIPMENT



Order Code	COMPONENT DESCRIPTION	PEP Code: 600A
	BRAKE EQUIPMENT (CONTINUED)	
157	Trailer Connection Socket, 7-way - Mounted at rear of frame, for Seperate trailer stop, tail, turn, marker light circuits; (compatible with trailers that have amber or side turn lights with Seperate stop/turn) (available for Air Brake Straight Truck) Available with (59D) Seperate Back of Cab Body Builder Wiring or available with (59E) Seperate End of Frame Body Builder Wiring. Not available with (18H)	O
	05 - ENGINE - ENGINE EQUIPMENT	
99C	6.7L Power Stroke® V8 Turbo Diesel - 270 horsepower @ 2400 rpm, 675 lb.-ft. torque @1600 rpm; governed rpm: 3200	S
99E	6.7L Power Stroke® V8 Turbo Diesel - 300 horsepower @ 2500 rpm, 700 lb.-ft. torque @ 1800 rpm; governed rpm: 3300	O
99X	6.7L Power Stroke® V8 Turbo Diesel - 330 horsepower @ 2600 rpm, 725 lb.-ft. torque @ 1800 rpm; governed rpm: 3400	O
	ENGINE EQUIPMENT	
62G	Air Compressor Bendix® - 13.2 CFM capacity - For stand-alone air source with Hydraulic Brakes; <u>Required</u> with Air Suspension, 68C or 68D <u>when using Hydraulic Brakes</u> . Also allows the following Seats to be used (88N, 88P, 88G, 88H, 88E, 88F, 88T 88U) in lieu of (88R, 88S, 88L, 88M, 88J, 88K, 88W, 88X), <u>when using Hydraulic Brakes</u>	O
41H	Engine Block Heater - Phillips; 120-volt, 750-watt	O
	Manual Regen Initiation - Driver interface in Message Center	S
98R	Active Regen Control - Allows Driver to Inhibit Automatic Regen till Regen can be performed in a Safe location.	O
	Radiator - Aluminum w/ in-tank transmission cooler, PremAir® ozone converter	S
916	Speed Limiter - 65 mph	O
917	Speed Limiter - 70 mph	O
	06 - TRANSMISSION	
44G	Ford 6-Speed TorqShift® HD Automatic - Double overdrive, less PTO provision (PRNDM)	S
41A	Transmission Power Takeoff Provision, with LiveDrive Capability	O
	07 - EXHAUST	
91G	Exhaust System - Under Cab, Right-Side Outlet - Single, horizontal muffler, right side, under cab, outside of frame rail with rear discharge, Switchback-style	S
91B	Exhaust System - Back of Cab, Right-Side Outlet - Single, horizontal muffler/pipe, inline, right-side exhaust with underbody exit, in front of axle, Torpedo-style ; Not available with Hydraulic Brakes at 158" or 176"WB Reg. Cab.	O
91D	Exhaust System - Under Cab, Vertical Outlet, Right Side - Single, horizontal muffler, right side, under cab, outside of frame rail with vertical exhaust, passenger-side rear corner with heat shield and turn-out, Switchback-style. Not Available with Mirrors (54F) Trailer Tow due to lack of Visability	O
	08 - ELECTRICAL - ALTERNATOR - BATTERY	
	ALTERNATOR (12-VOLT)	
	Extra Heavy Duty Alternator - 200-amp. Denso SC5	S
17C	Alternator - 220 amp. Denso SC6	O
17D	Dual Heavy Duty Alternators - 357-amp., (200+157 amp.) Denso SC5/SC2	O
55M	Jump Start Stud - Remote mounted (NA with Temporary Mount batteries)	O

2019 F-650 SUPER DUTY DIESEL PRO LOADER (KICK-UP FRAME) OPTIONAL EQUIPMENT



Order Code	COMPONENT DESCRIPTION	PEP Code: 600A
	BATTERY, 12-VOLT (INCLUDES STEEL BATTERY BOX)	
	Motorcraft® - Two, 750 CCA (1500 CCA total)	S
63B	Motorcraft® - Two, 900 CCA (1800 CCA total)	O
63D	Motorcraft® - Three, 900 CCA (2700 CCA total)	O
63Y	Temporary Battery Mount for Chassis Truck - Available with 63B or 63D - requires dual heavy duty alternators (17D)	O
	Emergency Flasher	S
	Fuses, SAE - Blade type	S
	Aero Headlamps - High series, includes side marker lights with reflectors (front)	S
163	Lights - Roof Marker/Clearance - Amber lenses, 5 lights	S
164	Roof Marker/Clearance Lights - Clear lenses, 5 lights	O
16X	Roof Marker/Clearance Lights Delete - (For airport or applications that receive modified roof coverings)	O
	Taillamps - Two w/ integral stop, turn, backup and license plate bracket	S
	Turn Signal Switch, Self Canceling - Multifunction switch with windshield wiper (1-7 variable speed, hi, low), windshield washer, L/R turn signal; self cancel, L/R lane change, hazard, flash-to-pass, high beam	S
	Body Builder Wiring - At Back of Cab (includes sealed connectors for 2 ground circuits, with Combined left/stop, Combined right/stop, park lamps, backup lamps) (also includes 2 additional pass through wires to cab) (available with Hydraulic or Air Brakes) Not Available with (154) Hydraulic Brake Trailer Connection or (157) Air Brake Trailer Connection.	S
59C	Body Builder Wiring - At End of Frame (includes sealed connectors for 2 ground circuits, with Combined left/stop, Combined right/stop, backup lamps) (also includes 2 additional pass through wires to cab) Not Available with (19B) Beverage Package, Not Available with (154) Hydraulic Brake Trailer Connection or (157) Air Brake Trailer Connection	O
59D	Body Builder Wiring - At Back of Cab (includes sealed connectors for 2 ground circuits, with Seperate left/stop, Seperate right/stop, backup lamps) (also includes 2 additional pass through wires to cab) Not Available with (19B) Beverage Package, Not Available with (152) Hydraulic Brake Trailer Connection or (159) Air Brake Trailer Connection	O
59E	Body Builder Wiring - At End of Frame (includes sealed connectors for 2 ground circuits, with Seperate left/stop, Seperate right/stop, backup lamps) (also includes 2 additional pass through wires to cab) Not Available with (19B) Beverage Package, Not Available with (152) Hydraulic Brake Trailer Connection or (159) Air Brake Trailer Connection	O
17M	Back-up Alarm - Electric, 102 dBA (NA w/Taillights Delete, Code 55X)	O
962	Daytime Running Lamps	O
55X	Tail Lights Delete (Deletes stop, turn, tail and backup lights) (does not omit cable to end of frame)	O
	09 - FUEL TANKS (For Clean CA installations with other cabs, refer to the Body Builders site)	
65B	Fuel Tank, 50-U.S. Gallon - Left-hand, aluminum, rectangular (Regular Cab only)	S
65E	Fuel Tank, 65-U.S. Gallon - Left-hand, aluminum, rectangular (Standard on SuperCab and Crew Cab only; Optional on Regular Cab only)	S/O
65F	Fuel Tank, 115-U.S. Gallon - Left-hand 65-gal.; right-hand 50-gal., aluminum, rectangular	O

2019 F-650 SUPER DUTY DIESEL PRO LOADER (KICK-UP FRAME) OPTIONAL EQUIPMENT



Order Code	COMPONENT DESCRIPTION	PEP Code: 600A
	10 - SEATS Seats are color-coordinated to cab trim level. All seats include seat belts. Rear seats of SuperCab or Crew Cab must be selected from this same grouping. Seat Delete options are available at the end of this list.	
88A	30/0/30 - Fixed driver and fixed passenger with consolette - vinyl	S
88B	30/0/30 - Fixed driver and fixed passenger with consolette - cloth	O
881	30/70 - Fixed driver and fixed 2-passenger bench - vinyl	O
882	30/70 - Fixed driver and fixed 2-passenger bench - cloth	O
88C	30/0/0 - Fixed driver only - vinyl	O
88D	30/0/0 - Fixed driver only - cloth	O
88R	30/0/30 - Air ride driver (integral air pump) and fixed passenger with consolette - vinyl (NA with SuperCab; NA with Air Ride, Air Brakes or Compressor 62G)	O
88S	30/0/30 - Air ride driver (integral air pump) and fixed passenger with consolette - cloth (NA with SuperCab; NA with Air Ride, Air Brakes or Compressor 62G)	O
88L	30/70 - Air ride driver (integral air pump) and fixed 2-passenger bench - vinyl (NA with SuperCab; NA with Air Ride, Air Brakes or Compressor 62G)	O
88M	30/70 - Air ride driver (integral air pump) and fixed 2-passenger bench - cloth (NA with SuperCab; NA with Air Ride, Air Brakes or Compressor 62G)	O
88J	30/0/30 - Air ride driver (integral air pump) and air ride passenger (integral air pump) with consolette - vinyl (NA with SuperCab; NA with Air Ride, Air Brakes or Compressor 62G)	O
88K	30/0/30 - Air ride driver (integral air pump) and air ride passenger (integral air pump) with consolette - cloth (NA with SuperCab; NA with Air Ride, Air Brakes or Compressor 62G)	O
88W	30/0/0 - Air ride driver only (integral air pump) - vinyl (NA with SuperCab; NA with Air Ride, Air Brakes or Compressor 62G)	O
88X	30/0/0 - Air ride driver only (integral air pump) - cloth (NA with SuperCab; NA with Air Ride, Air Brakes or Compressor 62G)	O
88N	30/0/30 - Air ride driver (external air source) and fixed passenger with consolette - vinyl (NA with SuperCab)	O
88P	30/0/30 - Air ride driver (external air source) and fixed passenger with consolette - cloth (NA with SuperCab)	O
88G	30/70 - Air ride driver (external air source) and fixed 2-passenger bench - vinyl (NA with SuperCab)	O
88H	30/70 - Air ride driver (external air source) and fixed 2-passenger bench - cloth (NA with SuperCab)	O
88E	30/0/30 - Air ride driver (external air source) and air ride passenger (external air source) with consolette - vinyl (NA on SuperCab)	O
88F	30/0/30 - Air ride driver (external air source) and air ride passenger (external air source) with consolette - cloth (NA on SuperCab)	O
88T	30/0/0 - Air ride driver only (external air source) - vinyl (NA with SuperCab)	O
88U	30/0/0 - Air ride driver only (external air source) - cloth (NA with SuperCab)	O
88Y	40/20/40 - Fixed driver and fixed passenger with unique 20% fold-down console - vinyl	O
88Z	40/20/40 - Fixed driver and fixed passenger with unique 20% fold-down console - cloth	O
	SUPERCAB - REAR SEAT	
87B	60/40 - Rear bench seat with bolster and flip-up cushion - trim will match selected driver seat material	S
87X	Rear Seat Delete	O
	CREW CAB - REAR SEAT	
87C	60/40 - Rear bench seat with flip-up cushion and fold-down back - trim will match selected driver seat material	S
87X	Rear Seat Delete	O
	11 - CAB EQUIPMENT	
	Regular Cab, SuperCab or Crew Cab - Ford conventional, steel	S/O
	INTERIOR APPEARANCE GROUP	
90A	Appearance Group - Front-mounted overhead console with dual sunglass bins and integral front map reading lights, door trim panel, chrome air registers, second-row bench seat (Crew Cab) or two-row high series flip-up seats with cushion and bolster (SuperCab). Includes Power Equipment Group (90P)	O
90P	Power Equipment Group - Power front side windows, power rear side windows (Crew Cab) power door locks and door trim panel. Includes manual rear side windows with SuperCab. Included in Appearance Group (90A)	O/I

2019 F-650 SUPER DUTY DIESEL PRO LOADER (KICK-UP FRAME) OPTIONAL EQUIPMENT



Order Code	COMPONENT DESCRIPTION	PEP Code: 600A
	EXTERIOR FEATURES	
90E	Exterior Appearance Group - Includes full-width chrome-plated front bumper (765), chromed fender badge and chrome grille surround (86C)	O
85A	Anti-Theft System	O
	Front End Tilting Fiberglass Hood & Fenders Assembly - Frame-mounted, torsion bar assist (includes integral noise and inner splash shields and mud flaps)	S
	Glass - Laminated windshield	S
	Glass - Solar tint complete	S
86C	Grille - Chrome surround (Included in Exterior Appearance Group 90E)	O/I
86B	Grille, Fixed - Black/grey	O
59A	Horn, Air - Black, single trumpet, air solenoid operated, chassis-mounted on rail back of bumper	O
	Horn, Electric - Dual	S
54H	Mirrors - Dual Rectangular XL2020 Integral Spot Mirror Sail type, 96" width, manual fold, solid black finish	S
54M	Mirrors, Heated - Dual Rectangular XL2020 Integral Spot Mirror Sail type, 96" width, manual fold, solid black finish	O
54P	Mirrors - Dual Rectangular XL2020 With Integral Spot Mirror Sail type, 96" width, heated and motorized, solid black finish (requires Power Equipment Group, 90P)	O
54B	Mirrors - Dual Rectangular XL2020 Integral Spot Mirror Sail type, 96" width, manual fold, chrome cap	O
54N	Mirrors, Heated - Dual Rectangular XL2020 Integral Spot Mirror Sail type, 96" width, manual fold, chrome cap	O
54A	Mirrors - Dual Rectangular XL2020 With Integral Spot Mirror Sail type, 96" width, heated and motorized, chrome cap (requires Power Equipment Group, 90P)	O
54J	Mirrors - Dual Rectangular XL2020 - Integral Spot Mirror Sail type, 102" width, manual fold, solid black finish	O
54C	Mirrors, Heated - Dual Rectangular XL2020 Integral Spot Mirror Sail type, 102" width, manual fold, solid black finish	O
54R	Mirrors - Dual Rectangular XL2020 With Integral Spot Mirror Sail type, 102" width, heated and motorized, solid black finish (requires Power Equipment Group, 90P)	O
54D	Mirrors - Dual Rectangular XL2020 Integral Spot Mirror Sail type, 102" width, manual fold, chrome cap	O
54E	Mirrors, Heated - Dual Rectangular XL2020 Integral Spot Mirror Sail type, 102" width, manual fold, chrome cap	O
54K	Mirrors - Dual Rectangular XL2020 With Integral Spot Mirror Sail Type, 102" Width, Heated and Motorized, Chrome Cap (Requires Power Equipment Group, 90P)	O
54F	Mirrors, Trailer Tow, Powered - Power telescoping, power folding w/ power heated glass, heated convex spotter and integrated clearance lights / turn signals (sail mount) (requires power equipment group, 90P) (heat controls dash mounted) N/A with (91D) Vertical Exhaust due to visibility	O
63F	Mirrors - Front Fender Mounted - (2) Driver Side and Passenger Side - (Late Availability)	O
63G	Mirror - Front Fender Mounted - (1) Passenger Side Only (Late Availability)	O
165	Mud Flaps Holder w/o Flaps	O
	Window, Rear - Fixed	S
	EXTERIOR FEATURES (CONTINUED)	
92S	Window, Rear - Sliding	O
	Windshield Wiper - Intermittent variable w/ windshield washers	S

2019 F-650 SUPER DUTY DIESEL PRO LOADER (KICK-UP FRAME) OPTIONAL EQUIPMENT



Order Code	COMPONENT DESCRIPTION	PEP Code: 600A
	INTERIOR FEATURES	
572	Air Conditioning, Manual - Includes integral heater and defroster; radiator-mounted compressor; R-134A refrigerant	S
57N	Air Conditioning, Delete - Fresh air heater and defroster only (NA with heated or motorized mirrors)	O
	Air Registers - Molded-in-color with positive shut-off, color coordinated trim	S
	Air Registers - With positive shut-off, chrome trimmed, included in Appearance Group	I
	ASSIST HANDLE	
	Interior A Pillars - Driver and passenger; all cabs	S
	Interior B Pillars - Grab handle, driver and passenger; Crew Cab only	S
	Auxiliary Power Point - In instrument panel (2)	S
59F	4 Body Builder Switches - Mounted in center instrument panel with connector access located in engine compartment; amperages vary by switch: 10, 15, 25, 25	S
	Back Panel Trim Cover	S
	Cruise Control - Steering wheel mounted controls	S
96C	Cup Holder - Instrument Panel Mounted, Pull out Cup Holder for two cups. (Not Available with Air Brakes) (Not Available with (55P) 110 A/C Outlet)	O
	Demisters - LH & RH side windows	S
	Dome Lamp - Rear mounted with integral map reading lights. (Regular and Crew Cab only)	S
90C	Fleet Telematics Modem - For Data Communication (Late Availability)	O
	Overhead Console - Front mounted with dual sunglass bins and integral front map reading lights (all cabs, included in Appearance Group)	I
	Floor Covering, Black - Full, vinyl floor	S
	Gauge Cluster, English - With English electronic speedometer (MPH/KPH) includes oil pressure, coolant temperature, DEF gauge, fuel gauge, tachometer and indicator lights. Also includes enhanced 3-button Message Center with odometer, trip odometer, distance-to-empty for fuel, average fuel economy hour meter and warning messages. Trans Temp in message center	S
16V	Volt Meter - Available in Message Center	O
55P	110 A/C Outlet - In lower center finish panel	O
	Glove Box	S
	Instrument Panel - Color-coordinated with color-coordinated accents	S
58P	Radio Prep Package - Deletes radio and dash-mounted auxiliary input jack. Includes radio/speaker wiring, 2 speakers, antenna, radio instrument panel cover and dash-mounted auxiliary audio input jack instrument panel cover	O
58B	Radio Delete Package - Deletes radio, speakers, antenna and antenna cable. Includes radio instrument panel cover and auxiliary audio jack cover and speaker locations for future radio upfit if owner desires	O
588	Radio AM/FM Stereo - With 2 speakers, includes auxiliary audio input jack and clock	S
586	Radio, Electronic Premium AM/FM Stereo, Disc - With 4 speakers, dash-mounted auxiliary audio input jack and clock and redundant steering wheel audio controls	O
21D	SYNC® Media System - Includes dash-mounted USB 2.0 port and redundant steering wheel SYNC® controls. Requires Radio 586	O
85B	Keyed Alike - NA with Anti-Theft System (85A); requires multiple-unit order (NA with 85K)	O
85L	Keyed Alike - Option #1 NA with Anti-Theft System (85A); requires multiple-unit order (NA with 85K)	O
85M	Keyed Alike - Option #2 NA with Anti-Theft System (85A); requires multiple-unit order (NA with 85K)	O
85N	Keyed Alike - Option #3 NA with Anti-Theft System (85A); requires multiple-unit order (NA with 85K)	O

2019 F-650 SUPER DUTY DIESEL PRO LOADER (KICK-UP FRAME) OPTIONAL EQUIPMENT



Order Code	COMPONENT DESCRIPTION	PEP Code: 600A
	ASSIST HANDLE (CONTINUED)	
85P	Keyed Alike - Option #4 NA with Anti-Theft System (85A); requires multiple-unit order (NA with 85K)	O
85K	Remote Keyless Entry - Requires Power Equipment Group, includes two key fobs. Also requires 85A Anti-Theft System	O
	SAFETY BELTS	
	Includes Fixed D-rings (Regular Cab)	S
	Includes Adjustable D-rings (SuperCab or Crew Cab)	S
	Steering Wheel, Tilt with Cruise Controls - Black PVC	S
	Sunvisor, Single Driver - Vinyl	S
	Sunvisor, Single Passenger - Vinyl with mirror	S
90M	Interior Rear View Mirror	O
94A	Timer - Engine idle shutdown, 5 minutes	O
94B	Timer - Engine idle shutdown, 10 minutes	O
94C	Timer - Engine idle shutdown, 15 minutes	O
94D	Timer - Engine idle shutdown, 20 minutes	O
	12 - FRONT WHEELS - TIRES Order codes of optional tires are listed in the Tire tab.	
	WHEELS, FRONT (HUB PILOT MOUNT)	
645	19.5x6.75, white powder-coated steel, 8-hole - NA with Air Brakes (67C or 67D)	S
646	19.5x7.50, white powder-coated steel, 10-hole - NA with Hydraulic Brakes (67J or 674)	O
642	19.5x7.50, polished aluminum, 10-hole - Requires Air Brakes (67C or 67D). (Available until added starter launch)	O
64D	19.5" X 7.5" Aluminum wheels, 10-hole Alcoa® Bright Polished both sides w/Dura-Bright® seal. Requires Air Brakes (67C or 67D). Available at added starter launch.	O
648	19.5" X 6.75" Aluminum wheels, 8-hole Alcoa® Clean Buff both sides w/Dura-Bright® seal, N/A with Air Brakes (67C or 67D).	O
TEA	245/70R 19.5G (14PR) Hankook AH11	S
	13 - REAR WHEELS - TIRES Order codes of optional tires are listed in the Tire tab.	
	WHEELS, REAR (HUB PILOT MOUNT)	
665	19.5x6.75, white powder-coated steel, 8-hole - NA with Air Brakes (67C or 67D)	S
666	19.5x7.50, white powder-coated steel, 10-hole - NA with Hydraulic Brakes (67J or 674)	O
662	19.5x7.50, polished aluminum, 10-hole - Requires Air Brakes (67C or 67D). Requires 642 wheel. (Available until added starter launch)	O
66D	19.5" X 7.5" Aluminum wheels, 10-hole Alcoa® Bright Polished both sides w/Dura-Bright® seal. Requires Air Brakes (67C or 67D). Requires (64D). Available at added starter launch	
668	19.5" X 6.75" Aluminum wheels, 8-hole Alcoa® Clean Buff both sides w/Dura-Bright® seal—outside mount, with white steel wheels inside mount. N/A with Air Brakes (67C or 67D). Requires (648)	O
REA	245/70R 19.5G (14PR) Hankook AH11	S
	13A - SPARE WHEEL - One Only	
60W	19.5x6.75, white powder-coated steel, 8-hole	O
60X	19.5x7.5, white powder-coated steel, 10-hole	O
	14 - PAINT	
	Body Color Available - Agate Black (UM), Oxford White (YZ), Ingot Silver (UX), Magnetic (J7), Race Red (PQ), Blue Jeans (N1), Green Gem (W6), Tangier Orange (J8), Bold Yellow (LE), School Bus Yellow (B1), Stone Gray (D1)	O
	Chassis Color - Black	S
	Paint Type - Environmentally friendly, "3-wet system"	S

**2019 F-650 SUPER DUTY
DIESEL PRO LOADER (KICK-UP FRAME)
OPTIONAL EQUIPMENT**



Order Code	COMPONENT DESCRIPTION	PEP Code: 600A
	15 - MISCELLANEOUS	
19A	Ambulance Prep Package - Special EPA calibration approved for special emergency vehicles. System includes (17D) Dual Heavy Duty Alternators @ 357 amps. total, and (63D) 3 - 900CCA Battery System for 2700 total CCA output	O
19F	Fire/Rescue Prep Package - Special EPA calibration approved for special emergency vehicles. System includes (17D) Dual Heavy Duty Alternators @ 357 amps. total, and (63D) 3 - 900CCA Battery System for 2700 total CCA output	O
21A	Pre-Delivery Inspection - Selection requires that you also choose either (314) or (31F) or (31V) to have the Pre-Delivery Inspection performed	O
314	Ship-Thru: Manning <u>MAY</u> be selected w/o adding (21A.) For <u>MODIFICATIONS ONLY</u> , Dealer must make arrangements directly with Manning (please use CVT Resources for add. Info).	O
31F	Ship-Thru: NFS National Fleet Services <u>MAY</u> be selected w/o adding (21A.) For <u>MODIFICATIONS ONLY</u> , Dealer must make arrangements directly with NFS (please use CVT Resources for add. Info).	O
31V	Ship-Thru: Fontaine Vocational Services for Tractors <u>MAY</u> be selected w/o adding (21A.) For <u>MODIFICATIONS ONLY</u> , Dealer must make arrangements directly with Fontaine (please use CVT Resources for add. Info). (If 21A Pre-Delivery Inspection is also selected it will be performed by NFS)	O
79V	Send a paper Certificate of Origin for a Vehicle (COV) for those states that file electronically (CA or MI)	O

2019 F-650 SUPER DUTY DIESEL PRO LOADER (KICK-UP FRAME) TIRES



Order Code		Description		Rev/Mile
Front	Rear			
OPTIONAL TIRES for 19.5" Wheel Configuration				
		Tubeless Radial Tires	Ply Rating	
		245/70R19.5G (14PR)		--
TEA	REA	Hankook AH11	14	618
--	REB	Hankook DH01	14	618
		245/70R19.5H (16PR)		--
TGK	RGK	Michelin XZE	16	621
TGA	RGA	Continental HSR1	16	621
--	RGB	Continental HDR	16	621
		265/70R19.5G (14 PR)		--
TPA	RPA	Hankook AH11	14	604
--	RPB	Hankook DH01	14	604



2019 F-650 SUPER DUTY DIESEL PRO LOADER (KICK-UP FRAME) AXLE RATIOS

Manufacturer:	Dana / Spicer	Dana / Spicer
Model:	S11-140	S14-140
Capacity (lbs.):	13,500	17,500
Differential:	Open	Open
Drive Gear:	Hypoid	GenTech
Order Code:	471	472
F650 Pro Loader Diesel		Std. Opt.

4.10	X4A	X-4.10	X-4.10
4.56	X4S	X-4.56	X-4.56
4.88	X4G	X4.88	X-4.88
5.29	X5B	X-5.29	X-5.29
5.57	X5D	X-5.57	X-5.57


2019 F-650 SUPER DUTY CAB-WHEELBASE-DIMENSIONAL DATA DIESEL REGULAR CAB - Pro Loader



Model Code: F6E

PEP Code: 600A

Std. GVWR	22,000 lbs.
Max. GVWR	26,000 lbs.

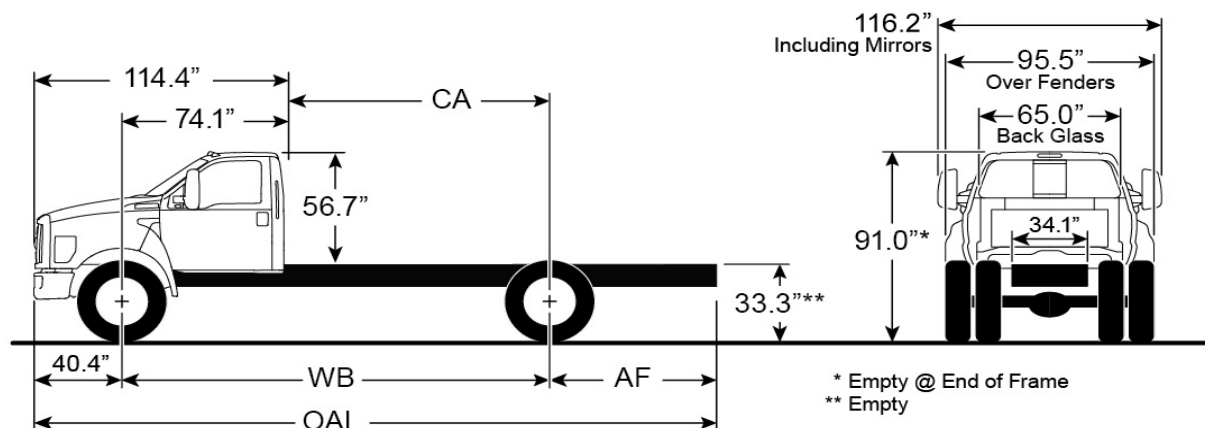

Wheelbase (in.)	Chassis Weights (lbs.)*			Dimensions (in.)			Turning Radius	
	Front	Rear	Total	CA	AF	OAL	To Curb	W/Bumper Clearance
158	5869	3538	9407	84	63	260	22 ft. 3 in.	23 ft. 10 in.
182	5919	3592	9511	108	75	296	25 ft. 2 in.	26 ft. 9 in.
194	5933	3607	9545	120	75	308	26 ft. 8 in.	28 ft. 3 in.
218	5974	3655	9628	144	81	338	28 ft. 10 in.	30 ft. 6 in.
242	6064	3749	9813	168	100	381	31 ft. 8 in.	33 ft. 4 in.


**2019 F-650 SUPER DUTY
DIESEL REGULAR CAB - Pro Loader
FRAMES
F6E**



FRAME RAIL SPECIFICATIONS

	CODE	Side Rail								
		DIMENSIONS (Inches)			YIELD STRENGTH Min.(psi)	SECTION MODULUS (inches ³)		RESISTING BENDING MOMENT (In.-Lbs.)		
		Depth	Width	Thickness		Nominal	Maximum	Nominal	Maximum	
S	537	Straight Channel Side Rail								
		9.125	3.062	0.312	80,000	10.75	11.47	860,000	917,600	

FRAME RAIL CROSS SECTION

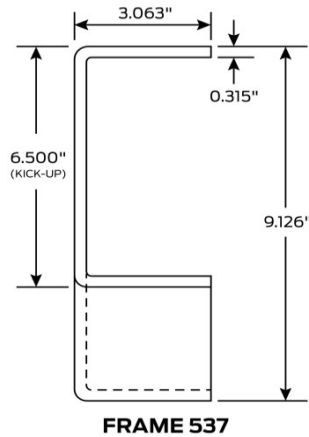


2019 F-650 SUPER DUTY CAB-WHEELBASE-DIMENSIONAL DATA DIESEL SUPERCAB - Pro Loader



Model Code: X6E

PEP Code: 600A

Std. GVWR	22,000 lbs.
Max. GVWR	26,000 lbs.

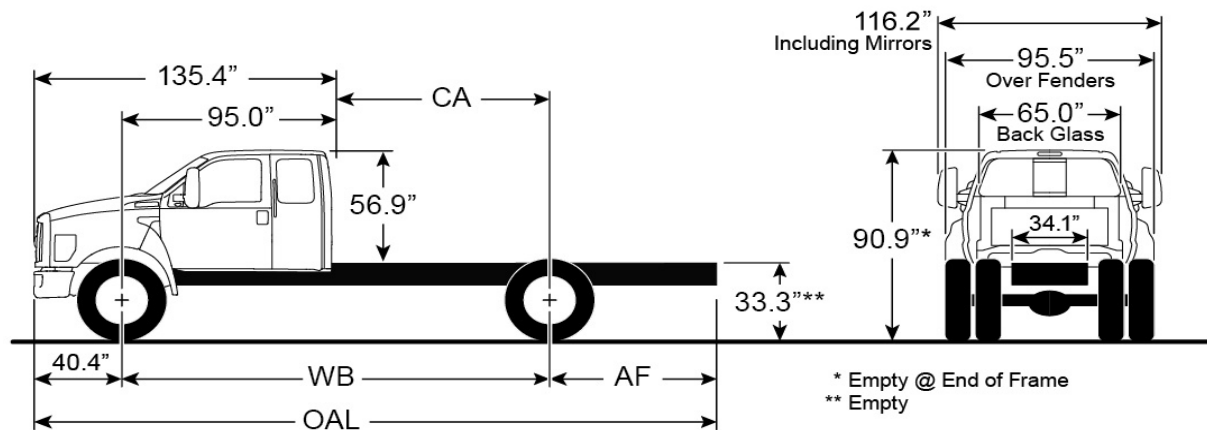

Wheelbase (in.)	Chassis Weights (lbs.)*			Dimensions (in.)			Turning Radius	
	Front	Rear	Total	CA	AF	OAL	To Curb	W/Bumper Clearance
179	6079	3605	9683	84	63	281	24 ft. 10 in.	26 ft. 5 in.
203	6120	3646	9765	108	75	317	27 ft. 1 in.	28 ft. 8 in.
239	6186	3718	9901	144	81	359	31 ft. 4 in.	33 ft. 0 in.


**2019 F-650 SUPER DUTY
DIESEL SUPERCAB - Pro Loader
FRAMES
X6E**



FRAME RAIL SPECIFICATIONS

	CODE	Side Rail								
		DIMENSIONS (Inches)			YIELD STRENGTH Min.(psi)	SECTION MODULUS (inches ³)		RESISTING BENDING MOMENT (In.-Lbs.)		
		Depth	Width	Thickness		Nominal	Maximum	Nominal	Maximum	
S	537	Straight Channel Side Rail								
		9.125	3.062	0.312	80,000	10.75	11.47	860,000	917,600	

FRAME RAIL CROSS SECTION

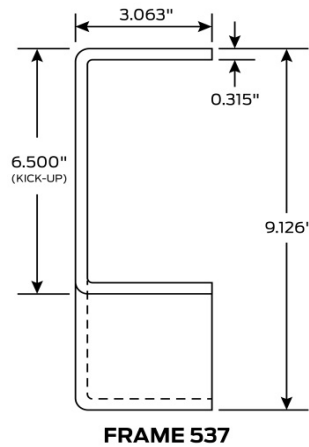


2019 F-650 SUPER DUTY CAB-WHEELBASE-DIMENSIONAL DATA DIESEL CREW CAB - Pro Loader



Model Code: W6E


PEP Code: 600A

Std. GVWR	22,000 lbs.
Max. GVWR	26,000 lbs.

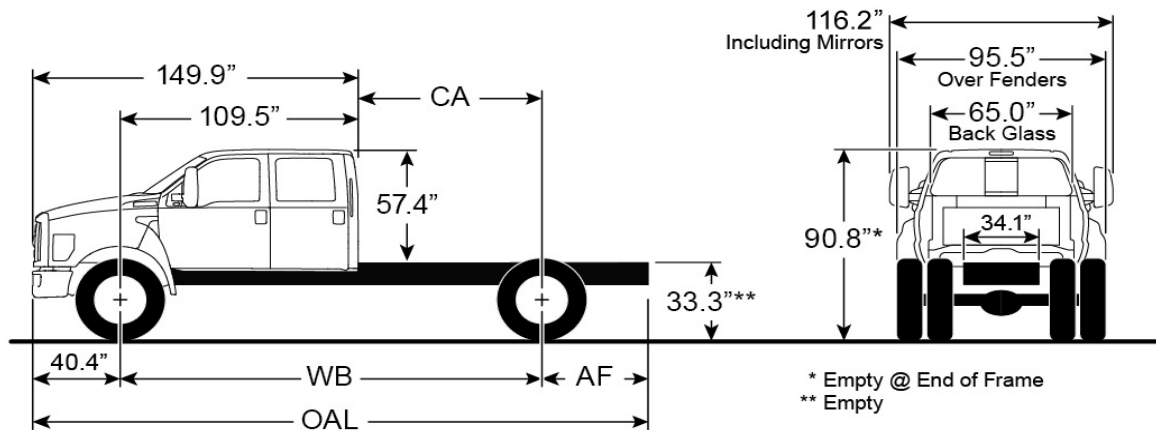

Wheelbase (in.)	Chassis Weights (lbs.)*			Dimensions (in.)			Turning Radius	
	Front	Rear	Total	CA	AF	OAL	To Curb	W/Bumper Clearance
194	6248	3641	9889	84	63	296	26 ft. 8 in.	28 ft. 3 in.
218	6283	3679	9962	108	75	332	28 ft. 10 in.	30 ft. 6 in.
254	6393	3793	10186	144	96	389	33 ft. 2 in.	34 ft. 9 in.

**2019 F-650 SUPER DUTY
DIESEL CREW CAB - Pro Loader
FRAMES
W6E**



FRAME RAIL SPECIFICATIONS

	CODE	Side Rail								
		DIMENSIONS (Inches)			YIELD STRENGTH Min.(psi)	SECTION MODULUS (inches ³)		RESISTING BENDING MOMENT (In.-Lbs.)		
		Depth	Width	Thickness		Nominal	Maximum	Nominal	Maximum	
S	537	Straight Channel Side Rail								
		9.125	3.062	0.312	80,000	10.75	11.47	860,000	917,600	

FRAME RAIL CROSS SECTION

