

2019 F-750 SUPER DUTY (DIESEL STRAIGHT FRAME) ORDER GUIDE



	Page
Model Index	1
Standard Equipment	2-4
Optional Equipment	5-14
Tire Sizes	15
Axle Ratios	16
Wheelbases and Frames	17-22
Cab - Wheelbase - Dimensional Data (Regular Cab) - (Dock Height)	
Frames (Regular Cab)	
Cab - Wheelbase - Dimensional Data (SuperCab) - (Dock Height)	
Frames (SuperCab)	
Cab - Wheelbase - Dimensional Data (Crew Cab) - (Dock Height)	
Frames (Crew Cab)	

Product Changes and Features Availability

Features, options and package content subject to change. Please check www.FMCDealer.com for the most current information.

2019 F-750 SUPER DUTY (DIESEL STRAIGHT FRAME)



FORD
CODE

MAJOR STANDARD EQUIPMENT

	STD WB is 158"	STD
	01 - FRAME	
535	Single Channel, Straight "C", 15.14 SM, 80,000 PSI, 1,211,200 RBM - High-strength low-alloy steel; 10.250" x 3.092" x 0.375" (260.4mm x 78.5mm x 9.5mm)	x
766	Bumper Front - Black, full width	x
	Less Frame Extension Package	x
	02 - AXLE, FRONT - SUSPENSION, FRONT	
43N	Axle, Front Non-Driving - Dana E-1002I 10,000-lb. capacity (includes Integral Power Steering)	x
61C	Parabolic Taper-leaf Springs - 2-leaf, 10,000-lb. capacity, 62" x 3.15"	x
	Shock Absorbers, Front - Standard duty, dual, double acting	x
	Wheel Seals, Front - Oil lubricated, SKF ScotSeal® PlusXL seals	x
	03 - AXLE, REAR - SUSPENSION, REAR	
475	21,000-lb. Rear Axle Assembly - Single-speed, (Dana 21060S), Single-reduction 21,000-lb. capacity with 190 wheel ends	x
	Multi-leaf Springs - 11-leaf, 21,000-lb. capacity with 2,000-lb. auxiliary springs for load stabilization	x
	Wheel Seals, Rear - Oil lubricated, SKF ScotSeal® PlusXL seals	x
	04 - BRAKES - BRAKE EQUIPMENT	
67J	Hydraulic Brake System - Bosch HydroMax®	x
	05 - ENGINE - ENGINE EQUIPMENT	
99C	6.7L Power Stroke® V8 Turbo Diesel - 270 horsepower @ 2400 rpm, 675 lb.-ft. torque @ 1600 rpm; governed rpm: 3200	x
	Manual Regen Initiation - Driver interface in Message Center	x
57B	Engine Exhaust Brake	x
425	50-State Emissions Requirements	x
	Canada and U.S. Territories get Federal Emissions	x
	Clean Idle Label - U.S., Military & EMS Direct Sales Only	x
	ENGINE EQUIPMENT	
	Air Cleaner - Dry, single-stage Donaldson® single element (includes restriction indicator)	x
	Fan Clutch - Bendix viscous screw-on type	x
	Fuel/Water Separator	x
	Radiator - Aluminum w/ in-tank transmission cooler, PremAir® ozone converter	x
	Starting Motor - 12-volt, Comstar, all parallel	x
	Anti-Freeze - OAT, extended life coolant; to -40 degrees F/-40 degrees C freeze protection	x
	06 - TRANSMISSION - DRIVELINE	
44G	Ford 6-Speed TorqShift® HD Automatic - Double overdrive, less PTO provision (RNDM)	x
	Driveshaft - Dana base	x
	07 - EXHAUST	
91G	Exhaust System - Under-Cab, Right-Side Outlet - Single, horizontal muffler, right side, under cab, outside of frame rail with rear discharge, Switchback-style	x
	08 - ELECTRICAL - ALTERNATOR - BATTERY	
	Alternator - Extra heavy duty 12-volt, 200-amp., Denso SC5	x
	Battery - 12-Volt, Motorcraft - Two, 750 CCA (1500 CCA Total)	x
	Battery Box - RH frame mount under cab step	x
	Body Builder Wiring - Frame mount at back of cab. Includes sealed connectors for 2 ground circuits, with combined left/stop, combined right/stop, stop lamps, park lamps, back up lamps. Also includes 2 additional pass-through wires to cab	x
	Emergency Flasher - Four-way	x
	Fuses, SAE - Blade-type smart fuse box	x

2019 F-750 SUPER DUTY (DIESEL STRAIGHT FRAME)



FORD
CODE

MAJOR STANDARD EQUIPMENT

	STD WB is 158"	STD
	LIGHTS	
	Aero Headlamps - High series, includes side marker lights with reflectors (front)	x
	Taillamps , Two w/ integral stop, turn, backup and license plate bracket	x
	Side Repeat Flasher	x
	09 - FUEL TANK	
65B	50-U.S. Gallon - Single, LH, aluminum, rectangular - Regular Cab only	x
65E	65-U.S. Gallon - Single, LH, aluminum, rectangular - SuperCab and Crew Cab only	x
	Diesel Fuel - Cold weather anti-gel additive - Gold Eagle 2106	x
	10 - SEATS	
88A	30/0/30 - Fixed driver and fixed passenger with console - vinyl	x
87B	60/40 - Rear bench seat with bolster and flip-up cushion - trim will match selected driver seat material (SuperCab)	x
87C	60/40 - Rear bench seat with flip-up cushion and fold-down back - trim will match selected driver seat material (Crew Cab)	x
	11 - CAB EQUIPMENT	
	Regular Cab, SuperCab or Crew Cab - Ford conventional, steel	x
	CAB EQUIPMENT - EXTERIOR	
	Doors - Two (four with SuperCab or Crew Cab)	x
	Front End Tilting Fiberglass Hood & Fenders Assembly - Tilt-type, frame-mounted, torsion bar assist (includes integral noise and inner splash shields and mud flaps)	x
	Glass - Laminated windshield, solar tint all-around	x
86A	Painted Grille - Plastic, NA with frame extension	x
	Horn - Dual note electric - level 2	x
	Lights - Roof marker/clearance - amber lenses, 5 lights	x
54H	Mirrors - Dual rectangular Velvac XL2020, integral spot mirrors, sail type, 96" width, manual fold, solid black finish	x
	Tow Hooks, Front (2) - Frame-mounted, painted black	x
	Window, Rear - Fixed	x
	Windshield Wiper Control - Two-speed electric intermittent w/ windshield washers	x
	CAB EQUIPMENT - INTERIOR	
572	Air Conditioning, Manual - Includes integral heater and defroster; radiator-mounted compressor; R-134A refrigerant	x
	Air Registers - Molded-in-color with positive shut-off, color-coordinated trim	x
	Assist Handles, Interior A Pillars - Driver and Passenger; all cabs	x
	Assist Handles, Interior B Pillars - Grab handle, driver and passenger; Crew Cab only	x
	Auxiliary Power Point - In instrument panel (2)	x
59F	4 Body Builder Switches - Mounted in center instrument panel with connector access located in engine compartment; amperages vary by switch: 10, 15, 25, 25	x
	Back Panel Trim Cover	x
	Coat Hook - RH/LH color-keyed	x
	Cruise Control - Steering Wheel-Mounted Controls	x
	Demisters - LH & RH side windows	x
	Dome Lamp - Rear mounted with integral map reading lights. (Regular and Crew Cab only)	x
	Door Trim - Color-coordinated molded w/ grab handle	x
	Armrest/grab handle	x
	Soft armrest, grab handle upper and lower map pockets	x
	Floor Covering - Black vinyl	x

2019 F-750 SUPER DUTY (DIESEL STRAIGHT FRAME)



FORD
CODE

MAJOR STANDARD EQUIPMENT

	STD WB is 158"	STD
	CAB EQUIPMENT - INTERIOR (CONTINUED)	
	Gauge Cluster, Diesel - with electronic speedometer, includes oil pressure, coolant temperature, DEF gauge, fuel gauge, tachometer, and indicator lights. Also included is enhanced 3-button Message Center with odometer, trip odometer, distance-to-empty for fuel, average fuel economy, hour meter and warning messages. Trans temp in Message Center.	x
	Glove Box - Instrument panel, RH	x
	Headliner - Color-coordinated, molded, cloth	x
	Instrument Panel - Color-coordinated with color-coordinated accents	x
	Intelligent Oil Life Monitor®	x
588	Radio AM/FM Stereo - With 2 speakers, includes auxiliary audio input jack and clock	x
	Safety Belts - Belt-Minder® (chime and flashing warning light on instrument panel if belts not buckled)	x
	Safety Belts - Color-coordinated, all-position, includes fixed D-rings (Regular Cab)	x
	Safety Belts - Color-coordinated, all-position, includes front seat adjustable D-rings (SuperCab or Crew Cab)	x
	Scuff Plates	x
	Steering Column - Tilt	x
	Steering Wheel - Black PVC, with integral cruise control switches	x
	Sunvisor, Single Driver - Vinyl	x
	Sunvisor, Single Passenger - Vinyl with mirror	x
	Tachometer - Electric	x
	Turn Signal Switch, Self Canceling - Multifunction switch	x
	12 - FRONT WHEEL - TIRES	
	Wheels, Front	
643	22.5x8.25 - Steel disc, 10-hole - hub-piloted, 5 hand hold, powder-coated white	x
	Tires, Front	
TCG	11R22.5G (14PR) Goodyear® Endurance RSA	x
	13 - REAR WHEEL - TIRES	
	Wheels, Rear	
663	22.5x8.25 - Steel disc, 10-hole - hub-piloted, 5 hand hold, powder-coated white	x
	Tires, Rear	
RCG	11R22.5G (14PR) Goodyear® Endurance RSA	x
	14 - PAINT	
	Body Color Available - Agate Black (UM), Oxford White (YZ), Ingot Silver (UX), Magnetic (J7), Race Red (PQ), Blue Jeans (N1), Green Gem (W6), Tangier Orange (J8), Bold Yellow (LE), School Bus Yellow (B1), Stone Gray (D1)	x
	Chassis Color - Black	x
	Paint Type - Environmentally friendly, "3-wet system"	x

2019 F-750 SUPER DUTY (DIESEL STRAIGHT FRAME) OPTIONAL EQUIPMENT



Order Code	COMPONENT DESCRIPTION	PEP Code: 600A
		STD
Body Code	Regular Cab SuperCab Crew Cab	F7D X7D W7D
01 - FRAME		
SINGLE CHANNEL - STRAIGHT "C"		
535	15.14 SM, 80,000 PSI, 1,211,200 RBM - High-strength low-alloy steel; 10.250" x 3.092" x 0.375" (260.4mm x 78.5mm x 9.5mm)	S
536	14.18 SM, 120,000 PSI, 1,701,600 RBM - Heat-treated alloy steel; 10.125" x 3.580" x 0.312" (257.2mm x 90.9mm x 8.0mm)	O
538	16.98 SM, 120,000 PSI, 2,037,600 RBM - Heat-treated alloy steel; 10.250" x 3.610" x 0.375" (260.4mm x 91.66mm x 9.5mm)	O
539	20.11 SM 120,000 PSI, 2,413,200 RBM - Single-channel straight C, heat-treated alloy steel; 10.375" x 3.705" x 0.438" (263.5mm x 94.1mm x 11.1mm)	O
41R	Frame Reinforcement - 29.84 SM, 120,000 PSI, 3,580,800 RBM - Outer "C" channel reinforcement, heat-treated alloy steel; 10.813 x 3.892" x 0.312"; (274.6 mm x 98.9 mm x 8.0 mm), requires Frame (536)	O
532	Integral Front Frame Extension - 20" in front of grille, [Requires Frame (536), (538), (539) or (536 + 41R). Includes (76X) Bumper Delete and includes (86B) Fixed Grille.] Available with (767) Swept Back Front Bumper.	O
766	Bumper, Front, Full Width - Black (NA with Frame Extension 532)	S
765	Bumper, Front, Full Width - Chrome-plated steel. Included with Exterior Appearance Group (90E)	O/I
767	Bumper, Front, Swept Back - Dark shadow gray painted steel (available with Front Frame Extension 532)	O
76X	Bumper, Front Delete - Standard with front Frame Extension (532) Also deletes the Mounting Brackets	O
76F	Bumper Extension, Front - 3" Extension (Not Available with Swpet Back Bumper 767)	O
	Tow Hooks, Front - Inside rail, frame mounted (2)	S
76Y	Tow Hooks Delete	O
18D	Special Rating GVWR - Limited to 25,999-lb. GVWR {N/A with (43P) 12K or (43D) 14K Front Axles, with (479 or 47P) 23K or (47X) 26K Rear Axles}	O
18G	Special Rating GVWR - Limited to 33,000-lb. GVWR, only available to GAWR combinations that exceed 33,000 lbs. Not Available when F/A (43P) and R/A (47X) are used together.	O
19D	FRAME RAIL DRILL #3 - Factory pre-drilled holes in frame rails to support aftermarket install of Hydraulic pump system for EZ-TRAC 4X4 conversion. (Late Availability) Requires Air Brakes.	O
19E	FRAME RAIL DRILL #2 - Factory pre-drilled holes in frame rails to support aftermarket install of transfer case brackets for a Meritor 4 x 4 conversion. Requires Standard Exhaust (91G). N/A with Frame Reinforcement (41R). N/A on SuperCab. (Late Availability) Requires Air Brakes.	O
	Square Cut Frame Ends	S
02 - AXLE, FRONT - SUSPENSION, FRONT		
43N	Axle, Front Non-Driving - Dana E-1002I 10,000-lb. capacity (includes Integral Power Steering)	S
43P	Axle, Front Non-Driving - Dana E-1202I, I-beam-type, 12,000-lb. capacity	O
43D	Axle, Front Non-Driving - Dana 14,000-lb. capacity	O
TAPER-LEAF SPRINGS		
61C	Parabolic Taper-leaf Springs - 2-leaf, 10,000-lb. capacity, 62" x 3.15" (requires 43N)	S
61D	Parabolic Taper-leaf Springs - 2-leaf, 12,000-lb. capacity, 62" x 3.15" (available on 43N and 43P)	O
61E	Parabolic Taper-leaf Springs - 3-leaf, 13,200-lb. capacity, 62" x 3.15" (available on 43P and 43D)	O
61F	Parabolic Taper-leaf Springs - 3-leaf, 14,000-lb. capacity, 62" x 3.15" (available on 43D)	O
	Shock Absorbers, Front - Double acting	S
15S	Stabilizer Bar, Front	O
	Wheel Seals, Front - Oil lubricated, SKF ScotSeal® PlusXL seals	S
60A	Lube, Front Axle , EmGard® 50W, synthetic oil	O

2019 F-750 SUPER DUTY (DIESEL STRAIGHT FRAME) OPTIONAL EQUIPMENT



Order Code	COMPONENT DESCRIPTION	PEP Code: 600A
	03 - AXLE, REAR - SUSPENSION, REAR	
	NOTE: When specifying an axle ratio, check performance guidelines for startability and gradeability	
475	21,000-lb. Rear Axle Assembly Single Reduction Open	S
476	21,000-lb. Rear Axle Assembly Single Reduction Locking	O
477	21,000-lb. Rear Axle Assembly Dual Reduction Open	O
479	23,000-lb. Rear Axle Assembly Single Reduction Open	O
47P	23,000-lb. Rear Axle Assembly Single Reduction Locking	O
47X	26,000-lb. Rear Axle Assembly Single Reduction Open	O
	03 - AXLE, REAR - SUSPENSION, REAR (CONTINUED)	
	NOTE: When specifying an axle ratio, check performance guidelines for startability and gradeability	
	Driveshaft - Dana base	S
18P	Driveshaft - Upgrade	O
	MULTI-LEAF SPRINGS	
68P	11-Leaf, 21,000-lb. Capacity - For 21,000-lb. rear axles; includes 2,000-lb. auxiliary springs for load stabilization	S
68R	11-Leaf, 23,000-lb. Capacity - For 21,000-lb. and 23,000-lb. rear axles; includes 2,000-lb. auxiliary springs for load stabilization	O
68T	11-Leaf, 31,000-lb. Capacity - For 23,000-lb. and 26,000-lb. rear axles; includes 2,000-lb. auxiliary springs for load stabilization	O
	AIR SUSPENSION	
68B	21,000-lb. Capacity - For Rear Axle Code 475, 476 and 477, with single air suspension leveling valve; Not Available with relocated brakes 62F	O
68F	23,000-lb. Capacity - For all rear axles except 47X, with single air suspension leveling valve; Not Available with relocated brakes 62F	O
68Z	Air Suspension Dump Valve	O
68Y	Air Suspension Leveling Valve - Dual Air Suspension Leveling Valves; creates L/R ride height	O
961	Shock Absorbers, Rear - Double acting (included in Air Ride Suspension but NA with 62F)	O
	Wheel Seals, Rear - Oil lubricated, SKF ScotSeal® PlusXL seals	S
607	Lube, Rear Axle - EmGard® 75W-90 synthetic oil	O
	04 - BRAKES - BRAKE EQUIPMENT	
67J	Hydraulic Brake System - Bosch HydroMax®	S
674	Hydraulic Brake System - Bosch HydroMax®, with Traction Control	O
67C	Air Brakes - Straight Truck w/16.5"x7.0" rear pads - 22.5" wheels; Meritor® Q-Plus with ABS (Bendix® Anti-Lock Brake System) (4-channel) (includes 15" x 4" front brakes, dual direct reading air pressure gauges, brake lines color-coded nylon, Bendix® 13.2 CFM capacity air compressor, instrument panel-mounted yellow knob parking brake control valve, automatic slack adjusters front and rear, two rear spring parking air brake chambers mounted on front of rear axle, three drain valve(s) and two air tanks (reference Body Builders book for location).	O
67D	Air Brakes with Traction Control - Straight truck w/16.5"x7.0" rear pads - 22.5" wheels; Meritor® Q-Plus with ABS (Bendix® Anti-Lock Brake System) (4-channel) (Includes 15" x 4" front brakes, dual direct reading air pressure gauges, brake lines color-coded nylon, Bendix® 13.2 CFM capacity air compressor, instrument panel-mounted yellow knob parking brake control valve, automatic slack adjusters front and rear, two rear spring parking air brake chambers mounted on front of rear axle, three drain valve(s) and two air tanks (reference Body Builders Book for location). (Should NEVER be used with Hi-Rail Train Systems) Required when using (18H) Electronic Stability Control.	O
18H	Electronic Stability Control - Requires Air Brakes with Traction Control (67D). N/A with (158) Trailer Airbrake Pkg. Requires the selection of a Special Build Requirement, for the Type of Center of Gravity, of the Final Upfit	O

2019 F-750 SUPER DUTY (DIESEL STRAIGHT FRAME) OPTIONAL EQUIPMENT



Order Code	COMPONENT DESCRIPTION	PEP Code: 600A
SPECIAL BUILD REQUIREMENT		
98B	Special Build Requirement - LOW - 38" to 48" Center of Gravity (Requires 18H)	O
98C	Special Build Requirement - MEDIUM - 48" to 58" Center of Gravity (Requires 18H)	O
98E	Special Build Requirement - HIGH - 58" to 68" Center of Gravity (Requires 18H)	O
98F	Special Build Requirement - TANKER HIGH - 58" to 68" Center of Gravity (Requires 18H)	O
98J	Special Build Requirement - TANKER MEDIUM - 48" to 58" Center of Gravity (Requires 18H)	O
BRAKE EQUIPMENT		
62F	Air Brake Chambers, Spring - Relocated to rear of rear axle for maximum ground clearance (standard with 158" and 176" WB Reg. Cab when Air Brakes [67C or 67D] are ordered with 91B Torpedo style exhaust - NA with Hydraulic Brakes)	O
62D	Air Dryer (Bendix® AD/IP) with heater - mounted inside left frame rail	O
62H	Air Dryer (Bendix® AD/IP) with heater - Alternate Mount outside the left Frame rail as close to cab as available. Requires Regular Cab, Requires Standard 50 gal tank.	O
	Drain Valve (1) - Automatic (Bendix® DV-2) with heater; required with air compressor or air brakes	S
152	Trailer Connection Socket, 7-way - Mounted at rear of frame, for combined trailer stop, tail, turn, marker light circuits; includes Electric Trailer Brake Accommodation Package with cab connections for mounting customer installed electric brake unit (available for Hydraulic Brake Straight Truck). Available with (Standard) Combined Back of Cab Body Builder Wiring or available with (59C) Combined End of Frame Body Builder Wiring.	O
154	Trailer Connection Socket, 7-way - Mounted at rear of frame, for Separate trailer stop, tail, turn, marker light circuits; includes Electric Trailer Brake Accommodation Package with cab connections for mounting customer installed electric brake unit (available for Hydraulic Brake Straight Truck). Available with (59D) Separate Back of Cab Body Builder Wiring	O
159	Trailer Connection Socket, 7-way - Mounted at rear of frame, for combined trailer stop, tail, turn; (compatible with trailers that use combined stop, tail, turn lights) (available for Air Brake Straight Truck) Available with (Standard) Combined Back of Cab Body Builder Wiring or available with (59C) Combined End of Frame Body Builder Wiring. Not Available with (18H).	O
158	Trailer Air Brake Package - Includes air lines to rear of frame, hand control valve and tractor protection valve (requires Trailer Connection Socket 7-Way, Code 159 or 157) (requires Air Brakes). Not Available with (18H)	O
157	Trailer Connection Socket, 7-way - Mounted at rear of frame, for Separate trailer stop, tail, turn, marker light circuits; (compatible with trailers that have amber or side turn lights with Separate stop/turn) (available for Air Brake Straight Truck) Available with (59D) Separate Back of Cab Body Builder Wiring or available with (59E) Separate End of Frame Body Builder Wiring. Not Available with (18H)	O
05 - ENGINE - ENGINE EQUIPMENT		
99C	6.7L Power Stroke® V8 Turbo Diesel - 270 horsepower @ 2400 rpm, 675 lb.-ft. torque @ 1600 rpm; governed rpm: 3200	S
99E	6.7L Power Stroke® V8 Turbo Diesel - 300 horsepower @ 2500 rpm, 700 lb.-ft. torque @ 1800 rpm; governed rpm: 3300	O
99X	6.7L Power Stroke® V8 Turbo Diesel - 330 horsepower @ 2600 rpm, 725 lb.-ft. torque @ 1800 rpm; governed rpm: 3400	O

2019 F-750 SUPER DUTY (DIESEL STRAIGHT FRAME) OPTIONAL EQUIPMENT



Order Code	COMPONENT DESCRIPTION	PEP Code: 600A
	ENGINE EQUIPMENT	
62G	Air Compressor Bendix® - 13.2 CFM capacity - For stand-alone air source with Hydraulic Brakes; <u>Required</u> with Air Suspension 68F and 68B, <u>when using Hydraulic Brakes</u> . Also allows the following Seats to be used (88N, 88P, 88G, 88H, 88E, 88F, 88T 88U) in lieu of (88R, 88S, 88L, 88M, 88J, 88K, 88W, 88X), <u>when using Hydraulic Brakes</u>	O
41H	Engine Block Heater - Phillips; 120-volt, 750-watt	O
	Manual Regen Initiation - Driver interface in Message Center	S
98R	Active Regen Control - Allows Driver to Inhibit Automatic Regen till Regen can be performed in a Safe location.	O
	Radiator - Aluminum w/ in-tank transmission cooler, PremAir® ozone converter	S
916	Speed Limiter - 65 mph	O
917	Speed Limiter - 70 mph	O
	06 - TRANSMISSION	
44G	Ford 6-Speed TorqShift® HD Automatic - Double Overdrive, Less PTO Provision (RNDM)	S
41A	Transmission Power Takeoff Provision, with LiveDrive capability	O
	07 - EXHAUST	
91G	Exhaust System - Under Cab, Right Side Outlet - Single, horizontal muffler, right-side, under-cab, outside of frame rail with rear discharge, Switchback-style	S
91B	Exhaust System - Back of Cab, Right-Side Outlet - Single, horizontal muffler/pipe, inline, right-side exhaust with underbody exit, in front of axle, Torpedo-style ; Not available with Hydraulic Brakes at 158" or 176"WB Reg. Cab.	O
91D	Exhaust System - Under Cab, Vertical Outlet, Right Side - Single, horizontal muffler, right side, under cab, outside of frame rail with vertical exhaust, passenger-side rear corner with heat shield and turn-out, Switchback-style. Not Available with Mirrors (54F) Trailer Tow due to lack of Visibility	O

2019 F-750 SUPER DUTY (DIESEL STRAIGHT FRAME) OPTIONAL EQUIPMENT



Order Code	COMPONENT DESCRIPTION	PEP Code: 600A
	08 - ELECTRICAL - ALTERNATOR - BATTERY	
	ALTERNATOR (12-VOLT)	
	Extra Heavy Duty Alternator - 200-amp. Denso SC5	S
17C	Alternator - 220 amp. Denso SC6	O
17D	Dual Heavy-Duty Alternators - 357-amp., (200+157 amp.) Denso SC5/SC2	O
55M	Jump Start Stud - Remote mounted (NA with temporary mount batteries)	O
	BATTERY, 12-VOLT (INCLUDES STEEL BATTERY BOX)	
	Motorcraft® - Two, 750 CCA (1500 CCA total)	S
63B	Motorcraft® - Two, 900 CCA (1800 CCA total)	O
63D	Motorcraft® - Three, 900 CCA (2700 CCA total)	O
63Y	Temporary Battery Mount for Chassis Truck - Available with 63B or 63D - requires Dual Heavy Duty Alternators (17D)	O
	Emergency Flasher	S
	Fuses, SAE - Blade Type	S
	Aero Headlamps - High series, includes side marker lights with reflectors (front)	S
163	Lights - Roof Marker/Clearance - Amber lenses, 5 lights	S
164	Roof Marker/Clearance Lights - Clear lenses, 5 lights	O
16X	Roof Marker/Clearance Lights Delete - (For airport or applications that receive modified roof coverings)	O
	Taillamps - Two w/ integral stop, turn, backup and license plate bracket	S
	Turn Signal Switch, Self Canceling - Multifunction switch with windshield wiper (1-7 variable speed, hi, low), windshield washer, L/R turn signal; self cancel, L/R lane change, hazard, flash-to-pass, high beam	S
	Body Builder Wiring - At Back of Cab (includes sealed connectors for 2 ground circuits, with Combined left/stop, Combined right/stop, park lamps, backup lamps) (also includes 2 additional pass through wires to cab) (available with Hydraulic or Air Brakes) Not Available with (154) Hydraulic Brake Trailer Connection or (157) Air Brake Trailer Connection.	S
59C	Body Builder Wiring - At End of Frame (includes sealed connectors for 2 ground circuits, with Combined left/stop, Combined right/stop, backup lamps) (also includes 2 additional pass through wires to cab) Not Available with (19B) Beverage Package, Not Available with (154) Hydraulic Brake Trailer Connection or (157) Air Brake Trailer Connection	O
59D	Body Builder Wiring - At Back of Cab (includes sealed connectors for 2 ground circuits, with Separate left/stop, Separate right/stop, backup lamps) (also includes 2 additional pass through wires to cab) Not Available with (19B) Beverage Package, Not Available with (152) Hydraulic Brake Trailer Connection or (159) Air Brake Trailer Connection	O
59E	Body Builder Wiring - At End of Frame (includes sealed connectors for 2 ground circuits, with Separate left/stop, Separate right/stop, backup lamps) (also includes 2 additional pass through wires to cab) Not Available with (19B) Beverage Package, Not Available with (152) Hydraulic Brake Trailer Connection or (159) Air Brake Trailer Connection	O
17M	Back-up Alarm - Electric, 102 dBA (NA w/Taillights Delete, Code 55X)	O
962	Daytime Running Lamps	O
55X	Tail Lights Delete (deletes stop, turn, tail and backup lights) (does not omit cable to end of frame)	O

2019 F-750 SUPER DUTY (DIESEL STRAIGHT FRAME) OPTIONAL EQUIPMENT



Order Code	COMPONENT DESCRIPTION	PEP Code: 600A
09 - FUEL TANKS		
(For Clean CA installations with other cabs refer to the Body Builders site)		
65B	Fuel Tank, 50-U.S. Gallon - Left-hand, aluminum, rectangular (Regular Cab only)	S
65E	Fuel Tank, 65-U.S. Gallon - Left-hand, aluminum, rectangular (standard on SuperCab and Crew Cab only; optional on Regular Cab only)	S/O
65C	Fuel Tank, 55-U.S. Gallon - Left-hand, aluminum, rectangular (Regular Cab only)	O
65F	Fuel Tank, 115-U.S. Gallon - Left-hand 65-gal.; right-hand 50-gal., aluminum, rectangular	O
10 - SEATS		
Seats are color-coordinated to cab trim level. All seats include seat belts. Rear seats of SuperCab or Crew Cab must be selected from this same grouping. Seat Delete options are available at the end of this list.		
88A	30/0/30 - Fixed driver and fixed passenger with consolette - vinyl	S
88B	30/0/30 - Fixed driver and fixed passenger with consolette - cloth	O
881	30/70 - Fixed driver and fixed 2-passenger bench - vinyl	O
882	30/70 - Fixed driver and fixed 2-passenger bench - cloth	O
88C	30/0/0 - Fixed driver only - vinyl	O
88D	30/0/0 - Fixed driver only - cloth	O
88R	30/0/30 - Air ride driver (integral air pump) and fixed passenger with consolette - vinyl (NA with SuperCab; NA with Air Ride, Air Brakes or Compressor 62G)	O
88S	30/0/30 - Air ride driver (integral air pump) and fixed passenger with consolette - cloth (NA with SuperCab; NA with Air Ride, Air Brakes or Compressor 62G)	O
88L	30/70 - Air ride driver (integral air pump) and fixed 2-passenger bench - vinyl (NA with SuperCab; NA with Air Ride, Air Brakes or Compressor 62G)	O
88M	30/70 - Air ride driver (integral air pump) and fixed 2-passenger bench - cloth (NA with SuperCab; NA with Air Ride, Air Brakes or Compressor 62G)	O
88J	30/0/30 - Air ride driver (integral air pump) and air ride passenger (integral air pump) with consolette - vinyl (NA with SuperCab; NA with Air Ride, Air Brakes or Compressor 62G)	O
88K	30/0/30 - Air ride driver (integral air pump) and air ride passenger (integral air pump) with consolette - cloth (NA with SuperCab; NA with Air Ride, Air Brakes or Compressor 62G)	O
88W	30/0/0 - Air ride driver only (integral air pump) - vinyl (NA with SuperCab; NA with Air Ride, Air Brakes or Compressor 62G)	O
88X	30/0/0 - Air ride driver only (integral air pump) - cloth (NA with SuperCab; NA with Air Ride, Air Brakes or Compressor 62G)	O
88N	30/0/30 - Air ride driver (external air source) and fixed passenger with consolette - vinyl (NA with SuperCab)	O
88P	30/0/30 - Air ride driver (external air source) and fixed passenger with consolette - cloth (NA with SuperCab)	O
88G	30/70 - Air ride driver (external air source) and fixed 2-passenger bench - vinyl (NA with SuperCab)	O
88H	30/70 - Air ride driver (external air source) and fixed 2-passenger bench - cloth (NA with SuperCab)	O
88E	30/0/30 - Air ride driver (external air source) and air ride passenger (external air source) with consolette - vinyl (NA on SuperCab)	O
88F	30/0/30 - Air ride driver (external air source) and air ride passenger (external air source) with consolette - cloth (NA on SuperCab)	O
88T	30/0/0 - Air ride driver only (external air source) - vinyl (NA with SuperCab)	O
88U	30/0/0 - Air ride driver only (external air source) - cloth (NA with SuperCab)	O
88Y	40/20/40 - Fixed driver and fixed passenger with unique 20% fold-down console - vinyl	O
88Z	40/20/40 - Fixed driver and fixed passenger with unique 20% fold-down console - cloth	O
SUPERCAB - REAR SEAT		
87B	60/40 - Rear bench seat with bolster and flip-up cushion - trim will match selected driver seat material	S
87X	Rear Seat Delete	O
CREW CAB - REAR SEAT		
87C	60/40 - Rear bench seat with flip-up cushion and fold-down back - trim will match selected driver seat material	S
87X	Rear Seat Delete	O

2019 F-750 SUPER DUTY (DIESEL STRAIGHT FRAME) OPTIONAL EQUIPMENT



Order Code	COMPONENT DESCRIPTION	PEP Code: 600A
11 - CAB EQUIPMENT		
	Regular Cab, SuperCab or Crew Cab - Ford conventional, steel	S/O
INTERIOR APPEARANCE GROUP		
90A	Appearance Group - Front-mounted overhead console with dual sunglass bins and integral front map reading lights, door trim panel, chrome air registers, second-row bench seat (Crew Cab) or two-row high series flip-up seats with cushion and bolster (SuperCab). Includes Power Equipment Group (90P).	O
90P	Power Equipment Group - Power front side windows, power rear side windows (Crew Cab) power door locks and door trim panel. Includes manual rear side windows with SuperCab. Included in Appearance Group (90A)	O/I
EXTERIOR FEATURES		
90E	Exterior Appearance Group - Includes full-width chrome-plated front bumper (765), chromed fender badge and chrome grille surround (86C)	O
85A	Anti-Theft System	O
	Front End Tilting Fiberglass Hood & Fenders Assembly - Frame-mounted, torsion bar assist (including integral noise and inner splash shields and mud flaps)	S
	Glass - Laminated windshield	S
	Glass - Solar tint complete	S
86A	Painted Grille - Plastic	S
86C	Grille - Chrome surround	O/I
86B	Grille, Fixed - Black/grey	O
59A	Horn, Air - Black, single trumpet, air solenoid operated, chassis-mounted on rail back of bumper	O
	Horn, Electric - Dual	S
54H	Mirrors - Dual Rectangular XL2020 Integral Spot Mirror Sail type, 96" width, manual fold, solid black finish	S
54M	Mirrors, Heated - Dual Rectangular XL2020 Integral Spot Mirror Sail type, 96" width, manual fold, solid black finish	O
54P	Mirrors - Dual Rectangular XL2020 With Integral Spot Mirror Sail type, 96" width, heated and motorized, solid black finish (requires Power Equipment Group, 90P)	O
54B	Mirrors - Dual Rectangular XL2020 Integral Spot Mirror Sail type, 96" width, manual fold, chrome cap	O
54N	Mirrors, Heated - Dual Rectangular XL2020 Integral Spot Mirror Sail type, 96" width, manual fold, chrome cap	O
54A	Mirrors - Dual Rectangular XL2020 With Integral Spot Mirror Sail type, 96" width, heated and motorized, chrome cap (requires Power Equipment Group, 90P)	O
54J	Mirrors - Dual Rectangular XL2020 Integral Spot Mirror Sail type, 102" width, manual fold, solid black finish	O
54C	Mirrors, Heated - Dual Rectangular XL2020 Integral Spot Mirror Sail type, 102" width, manual fold, solid black finish	O
54R	Mirrors - Dual Rectangular XL2020 With Integral Spot Mirror Sail type, 102" width, heated and motorized, solid black finish (requires Power Equipment Group, 90P)	O
54D	Mirrors - Dual Rectangular XL2020 Integral Spot Mirror Sail type, 102" width, manual fold, chrome cap	O
54E	Mirrors, Heated - Dual Rectangular XL2020 Integral Spot Mirror Sail type, 102" width, manual fold, chrome cap	O
54K	Mirrors - Dual Rectangular XL2020 With Integral Spot Mirror Sail type, 102" width, heated and motorized, chrome cap (requires Power Equipment Group, 90P)	O
54F	Mirrors, Trailer Tow, Powered - Power telescoping, power folding w/ power heated glass, heated convex spotter & integrated clearance lights / turn signals (sail mount) (requires Power Equipment Group, 90P) (heat controls dash mounted). N/A with (91D) Vertical Exhaust due to Visibility	O
EXTERIOR FEATURES (CONTINUED)		
63F	Mirrors - Front Fender Mounted - (2) Driver Side and Passenger Side - (Late Availability)	O
63G	Mirror - Front Fender Mounted - (1) Passenger Side Only (Late Availability)	O
165	Mud Flaps Holder w/o Flaps	O
166	Mud Flap Holder with Flaps	O
	Window, Rear - Fixed	S
92S	Window, Rear - Sliding	O
	Windshield Wiper - Intermittent variable w/ windshield washers	S

2019 F-750 SUPER DUTY (DIESEL STRAIGHT FRAME) OPTIONAL EQUIPMENT



Order Code	COMPONENT DESCRIPTION	PEP Code: 600A
	INTERIOR FEATURES	
572	Air Conditioning, Manual - Includes integral heater and defroster; radiator-mounted compressor; R-134A refrigerant	S
57N	Air Conditioning, Delete - Fresh air heater and defroster only (NA with heated or motorized mirrors)	O
	Air Registers - Molded-in-color with positive shut-off, color-coordinated trim	S
	Air Registers - With positive shut-off, chrome-trimmed, included in Appearance Group	I
	ASSIST HANDLE	
	Interior A Pillars - Driver and passenger; all cabs	S
	Interior B Pillars - Grab handle, driver and passenger; Crew Cab only	S
	Auxiliary Power Point - In instrument panel (2)	S
59F	4 Body Builder Switches - Mounted in center instrument panel with connector access located in engine compartment; amperages vary by switch: 10, 15, 25, 25	S
	Back Panel Trim Cover	S
	Cruise Control - Steering wheel-mounted controls	S
96C	Cup Holder - Instrument Panel Mounted, Pull out Cup Holder for two cups (Not available with Air Brakes) (Not Available with (55P) 110 A/C Outlet)	O
	Demisters - LH & RH side windows	S
	Dome Lamp - Rear mounted with integral map reading lights. (Regular and Crew Cab only)	S
90C	Fleet Telematics Modem - For Data Communication (Late Availability)	O
	Overhead Console - Front mounted with dual sunglass bins and integral front map reading lights (all cabs, included in Appearance Group)	I
	Floor Covering, Black - Full, vinyl floor	S
	Gauge Cluster, English - With English electronic speedometer (MPH/KPH) includes oil pressure, coolant temperature, DEF gauge, fuel gauge, tachometer and indicator lights. Also includes enhanced 3-button Message Center with odometer, trip odometer, distance-to-empty for fuel, average fuel economy hour meter and warning messages. Trans Temp in message center	S
16V	Volt Meter - Available in Message Center	O
55P	110 A/C Outlet - In lower center finish panel	O
	Glove Box	S
	Instrument Panel - Color-coordinated with color-coordinated accents	S
58P	Radio Prep Package - Deletes radio and dash-mounted auxiliary input jack. Includes radio/speaker wiring, 2 speakers, antenna, radio instrument panel cover and dash-mounted auxiliary audio input jack instrument panel cover	O
58B	Radio Delete Package - Deletes radio, speakers, antenna and antenna cable. Includes radio instrument panel cover and auxiliary audio jack cover and speaker locations for future radio upfit if owner desires	O
588	Radio AM/FM Stereo - With 2 speakers, includes auxiliary audio input jack and clock	S
586	Radio, Electronic Premium AM/FM Stereo, Disc - With 4 speakers, dash-mounted auxiliary audio input jack and clock and redundant steering wheel audio controls	O
21D	SYNC® Media System - Includes dash-mounted USB 2.0 port and redundant steering wheel SYNC® controls. Requires Radio 586	O
	INTERIOR FEATURES (CONTINUED)	
85B	Keyed Alike - NA with Anti-Theft System (85A); requires multiple-unit order (NA with 85K)	O
85L	Keyed Alike - Option #1 NA with Anti-Theft System (85A); requires multiple-unit order (NA with 85K)	O
85M	Keyed Alike - Option #2 NA with Anti-Theft System (85A); requires multiple-unit order (NA with 85K)	O
85N	Keyed Alike - Option #3 NA with Anti-Theft System (85A); requires multiple-unit order (NA with 85K)	O
85P	Keyed Alike - Option #4 NA with Anti-Theft System (85A); requires multiple-unit order (NA with 85K)	O
85K	Remote Keyless Entry - Requires Power Equipment Group 90P, includes two key fobs. Also requires 85A Anti-Theft System	O

2019 F-750 SUPER DUTY (DIESEL STRAIGHT FRAME) OPTIONAL EQUIPMENT



Order Code	COMPONENT DESCRIPTION	PEP Code: 600A
	SAFETY BELTS	
	Includes fixed D-rings (Regular Cab)	S
	Includes adjustable D-rings (SuperCab or Crew Cab)	S
	Steering Wheel, Tilt with Cruise Controls - Black PVC	S
	Sunvisor, Single Driver - Vinyl	S
	Sunvisor, Single Passenger - Vinyl with mirror	S
90M	Interior Rear View Mirror	O
94A	Timer - Engine idle shutdown, 5 minutes	O
94B	Timer - Engine idle shutdown, 10 minutes	O
94C	Timer - Engine idle shutdown, 15 minutes	O
94D	Timer - Engine idle shutdown, 20 minutes	O
	12 - FRONT WHEELS - TIRES Order codes of optional tires are listed in the Tire tab.	
	WHEELS, FRONT (HUB PILOT MOUNT)	
643	22.5x8.25, white powder-coated steel, 10-hole	S
644	22.5x8.25, polished aluminum, 10-hole. (Available until added starter launch)	O
64H	22.5" X 8.25" Aluminum wheels, 10-hole Alcoa® Bright Polished both sides w/Dura-Bright® seal (feature available at added starter launch)	O
649	22.5x8.25, Black Wheel, Requires 669	O
TCG	11R22.5G (14PR) Goodyear® Endurance RSA	S
	13 - REAR WHEELS - TIRES Order codes of optional tires are listed in the Tire tab.	
	WHEELS, REAR (HUB PILOT MOUNT)	
663	22.5x8.25, white powder-coated steel, 10-hole	S
664	22.5x8.25, polished aluminum, 10-hole - outer surface of outer wheel only; inner wheel is white powder-coated steel. Requires 644. (Available until added starter launch)	O
66H	22.5" X 8.25" Aluminum wheels, 10-hole Alcoa® Bright Polished both sides w/Dura-Bright® seal. Inner wheel is white powder-coated steel. Requires 64H. (Feature available at added starter launch)	O
669	22.5x8.25, Black Wheel, Requires 649	O
RCG	11R22.5G (14PR) Goodyear® Endurance RSA	S
	13A - SPARE WHEEL - One Only	
60Z	22.5x8.25, white powder-coated steel, 10-hole, (Not Available with 649/669)	O
	14 - PAINT	
	Body Color Available - Agate Black (UM), Oxford White (YZ), Ingot Silver (UX), Magnetic (J7), Race Red (PQ), Blue Jeans (N1), Green Gem (W6), Tangier Orange (J8), Bold Yellow (LE), School Bus Yellow (B1), Stone Gray (D1)	O
	Chassis Color - Black	S
	Paint Type - Environmentally friendly, "3-wet system"	S

2019 F-750 SUPER DUTY (DIESEL STRAIGHT FRAME) OPTIONAL EQUIPMENT



Order Code	COMPONENT DESCRIPTION	PEP Code: 600A
15 - MISCELLANEOUS		
19A	Ambulance Prep Package - Special EPA calibration approved for special emergency vehicles. System includes (17D) Dual Heavy-Duty Alternators @ 357 amps. total, and (63D) 3 - 900CCA battery system for 2700 total CCA output.	O
19B	Beverage Delivery Package - Contains Body Builder Wiring - At Back of Cab at frame (includes sealed connectors for 2 ground circuits, with combined left/stop, combined right/stop, stop lamps, park lamps, backup lamps) (also includes 2 additional pass through wires to cab). With 6 feet additional length to accommodate drop frame beverage body application.	O
19F	Fire/Rescue Prep Package - Special EPA calibration approved for special emergency vehicles. System includes (17D) Dual Heavy-Duty Alternators @ 357 amps. total, and (63D) 3 - 900CCA battery system for 2700 total CCA output.	O
21A	Pre-Delivery Inspection - Selection requires that you also choose either (314) or (31F) or (31V) to have the Pre-Delivery Inspection performed	O
314	Ship-Thru: Manning <u>MAY</u> be selected w/o adding (21A.) For MODIFICATIONS ONLY , Dealer must make arrangements directly with Manning (please use CVT Resources for add. Info).	O
31F	Ship-Thru: NFS National Fleet Services <u>MAY</u> be selected w/o adding (21A.) For MODIFICATIONS ONLY , Dealer must make arrangements directly with NFS (please use CVT Resources for add. Info).	O
31V	Ship-Thru: Fontaine Vocational Services for Tractors <u>MAY</u> be selected w/o adding (21A.) For MODIFICATIONS ONLY , Dealer must make arrangements directly with Fontaine (please use CVT Resources for add. Info).	O
79V	Send a paper Certificate of Origin for a Vehicle (COV) for those states that file electronically (CA or MI)	O

**2019 F-750 SUPER DUTY
(DIESEL STRAIGHT FRAME)
TIRES**



Order Code		Description			Rev/Mile		
Front	Rear						
OPTIONAL TIRES for 22.5" Wheel Configuration							
		Tubeless Radial Tires (Allowable Mixed Plys Noted)		Ply Rating		Front FET	Rear FET
		11R22.5G (14PR)			--		
TCG	RCG	GDYR Endurance RSA		14	496	\$50.46	\$100.92
--	RCA	Goodyear® G182		14	496		\$100.92
--	RCF	GDYR Endurance RSA		16	497		\$117.56
--	RCE*	Goodyear® G182*		16	497		\$117.56
TC1	RC1	Michelin XZE2		14	496	\$50.46	\$100.92
	RMA	Michelin X Multi D		14	496		
--	RC3*	Michelin XZE2*		16	497		\$117.56
	RMB*	Michelin X Multi D		16	494		
		11R22.5H (16PR)			--		
TCF	RCF	GDYR Endurance RSA		16	497	\$58.78	\$117.56
--	RCE	Goodyear® G182		16	497		\$117.56
--	RCG	GDYR Endurance RSA		14	496		\$100.92
--	RCA**	Goodyear® G182**		14	496		\$100.92
TC3	RC3	Michelin XZE2		16	497	\$58.78	\$117.56
	RMB	Michelin X Multi D		16	494		
--	RC1**	Michelin XZE2**		14	496		\$100.92
	RMA**	Michelin X Multi D		14	496		
		255/70R22.5H (16PR)†			--		
TCH	RCH	GDYR Endurance RSA		16	564	\$39.78	\$75.96
--	RHB	Goodyear® G622 RSD		16	564		\$75.96
		275/80R22.5G (14PR)‡			--		
TJF	RJF	Michelin XZE2		14	510	\$50.46	\$100.92
--	RN5	Michelin XDA5		14	510		\$100.92
		275/80R22.5H (16PR)			--		
TFA	RFA	Hankook AH22		16	509	\$69.18	\$138.36
--	RFB	Hankook DH15		16	509		\$138.36
		295/75R22.5H (16PR)			--		
TRA	RRA	Continental HA3 ##		16	514		
	RRC	Continental HDR2		16	509		
		295/80R22.5H (16PR)			--		
		(Tire Size)					
TDG	RDG	Continental HSR2###		16	501	\$81.84	\$163.68
--	RCE	Goodyear® G182 RSD	11R22.5	16	497		\$117.56
	RMB	Michelin X Multi D	11R22.5	16	494		
--	RCB**	Continental HDR2**	11R22.5	14	496		\$101.12
--	RCA**	Goodyear® G182 RSD**	11R22.5	14	496		\$100.92
	RMA**	Michelin X Multi D	11R22.5	14	496		

* 16 Ply

** 14 Ply

† 255/70R22.5H (16PR) - Not Available with 14,000# Front Axle (43D)

‡ 275/80R22.5G (14PR) - Not Available with 14,000# Front Axle (43D)

- Not Available with 26,000# Rear Axle (47X)

**Late Availability

Requires 643, 644 Front Wheels and 663, 664 Rear Wheels



2019 F-750 SUPER DUTY (DIESEL STRAIGHT FRAME) AXLE RATIOS

					Locking Differentials		Two Speed
Manufacturer:		Dana / Spicer	Dana / Spicer	Dana / Spicer	Dana / Spicer	Dana / Spicer	Dana / Spicer
Model:		21060S	S23-170	S26-190	21060D	S23-170D	21065T
Capacity (lbs.):		21,000	23,000	26,000	21,000	23,000	21,000
Differential:		Open	Open	Open	Locking	Locking	Open
Drive Gear:		Hypoid	Hypoid	Hypoid	Hypoid	Hypoid	Hypoid
Order Code:		475	479	47X	476	47P	477
F750 Diesel		Std.	Opt.	Opt.	Opt.	Opt.	Opt.

Single Speed	4.63	X4E	X-4.63	-	-	X-4.63	-	-
	4.78	X4F	-	X-4.78	-	-	X-4.78	-
	4.88	X4G	X-4.88	-	-	X-4.88	-	-
	5.25	X5F	-	X-5.25	-	-	X-5.25	-
	5.29	X5B	X-5.29	-	-	X-5.29	-	-
	5.57	X5D	X-5.57	X-5.57	X-5.57	X-5.57	X-5.57	-
	6.14	X6A	-	X-6.14	-	-	X-6.14	-
	6.17	X6B	X-6.17	-	-	X-6.17	-	-
	6.50	X6D*	X-6.50	-	-	X-6.50	-	-
	6.83	X6E**	-	X-6.83	X-6.83	-	X-6.83	-

2-Speed	4.88/6.65 - Diesel/Air	X48	-	-	-	-	-	X-4.88/6.65
	5.29/7.21 - Diesel/Air	X52	-	-	-	-	-	X-5.29/7.21
	6.50/8.87 - Diesel/Air	X65†	-	-	-	-	-	X-6.50/8.87

*Not Available with 255/70R/22.5" Tires

**Available with all 11R22.5" Tires AND 295/80R/22.5" Tires also Hankook 275/80R/22.5" Tires

†Not Available with 255/70R/22.5" Tires


2019 F-750 SUPER DUTY **CAB-WHEELBASE-DIMENSIONAL DATA** **DIESEL REGULAR CAB - Straight Frame**



Model Code: F7D

PEP Code: 600A

Std. GVWR	31,000 lbs.
Max. GVWR	37,000 lbs.

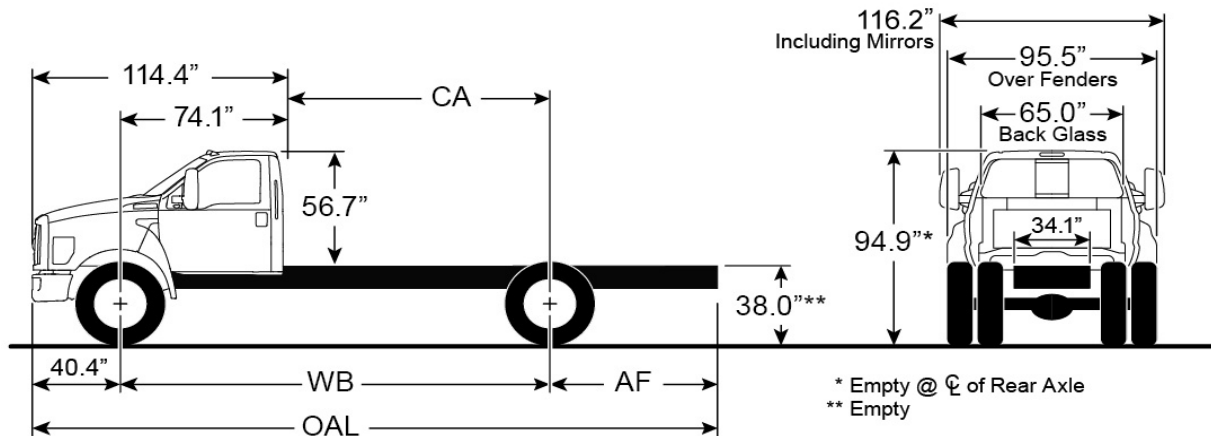

Wheelbase (in.)	Chassis Weights (lbs.)*			Dimensions (in.)			Turning Radius	
	Front	Rear	Total	CA	AF	OAL	To Curb	W/Bumper Clearance
158	6494	3914	10408	84	49	246	21 ft. 11 in.	23 ft. 7 in.
176	6563	3987	10551	102	70	285	24 ft. 2 in.	25 ft. 9 in.
182	6574	3998	10572	108	70	291	24 ft. 10 in.	26 ft. 6 in.
194	6603	4028	10631	120	75	308	26 ft. 4 in.	27 ft. 11 in.
200	6619	4047	10666	126	75	314	27 ft. 0 in.	28 ft. 8 in.
212	6649	4077	10724	138	81	332	28 ft. 1 in.	29 ft. 9 in.
218	6666	4098	10764	144	81	338	28 ft. 10 in.	30 ft. 6 in.
224	6696	4128	10825	150	87	350	29 ft. 7 in.	31 ft. 2 in.
230	6706	4139	10846	156	87	356	30 ft. 3 in.	31 ft. 11 in.
242	6752	4188	10941	168	100	381	31 ft. 8 in.	33 ft. 4 in.
260	6812	4247	11057	186	120	419	33 ft. 10 in.	35 ft. 6 in.
281 ^	7059	4511	11571	207	120	440	36 ft. 4 in.	38 ft. 0 in.

^ Available with Frame (539); also Available with Frame (536) + Frame Reinforcement (41R)

^ Available with Frame (538)


**2019 F-750 SUPER DUTY
DIESEL REGULAR CAB
FRAMES
F7D**



FRAME RAIL SPECIFICATIONS

	CODE	Side Rail								
		DIMENSIONS (Inches)			YIELD STRENGTH Min.(psi)	SECTION MODULUS (inches ³)		RESISTING BENDING MOMENT (In.-Lbs.)		
		Depth	Width	Thickness		Nominal	Maximum	Nominal	Maximum	
S	535	Straight Channel Side Rail								
		10.250	3.092	0.375	80,000	15.14	15.94	1,211,200	1,275,200	
O	536	Straight Channel Side Rail								
		10.125	3.58	0.312	120,000	14.18	14.84	1,701,600	1,780,800	
O	538	Straight Channel Side Rail								
		10.25	3.61	0.375	120,000	16.98	17.79	2,037,600	2,134,800	
O	539	Straight Channel Side Rail								
		10.375	3.705	0.438	120,000	20.11	21.05	2,413,200	2,526,000	
O	41R	Straight Channel Side Rail - Outer "C" Channel Reinforcement and Base Frame Rail								
		10.813	3.892	0.312	120,000	29.84	29.84	3,580,800	3,580,800	

FRAME RAIL CROSS SECTION

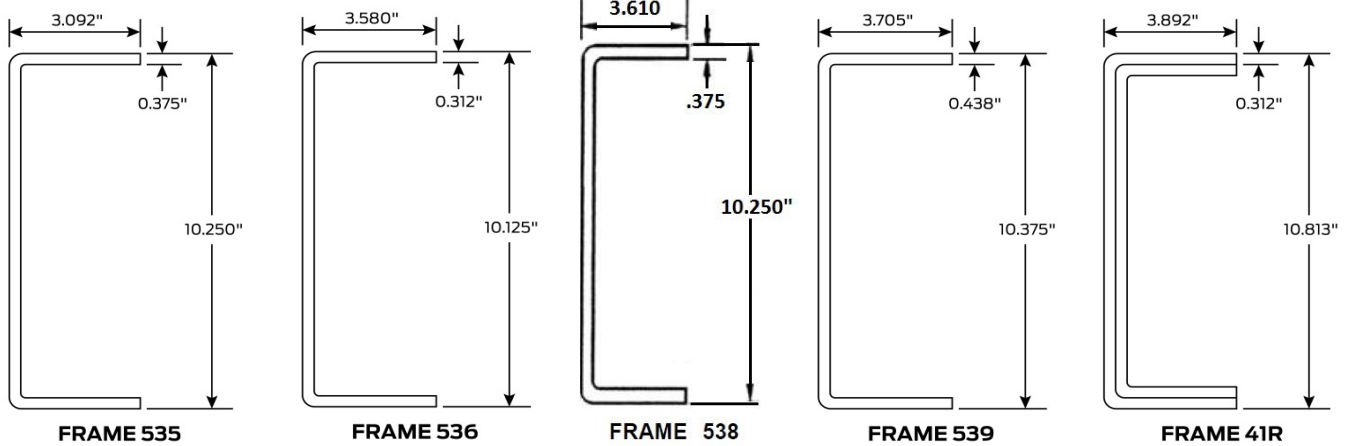


2019 F-750 SUPER DUTY CAB-WHEELBASE-DIMENSIONAL DATA DIESEL SUPERCAB - Straight Frame



Model Code: X7D

PEP Code: 600A

Std. GVWR	31,000 lbs.
Max. GVWR	37,000 lbs.

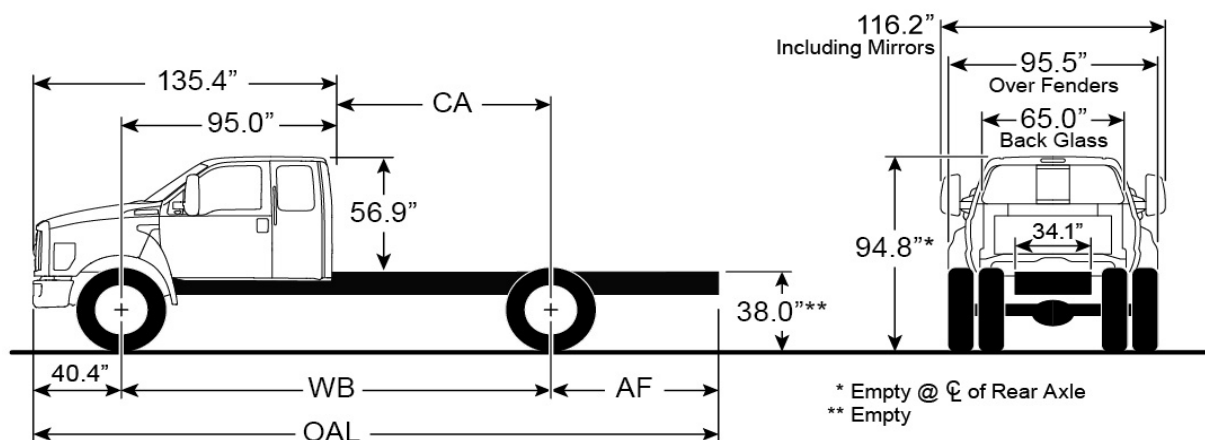

Wheelbase (in.)	Chassis Weights (lbs.)*			Dimensions (in.)			Turning Radius	
	Front	Rear	Total	CA	AF	OAL	To Curb	W/Bumper Clearance
179	6711	3989	10700	84	49	267	24 ft. 6 in.	26 ft. 1 in.
197	6775	4053	10827	102	70	306	26 ft. 8 in.	28 ft. 3 in.
203	6783	4061	10844	108	70	312	27 ft. 1 in.	28 ft. 8 in.
215	6814	4093	10906	120	75	329	28 ft. 6 in.	30 ft. 1 in.
221	6831	4114	10945	126	75	335	29 ft. 2 in.	30 ft. 10 in.
233	6861	4145	11005	138	81	353	30 ft. 8 in.	32 ft. 3 in.
239	6872	4156	11027	144	81	359	31 ft. 4 in.	33 ft. 0 in.
245	6908	4196	11104	150	87	371	32 ft. 1 in.	33 ft. 8 in.
251	6916	4202	11119	156	87	377	32 ft. 3 in.	34 ft. 5 in.
263	6953	4237	11189	168	100	402	34 ft. 3 in.	35 ft. 10 in.
281 ^	7197	4486	11683	186	120	440	36 ft. 4 in.	38 ft. 0 in.

^ Available with Frame (539); also Available with Frame (536) + Frame Reinforcement (41R)

^ Available with Frame (538)


**2019 F-750 SUPER DUTY
DIESEL SUPERCAB
FRAMES
X7D**



FRAME RAIL SPECIFICATIONS

	CODE	Side Rail								
		DIMENSIONS (Inches)			YIELD STRENGTH Min.(psi)	SECTION MODULUS (inches ³)		RESISTING BENDING MOMENT (In.-Lbs.)		
		Depth	Width	Thickness		Nominal	Maximum	Nominal	Maximum	
S	535	Straight Channel Side Rail								
		10.250	3.092	0.375	80,000	15.14	15.94	1,211,200	1,275,200	
O	536	Straight Channel Side Rail								
		10.125	3.58	0.312	120,000	14.18	14.84	1,701,600	1,780,800	
O	538	Straight Channel Side Rail								
		10.25	3.61	0.375	120,000	16.98	17.79	2,037,600	2,134,800	
O	539	Straight Channel Side Rail								
		10.375	3.705	0.438	120,000	20.11	21.05	2,413,200	2,526,000	
O	41R	Straight Channel Side Rail - Outer "C" Channel Reinforcement and Base Frame Rail								
		10.813	3.892	0.312	120,000	29.84	29.84	3,580,800	3,580,800	

FRAME RAIL CROSS SECTION

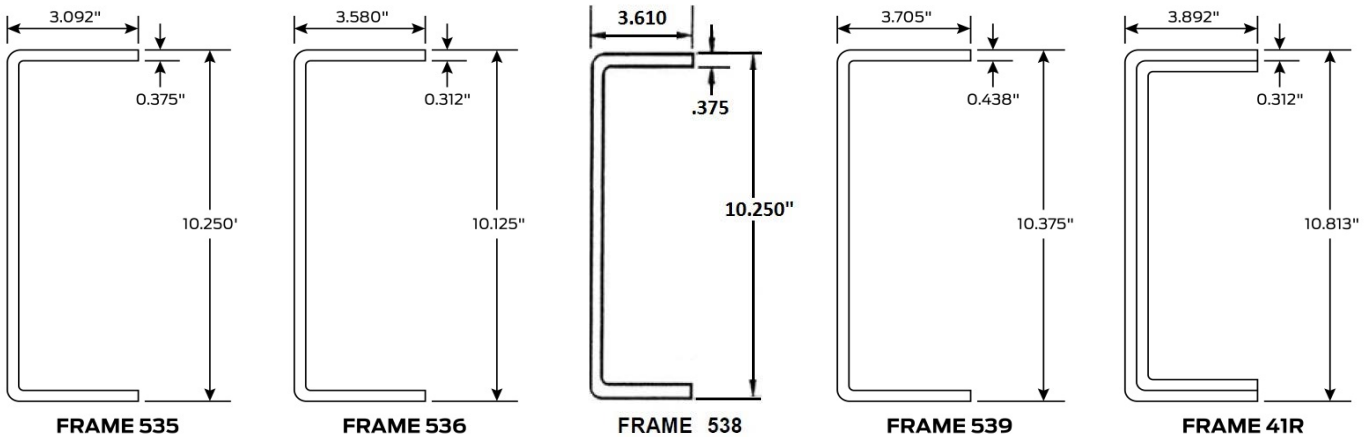


2019 F-750 SUPER DUTY **CAB-WHEELBASE-DIMENSIONAL DATA** **DIESEL CREW CAB - Straight Frame**



Model Code: W7D

PEP Code: 600A

Std. GVWR	31,000 lbs.
Max. GVWR	37,000 lbs.

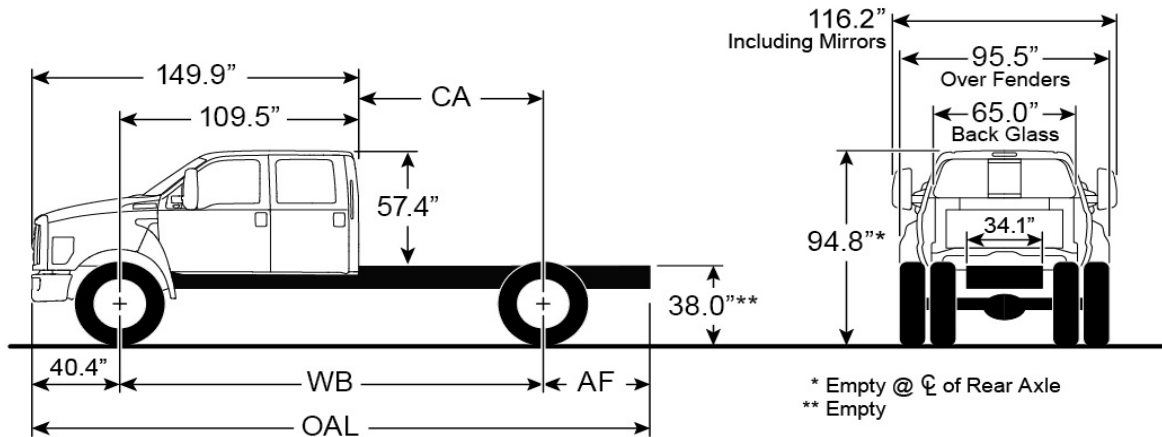

Wheelbase (in.)	Chassis Weights (lbs.)*			Dimensions (in.)			Turning Radius	
	Front	Rear	Total	CA	AF	OAL	To Curb	W/Bumper Clearance
182	6851	3993	10843	72	49	270	24 ft. 10 in.	26 ft. 6 in.
194	6887	4031	10917	84	49	282	26 ft. 4 in.	27 ft. 11 in.
212	6947	4091	11038	102	70	321	28 ft. 1 in.	29 ft. 9 in.
218	6964	4111	11074	108	70	327	28 ft. 10 in.	30 ft. 6 in.
230	7034	4187	11158	120	75	344	30 ft. 3 in.	31 ft. 11 in.
236	6874	4028	11181	126	75	350	31 ft. 0 in.	32 ft. 7 in.
248	7038	4189	11228	136	81	368	32 ft. 5 in.	34 ft. 1 in.
254	7050	4201	11250	144	81	374	33 ft. 2 in.	34 ft. 9 in.
260	7080	4233	11312	150	87	386	33 ft. 10 in.	35 ft. 6 in.
266	7090	4242	11332	156	87	392	34 ft. 7 in.	36 ft. 3 in.

**2019 F-750 SUPER DUTY
DIESEL CREW CAB
FRAMES
W7D**



FRAME RAIL SPECIFICATIONS

	CODE	Side Rail			YIELD STRENGTH Min.(psi)	SECTION MODULUS (inches ³)		RESISTING BENDING MOMENT (In.-Lbs.)	
		DIMENSIONS (Inches)				Nominal	Maximum	Nominal	Maximum
		Depth	Width	Thickness					
S	535	Straight Channel Side Rail							
		10.250	3.092	0.375	80,000	15.14	15.94	1,211,200	1,275,200
O	536	Straight Channel Side Rail							
		10.125	3.58	0.312	120,000	14.18	14.84	1,701,600	1,780,800
O	538	Straight Channel Side Rail							
		10.25	3.61	0.375	120,000	16.98	17.79	2,037,600	2,134,800
O	539	Straight Channel Side Rail							
		10.375	3.705	0.438	120,000	20.11	21.05	2,413,200	2,526,000
O	41R	Straight Channel Side Rail - Outer "C" Channel Reinforcement and Base Frame Rail							
		10.813	3.892	0.312	120,000	29.84	29.84	3,580,800	3,580,800

FRAME RAIL CROSS SECTION

