

2019 F-750 SUPER DUTY (DIESEL TRACTOR) ORDER GUIDE



	Page
Model Index	1
Standard Equipment	2-5
Optional Equipment	6-12
Tire Sizes	13
Axle Ratios	14
Wheelbases and Frames	
Cab - Wheelbase - Dimensional Data (Regular Cab)	15-20
Frames (Regular Cab)	
Cab - Wheelbase - Dimensional Data (SuperCab)	
Frames (SuperCab)	
Cab - Wheelbase - Dimensional Data (Crew Cab)	
Frames (Crew Cab)	

Product Changes and Features Availability

Features, options and package content subject to change. Please check www.FMCDealer.com for the most current information.

2019 F-750 SUPER DUTY (DIESEL TRACTOR)



FORD
CODE

MAJOR STANDARD EQUIPMENT

PEP Code:
600A

	STD WB is 146"	STD
	01 - FRAME	
536	Single Channel, Straight "C", 14.18 SM, 120,000 PSI, 1,701,600 RBM - Heat-treated alloy steel;10.125" x 3.580" x 0.312" (257.2mm x 90.9mm x 8.0mm)	x
766	Bumper Front - Black full width	x
	Less Frame Extension Package	x
	Tapered frame ends	x
	02 - AXLE, FRONT - SUSPENSION, FRONT	
43N	Axle, Front Non-Driving - Dana E-1002I 10,000-lb. capacity (includes Integral Power Steering)	x
61C	Parabolic Taper-leaf Springs - 2-leaf, 10,000-lb. capacity, 62" x 3.15"	x
	Shock Absorbers, Front - Standard duty, dual, double acting	x
	Wheel Seals, Front - Oil lubricated, SKF ScotSeal® PlusXL seals	x
	03 - AXLE, REAR - SUSPENSION, REAR	
475	21,000-lb. Rear Axle Assembly - Single Reduction Open	x
68P	Multi-leaf Springs - 11-leaf, 21,000-lb. capacity with 2,000-lb. auxiliary springs for load stabilization	x
	Wheel Seals, Rear - Oil Lubricated, SKF ScotSeal® PlusXL seals	x
	04 - BRAKES - BRAKE EQUIPMENT	
67D	Air Brakes with Traction Control - Meritor® Q-Plus with ABS (Bendix® anti-lock brake system) (4-channel). Includes 15" x 4" front brakes w/16.5"x7.0" rear brakes - 22.5" wheels; dual direct reading air pressure gauges, brake lines color-coded nylon, Bendix® 13.2 CFM capacity air compressor, instrument panel-mounted yellow knob parking brake control valve, automatic slack adjusters front and rear, two rear spring parking air brake chambers mounted on front of rear axle, three drain valve(s) and two air tanks (reference Body Builders book for location) Requires (18H), Electronic Stability Control.	x
	Trailer Brake - Hand Control Valve	x
18H	Electronic Stability Control - Requires Air Brakes with Traction Control (67D).	x
	05 - ENGINE - ENGINE EQUIPMENT	
99C	6.7L Power Stroke® V8 Turbo Diesel - 270 horsepower @ 2400 rpm, 675 lb.-ft. torque @ 1600 rpm; governed rpm: 3200	x
	Manual Regen Initiation - Driver interface in Message Center	x
57B	Engine Exhaust Brake	x
425	50-State Emissions Requirements	x
	Canada and U.S. Territories get Federal Emissions	x
	Clean Idle Label - U.S., Military & EMS Direct Sales Only	x
	ENGINE EQUIPMENT	
	Air Cleaner - Dry, single-stage Donaldson® single element (includes restriction indicator)	x
	Fan Clutch - Bendix® viscous screw-on type	x
	Fuel/Water Separator	x
	Radiator - Aluminum w/ in-tank transmission cooler, PremAir® ozone converter	x
	Starting Motor - 12-volt, Comstar, all parallel	x
	Anti-Freeze - OAT, extended life coolant; to -40 degrees F/-40 degrees C freeze protection	x
	06 - TRANSMISSION - DRIVELINE	
44G	Ford 6-Speed TorqShift® HD Automatic - Double overdrive, less PTO provision (RNDM)	x
	Driveshaft - Dana base	x
	07 - EXHAUST	
91G	Exhaust System - Under Cab, Right-Side Outlet - Single, horizontal muffler, right side, under cab, outside of frame rail with rear discharge, Switchback-style (NA with 146" WB)	x

2019 F-750 SUPER DUTY (DIESEL TRACTOR)



FORD
CODE

MAJOR STANDARD EQUIPMENT

PEP Code:
600A

	STD WB is 146"	STD
	08 - ELECTRICAL - ALTERNATOR - BATTERY	
	Alternator - Extra heavy duty 12-volt, 200-amp., Denso SC5	x
	Battery - 12-Volt, Motorcraft® - Two, 750 CCA (1500 CCA Total)	x
	Battery Box - RH frame mount under cab step	x
	Emergency Flasher - Four way	x
	Fuses, SAE - Blade-type smart fuse box	x
	LIGHTS	
	Aero Headlamps - High series, includes side marker lights with reflectors (front)	x
	Taillamps , Two w/ integral stop, turn, backup and license plate bracket	x
	Side Repeat Flasher	x
	09 - FUEL TANK	
65B	50-U.S. Gallon - Single, LH, aluminum, rectangular - Regular Cab only	x
65E	65-U.S. Gallon - Single, LH, aluminum, rectangular - SuperCab and Crew Cab only	x
	Diesel Fuel - Cold weather anti-gel additive - Gold Eagle 2106	x
	10 - SEATS	
88A	30/0/30 - Fixed driver and fixed passenger with console - vinyl	x
87B	60/40 - Rear bench seat with bolster and flip-up cushion - trim will match selected driver seat material (SuperCab)	x
87C	60/40 - Rear bench seat with flip-up cushion and fold-down back - trim will match selected driver seat material (Crew Cab)	x
	11 - CAB EQUIPMENT	
	Regular Cab, SuperCab or Crew Cab - Ford conventional, steel	x
	CAB EQUIPMENT - EXTERIOR	
	Doors - Two (four with SuperCab or Crew Cab)	x
	Front End Tilting Fiberglass Hood & Fenders Assembly - Tilt type, frame-mounted, torsion bar assist (includes integral noise and inner splash shields and mud flaps)	x
	Glass - Laminated windshield, solar tint all-around	x
86A	Painted Grille - Plastic	x
	Horn - Dual note electric - Level 2	x
	Hose Tender for Air/Electric Lines	x
	Lights - Roof marker/clearance - amber lenses, 5 lights	x
54H	Mirrors - Dual rectangular Velvac XL2020, integral spot mirrors, sail type, 96" width, manual fold, solid black finish	x
	Reflective Tape - Tractor	x
	Tow Hooks, Front (2) - Frame-mounted, painted black	x
	Tractor Air/Electric Lines - 12' coiled	x
	Tractor Deck Plate/Pogo Stick	x
	Trailer Module - 7-Pin - (Mounted at back of cab; wired for turn signals, independent of stop; compatible with trailers that have amber or side turn lights with independent stop/turn); 7-way connector with PIN terminals only	x
	Trailer Charge Valve	x
	Window, Rear - Fixed	x
	Windshield Wiper Control - Two-speed electric intermittent w/ windshield washers	x

2019 F-750 SUPER DUTY (DIESEL TRACTOR)



FORD
CODE

PEP Code:
600A

MAJOR STANDARD EQUIPMENT

	STD WB is 146"	STD
	CAB EQUIPMENT - INTERIOR	
572	Air Conditioning, Manual - Includes integral heater and defroster; radiator-mounted compressor; R-134A refrigerant	x
	Air Registers - Molded-in-color with positive shut-off, color-coordinated trim	x
	Assist Handles, Interior A Pillars - Driver and passenger; all cabs	x
	Assist Handles, Interior B Pillars - Grab handle, driver and passenger; Crew Cab only	x
	Auxiliary Power Point - In instrument panel (2)	x
59F	4 Body Builder Switches - Mounted in center instrument panel with connector access located in engine	x
	Back Panel Trim Cover	x
	Coat Hook - RH/LH color-keyed	x
	Cruise Control - Steering Wheel-Mounted Controls	x
	Demisters - LH & RH side windows	x
	Dome Lamp - Rear mounted with integral map reading lights. (Regular and Crew Cab only)	x
	Door Trim - Color-coordinated molded w/ grab handle	x
	Armrest/grab handle	x
	Soft armrest, grab handle upper and lower map pockets	x
	Floor Covering - Black vinyl	x
	Gauge Cluster, Diesel - With electronic speedometer, includes oil pressure, coolant temperature, DEF gauge, fuel gauge, tachometer, and indicator lights. Also included is enhanced 3-button Message Center with odometer, trip odometer, distance-to-empty for fuel, average fuel economy, hour meter and warning messages. Trans temp in Message Center.	x
	Glove Box - Instrument panel, RH	x
	Headliner - Color-coordinated, molded, cloth	x
	Instrument Panel - Color-coordinated with color-coordinated accents	x
	Intelligent Oil-Life Monitor®	x
588	Radio AM/FM Stereo - With 2 speakers, includes auxiliary audio input jack and clock	x
	Safety Belts - Belt-Minder® (chime and flashing warning light on instrument panel if belts not buckled)	x
	Safety Belts - Color-coordinated, all-position, includes fixed D-rings (Regular Cab)	x
	Safety Belts - Color-coordinated, all-position, includes front seat adjustable D-rings (SuperCab or Crew Cab)	x
	Scuff Plates	x
	Steering Column - Tilt	x
	Steering Wheel - Black PVC, with integral cruise control switches	x
	Sunvisor, Single Driver - Vinyl	x
	Sunvisor, Single Passenger - Vinyl with mirror	x
	Tachometer - Electric	x
	Turn Signal Switch, Signal Stat, Non-Canceling	x
	12 - FRONT WHEEL - TIRES	
	Wheels, Front	
643	22.5x8.25 - Steel disc, 10-hole - hub-piloted, 5 hand hold, powder-coated white	x
	Tires, Front	
TCG	11R22.5G (14PR) Goodyear® Endurance RSA	x

2019 F-750 SUPER DUTY (DIESEL TRACTOR)



FORD
CODE

MAJOR STANDARD EQUIPMENT

PEP Code:
600A

	STD WB is 146"	STD
	13 - REAR WHEEL - TIRES	
	Wheels, Rear	
663	22.5x8.25 - Steel disc, 10-hole - hub-piloted, 5 hand hold, powder-coated white	x
	Tires, Rear	
RCG	11R22.5G (14PR) Goodyear® Endurance RSA	x
	14 - PAINT	
	Body Color Available - Agate Black (UM), Oxford White (YZ), Ingot Silver (UX), Magnetic (J7), Race Red (PQ), Blue Jeans (N1), Green Gem (W6), Tangier Orange (J8), Bold Yellow (LE), School Bus Yellow (B1), Stone Gray (D1)	x
	Chassis Color - Black	x
	Paint Type - Environmentally friendly, "3-wet system"	x

2019 F-750 SUPER DUTY (DIESEL TRACTOR) OPTIONAL EQUIPMENT



Order Code	COMPONENT DESCRIPTION	PEP Code: 600A
		STD
Body Code	Regular Cab	F7T
	SuperCab	X7T
	Crew Cab	W7T
	01 - FRAME	
	SINGLE CHANNEL - STRAIGHT "C"	
536	14.18 SM, 120,000 PSI, 1,701,600 RBM - Heat-treated alloy steel; 10.125" x 3.580" x 0.312" (257.2mm x 90.9mm x 8.0mm)	S
19S	5th Wheel Frame Rail Drilling - Factory pre-drilled holes in Frame Rails supports Plates and other Mounting Equipment for Fontaine Fixed Fifth Wheels. Pre-determined and designed to fit all available tractor wheelbases regardless of Cab Style. Reduces time and expense while providing consistent accuracy for the mount. {With Spring Suspensions (68P), (68R) or (68T) Shock Absorbers (961) are Required.}	O
766	Bumper, Front, Full Width - Black	S
765	Bumper, Front, Full Width - Chrome-plated steel. Included in Exterior Appearance Group (90E)	I
76X	Bumper, Front Delete Also deletes the Mounting Brackets	O
76F	Bumper Extension, Front - 3" Extension	O
	Tow Hooks, Front - Inside rail, frame-mounted (2)	S
76Y	Tow Hooks Delete	O
	Tapered Frame Ends	S
	02 - AXLE, FRONT - SUSPENSION, FRONT	
43N	Axle, Front Non-Driving - Dana E-1002I 10,000-lb. capacity (includes Integral Power Steering)	S
43P	Axle, Front Non-Driving - Dana E-1202I, I-beam-type, 12,000-lb. capacity	O
43D	Axle, Front Non-Driving - Dana 14,000-lb. capacity	O
	TAPER-LEAF SPRINGS	
61C	Parabolic Taper-leaf Springs - 2-leaf, 10,000-lb. capacity, 62" x 3.15" (requires 43N)	S
61D	Parabolic Taper-leaf Springs - 2-leaf, 12,000-lb. capacity, 62" x 3.15" (available on 43N and 43P)	O
61E	Parabolic Taper-leaf Springs - 3-leaf, 13,200-lb. capacity, 62" x 3.15" (available on 43P and 43D)	O
61F	Parabolic Taper-leaf Springs - 3-leaf, 14,000-lb. capacity, 62" x 3.15" (available on 43D)	O
	Shock Absorbers, Front - Double acting	S
15S	Stabilizer Bar, Front	O
	Wheel Seals, Front - Oil lubricated, SKF ScotSeal® PlusXL seals	S
60A	Lube, Front Axle - EmGard® 50W, synthetic oil	O
	03 - AXLE, REAR - SUSPENSION, REAR	
	NOTE: When specifying an axle ratio, check performance guidelines for startability and gradeability	
475	21,000-lb. Rear Axle Assembly - Single reduction open	S
476	21,000-lb. Rear Axle Assembly - Single reduction locking	O
479	23,000-lb. Rear Axle Assembly - Single reduction open	O
47P	23,000-lb. Rear Axle Assembly - Single reduction locking	O
47X	26,000-lb. Rear Axle Assembly - Single reduction open (NA with 10,000-lb. Front Axle [43N])	O
	Driveshaft - Dana base	S
18P	Driveshaft - Upgrade	O
	MULTI-LEAF SPRINGS	
68P	11-Leaf, 21,000-lb. Capacity - For 21,000-lb. rear axles; includes 2,000-lb. auxiliary springs for load stabilization	S
68R	11-Leaf, 23,000-lb. Capacity - For 21,000-lb. and 23,000-lb. rear axles; includes 2,000-lb. auxiliary springs for load stabilization	O
68T	11-Leaf, 31,000-lb. Capacity - For 23,000-lb. and 26,000-lb. rear axles; includes 2,000-lb. auxiliary springs for load stabilization	O

2019 F-750 SUPER DUTY (DIESEL TRACTOR) OPTIONAL EQUIPMENT



Order Code	COMPONENT DESCRIPTION	PEP Code: 600A
	AIR SUSPENSION	
68B	21,000-lb. Capacity - For 21,000-lb. rear axles, with single air suspension leveling valve; NA with relocated brakes 62F or 146" WB	O
68F	23,000-lb. Capacity - With single air suspension leveling valve; NA with Relocated Brakes 62F or 47X (26K Rear Axle) also NA with 146" WB	O
68Z	Air Suspension Dump Valve	O
68Y	Air Suspension Leveling Valve - Dual Air Suspension Leveling Valves; creates L/R ride height	O
961	Shock Absorbers, Rear - Double acting (included in Air Ride Suspension) NA with Relocated Brake Chambers (62F)	O
	Wheel Seals, Rear - Oil lubricated, SKF ScotSeal® PlusXL seals	S
607	Lube, Rear Axle - EmGard® 75W-90, synthetic oil	O
	04 - BRAKES - BRAKE EQUIPMENT	
67D	Air Brakes with Traction Control - Meritor® Q-Plus with ABS (Bendix® anti-lock brake system) (4-channel). Includes 15" x 4" front brakes w/16.5"x7.0" rear brakes - 22.5" wheels; dual direct reading air pressure gauges, brake lines color-coded nylon, Bendix® 13.2 CFM capacity air compressor, instrument panel-mounted yellow knob parking brake control valve, automatic slack adjusters front and rear, two rear spring parking air brake chambers mounted on front of rear axle, three drain valve(s) and two air tanks (reference Body Builders book for location) Requires (18H), Electronic Stability Control.	S
18H	Electronic Stability Control - Requires Air Brakes with Traction Control (67D).	S
	BRAKE EQUIPMENT	
62F	Air Brake Chambers, Spring - Relocated to rear of rear axle for maximum ground clearance - Required with 158" WB Reg. Cab or 167" WB SuperCab when using 91B Torpedo-style Exhaust.	O
62D	Air Dryer (Bendix® AD/IP) with heater - mounted left frame rail	O
	Drain Valve (1) - Automatic (Bendix® DV-2) with heater; required with air compressor or air brakes	S
	05 - ENGINE - ENGINE EQUIPMENT	
99C	6.7L Power Stroke® V8 Turbo Diesel - 270 horsepower @ 2400 rpm, 675 lb.-ft. torque @ 1600 rpm; governed rpm: 3200	S
99E	6.7L Power Stroke® V8 Turbo Diesel - 300 horsepower @ 2500 rpm, 700 lb.-ft. torque @ 1800 rpm; governed rpm: 3300	O
99X	6.7L Power Stroke® V8 Turbo Diesel - 330 horsepower @ 2600 rpm, 725 lb.-ft. torque @ 1800 rpm; governed rpm: 3400	O
	ENGINE EQUIPMENT	
41H	Engine Block Heater - Phillips; 120-volt, 750-watt	O
	Manual Regen Initiation - Driver interface in Message Center	S
98R	Active Regen Control - Allows Driver to Inhibit Automatic Regen till Regen can be performed in a Safe location.	O
	Radiator - Aluminum w/ in-tank transmission cooler, PremAir® ozone converter	S
916	Speed Limiter - 65 mph	O
917	Speed Limiter - 70 mph	O
	06 - TRANSMISSION	
44G	Ford 6-Speed TorqShift® HD Automatic - Double overdrive, less PTO provision (RNDM)	S
41A	Transmission Power Takeoff Provision, with LiveDrive Capability	O

2019 F-750 SUPER DUTY (DIESEL TRACTOR) OPTIONAL EQUIPMENT



Order Code	COMPONENT DESCRIPTION	PEP Code: 600A
07 - EXHAUST		
91G	Exhaust System - Under Cab, Right-Side Outlet - Single, horizontal muffler, right side, under cab, outside of frame rail with rear discharge, Switchback-style (NA w/146" WB)	S
91B	Exhaust System - Back of Cab, Right-Side Outlet - Single, horizontal muffler/pipe, inline, right-side exhaust with underbody exit, in front of axle, Torpedo-style (NA w/146" WB)	O
91D	Exhaust System - Under Cab, Vertical Outlet, Right Side - Single, horizontal muffler, right side, under cab, outside of frame rail with vertical exhaust, passenger-side rear corner with heat shield and turn-out, Switchback-style (Required when using the 146" WB) Not Available with Mirrors (54F) Trailer Tow due to lack of Visability	O
08 - ELECTRICAL - ALTERNATOR - BATTERY		
ALTERNATOR (12-VOLT)		
	Extra Heavy-Duty Alternator - 200-amp. Denso SC5	S
17C	Alternator - 220-amp. Denso SC6	O
17D	Dual Heavy-Duty Alternators - 357-amp. (200+157-amp.) Denso SC5/SC2	O
55M	Jump Start Stud - Remote-mounted (NA with temporary mount batteries)	O
BATTERY, 12-VOLT (INCLUDES STEEL BATTERY BOX)		
	Motorcraft® - Two, 750 CCA (1500 CCA total)	S
63B	Motorcraft® - Two, 900 CCA (1800 CCA total)	O
63D	Motorcraft® - Three, 900 CCA (2700 CCA total)	O
	Emergency Flasher	S
	Fuses, SAE - Blade type	S
	Aero Headlamps - High series, includes side marker lights with reflectors (front)	S
163	Lights - Roof Marker/Clearance - Amber lenses, 5 lights	S
164	Roof Marker/Clearance Lights - Clear lenses, 5 lights	O
	Taillamps - Two w/ integral stop, turn, backup and license plate bracket	S
	Turn Signal Switch, Signal Stat, Non-Canceling	S
17M	Back-up Alarm - Electric, 102 dBA	O
962	Daytime Running Lamps	O
09 - FUEL TANKS (For Clean CA installations with other cabs, refer to the Body Builders site)		
65B	Fuel Tank, 50-U.S. Gallon - Left-hand, aluminum, rectangular (Regular Cab Only)	S
65E	Fuel Tank, 65-U.S. Gallon - Left-hand, aluminum, rectangular (Standard on SuperCab and Crew Cab only; Optional on Regular Cab only)	S/O
65C	Fuel Tank, 55-U.S. Gallon - Left-hand, aluminum, rectangular (Regular Cab only)	O
10 - SEATS Seats are color-coordinated to cab trim level. All seats include seat belts. Rear seats of SuperCab or Crew Cab must be selected from this same grouping. Seat Delete options are available at the end of this list.		
88A	30/0/30 - Fixed driver and fixed passenger with consolette - vinyl	S
88B	30/0/30 - Fixed driver and fixed passenger with consolette - cloth	O
881	30/70 - Fixed driver and fixed 2-passenger bench - vinyl	O
882	30/70 - Fixed driver and fixed 2-passenger bench - cloth	O
88C	30/0/0 - Fixed driver only - vinyl	O
88D	30/0/0 - Fixed driver only - cloth	O
88N	30/0/30 - Air ride driver (external air source) and fixed passenger with consolette - vinyl (NA with SuperCab)	O
88P	30/0/30 - Air ride driver (external air source) and fixed passenger with consolette - cloth (NA with SuperCab)	O
88G	30/70 - Air ride driver (external air source) and fixed 2-passenger bench - vinyl (NA with SuperCab)	O
88H	30/70 - Air ride driver (external air source) and fixed 2-passenger bench - cloth (NA with SuperCab)	O

2019 F-750 SUPER DUTY (DIESEL TRACTOR) OPTIONAL EQUIPMENT



Order Code	COMPONENT DESCRIPTION	PEP Code: 600A
	10 - SEATS (CONTINUED) Seats are color-coordinated to cab trim level. All seats include seat belts. Rear seats of SuperCab or Crew Cab must be selected from this same grouping. Seat Delete options are available at the end of this list.	
88E	30/0/30 - Air ride driver (external air source) and air ride passenger (external air source) with consolette - vinyl (NA on SuperCab)	O
88F	30/0/30 - Air ride driver (external air source) and air ride passenger (external air source) with consolette - cloth (NA on SuperCab)	O
88T	30/0/0 - Air ride driver only (external air source) - vinyl (NA with SuperCab)	O
88U	30/0/0 - Air ride driver only (external air source) - cloth (NA with SuperCab)	O
88Y	40/20/40 - Fixed driver and fixed passenger with unique 20% fold-down console - vinyl	O
88Z	40/20/40 - Fixed driver and fixed passenger with unique 20% fold-down console - cloth	O
	SUPERCAB - REAR SEAT	
87B	60/40 - Rear bench seat with bolster and flip-up cushion - trim will match selected driver seat material	S
87X	Rear Seat Delete	O
	CREW CAB - REAR SEAT	
87C	60/40 - Rear bench seat with flip-up cushion and fold-down back - trim will match selected driver seat material	S
87X	Rear Seat Delete	O
	11 - CAB EQUIPMENT	
	Regular Cab, SuperCab or Crew Cab - Ford conventional, steel	S/O
	INTERIOR APPEARANCE GROUP	
90A	Appearance Group - Front-mounted overhead console with dual sunglass bins and integral front map reading lights, door trim panel, chrome air registers, second-row bench seat (Crew Cab) or two-row high series flip-up seats with cushion and bolster (SuperCab). Includes Power Equipment Group (90P)	O
90P	Power Equipment Group - Power front side windows, power rear side windows (Crew Cab) power door locks and door trim panel. Includes manual rear side windows with SuperCab. Included in Appearance Group (90A)	O/I
	EXTERIOR FEATURES	
90E	Exterior Appearance Group - Includes full-width chrome-plated front bumper (765), chromed fender badge and chrome grille surround (86C)	O
85A	Anti-Theft System	O
	Front End Tilting Fiberglass Hood and Fenders Assembly - Frame-mounted, torsion bar assist (includes integral noise and inner splash shields and mud flaps)	S
	Glass - Laminated windshield	S
	Glass - Solar tint complete	S
86A	Painted Grille - Plastic	S
86C	Grille - Chrome surround	O/I
86B	Grille, Fixed - Black/grey	O
59A	Horn, Air - Black, single trumpet, air solenoid operated, chassis-mounted on rail back of bumper	O
	Horn, Electric - Dual	S
54H	Mirrors - Dual Rectangular XL2020 Integral Spot Mirror Sail type, 96" width, manual fold, solid black finish	S
54M	Mirrors, Heated - Dual Rectangular XL2020 Integral Spot Mirror Sail type, 96" width, manual fold, solid black finish	O
54P	Mirrors - Dual Rectangular XL2020 With Integral Spot Mirror Sail type, 96" width, heated and motorized, solid black finish (requires Power Equipment Group, 90P)	O
54B	Mirrors - Dual Rectangular XL2020 Integral Spot Mirror Sail type, 96" width, manual fold, chrome cap	O

2019 F-750 SUPER DUTY (DIESEL TRACTOR) OPTIONAL EQUIPMENT



Order Code	COMPONENT DESCRIPTION	PEP Code: 600A
	EXTERIOR FEATURES (CONTINUED)	
54N	Mirrors, Heated - Dual Rectangular XL2020 Integral Spot Mirror Sail type, 96" width, manual fold, chrome cap	O
54A	Mirrors - Dual Rectangular XL2020 With Integral Spot Mirror Sail type, 96" width, heated and motorized, chrome cap (requires Power Equipment Group, 90P)	O
54J	Mirrors - Dual Rectangular XL2020 - Integral Spot Mirror Sail type, 102" width, manual fold, solid black finish	O
54C	Mirrors, Heated - Dual Rectangular XL2020 Integral Spot Mirror Sail type, 102" width, manual fold, solid black finish	O
54R	Mirrors - Dual Rectangular XL2020 With Integral Spot Mirror Sail type, 102" width, heated and motorized, solid black finish (requires Power Equipment Group, 90P)	O
54D	Mirrors - Dual Rectangular XL2020 Integral Spot Mirror Sail type, 102" width, manual fold, chrome cap	O
54E	Mirrors, Heated - Dual Rectangular XL2020 Integral Spot Mirror Sail type, 102" width, manual fold, chrome cap	O
54K	Mirrors - Dual Rectangular XL2020 With Integral Spot Mirror Sail type, 102" width, heated and motorized, chrome cap (requires Power Equipment Group, 90P)	O
54F	Mirrors, Trailer Tow, Powered - Power telescoping, power folding w/ power heated glass, heated convex spotter and integrated clearance lights / turn signals (sail mount) (requires Power Equipment Group, 90P) (heat controls dash mounted) Not Available w/(91D) Vertical Exhaust due to visibility.	O
63F	Mirrors - Front Fender Mounted - (2) Driver Side and Passenger Side - (Late Availability)	O
63G	Mirror - Front Fender Mounted - (1) Passenger Side Only (Late Availability)	O
165	Mud Flaps Holder w/o Flaps	O
166	Mud Flap Holder with Flaps	O
	Window, Rear - Fixed	S
92S	Window, Rear - Sliding	O
	Windshield Wiper - Intermittent variable w/ windshield washers	S
	INTERIOR FEATURES	
572	Air Conditioning, Manual - Includes integral heater and defroster; radiator-mounted compressor; R-134A refrigerant	S
57N	Air Conditioning, Delete - Fresh air heater and defroster only (NA with heated or motorized mirrors)	O
	Air Registers - Molded-in-color with positive shut-off, color-coordinated trim	S
	Air Registers - With positive shut-off, chrome trimmed, included in Appearance Group	I
	ASSIST HANDLE	
	Interior A pillars - Driver and passenger; all cabs	S
	Interior B pillars - Grab handle, driver and passenger; crew cab only	S
	Auxiliary Power Point - In instrument panel (2)	S
59F	4 Body Builder Switches - Mounted in center instrument panel with connector access located in engine compartment; amperages vary by switch: 10, 15, 25, 25	S
	Back Panel Trim Cover	S
	Cruise Control - Steering wheel-mounted controls	S
	Demisters - LH & RH side windows	S
	Dome Lamp - Rear mounted with integral map reading lights. (Regular and Crew Cab only)	S
	Overhead Console - Front mounted with dual sunglass bins and integral front map reading lights (all cabs, included in Appearance Group)	I
	Floor Covering, Black - Full, vinyl floor	S

2019 F-750 SUPER DUTY (DIESEL TRACTOR) OPTIONAL EQUIPMENT



Order Code	COMPONENT DESCRIPTION	PEP Code: 600A
	INTERIOR FEATURES (CONTINUED)	
	Gauge Cluster, English - With English electronic speedometer (MPH/KPH) includes oil pressure, coolant temperature, DEF gauge, fuel gauge, tachometer and indicator lights. Also includes enhanced 3-button Message Center with odometer, trip odometer, distance-to-empty for fuel, average fuel economy hour meter and warning messages. Trans Temp in message center	S
16V	Volt Meter - Available in Message Center	O
55P	110 A/C Outlet - In lower center finish panel	O
90C	Fleet Telematics Modem - For Data Communication (Late Availability)	O
	Glove Box	S
	Instrument Panel - Color-coordinated with color-coordinated accents	S
90C	eWID - Tracking Sysytem- For Data Communication (Late Availability)	O
58P	Radio Prep Package - Deletes radio and dash-mounted auxiliary input jack. Includes radio/speaker wiring, 2 speakers, antenna, radio instrument panel cover and dash-mounted auxiliary audio input jack instrument panel cover	O
58B	Radio Delete Package - Deletes radio, speakers, antenna and antenna cable. Includes radio instrument panel cover and auxiliary audio jack cover and speaker locations for future radio upfit if owner desires	O
588	Radio AM/FM Stereo - With 2 speakers, includes auxiliary audio input jack and clock	S
586	Radio, Electronic Premium AM/FM Stereo, Disc - With 4 speakers, dash-mounted auxiliary audio input jack and clock and redundant steering wheel audio controls	O
21D	SYNC® Media System - Includes dash-mounted USB 2.0 port and redundant steering wheel SYNC® controls. Requires Radio 586	O
85B	Keyed Alike - NA with Anti-Theft System (85A); requires multiple-unit order (NA with 85K)	O
85L	Keyed Alike - Option #1 NA with Anti-Theft System (85A); requires multiple-unit order (NA with 85K)	O
85M	Keyed Alike - Option #2 NA with Anti-Theft System (85A); requires multiple-unit order (NA with 85K)	O
85N	Keyed Alike - Option #3 NA with Anti-Theft System (85A); requires multiple-unit order (NA with 85K)	O
85P	Keyed Alike - Option #4 NA with Anti-Theft System (85A); requires multiple-unit order (NA with 85K)	O
85K	Remote Keyless Entry - Requires Power Equipment Group 90P, includes two key fobs. Also requires 85A Anti-Theft system	O
	SAFETY BELTS	
	Includes fixed D-rings (Regular Cab)	S
	Includes adjustable D-rings (SuperCab or Crew Cab)	S
	Steering Wheel, Tilt with Cruise Controls - Black PVC	S
	Sunvisor, Single Driver - Vinyl	S
	Sunvisor, Single Passenger - Vinyl with mirror	S
90M	Interior Rear View Mirror	O
94A	Timer - Engine idle shutdown, 5 minutes	O
94B	Timer - Engine idle shutdown, 10 minutes	O
94C	Timer - Engine idle shutdown, 15 minutes	O
94D	Timer - Engine idle shutdown, 20 minutes	O
	12 - FRONT WHEELS - TIRES Order codes of optional tires are listed in the Tire tab.	
	WHEELS, FRONT (HUB PILOT MOUNT)	
643	22.5x8.25, white powder-coated steel, 10-hole	S
644	22.5x8.25, polished aluminum, 10-hole. (Available until added starter launch)	O
64H	22.5" X 8.25" Aluminum wheels, 10-hole Alcoa® Bright Polished both sides w/Dura-Bright® seal (feature available at added starter launch)	O
649	22.5x8.25, Black Wheel (Requires 669)	O
TCG	11R22.5G (14PR) Goodyear® Endurance RSA	S

2019 F-750 SUPER DUTY (DIESEL TRACTOR) OPTIONAL EQUIPMENT



Order Code	COMPONENT DESCRIPTION	PEP Code: 600A
	13 - REAR WHEELS - TIRES Order codes of optional tires are listed in the Tire tab.	
	WHEELS, REAR (HUB PILOT MOUNT)	
663	22.5x8.25, white powder-coated steel, 10-hole	S
664	22.5x8.25, polished aluminum, 10-hole - outer surface of outer wheel only; inner wheel is white powder-coated steel. Requires 644. (Available until added starter launch)	O
66H	22.5" X 8.25" Aluminum wheels, 10-hole Alcoa® Bright Polished both sides w/Dura-Bright® seal. Inner wheel is white powder-coated steel. Requires 64H. (Feature available at added starter launch)	O
669	22.5x8.25, Black Wheel (Requires 649)	O
RCG	11R22.5G (14PR) Goodyear® Endurance RSA	S
	14 - PAINT	
	Body Color Available - Agate Black (UM), Oxford White (YZ), Ingot Silver (UX), Magnetic (J7), Race Red (PQ), Blue Jeans (N1), Green Gem (W6), Tangier Orange (J8), Bold Yellow (LE), School Bus Yellow (B1), Stone Gray (D1)	O
	Chassis Color - Black	S
	Paint Type - Environmentally friendly, "3-wet system"	S
	15 - MISCELLANEOUS	
21A	Pre-Delivery Inspection - Selection requires that you also choose either (314) or (31F) or (31V) to have the Pre-Delivery Inspection performed	O
314	Ship-Thru: Manning MAY be selected w/o adding (21A.) For MODIFICATIONS ONLY , Dealer must make arrangements directly with Manning (please use CVT Resources for add. Info).	O
31F	Ship-Thru: NFS National Fleet Services MAY be selected w/o adding (21A.) For MODIFICATIONS ONLY , Dealer must make arrangements directly with NFS (please use CVT Resources for add. Info).	O
31V	Ship-Thru: Fontaine Vocational Services for Tractors MAY be selected w/o adding (21A.) For MODIFICATIONS ONLY , Dealer must make arrangements directly with Fontaine (please use CVT Resources for add. Info).	O
79V	Send a paper Certificate of Origin for a Vehicle (COV) for those states that file electronically (CA or MI)	O

2019 F-750 SUPER DUTY (DIESEL TRACTOR) TIRES



Order Code		Description			Rev/Mile		
Front	Rear						
OPTIONAL TIRES for 22.5" Wheel Configuration							
		Tubeless Radial Tires (Allowable Mixed Plys Noted)		Ply Rating		Front FET	Rear FET
		11R22.5G (14PR)			--		
TCG	RCG	GDYR Endurance RSA		14	496	\$50.46	\$100.92
--	RCA	Goodyear® G182		14	496		\$100.92
--	RCF	GDYR Endurance RSA		16	497		\$117.56
--	RCE*	Goodyear® G182*		16	497		\$117.56
TC1	RC1	Michelin XZE2		14	496	\$50.46	\$100.92
	RMA	Michelin X Multi D		14	496		
--	RC3*	Michelin XZE2*		16	497	\$58.78	\$117.56
	RMB*	Michelin X Multi D		16	494		
		11R22.5H (16PR)			--		
TCF	RCF	GDYR Endurance RSA		16	497	\$58.78	\$117.56
--	RCE	Goodyear® G182		16	497		\$117.56
--	RCG	GDYR Endurance RSA		14	496		\$100.92
--	RCA**	Goodyear® G182**		14	496		\$100.92
TC3	RC3	Michelin XZE2		16	497	\$58.78	\$117.56
	RMB	Michelin X Multi D		16	494		
--	RC1**	Michelin XZE2**		14	496	\$50.46	\$100.92
	RMA**	Michelin X Multi D		14	496		
		255/70R22.5H (16PR)†			--		
TCH	RCH	GDYR Endurance RSA		16	564	\$39.78	\$75.96
--	RHB	Goodyear® G622 RSD		16	564		\$75.96
		275/80R22.5G (14PR)‡			--		
TJF	RJF	Michelin XZE2		14	510	\$50.46	\$100.92
--	RN5	Michelin XDA5		14	510		\$100.92
		275/80R22.5H (16PR)			--		
TFA	RFA	Hankook AH22		16	509	\$69.18	\$138.36
--	RFB	Hankook DH15		16	509		\$138.36
		295/75R22.5H (16PR)			--		
TRA	RRA	Continental HA3 ##		16	514		
	RRC	Continental HDR2		16	509		
		295/80R22.5H (16PR)			--		
TDG	RDG	Continental HSR2##	(Tire Size)	16	501	\$81.84	\$163.68
--	RCE	Goodyear® G182 RSD	11R22.5	16	497		\$117.56
	RMB	Michelin X Multi D	11R22.5	16	494		
--	RCB**	Continental HDR2**	11R22.5	14	496		\$101.12
--	RCA**	Goodyear® G182 RSD**	11R22.5	14	496		\$100.92
	RMA**	Michelin X Multi D	11R22.5	14	496		

**Late Availability

* 16 Ply
 ** 14 Ply
 † 255/70R22.5H (16PR) - Not Available with 14,000# Front Axle (43D)
 ‡ 275/80R22.5G (14PR) - Not Available with 14,000# Front Axle (43D)
 - Not Available with 26,000# Rear Axle (47X)

^{##} Requires 643, 644, Front Wheels and 663, 664 Rear Wheels



2019 F-750 SUPER DUTY (DIESEL TRACTOR) AXLE RATIOS

					Locking Differentials	
Manufacturer:					Dana / Spicer	Dana / Spicer
Model:					21060S	S23-170
Capacity (lbs.):					21,000	23,000
Differnetial:					Open	Open
Drive Gear:					Hypoid	Hypoid
Order Code:					475	479
F750 Diesel Tractor					Std.	Opt.

Single Speed	4.63	X4E***	X-4.63	-	-	X-4.63	-
	4.78	X4F	-	X-4.78	-	-	X-4.78
	4.88	X4G	X-4.88	-	-	X-4.88	-
	5.25	X5F	-	X-5.25	-	-	X-5.25
	5.29	X5B	X-5.29	-	-	X-5.29	-
	5.57	X5D	X-5.57	X-5.57	X-5.57	X-5.57	X-5.57
	6.14	X6A	-	X-6.14	-	-	X-6.14
	6.17	X6B	X-6.17	-	-	X-6.17	-
	6.50	X6D*	X-6.50	-	-	X-6.50	-
	6.83	X6E**	-	X-6.83	X-6.83	-	X-6.83

*Not Available with 255/70R/22.5" Tires

**Available with all 11R22.5" Tires AND 295/80R/22.5" Tires also Hankook 275/80R/22.5" Tires

†Not Available with 255/70R/22.5" Tires

*** Standard with 255/70R/22.5" Tires


2019 F-750 SUPER DUTY CAB-WHEELBASE-DIMENSIONAL DATA DIESEL REGULAR CAB - Tractor



Model Code: F7T

PEP Code: 600A

Std. GVWR	31,000 lbs.
Max. GVWR	37,000 lbs.

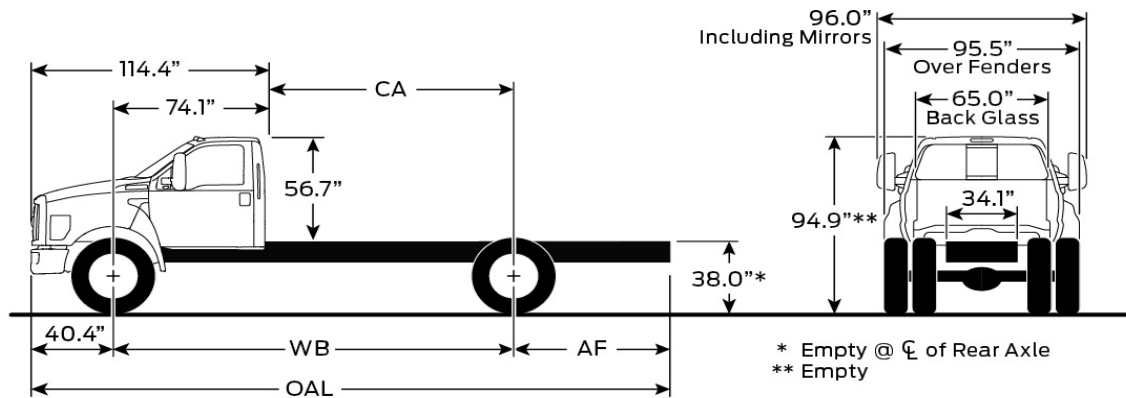

Wheelbase (in.)	Chassis Weights (lbs.)*			Dimensions (in.)			Turning Radius	
	Front	Rear	Total	CA	AF	OAL	To Curb	W/Bumper Clearance
146	7034	4240	11274	72	39	224	20 ft. 6 in.	22 ft. 1 in.
158	7075	4284	11359	84	39	236	21 ft. 11 in.	23 ft. 7 in.


**2019 F-750 SUPER DUTY
DIESEL REGULAR CAB - Tractor
FRAMES
F7T**



FRAME RAIL SPECIFICATIONS

	CODE	Side Rail							
		DIMENSIONS (Inches)			YIELD STRENGTH Min.(psi)	SECTION MODULUS (inches ³)		RESISTING BENDING MOMENT (In.-Lbs.)	
		Depth	Width	Thickness		Nominal	Maximum	Nominal	Maximum
S	536	Straight Channel Side Rail							
		10.125	3.58	0.312	120,000	14.18	14.84	1,701,600	1,780,800

FRAME RAIL CROSS SECTION

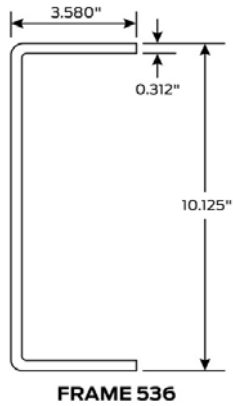


2019 F-750 SUPER DUTY CAB-WHEELBASE-DIMENSIONAL DATA DIESEL SUPERCAB - Tractor



Model Code: X7T

PEP Code: 600A

Std. GVWR	31,000 lbs.
Max. GVWR	37,000 lbs.

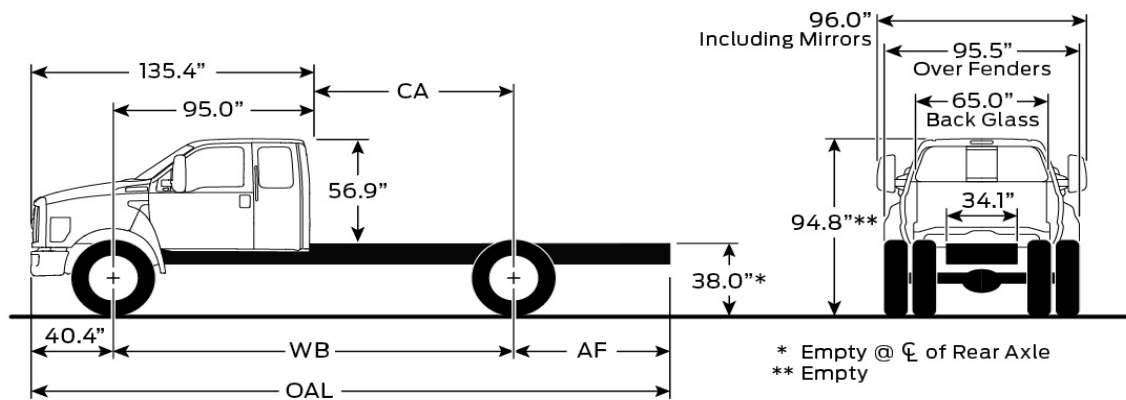

Wheelbase (in.)	Chassis Weights (lbs.)*			Dimensions (in.)			Turning Radius	
	Front	Rear	Total	CA	AF	OAL	To Curb	W/Bumper Clearance
167	7239	4297	11536	72	39	245	23 ft. 1 in.	24 ft. 8 in.
179	7323	4392	11716	84	39	257	24 ft. 6 in.	26 ft. 1 in.


**2019 F-750 SUPER DUTY
DIESEL SUPERCAB - Tractor
FRAMES
X7T**



FRAME RAIL SPECIFICATIONS

	CODE	Side Rail							
		DIMENSIONS (Inches)			YIELD STRENGTH Min.(psi)	SECTION MODULUS (inches ³)		RESISTING BENDING MOMENT (In.-Lbs.)	
		Depth	Width	Thickness		Nominal	Maximum	Nominal	Maximum
S	536	Straight Channel Side Rail							
		10.125	3.58	0.312	120,000	14.18	14.84	1,701,600	1,780,800

FRAME RAIL CROSS SECTION

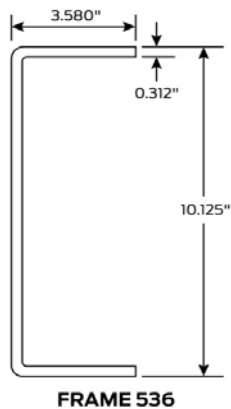


2019 F-750 SUPER DUTY CAB-WHEELBASE-DIMENSIONAL DATA DIESEL CREW CAB - Tractor



Model Code: W7T

PEP Code: 600A

Std. GVWR	31,000 lbs.
Max. GVWR	37,000 lbs.

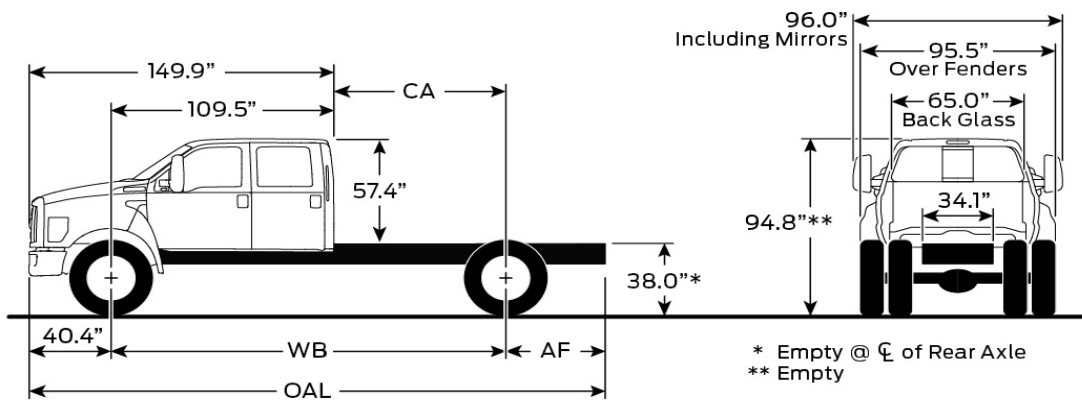

Wheelbase (in.)	Chassis Weights (lbs.)*			Dimensions (in.)			Turning Radius	
	Front	Rear	Total	CA	AF	OAL	To Curb	W/Bumper Clearance
182	7427	4358	11785	72	39	260	24 ft. 10 in.	26 ft. 6 in.

**2019 F-750 SUPER DUTY
DIESEL CREW CAB - Tractor
FRAMES
W7T**



FRAME RAIL SPECIFICATIONS

	CODE	Side Rail							
		DIMENSIONS (Inches)			YIELD STRENGTH Min.(psi)	SECTION MODULUS (inches ³)		RESISTING BENDING MOMENT (In.-Lbs.)	
		Depth	Width	Thickness		Nominal	Maximum	Nominal	Maximum
S	536	Straight Channel Side Rail							
		10.125	3.58	0.312	120,000	14.18	14.84	1,701,600	1,780,800

FRAME RAIL CROSS SECTION

