

2019 F-750 SUPER DUTY (GAS STRAIGHT FRAME) ORDER GUIDE



	Page
Model Index	1
Standard Equipment	2-4
Optional Equipment	5-11
Tire Sizes	12
Axle Ratios	13
Wheelbases and Frames	14-19
Cab - Wheelbase - Dimensional Data (Regular Cab)	
Frames (Regular Cab)	
Cab - Wheelbase - Dimensional Data (SuperCab)	
Frames (SuperCab)	
Cab - Wheelbase - Dimensional Data (Crew Cab)	
Frames (Crew Cab)	

Product Changes and Features Availability

Features, options and package content subject to change. Please check www.FMCDealer.com for the most current information.

2019 F-750 GAS SUPER DUTY (GAS STRAIGHT FRAME)



FORD
CODE

MAJOR STANDARD EQUIPMENT

PEP Code:
600A

	STD WB is 158"	STD
	01 - FRAME	
535	Single Channel, Straight "C", 15.14 SM, 80,000 PSI, 1,211,200 RBM - High-strength low-alloy steel; 10.250" x 3.092" x 0.375" (260.4mm x 78.5mm x 9.5mm) (available for Straight Truck use only)	x
766	Bumper Front - Black full width	x
	Less Frame Extension Package	x
	02 - AXLE, FRONT - SUSPENSION, FRONT	
43N	Axle, Front Non-Driving - Dana E-1002I 10,000-lb. capacity (Includes Ross Integral Power Steering)	x
61C	Parabolic Taper-leaf Springs - 2-leaf, 10,000-lb. capacity, 62" x 3.15"	x
	Shock Absorbers, Front - Standard Duty, Dual, Double Acting	x
	Wheel Seals, Front - Oil Lubricated, SKF ScotSeal® PlusXL seals	x
	03 - AXLE, REAR - SUSPENSION, REAR	
475	21,000-lb. Rear Axle Assembly - Single-speed, (Dana 21060S), single-reduction 21,000-lb. capacity with 190 wheel ends	x
68P	Multi-leaf Springs - 11-leaf, 21,000-lb. capacity with 2,000-lb. auxiliary springs for load stabilization	x
	Wheel Seals, Rear - Oil lubricated, SKF ScotSeal® PlusXL seals	x
	04 - BRAKES - BRAKE EQUIPMENT	
67J	Hydraulic Brake System - Bosch HydroMax®	x
	05 - ENGINE - ENGINE EQUIPMENT	
99Y	6.8L 3V SEFI V10 GAS - 320 horsepower @ 3900 rpm, 460 lb.-ft. torque @ 3000 rpm	x
425	50-State Emissions Requirements	x
	Canada and U.S. Territories get Federal Emissions	x
	ENGINE EQUIPMENT	
	Air Cleaner - Heavy-duty filter, dry type (Motorcraft FA-1883)	x
	Fan Clutch - Viscous screw-on type	x
	Radiator - Aluminum w/ in-tank transmission cooler, PremAir® ozone converter	x
	Starting Motor - 12-volt, Denso	x
	Anti-Freeze - OAT, extended life coolant; to -40 degrees F/-40 degrees C freeze protection	x
	06 - TRANSMISSION - DRIVELINE	
44P	Ford 6-Speed TorqShift® HD Automatic - Double overdrive, less PTO provision (RNDM)	x
	Driveshaft - Dana base	x
	07 - EXHAUST	
91H	EXHAUST SYSTEM - Single horizontal muffler, catalytic converter, frame-mounted, RH, back of cab, downward facing, outlet tip	x
	08 - ELECTRICAL - ALTERNATOR - BATTERY	
	Alternator - Extra heavy-duty 12-volt, 175-amp., Mitsubishi	x
	Battery - 12-Volt, Motorcraft® - Single, 900 CCA, R/H frame-mount, under cab	x
	Battery Box - RH frame-mount, under cab step	x
	Body Builder Wiring - Frame-mount at back of cab. Includes sealed connectors for 2 ground circuits, with combined left/stop, combined right/stop, stop lamps, park lamps, backup lamps. Also includes 2 additional pass-through wires to cab	x
	Emergency Flasher - Four-way	x
	Fuses, SAE - Blade-type smart fuse box	x
	LIGHTS	
	Aero Headlamps - High series, includes side marker lights with reflectors (front)	x
	Taillamps , Two w/ integral stop, turn, backup and license plate bracket	x
	Side Repeat Flasher	x

2019 F-750 GAS SUPER DUTY (GAS STRAIGHT FRAME)



FORD
CODE

MAJOR STANDARD EQUIPMENT

PEP Code:
600A

	STD WB is 158"	STD
	09 - FUEL TANK	
	50-U.S. Gallon - Single, LH, steel	x
	10 - SEATS	
88A	30/0/30 - Fixed driver and fixed passenger with console - vinyl	x
87B	60/40 - Rear bench seat with bolster and flip-up cushion - trim will match selected driver seat material (SuperCab)	x
87C	60/40 - Rear bench seat with flip-up cushion and fold-down back - trim will match selected driver seat material (Crew Cab)	x
	11 - CAB EQUIPMENT	
	Regular Cab, SuperCab or Crew Cab - Ford conventional, steel	x
	CAB EQUIPMENT - EXTERIOR	
	Doors - Two (four with SuperCab or Crew Cab)	x
	Front End Tilting Fiberglass Hood and Fenders Assembly - Tilt-type, frame-mounted, torsion bar assist (includes integral noise and inner splash shields and mud flaps)	x
	Glass - Laminated windshield, solar tint all-around	x
86A	Painted Grille - Plastic, NA with Frame Extension	x
	Horn - Dual note electric - Level 2	x
163	Lights - Roof marker/clearance - amber lenses, 5 lights	x
54H	Mirrors - Dual rectangular Velvac XL2020, integral spot mirrors, sail type, 96" width, manual fold, solid black finish	x
	Tow Hooks, Front (2) - Frame-mounted, painted black	x
	Window, Rear - Fixed	x
	Windshield Wiper Control - Two-speed electric intermittent w/ windshield washers	x
	CAB EQUIPMENT - INTERIOR	
572	Air Conditioning, Manual - Includes integral heater and defroster; radiator-mounted compressor; R-134A refrigerant	x
	Air Registers - Molded-in-color with positive shut-off, color-coordinated trim	x
	Assist Handles, Interior A Pillars - Driver and passenger; all cabs	x
	Assist Handles, Interior B Pillars - Grab handle, driver and passenger; Crew Cab only	x
	Auxiliary Power Point - In instrument panel (2)	x
	Back Panel Trim Cover	x
	Coat Hook - RH/LH color-keyed	x
	Cruise Control - Steering Wheel-Mounted Controls	x
	Demisters - LH & RH side windows	x
	Dome Lamp - Rear-mounted with integral map reading lights. (Regular and Crew Cab only)	x
	Door Trim - Color-coordinated molded w/ grab handle	x
	Armrest/grab handle	x
	Soft armrest, grab handle upper and lower map pockets	x
	Floor Covering - Black vinyl	x
	Gauge Cluster, English - With English electronic speedometer (MPH/KPH) includes oil pressure, coolant temperature, DEF gauge, fuel gauge, tachometer and indicator lights. Also includes enhanced 3-button Message Center with odometer, trip odometer, distance-to-empty for fuel, average fuel economy hour meter and warning messages. Trans Temp in message center	x
	Glove Box - Instrument panel, RH	x
	Headliner - Color-coordinated, molded, cloth	x
	Instrument Panel - Color-coordinated, with color-coordinated accents	x
	Intelligent Oil-Life Monitor®	x
588	Radio AM/FM Stereo - With 2 speakers, includes auxiliary audio input jack and clock	x

2019 F-750 GAS SUPER DUTY (GAS STRAIGHT FRAME)



FORD
CODE

MAJOR STANDARD EQUIPMENT

PEP Code:
600A

	STD WB is 158"	STD
	CAB EQUIPMENT - INTERIOR (CONTINUED)	
	Safety Belts - Belt-Minder® (chime and flashing warning light on instrument panel if belts not buckled)	x
	Safety Belts - Color-coordinated, all position, includes fixed D-rings (Regular Cab)	x
	Safety Belts - Color-coordinated, all position, includes front seat adjustable D-rings (SuperCab or Crew Cab)	x
	Scuff Plates	x
	Steering Column - Tilt	x
	Steering Wheel - Black PVC, with integral cruise control switches	x
	Sunvisor, Single Driver - Vinyl	x
	Sunvisor, Single Passenger - Vinyl with mirror	x
	Tachometer - Electric	x
	Turn Signal Switch, Self Canceling - Multifunction switch	x
	12 - FRONT WHEEL - TIRES	
	Wheels, Front	
643	22.5x8.25 - Steel disc, 10-hole - hub-piloted, 5 hand hold, powder-coated white	x
	Tires, Front	
TCG	11R22.5G (14PR) Goodyear® Endurance RSA	x
	13 - REAR WHEEL - TIRES	
	Wheels, Rear	
663	22.5x8.25 - Steel disc, 10-hole - hub-piloted, 5 hand hold, powder-coated white	x
	Tires, Rear	
RCG	11R22.5G (14PR) Goodyear® Endurance RSA	x
	14 - PAINT	
	Body Color Available - Agate Black (UM), Oxford White (YZ), Ingot Silver (UX), Magnetic (J7), Race Red (PQ), Blue Jeans (N1), Green Gem (W6), Tangier Orange (J8), Bold Yellow (LE), School Bus Yellow (B1), Stone Gray (D1)	x
	Chassis Color - Black	x
	Paint Type - Environmentally friendly, "3-wet system"	x

2019 F-750 SUPER DUTY (GAS STRAIGHT FRAME) OPTIONAL EQUIPMENT



Order Code	COMPONENT DESCRIPTION	PEP Code: 600A
		STD
Body Code	Regular Cab	F7A
	SuperCab	X7A
	Crew Cab	W7A
01 - FRAME		
SINGLE CHANNEL - STRAIGHT "C"		
535	15.14 SM, 80,000 PSI, 1,211,200 RBM - High-strength low-alloy steel; 10.250" x 3.092" x 0.375" (260.4mm x 78.5mm x 9.5mm)	S
536	14.18 SM, 120,000 PSI, 1,701,600 RBM - Heat-treated alloy steel; 10.125" x 3.580" x 0.312" (257.2mm x 90.9mm x 8.0mm)	O
538	16.98 SM, 120,000 PSI, 2,037,600 RBM - Heat-treated alloy steel; 10.250" x 3.610" x 0.375" (260.4mm x 91.66mm x 9.5mm)	O
539	20.11 SM 120,000 PSI, 2,413,200 RBM - Single-channel straight "C", heat-treated alloy steel; 10.375" x 3.705" x 0.438" (263.5mm x 94.1mm x 11.1mm)	O
19C	Frame Rail Drilling - Factory pre-drilled holes in Frame Rails to support Special Fuel Tanks for a Roush CNG/LPG Gaseous Prep Conversion. Saves time, cost, transportation while providing accuracy for the mount. Requires (98G) CNG/LPG Gaseous FuelPrep Pack.	O
41R	Frame Reinforcement - 29.84 SM, 120,000 PSI, 3,580,800 RBM - Outer "C" channel reinforcement, heat-treated alloy steel; 10.813 x 3.892" x 0.312"; (274.6 mm x 98.9 mm x 8.0 mm), requires Frame 536	O
532	Integral Front Frame Extension - 20" in front of grille, [Requires Frame (536), (538), (539) or (536 + 41R). Includes (76X) Bumper Delete and includes (86B) Fixed Grille.] Available with (767) Swept Back Front Bumper.	O
766	Bumper, Front, Full Width - Black (NA with Frame Extension 532)	S
765	Bumper, Front, Full Width - Chrome-plated steel. Included with Exterior Appearance Group (90E)	O/I
76F	Bumper Extension, Front - 3" Extension, (N/A with 767, Bumper, Front, Swept Back)	O
767	Bumper, Front, Swept Back - Dark shadow gray painted steel (available with Front Frame Extension, 532)	O
76X	Bumper, Front Delete - Standard with front Frame Extension (532) Also deletes the Mounting Brackets	O
	Tow Hooks, Front - Inside-rail, frame-mounted (2)	S
76Y	Tow Hooks Delete	O
18D	Special Rating GVWR - Limited to 25,999-lb. GVWR	O
	Square Cut Frame Ends	S
02 - AXLE, FRONT - SUSPENSION, FRONT		
43N	Axle, Front Non-Driving - Dana E-1002I 10,000-lb. capacity (includes Integral Power Steering)	S
43P	Axle, Front Non-Driving - Dana E-1202I, I-beam-type, 12,000-lb. capacity	O
TAPER-LEAF SPRINGS		
61C	Parabolic Taper-leaf Springs - 2-leaf, 10,000-lb. capacity, 62" x 3.15" (requires 43N)	S
61D	Parabolic Taper-leaf Springs - 2-leaf, 12,000-lb. capacity, 62" x 3.15" (available on 43N and 43P)	O
61E	Parabolic Taper-leaf Springs - 3-leaf, 13,200-lb. capacity, 62" x 3.15" (available only on 43P)	O
15S	Stabilizer Bar, Front	O
	Wheel Seals, Front - Oil lubricated, SKF ScotSeal® PlusXL seals	S
60A	Lube, Front Axle - EmGard® 50W, synthetic oil	O
03 - AXLE, REAR - SUSPENSION, REAR		
NOTE: When specifying an axle ratio, check performance guidelines for startability and gradeability		
475	21,000-lb. Rear Axle Assembly	S
	Driveshaft - Dana base	S
MULTI-LEAF SPRINGS		
68P	11-Leaf, 21,000-lb. Capacity - For 21,000-lb. rear axles; includes 2,000-lb. auxiliary springs for load stabilization	S
68R	11-Leaf, 23,000-lb. Capacity - For 21,000-lb. and 23,000-lb. rear axles; includes 2,000-lb. auxiliary springs for load stabilization	O
961	Shock Absorbers, Rear - Double acting	O
	Wheel Seals, Rear - Oil lubricated, SKF ScotSeal® PlusXL seals	S
607	Lube, Rear Axle - EmGard® 75W-90, synthetic oil	O

2019 F-750 SUPER DUTY (GAS STRAIGHT FRAME) OPTIONAL EQUIPMENT



Order Code	COMPONENT DESCRIPTION	PEP Code: 600A
	04 - BRAKES - BRAKE EQUIPMENT	
67J	Hydraulic Brake System - Bosch HydroMax®	S
674	Hydraulic Brake System with Traction Control - Bosch HydroMax®	O
	BRAKE EQUIPMENT	
152	Trailer Connection Socket, 7-way - Mounted at rear of frame, for Combined trailer stop, tail, turn, marker light circuits; includes Electric Trailer Brake Accommodation Package with cab connections for mounting customer installed electric brake unit (available for Hydraulic Brake Straight Truck) Requires (Standard) Back of Cab Body Builder Wiring or (59C) End of Frame Body Builder Wiring.	O
154	Trailer Connection Socket, 7-way - Mounted at rear of frame, for Separate trailer stop, tail, turn, marker light circuits; includes Electric Trailer Brake Accommodation Package with cab connections for mounting customer installed electric brake unit (available for Hydraulic Brake Straight Truck) Requires (59D) Back of Cab Body Builder Wiring or (59E) End of Frame Body Builder Wiring.	O
	05 - ENGINE - ENGINE EQUIPMENT	
99Y	6.8L 3V SEFI V10 GAS - 320 horsepower @ 3900 rpm, 460 lb.-ft. torque @ 3000 rpm	S
	ENGINE EQUIPMENT	
41H	Engine Block Heater - Phillips; 120-volt, 750-watt	O
98G	Gaseous Fuel Prep Pack - CNG/LPG Engine Prep, Includes Hardened Engine Intake Valves, Exhaust Vales and Valve Seats. <i>NOTE: This package DOES NOT include CNG/LPG fuel tanks, lines, etc. Vehicle will be equipped with the standard factory gasoline fuel system. Additional equipment combined with a Certified calibration reflash is required, from an external upfitter, to convert the vehicle to a CNG/LPG fueled vehicle.</i>	O
	Radiator - Aluminum w/ in-tank transmission cooler, PremAir® ozone converter	S
916	Speed Limiter - 65 mph	O
917	Speed Limiter - 70 mph	O
	06 - TRANSMISSION	
44P	Ford 6-Speed TorqShift® HD Automatic - Double overdrive, less PTO provision (RNDM)	S
41B	Transmission Power Takeoff Provision	O
	07 - EXHAUST	
91H	Exhaust System - Single horizontal muffler, catalytic converter, frame-mounted, right-hand, back of cab, downward facing, outlet tip	S
	08 - ELECTRICAL - ALTERNATOR - BATTERY	
	ALTERNATOR (12-VOLT)	
	Alternator - Extra heavy-duty 12-volt, 175-amp., Mitsubishi	S
17E	Alternator - Extra/Extra heavy duty 12-volt, 240-amp. (N/A with 57L, Air Conditioner Delete)	O
55M	Jump Start Stud - Remote mounted	O
	BATTERY, 12-VOLT (INCLUDES STEEL BATTERY BOX)	
	Motorcraft® - Single, 900 CCA	S
63B	Motorcraft® - Two, 900 CCA (1800 CCA Total)	O
	Emergency Flasher	S
	Fuses, SAE , Blade type	S
	Aero Headlamps - High series, includes side marker lights with reflectors (front)	S
163	Lights - Roof Marker/Clearance - Amber lenses, 5 lights	S
164	Roof Marker/Clearance Lights - Clear lenses, 5 lights	O
16X	Roof Marker/Clearance Lights Delete - For airport or applications that receive modified roof coverings	O
	Taillamps - Two w/ integral stop, turn, backup and license plate bracket	S
55X	Tail Lights Delete - Deletes stop, turn, tail and backup lights (does not omit cable to end of frame)	O
	Turn Signal Switch, Self Canceling - Multifunction switch with windshield wiper (1-7 variable speed, hi, low), windshield washer, L/R turn signal; self cancel, L/R lane change, hazard, flash-to-pass, high beam	S
	Body Builder Wiring - At Back of Cab (includes sealed connectors for 2 ground circuits, with Combined left/stop, Combined right/stop, stop lamps, park lamps, backup lamps) (also includes 2 additional pass through wires to cab) Not Available with (154) Hydraulic Brake Trailer Connection	S

2019 F-750 SUPER DUTY (GAS STRAIGHT FRAME) OPTIONAL EQUIPMENT



Order Code	COMPONENT DESCRIPTION	PEP Code: 600A
	BATTERY, 12-VOLT (INCLUDES STEEL BATTERY BOX) (Continued)	
59C	Body Builder Wiring - At End of Frame (includes sealed connectors for 2 ground circuits, with Combined left/stop, Combined right/stop, stop lamps, backup lamps) (also includes 2 additional pass through wires to cab) Not Available with (19B) Beverage Package, Not Available with (154) Hydraulic Brake Trailer Connection	O
59D	Body Builder Wiring - At Back of Cab (includes sealed connectors for 2 ground circuits, with Seperate left/stop, Seperate right/stop, stop lamps, backup lamps) (also includes 2 additional pass through wires to cab) Not Available with (19B) Beverage Package, Not Available with (152) Hydraulic Brake Trailer Connection	O
59E	Body Builder Wiring - At End of Frame (includes sealed connectors for 2 ground circuits, with Seperate left/stop, Seperate right/stop, stop lamps, backup lamps) (also includes 2 additional pass through wires to cab) Not Available with (19B) Beverage Package, Not Available with (152) Hydraulic Brake Trailer Connection	O
17M	Back-up Alarm - Electric, 102 dBA (NA w/Taillights Delete, Code 55X)	O
962	Daytime Running Lamps	O
	09 - FUEL TANKS (For Clean CA installations with other cabs refer to the Body Builders site)	
65A	Fuel Tank, 50-U.S. Gallon - Single, left-hand, steel (Regular Cab and SuperCab only)	S
65D	Fuel Tank, 60-U.S. Gallon - Single, left-hand, steel (Standard on Crew Cab)	O
	10 - SEATS Seats are color-coordinated to cab trim level. All seats include seat belts. Rear seats of SuperCab or Crew Cab must be selected from this same grouping. Seat Delete options are available at the end of this list.	
88A	30/0/30 - Fixed driver and fixed passenger with consolette - vinyl	S
88B	30/0/30 - Fixed driver and fixed passenger with consolette - cloth	O
881	30/70 - Fixed driver and fixed 2-passenger bench - vinyl	O
882	30/70 - Fixed driver and fixed 2-passenger bench - cloth	O
88C	30/0/0 - Fixed driver only - vinyl	O
88D	30/0/0 - Fixed driver only - cloth	O
88R	30/0/30 - Air ride driver (integral air pump) and fixed passenger with consolette - vinyl (NA with SuperCab; NA with Air Ride, Air Brakes or Compressor 62G)	O
88S	30/0/30 - Air ride driver (integral air pump) and fixed passenger with consolette - cloth (NA with SuperCab; NA with Air Ride, Air Brakes or Compressor 62G)	O
88L	30/70 - Air ride driver (integral air pump) and fixed 2-passenger bench - vinyl (NA with SuperCab; NA with Air Ride, Air Brakes or Compressor 62G)	O
88M	30/70 - Air ride driver (integral air pump) and fixed 2-passenger bench - cloth (NA with SuperCab; NA with Air Ride, Air Brakes or Compressor 62G)	O
88J	30/0/30 - Air ride driver (integral air pump) and air ride passenger (integral air pump) with consolette - vinyl (NA with SuperCab; NA with Air Ride, Air Brakes or Compressor 62G)	O
88K	30/0/30 - Air ride driver (integral air pump) and air ride passenger (integral air pump) with consolette - cloth (NA with SuperCab; NA with Air Ride, Air Brakes or Compressor 62G)	O
88W	30/0/0 - Air ride driver only (integral air pump) - vinyl (NA with SuperCab; NA with Air Ride, Air Brakes or Compressor 62G)	O
88X	30/0/0 - Air ride driver only (integral air pump) - cloth (NA with SuperCab; NA with Air Ride, Air Brakes or Compressor 62G)	O
88Y	40/20/40 - Fixed driver and fixed passenger with unique 20% fold-down console - vinyl	O
88Z	40/20/40 - Fixed driver and fixed passenger with unique 20% fold-down console - cloth	O
	SUPERCAB - REAR SEAT	
87B	60/40 - Rear bench seat with bolster and flip-up cushion - trim will match selected driver seat material	S
87X	Rear Seat Delete	O
	CREW CAB - REAR SEAT	
87C	60/40 - Rear bench seat with flip-up cushion and fold-down back - trim will match selected driver seat material	S
87X	Rear Seat Delete	O

2019 F-750 SUPER DUTY (GAS STRAIGHT FRAME) OPTIONAL EQUIPMENT



Order Code	COMPONENT DESCRIPTION	PEP Code: 600A
	11 - CAB EQUIPMENT	
	Regular Cab, SuperCab or Crew Cab - Ford conventional, steel	S/O
	INTERIOR APPEARANCE GROUP	
90A	Appearance Group - Front-mounted overhead console with dual sunglass bins and integral front map reading lights, door trim panel, chrome air registers, second-row bench seat (Crew Cab) or two-row high series flip-up seats with cushion and bolster (SuperCab). Includes Power Equipment Group (90P)	O
90P	Power Equipment Group - Power front side windows, power rear side windows (Crew Cab) power door locks and door trim panel. Includes manual rear side windows with SuperCab. Included in Appearance Group (90A)	O/I
	EXTERIOR FEATURES	
90E	Exterior Appearance Group - Includes full-width chrome-plated front bumper (765), chromed fender badge and chrome grille surround (86C)	O
85A	Anti-Theft System	O
	Front End Tilting Fiberglass Hood and Fenders Assembly - Frame-mounted, torsion bar assist (including integral noise and inner splash shields and mud flaps)	S
	Glass - Laminated windshield	S
	Glass - Solar tint Complete	S
86A	Painted Grille - Plastic	S
86C	Grille - Chrome surround	O/I
86B	Grille, Fixed - Black/grey	O
	Horn, Electric - Dual	S
54H	Mirrors - Dual Rectangular XL2020 Integral Spot Mirror Sail type, 96" width, manual fold, solid black finish	S
54M	Mirrors, Heated - Dual Rectangular XL2020 Integral Spot Mirror Sail type, 96" width, manual fold, solid black finish	O
54P	Mirrors - Dual Rectangular XL2020 With Integral Spot Mirror Sail type, 96" width, heated and motorized, solid black finish (requires Power Equipment Group, 90P)	O
54B	Mirrors - Dual Rectangular XL2020 Integral Spot Mirror Sail type, 96" width, manual fold, chrome cap	O
54N	Mirrors, Heated - Dual Rectangular XL2020 Integral Spot Mirror Sail type, 96" width, manual fold, chrome cap	O
54A	Mirrors - Dual Rectangular XL2020 With Integral Spot Mirror Sail type, 96" width, heated and motorized, chrome cap (requires Power Equipment Group, 90P)	O
54J	Mirrors - Dual Rectangular XL2020 Integral Spot Mirror Sail type, 102" width, manual fold, solid black finish	O
54C	Mirrors, Heated - Dual Rectangular XL2020 Integral Spot Mirror Sail type, 102" width, manual fold, solid black finish	O
54R	Mirrors - Dual Rectangular XL2020 With Integral Spot Mirror Sail type, 102" width, heated and motorized, solid black finish (requires Power Equipment Group, 90P)	O
54D	Mirrors - Dual Rectangular XL2020 Integral Spot Mirror Sail type, 102" width, manual fold, chrome cap	O
54E	Mirrors, Heated - Dual Rectangular XL2020 Integral Spot Mirror Sail type, 102" width, manual fold, chrome cap	O
54K	Mirrors - Dual Rectangular XL2020 With Integral Spot Mirror Sail type, 102" width, heated and motorized, chrome cap (requires Power Equipment Group, 90P)	O
54F	Mirrors, Trailer Tow, Powered - Power telescoping, power folding w/ power heated glass, heated convex spotter and integrated clearance lights / turn signals (sail mount) (requires Power Equipment Group, 90P) (heat controls dash mounted)	O
63F	Mirrors - Front Fender Mounted - (2) Driver Side and Passenger Side - (Late Availability)	O
63G	Mirror - Front Fender Mounted - (1) Passenger Side Only (Late Availability)	O
165	Mud Flaps Holder w/o Flaps	O
166	Mud Flap Holder with Flaps	O
	Window, Rear - Fixed	S
92S	Window, Rear - Sliding	O
	Windshield Wiper - Intermittent variable w/ windshield washers	S

2019 F-750 SUPER DUTY (GAS STRAIGHT FRAME) OPTIONAL EQUIPMENT



Order Code	COMPONENT DESCRIPTION	PEP Code: 600A
	INTERIOR FEATURES	
572	Air Conditioning, Manual - Includes integral heater and defroster; radiator-mounted compressor; R-134A refrigerant	S
57N	Air Conditioning, Delete - Fresh air heater and defroster only (NA with heated or motorized mirrors)	O
	Air Registers - Molded-in-color with positive shut-off, color-coordinated trim	S
	Air Registers - With positive shut-off, chrome-trimmed, included in Appearance Group	I
	ASSIST HANDLE	
	Interior A Pillars - Driver and passenger; all cabs	S
	Interior B Pillars - Grab handle, driver and passenger; Crew Cab only	S
	Auxiliary Power Point - In instrument panel (2)	S
59F	4 Body Builder Switches - Mounted in center instrument panel with connector access located in engine compartment; amperages vary by switch: 10, 15, 25, 25	O
	Back Panel Trim Cover	S
	Cruise Control - Steering wheel-mounted controls	S
96C	Cup Holder - Instrument Panel Mounted, Pull out Cup Holder for two cups (N/A with (55P) 110 A/C Outlet)	O
	Demisters - LH & RH side windows	S
	Dome Lamp - Rear-mounted with integral map reading lights. (Regular and Crew Cab only)	S
	Overhead Console - Front-mounted with dual sunglass bins and integral front map reading lights (all cabs, included in Appearance Group)	I
90C	Fleet Telematics Modem - For Data Communication (Late Availability)	O
	Gauge Cluster, English - With English electronic speedometer (MPH/KPH) includes oil pressure, coolant temperature, DEF gauge, fuel gauge, tachometer and indicator lights. Also includes enhanced 3-button Message Center with odometer, trip odometer, distance-to-empty for fuel, average fuel economy hour meter and warning messages. Trans Temp in message center	S
92C	CNG/LNG Gauge Cluster - Eliminates confusing settings from gauge cluster, due to new fuel tanks being used. (Specifically <i>Distance to Empty for Fuel</i> , and <i>Average Fuel Economy</i>) Requires (98G) CNG/LPG Gaseous FuelPrep Pack.	O
16V	Volt Meter - Available in Message Center	O
55P	110 A/C Outlet - In lower center finish panel (requires 59F 4 Body Builders Switches)	O
	Glove Box	S
	Instrument Panel - Color-coordinated with color-coordinated accents	S
58P	Radio Prep Package - Deletes radio and dash-mounted auxiliary input jack. Includes radio/speaker wiring, 2 speakers, antenna, radio instrument panel cover and dash-mounted auxiliary audio input jack instrument panel cover	O
58B	Radio Delete Package - Deletes radio, speakers, antenna and antenna cable. Includes radio instrument panel cover and auxiliary audio jack cover and speaker locations for future radio upfit if owner desires	O
588	Radio AM/FM Stereo - With 2 speakers, includes auxiliary audio input jack and clock	S
586	Radio, Electronic Premium AM/FM Stereo, Disc - With 4 speakers, dash-mounted auxiliary audio input jack and clock and redundant steering wheel audio controls	O
21D	SYNC® Media System - Includes dash-mounted USB 2.0 port and redundant steering wheel SYNC® controls.	O
85B	Keyed Alike - NA with Anti-Theft System (85A); requires multiple-unit order (NA with 85K)	O
85L	Keyed Alike - Option #1 NA with Anti-Theft System (85A); requires multiple-unit order (NA with 85K)	O
85M	Keyed Alike - Option #2 NA with Anti-Theft System (85A); requires multiple-unit order (NA with 85K)	O
85N	Keyed Alike - Option #3 NA with Anti-Theft System (85A); requires multiple-unit order (NA with 85K)	O
85P	Keyed Alike - Option #4 NA with Anti-Theft System (85A); requires multiple-unit order (NA with 85K)	O
85K	Remote Keyless Entry - Requires Power Equipment Group 90P, includes two key fobs also requires 85A Anti-Theft System.	O

2019 F-750 SUPER DUTY (GAS STRAIGHT FRAME) OPTIONAL EQUIPMENT



Order Code	COMPONENT DESCRIPTION	PEP Code: 600A
	SAFETY BELTS	
	Includes fixed D-rings (Regular Cab)	S
	Includes adjustable D-rings (SuperCab or Crew Cab)	S
	Steering Wheel, Tilt with Cruise Controls - Black PVC	S
	Sunvisor, Single Driver - Vinyl	S
	Sunvisor, Single Passenger - Vinyl with mirror	S
90M	Interior Rear View Mirror	O
94A	Timer - Engine idle shutdown, 5 minutes	O
94B	Timer - Engine idle shutdown, 10 minutes	O
94C	Timer - Engine idle shutdown, 15 minutes	O
94D	Timer - Engine idle shutdown, 20 minutes	O
	12 - FRONT WHEELS - TIRES Order codes of optional tires are listed in the Tire tab.	
	WHEELS, FRONT (HUB PILOT MOUNT)	
643	22.5x8.25, white powder-coated steel, 10-hole	S
644	22.5x8.25, polished aluminum, 10-hole. (Available until Added Stater Launch)	O
64H	22.5" X 8.25" Aluminum wheels, 10-hole Alcoa® Bright Polished both sides w/Dura-Bright® seal (feature available at added starter launch)	O
649	22.5x8.25, Black Wheel (Requires 669)	O
TCG	11R22.5G (14PR) Goodyear® Endurance RSA	S
	13 - REAR WHEELS - TIRES Order codes of optional tires are listed in the Tire tab.	
	WHEELS, REAR (HUB PILOT MOUNT)	
663	22.5x8.25, white powder-coated steel, 10-hole	S
664	22.5x8.25, polished aluminum, 10-hole - outer surface of outer wheel only; inner wheel is white powder-coated steel. Requires 644. (Available until Added Stater Launch)	O
66H	22.5" X 8.25" Aluminum wheels, 10-hole Alcoa® Bright Polished both sides w/Dura-Bright® seal. Inner wheel is white powder-coated steel. Requires 64H. (Feature available at added starter launch)	O
669	22.5x8.25, Black Wheel (Requires 649)	O
RCG	11R22.5G (14PR) Goodyear® Endurance RSA	S
	13A - SPARE WHEEL - One Only	
60Z	22.5x8.25, white powder-coated steel, 10-hole Not Available with 649/669 Black Wheels	O

2019 F-750 SUPER DUTY (GAS STRAIGHT FRAME) OPTIONAL EQUIPMENT



Order Code	COMPONENT DESCRIPTION	PEP Code: 600A
	14 - PAINT	
	Body Color Available - Agate Black (UM), Oxford White (YZ), Ingot Silver (UX), Magnetic (J7), Race Red (PQ), Blue Jeans (N1), Green Gem (W6), Tangier Orange (J8), Bold Yellow (LE), School Bus Yellow (B1), Stone Gray (D1)	O
	Chassis Color - Black	S
	Paint Type - Environmentally friendly, "3-wet system"	S
	15 - MISCELLANEOUS	
19B	Beverage Delivery Package - Contains Body Builder Wiring - At Back of Cab at frame (includes sealed connectors for 2 ground circuits, with combined left/stop, combined right/stop, stop lamps, park lamps, backup lamps) (also includes 2 additional pass through wires to cab). With 6 feet additional length to accommodate drop frame beverage body	O
21A	Pre-Delivery Inspection - Selection requires that you also choose either (314) or (31F) or (31V) to have the Pre-Delivery Inspection performed	O
314	Ship-Thru: Manning <u>MAY</u> be selected w/o adding (21A.) For MODIFICATIONS ONLY , Dealer must make arrangements directly with Manning (please use CVT Resources for add. Info).	O
31F	Ship-Thru: NFS National Fleet Services <u>MAY</u> be selected w/o adding (21A.) For MODIFICATIONS ONLY , Dealer must make arrangements directly with NFS (please use CVT Resources for add. Info).	O
31V	Ship-Thru: Fontaine Vocational Services for Tractors <u>MAY</u> be selected w/o adding (21A.) For MODIFICATIONS ONLY , Dealer must make arrangements directly with Fontaine (please use CVT Resources for add. Info).(If 21A Pre-Delivery Inspection is also selected it will be performed by NFS)	O
79V	Send a paper Certificate of Origin for a Vehicle (COV) for those states that file electronically (CA or MI)	O



2019 F-750 SUPER DUTY (GAS STRAIGHT FRAME) TIRES

Order Code		Description			Rev/Mile
Front	Rear				
OPTIONAL TIRES for 22.5" Wheel Configuration					
		Tubeless Radial Tires (Allowable Mixed Plys Noted)		Ply Rating	
		11R22.5G (14PR)			--
TCG	RCG	GDYR Endurance RSA		14	496
--	RCA	Goodyear® G182		14	496
--	RCF	GDYR Endurance RSA		16	497
--	RCE*	Goodyear® G182*		16	497
TC1	RC1	Michelin XZE2		14	496
	RMA	Michelin X Multi D		14	496
--	RC3*	Michelin XZE2*		16	497
	RMB*	Michelin X Multi D		16	494
		11R22.5H (16PR)			--
TCF	RCF	GDYR Endurance RSA		16	497
--	RCE	Goodyear® G182		16	497
--	RCG	GDYR Endurance RSA		14	496
--	RCA**	Goodyear® G182**		14	496
TC3	RC3	Michelin XZE2		16	497
	RMB	Michelin X Multi D		16	494
--	RC1**	Michelin XZE2**		14	496
	RMA**	Michelin X Multi D		14	496
		255/70R22.5H (16PR)†			--
TCH	RCH	GDYR Endurance RSA		16	564
--	RHB	Goodyear® G622 RSD		16	564
		275/80R22.5G (14PR)‡			--
TJF	RJF	Michelin XZE2		14	510
--	RN5	Michelin XDA5		14	510
		275/80R22.5H (16PR)			--
TFA	RFA	Hankook AH22		16	509
--	RFB	Hankook DH15		16	509
		295/75R22.5H (16PR)			--
TRA	RRA	Continental HA3 ^{##}		16	514
	RRC	Continental HDR2		16	509
		295/80R22.5H (16PR)	(Tire Size)		--
TDG	RDG	Continental HSR2 ^{##}		16	501
--	RCE	Goodyear® G182 RSD	11R22.5	16	497
	RMB	Michelin X Multi D	11R22.5	16	494
--	RCB**	Continental HDR2**	11R22.5	14	496
--	RCA**	Goodyear® G182 RSD**	11R22.5	14	496
	RMA**	Michelin X Multi D	11R22.5	14	496

**Late Availability

* 16 Ply

^{###} Requires 643, 644 Front Wheels and 663, 664 Rear Wheels

** 14 Ply



2019 F-750 SUPER DUTY (GAS STRAIGHT FRAME) AXLE RATIOS

Manufacturer:		Dana / Spicer
Model:		21060S
Capacity (lbs.):		21,000
Differential:		Open
Drive Gear:		Hypoid
Order Code:		475
F750 Dock Height Gas		Std.
6.17	X6B*	X-6.17
6.50	X6D	X-6.50
7.17	X7A*	X-7.17

* Only Available with 255/70R/22.5" Tires

* Not available with 255/70R/22.5" Tires


**2019 F-750 SUPER DUTY
CAB-WHEELBASE-DIMENSIONAL DATA
GAS REGULAR CAB - Straight Frame**



Model Code: F7A

PEP Code: 600A

Std. GVWR	31,000 lbs.
Max. GVWR	33,000 lbs.

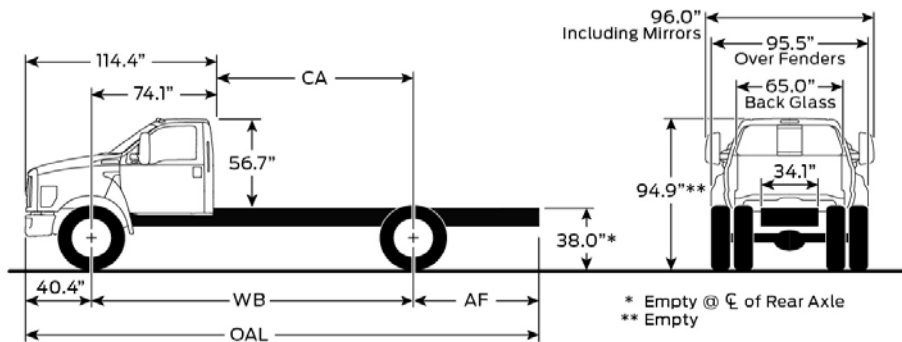

Wheelbase (in.)	Chassis Weights (lbs.)*			Dimensions (in.)			Turning Radius	
	Front	Rear	Total	CA	AF	OAL	To Curb	W/Bumper Clearance
158	6082	3666	9748	84	49	246	21 ft. 11 in.	23 ft. 7 in.
176	6151	3739	9891	102	70	285	24 ft. 2 in.	25 ft. 9 in.
182	6162	3750	9912	108	70	291	24 ft. 10 in.	26 ft. 6 in.
194	6191	3780	9971	120	75	308	26 ft. 4 in.	27 ft. 11 in.
200	6207	3799	10006	126	75	314	27 ft. 0 in.	28 ft. 8 in.
212	6237	3829	10064	138	81	332	28 ft. 1 in.	29 ft. 9 in.
218	6254	3850	10104	144	81	338	28 ft. 10 in.	30 ft. 6 in.
224	6284	3880	10165	150	87	350	29 ft. 7 in.	31 ft. 2 in.
230	6294	3891	10186	156	87	356	30 ft. 3 in.	31 ft. 11 in.
242	6340	3940	10281	168	100	381	31 ft. 8 in.	33 ft. 4 in.
260	6400	3999	10397	186	120	419	33 ft. 10 in.	35 ft. 6 in.
281 ^	6647	4263	10911	207	120	440	36 ft. 4 in.	38 ft. 0 in.

^ Available with Frames (538) or (539); also Available with Frame (536) + Frame Reinforcement (41R)


**2019 F-750 SUPER DUTY
GAS REGULAR CAB
FRAMES
F7A**



FRAME RAIL SPECIFICATIONS

	CODE	Side Rail			YIELD STRENGTH Min.(psi)	SECTION MODULUS (inches ³)		RESISTING BENDING MOMENT (In.-Lbs.)	
		DIMENSIONS (Inches)				Nominal	Maximum	Nominal	Maximum
		Depth	Width	Thickness					
S	535	Straight Channel Side Rail			80,000	15.14	15.94	1,211,200	1,275,200
		10.250	3.092	0.375					
O	536	Straight Channel Side Rail			120,000	14.18	14.84	1,701,600	1,780,800
		10.125	3.58	0.312					
O	538	Straight Channel Side Rail			120,000	16.98	17.79	2,037,600	2,134,800
		10.25	3.61	0.375					
O	539	Straight Channel Side Rail			120,000	20.11	21.05	2,413,200	2,526,000
		10.375	3.705	0.438					
O	41R	Straight Channel Side Rail - Outer "C" Channel Reinforcement and Base Frame Rail			120,000	29.84	29.84	3,580,800	3,580,800
		10.813	3.892	0.312					

FRAME RAIL CROSS SECTION

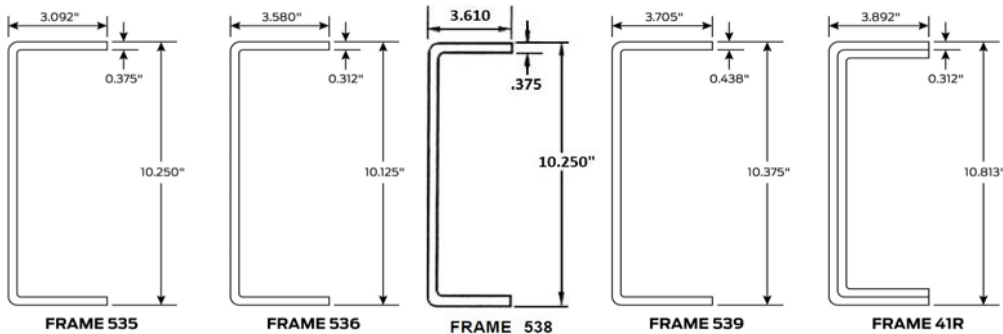


**2019 F-750 SUPER DUTY
CAB-WHEELBASE-DIMENSIONAL DATA
GAS SUPERCAB - Straight Frame**



Model Code: X7A

PEP Code: 600A

Std. GVWR	31,000 lbs.
Max. GVWR	33,000 lbs.

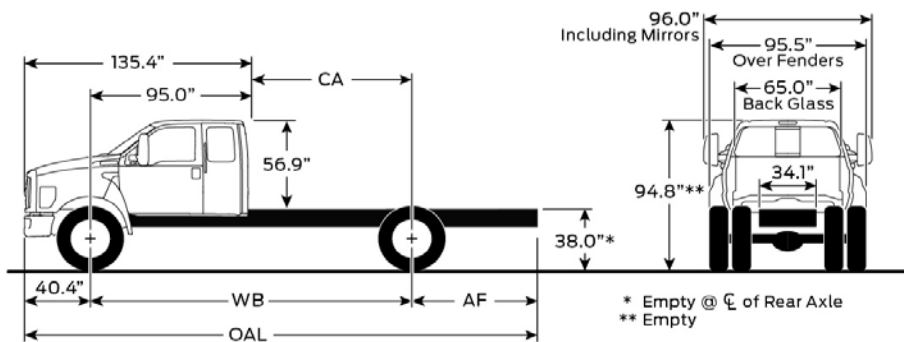

Wheelbase (in.)	Chassis Weights (lbs.)*			Dimensions (in.)			Turning Radius	
	Front	Rear	Total	CA	AF	OAL	To Curb	W/Bumper Clearance
179	6299	3741	10040	84	49	267	24 ft. 6 in.	26 ft. 1 in.
197	6363	3805	10167	102	70	306	26 ft. 8 in.	28 ft. 3 in.
203	6371	3813	10184	108	70	312	27 ft. 1 in.	28 ft. 8 in.
215	6402	3845	10246	120	75	329	28 ft. 6 in.	30 ft. 1 in.
221	6419	3866	10285	126	75	335	29 ft. 2 in.	30 ft. 10 in.
233	6449	3897	10345	138	81	353	30 ft. 8 in.	32 ft. 3 in.
239	6460	3908	10367	144	81	359	31 ft. 4 in.	33 ft. 0 in.
245	6496	3947	10444	150	87	371	32 ft. 1 in.	33 ft. 8 in.
251	6504	3954	10459	156	87	377	32 ft. 3 in.	34 ft. 5 in.
263	6541	3989	10529	168	100	402	34 ft. 3 in.	35 ft. 10 in.
281 ^	6785	4238	11023	186	120	440	36 ft. 4 in.	38 ft. 0 in.

^ Available with Frames (538) or (539); also Available with Frame (536) + Frame Reinforcement (41R)


**2019 F-750 SUPER DUTY
GAS SUPERCAB
FRAMES
X7A**



FRAME RAIL SPECIFICATIONS

	CODE	Side Rail			YIELD STRENGTH Min.(psi)	SECTION MODULUS (inches ³)		RESISTING BENDING MOMENT (In.-Lbs.)	
		DIMENSIONS (Inches)				Nominal	Maximum	Nominal	Maximum
		Depth	Width	Thickness					
S	535	Straight Channel Side Rail			80,000	15.14	15.94	1,211,200	1,275,200
		10.250	3.092	0.375					
O	536	Straight Channel Side Rail			120,000	14.18	14.84	1,701,600	1,780,800
		10.125	3.58	0.312					
O	538	Straight Channel Side Rail			120,000	16.98	17.79	2,037,600	2,134,800
		10.25	3.61	0.375					
O	539	Straight Channel Side Rail			120,000	20.11	21.05	2,413,200	2,526,000
		10.375	3.705	0.438					
O	41R	Straight Channel Side Rail - Outer "C" Channel Reinforcement and Base Frame Rail			120,000	29.84	29.84	3,580,800	3,580,800
		10.813	3.892	0.312					

FRAME RAIL CROSS SECTION

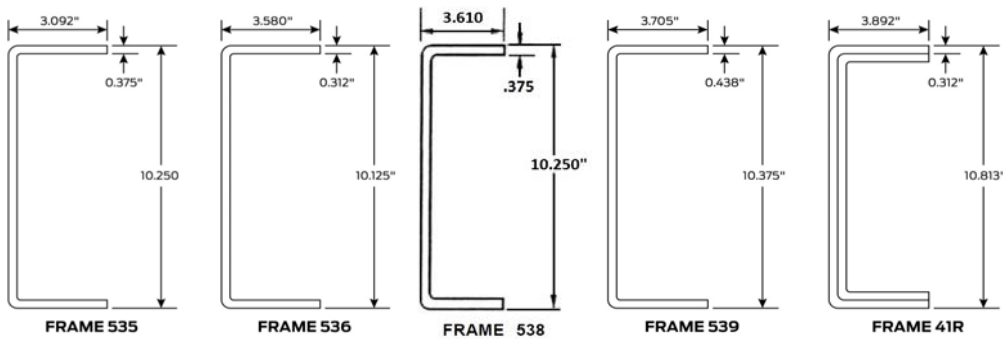


**2019 F-750 SUPER DUTY
CAB-WHEELBASE-DIMENSIONAL DATA
GAS CREW CAB - Straight Frame**



**Model Code: W7A
PEP Code: 600A**

Std. GVWR	31,000 lbs.
Max. GVWR	33,000 lbs.

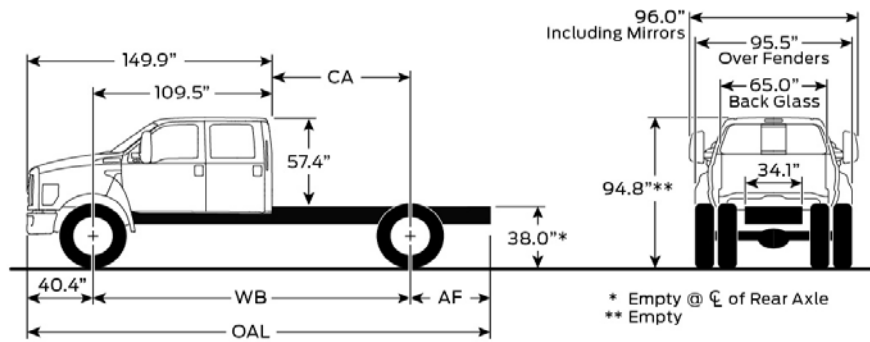

Wheelbase (in.)	Chassis Weights (lbs.)*			Dimensions (in.)			Turning Radius	
	Front	Rear	Total	CA	AF	OAL	To Curb	W/Bumper Clearance
182	6439	3745	10183	72	49	270	24 ft. 10 in.	26 ft. 6 in.
194	6475	3783	10257	84	49	282	26 ft. 4 in.	27 ft. 11 in.
212	6535	3843	10378	102	70	321	28 ft. 1 in.	29 ft. 9 in.
218	6552	3863	10414	108	70	327	28 ft. 10 in.	30 ft. 6 in.
230	6591	3908	10498	120	75	344	30 ft. 3 in.	31 ft. 11 in.
236	6602	3920	10521	126	75	350	31 ft. 0 in.	32 ft. 7 in.
248	6626	3941	10568	136	81	368	32 ft. 5 in.	34 ft. 1 in.
254	6638	3953	10590	144	81	374	33 ft. 2 in.	34 ft. 9 in.
260	6668	3985	10652	150	87	386	33 ft. 10 in.	35 ft. 6 in.
266	6678	3994	10672	156	87	392	34 ft. 7 in.	36 ft. 3 in.

**2019 F-750 SUPER DUTY
GAS CREW CAB
FRAMES
W7A**



FRAME RAIL SPECIFICATIONS

	CODE	Side Rail			YIELD STRENGTH Min.(psi)	SECTION MODULUS (inches ³)		RESISTING BENDING MOMENT (In.-Lbs.)	
		DIMENSIONS (Inches)				Nominal	Maximum	Nominal	Maximum
		Depth	Width	Thickness					
S	535	Straight Channel Side Rail			80,000	15.14	15.94	1,211,200	1,275,200
		10.250	3.092	0.375					
O	536	Straight Channel Side Rail			120,000	14.18	14.84	1,701,600	1,780,800
		10.125	3.58	0.312					
O	538	Straight Channel Side Rail			120,000	16.98	17.79	2,037,600	2,134,800
		10.25	3.61	0.375					
O	539	Straight Channel Side Rail			120,000	20.11	21.05	2,413,200	2,526,000
		10.375	3.705	0.438					
O	41R	Straight Channel Side Rail - Outer "C" Channel Reinforcement and Base Frame Rail			120,000	29.84	29.84	3,580,800	3,580,800
		10.813	3.892	0.312					

FRAME RAIL CROSS SECTION

