MINISTRY OF EDUCATION AND TRAINING
VIETNAMESE GERMAN UNIVERSITY

SOCIALIST REPUBLIC OF VIETNAM
Independence – Freedom - Happiness

APPLICATION FORM

Project Title (EN): A Library Robot - ALAR
Project Title (VN): Dự án Robot hỗ trợ thư viện - ALAR
Code (*given by the Dept of Research Management*):

Name (VN): (team leader)	Bùi Vũ Hoàng
Year of study: 2025	Current GPA: 2.4
Student ID: 10225014	Date of birth: 15/06/2007
Class/Program/Intake: ECE2025	Faculty: Faculty of Engineering
Phone: 0328408331	Email:10225014@student.vgu.edu.vn
Address:	Trường Đại học Việt Đức (VGU), Đường Vành Đai 4, Khu phố Thới An, Phường Thới Hòa,Thành Phố Hồ Chí Minh.
(*Repeat this part in case a group of students applies*)	

Name (VN):	Võ Minh Đăng
Year of study: 2025	Current GPA: 2.3
Student ID: 10225078	Date of birth: 11/08/2007

Class/Program/Intake: ECE2025	Faculty: Faculty of Engineering
Phone: 0889994605	Email:10225078@student.vgu.edu.vn
Address:	Trường Đại học Việt Đức (VGU), Đường Vành Đai 4, Khu phố Thới An, Phường Thới Hòa,Thành Phố Hồ Chí Minh.
(*Repeat this part in case a group of students applies*)	

Name (VN):	Tạ Hiếu Đông
Year of study: 2025	Current GPA: 2.0
Student ID: 11525020	Date of birth: 03/03/2007
Class/Program/Intake: MEC2025	Faculty: Faculty of Engineering
Phone:0939177891	Email:11525020@student.vgu.edu.vn
Address:	Trường Đại học Việt Đức (VGU), Đường Vành Đai 4, Khu phố Thới An, Phường Thới Hòa,Thành Phố Hồ Chí Minh.
(*Repeat this part in case a group of students applies*)	

Name (VN):	Trịnh Gia Bảo
Year of study: 2025	Current GPA: 2.4
Student ID: 10225014	Date of birth: 24/11/2007
Class/Program/Intake: MEC2025	Faculty: Faculty of Engineering

Phone:0376763007	Email:11525022@student.vgu
Address:	Trường Đại học Việt Đức (VGU), Đường Vành Đai 4, Khu phố Thới An, Phường Thới Hòa,Thành Phố Hồ Chí Minh.
(*Repeat this part in case a group of students applies*)	

Name (VN):	Trần Quốc Thống
Year of study: 2021	Current GPA: 2.9
Student ID: 10221047	Date of birth: 19/05/2003
Class/Program/Intake: ECE2021	Faculty: Faculty of Engineering
Phone:	Email: 10221047@student.vgu.edu.vn
Address:	Trường Đại học Việt Đức (VGU), Đường Vành Đai 4, Khu phố Thới An, Phường Thới Hòa,Thành Phố Hồ Chí Minh.
(*Repeat this part in case a group of students applies*)	

Supervisor 1 *(main supervisor, the account holder will receive funding from FAD):* Tran Quang Nhu
Department/Program: Electrical and Computer Engineering (ECE)
Faculty: Faculty of Engineering
Supervisor 2

DECLARATION AND COMMITMENT

1. Students are required to participate in person in the final inspection meeting and present their final project report to the Final Assessment Committee.
   For group projects:
   - Groups of 03 - 04 members: at least 02 members must attend the final inspection meeting in person.
   - Groups of 05 - 06 members: at least 03 members must attend the final inspection meeting in person.
   - Other members with valid reasons, such as exchange program, are encouraged to join the meeting online.

2. After the final inspection, students and supervisors must complete the financial settlement and contract liquidation procedures with the Research Management Department (RMD) and the Finance and Accounting Department (FAD) to close the project.

3. Students commit that the student research project does not overlap with any student's graduation thesis.

Student Commitment

Student's signature (To be signed by the team leader on behalf of the group)

Supervisor Confirmation

Supervisor's signature (To be signed by main supervisor)

I. ABSTRACT

Please provide a brief description of your proposed undergraduate research project, including a statement of the research problem, major hypotheses or questions posed in the research, the project's significance, and the methods used to examine the issue. Please include a statement of the theoretical and/or practical contributions and applications of your project.

We denote the initials as follows:

MC	Main Computer
CM	Microcontroller responsible for bot controls.
EM	Microcontroller responsible for the bot-side power system.
DP	Microcontroller responsible for the dock-side power system.

The transition towards smart campuses highlights the demand for autonomous service robot systems. For this study, we focus on an autonomous robotic system in a library setting, named ALAR, or A Library Assistant Robot, to handle repetitive tasks, such as book transportation and interacting with and assisting library users.


However, building such a robot system (including the robot itself and charging infrastructure) from the ground up poses a formidable engineering challenge for an undergraduate team. The primary research problem lies in the navigation algorithm, as well as in designing and integrating the electrical and hardware architecture. Safely operating and recharging a robot capable of navigating a dense, unpredictable environment requires a highly complex navigation, control, and power system. This complexity significantly elevates the risk of system failure, algorithm edge cases, power system short circuits, and so on. Compounding these technical hurdles are severe practical constraints, specifically the difficulty of sourcing specialized robotics components and the mechanical challenges of creating a compact, durable, and safe chassis with limited manufacturing resources.

This project poses the core question: *How can we engineer a safe, reliable hardware architecture for an autonomous robot system under budget, component limitations, and a dynamic environment such as a library?* We hypothesize that adopting a modular, decentralized system and an overkill power system design. The control system gives the system the ability to cross-check, provide redundancy, and communicate with each other in real time, and will be capable of shutting the most dangerous system down, creating a controlled failure environment. The power system design also follows the same philosophy of having human safety at the core; We aim to create a power system that can theoretically endure up to 500W of continuous DC


power and be safe in the extreme event of short circuits.

Methodology:

Hardware: The project employs a distributed control strategy. Our main control computer, denoted as MC, will handle computationally intensive tasks - such as SLAM (Simultaneous Localization and Mapping) and obstacle avoidance using cameras - while 2 microcontrollers (denoted CM and EM for control management and energy management, respectively) will ensure real-time, low-level motor and relay control, power system monitoring, and serve as the 2nd and 3rd layer to verify total system status. Another microcontroller, denoted DP, will monitor the dock power system, control charging protocols, safeguard the charging system, and continuously communicate with EM on the robot. The hardware build will undergo iterative testing to ensure navigation and electrical safety, as well as structural integrity.

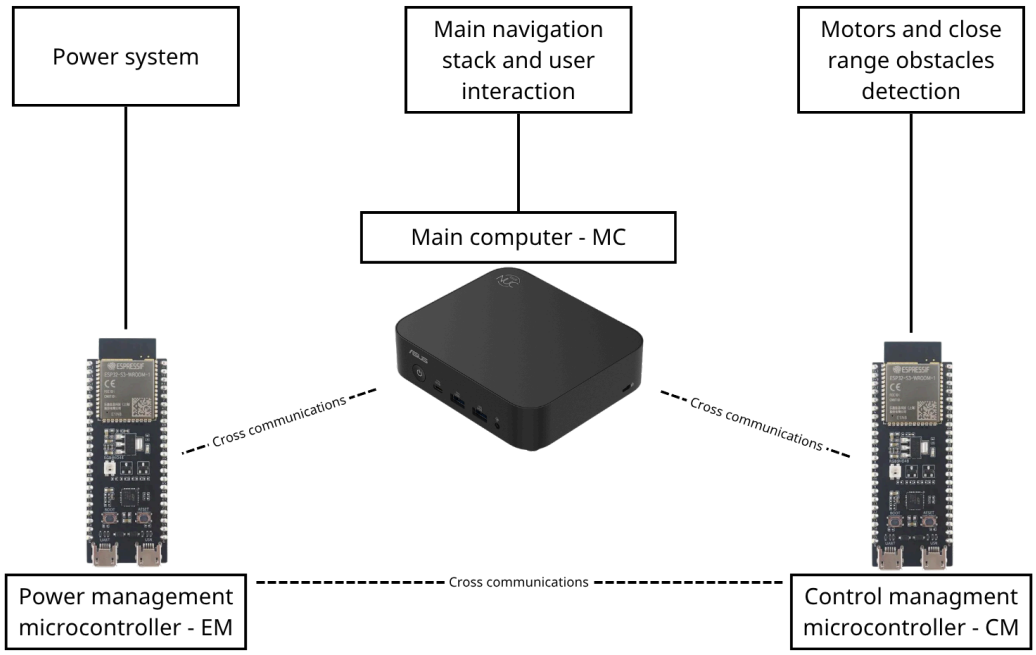

Bot side control system diagram

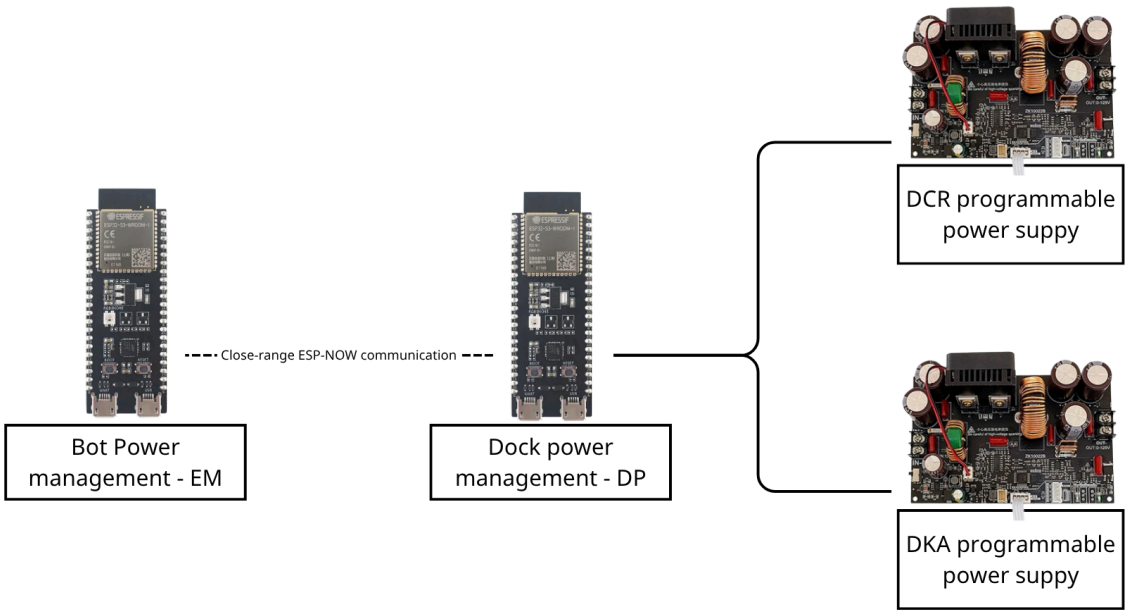

Dock side control system diagram

Software: The project utilizes ROS2, a Linux-based operating system for robotic applications, alongside dedicated ROS2 open-source add-ons and a mix of experimental navigation algorithms.

Ultimately, this project will deliver a fully functional prototype to further enhance library operations at VGU. Furthermore, its major theoretical and practical contribution is a validated, open-source-style engineering blueprint. This blueprint will demonstrate how to safely build high-power autonomous robots using accessible, off-the-shelf components, serving as a vital reference for future student researchers facing similar hardware bottlenecks.

Literature Review:

Recent advancements in campus automation emphasize the growing need in the development of various mobile robots for indoor services such as education and libraries [1]. The majority of the established solutions make use of ROS 2 middleware paired with LiDAR and visual SLAM to enable the dynamic localization and obstacle avoidance of the robot [2], [3]. In particular, the design of the distributed control architecture is gaining more and more traction in the robotics community as an alternative to a monolithic approach, which can introduce unacceptable delays in safety-critical systems [4]. Modern projects address both the high-level decision-making process implemented in ROS 2 on host computers and the low-level motor controllers and perception sensors [3]. The concept of autonomous docking is already well-established, with many current projects utilising visual markers or IR-based positioning [5]. However, the majority of the prior art only addresses the first part of the system, whereas a multi-stage power handshake and a redundant power supply to support high-current charging are

two relatively unexplored areas for much-needed budget-friendly mobile robots. The proposed ALAR project aims to tackle the problem by implementing a modular and fault-tolerant arrangement of the low-level microcontroller paired with a complex power circuit to ensure uninterrupted library operation.

References:

- [1] B. A. Croft and M. H. Smith, "Autonomous service robots in public and academic facilities: A review," *IEEE Transactions on Automation Science and Engineering*, vol. 18, no. 3, pp. 1120–1135, 2021.
- [2] S. Macenski et al., "Robot Operating System 2: Design, architecture, and uses in the wild," *Science Robotics*, vol. 7, no. 66, p. eabm6074, 2022.
- [3] J. Zhang and S. Singh, "LOAM: Lidar Odometry and Mapping in Real-time," in *Robotics: Science and Systems (RSS)*, 2014.
- [4] M. Quigley, "Distributed embedded control architectures for mobile service robotics," *Journal of Intelligent & Robotic Systems*, vol. 84, no. 2, pp. 145–158, 2016.
- [5] M. C. Silverman et al., "Autonomous docking for dynamic battery recharging of mobile robots," in *Proc. IEEE Int. Conf. Robot. Autom. (ICRA)*, 2002, pp. 1055–1060.
- [6] H. Park and K. Kim, "Fault-tolerant power management and dynamic charging protocols for indoor autonomous robots," *IEEE Access*, vol. 9, pp. 45210–45222, 2021.

II. DETAIL PROJECT PROPOSAL

Please describe your detail proposal below or submit it as a separate document.

Research questions:

This research focuses on the development of an autonomous library assistance robot system that can safely navigate the library environment, interact with and assist users, and maintain stable and electrically safe operation during continuous use. The scope of this research focuses on the development and evaluation of an autonomous library assistance robot for indoor library environments. The study covers autonomous navigation, obstacle avoidance, user interaction and assistance, as well as system stability and electrical safety. The robot's performance will be evaluated based on navigation speed, accuracy, obstacle avoidance, response time, operational stability, and user satisfaction.


Project Objectives:

Overall, it is an autonomous library assistance robot system that can safely navigate the library and effectively assist and interact with library users with minimal human intervention.


Develop a safe autonomous navigation system that allows the robot to move efficiently in different areas of the library while considering the presence and movement of users and user-assistance functions, such as guiding users to specific books, shelves, or areas within the library. Human detection and human–robot interaction so that the robot can recognize users, respond to their requests, and provide basic assistance.

Design:

The mechanical design is divided into two main sections: a rounded rectangular base (400mm x 400mm, filleted corners for safe operation around people). This lower section houses the battery, motors, close-range obstacle sensors, and power distribution board. Above it will be a cylindrical upper section with 1.1m height. The cylindrical upper section has a top cap to mount the LiDAR sensor, a user-interactable display, as well as navigation and user-interaction cameras. A rectangular gap in the middle of the chassis serves as a multi-purpose container. Two stepper motors drive two main wheels and two extra omni wheels for stability.

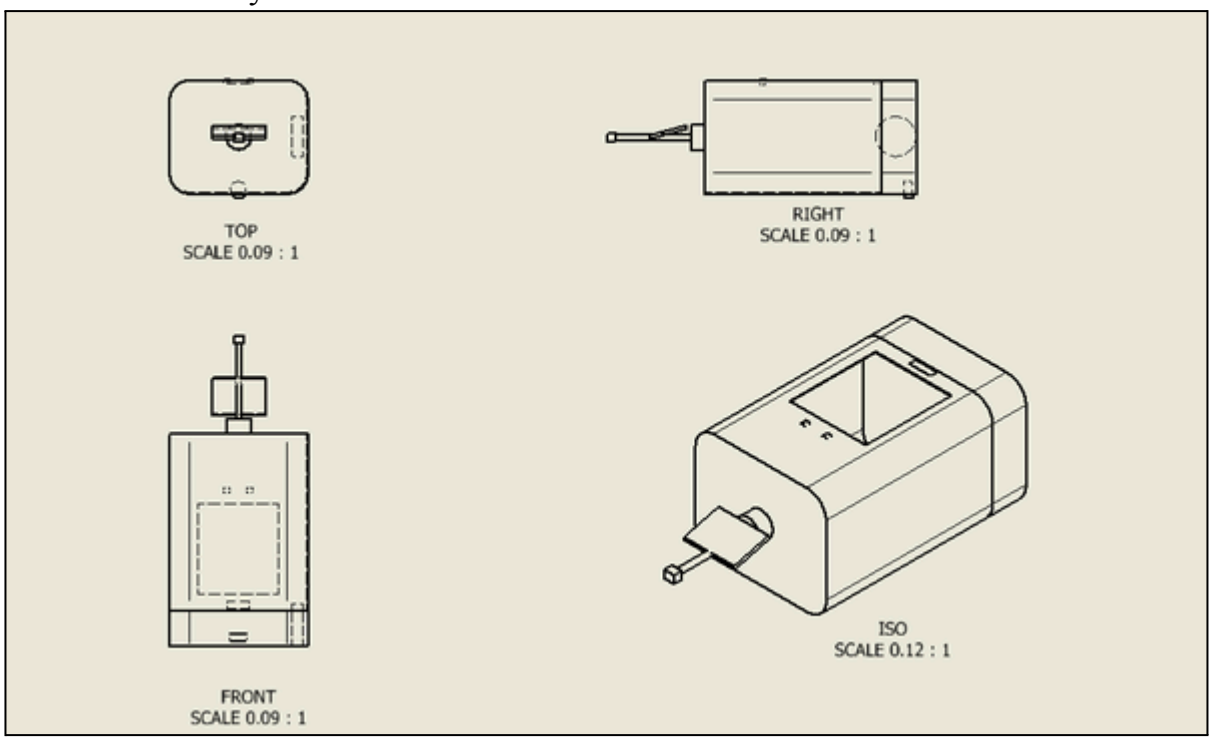

ALAR design mockup

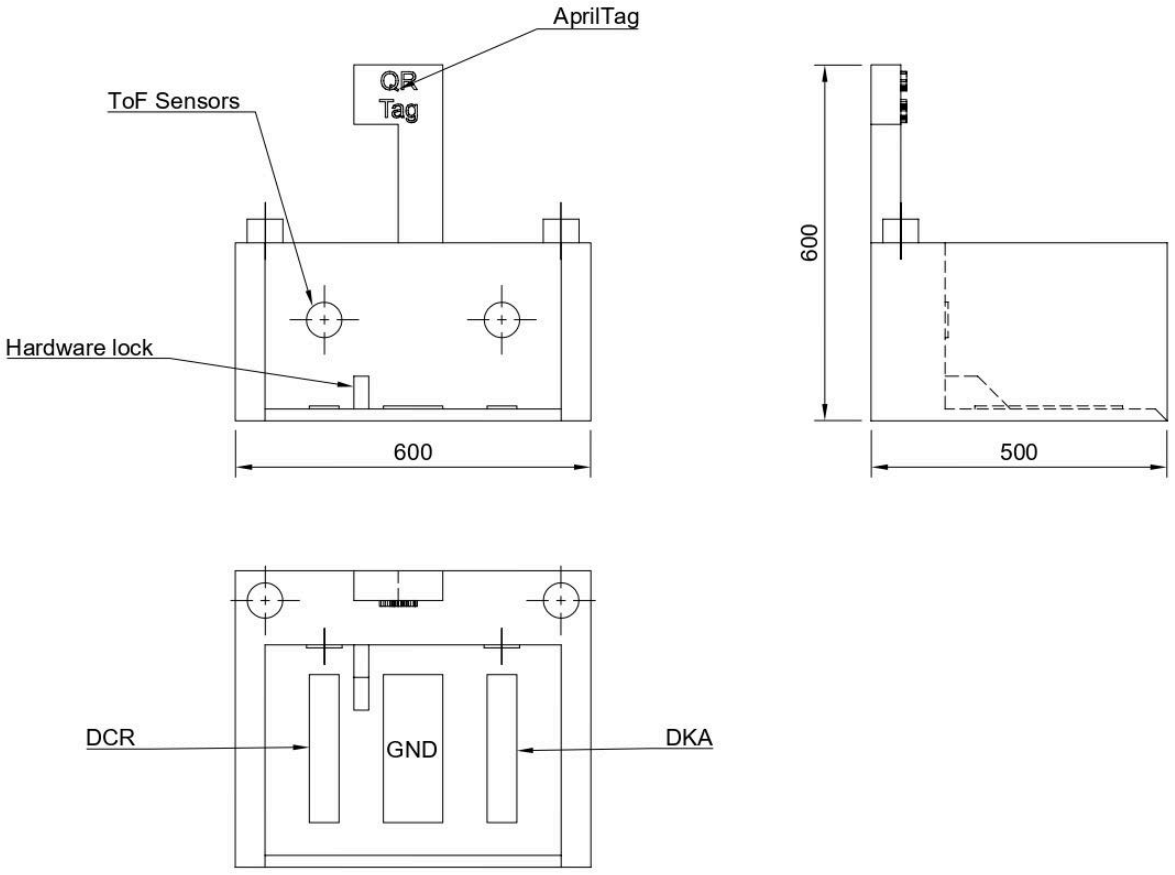

ALA's dock design

Power:


For the power section, we denote the initials as follows:

DKA	Dock side power rail to keep the entire system online while charging
DCR	Dock side charging rail
BBR	Bot side battery rail
BCR	Bot side charging rail
BKA	Bot side power rail connecting to DKA
BMR	Bot side main power rail


Source: The main power source consists of 3 LiFePO4 batteries rated at 15Ah, 3 in

parallel, resulting in a total of 45Ah, which translates to roughly 1.5 hours of continuous motor activity.

Dock: The dock consists of 2 main 24VDC rails converted from 220VAC: DKA rail and DCR rail; DKA is at 24VDC@16A, whose main purpose is to offload the robot main rail (BMR) away from the battery rail (BBR). The other rail, DCR, is set at 24VDC@15A and is used to charge the onboard batteries. The dock will use 3 copper rails that contact the corresponding 3 copper rails onboard, forming solid charging contacts. The layout is as follows: DKA on the outer right, GND in the middle, and DCR on the outer left, with 3cm spacing between them to help with electrical isolation. The charging protocol will follow a power ladder as follows: 5V@1A-12V@1A-24V@1A-24V@15A; designed to allow both DP and EM to cross-validate if the power rail order is correct and the voltage level is within a safety threshold of ±0.5V to ensure safe power recharging/handoff from the onboard. Disconnect BBR-BMR, connect DKA-BKA-BMR, cut BBR-BMR, and connect CR-BBR paths.

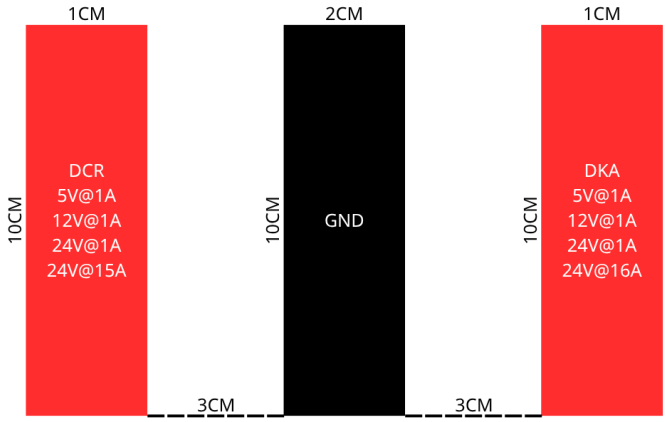

Dock's contact pad layout

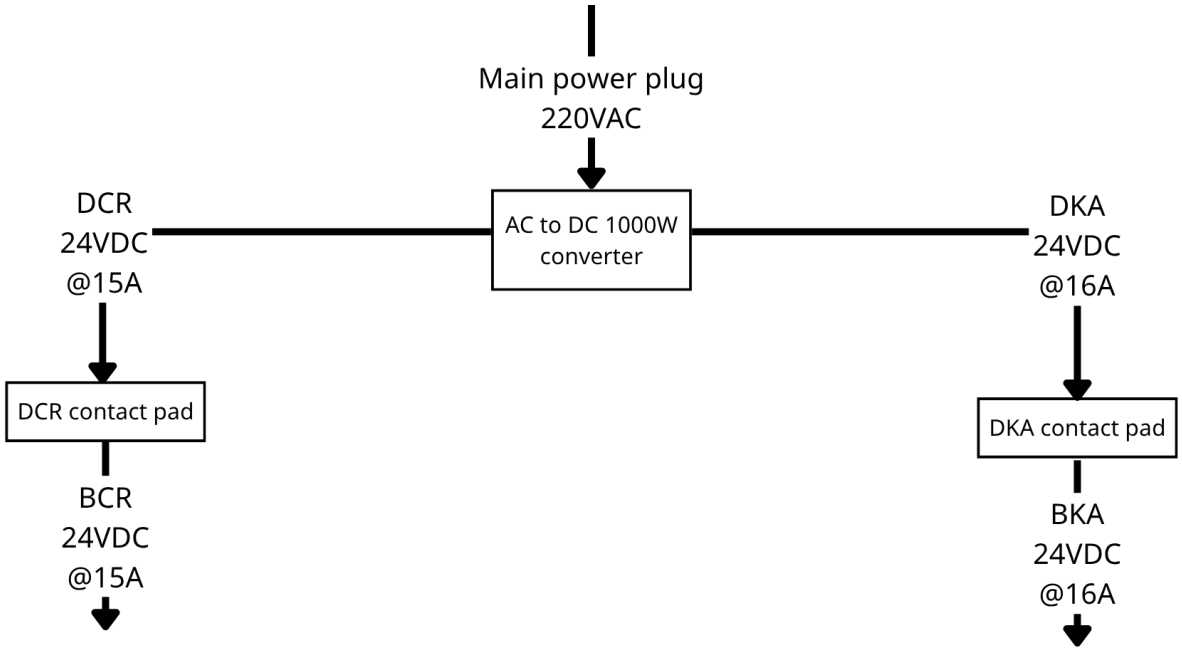


Basic layout of dock side power system

Robot:


- **Battery:** The battery pack will provide 12VDC nominal at 32A, which will then be boosted to 24VDC@16A for BMR. BMR will then transmit the power to 3 different buck converters, which will reduce the voltage again to the corresponding rails. We have 3 different sub-power rails, denoted as BMR_1, BMR_2, and BMR_3. BMR_1 is responsible for the logic relays, fan power, and power sensors, as well as EM. BMR_2 is responsible for CM and close-range sensors, and lighting. BMR_3 is responsible for MC, LiDAR, cameras, and the display. There will be power sensors, fuses, and 1 18650 battery as an emergency source; this will ensure the safety of the power system against short circuits. To protect against voltage surges, high-voltage capacitors and isolation boards are present across important intersections, as well as power monitoring sensors and temperature sensors on each vital line connecting to EM. To protect against EM malfunctions, MC and CM can turn the relay on BBR - BMR off independently
- **Charging:** the battery pack is a combination of 3 separate LiFePO4 battery packs that all need 14.6V to fully charge. The charge rail CR is capable of 24VDC@15A, steps down to 14.6V to charge the battery, and the charge current will be 24A total, which calculates to be around 8A per pack, which leads to a theoretical full charge time of 2 hours from 0%. To ensure maximum safety as well as efficiency during

the charging phase, the use of a separate keep-alive rail KA is ideal; it will offload the battery to keep the vital systems online, able to charge at the highest speed possible, and, at the same time, protect the other components in case of a battery failure.

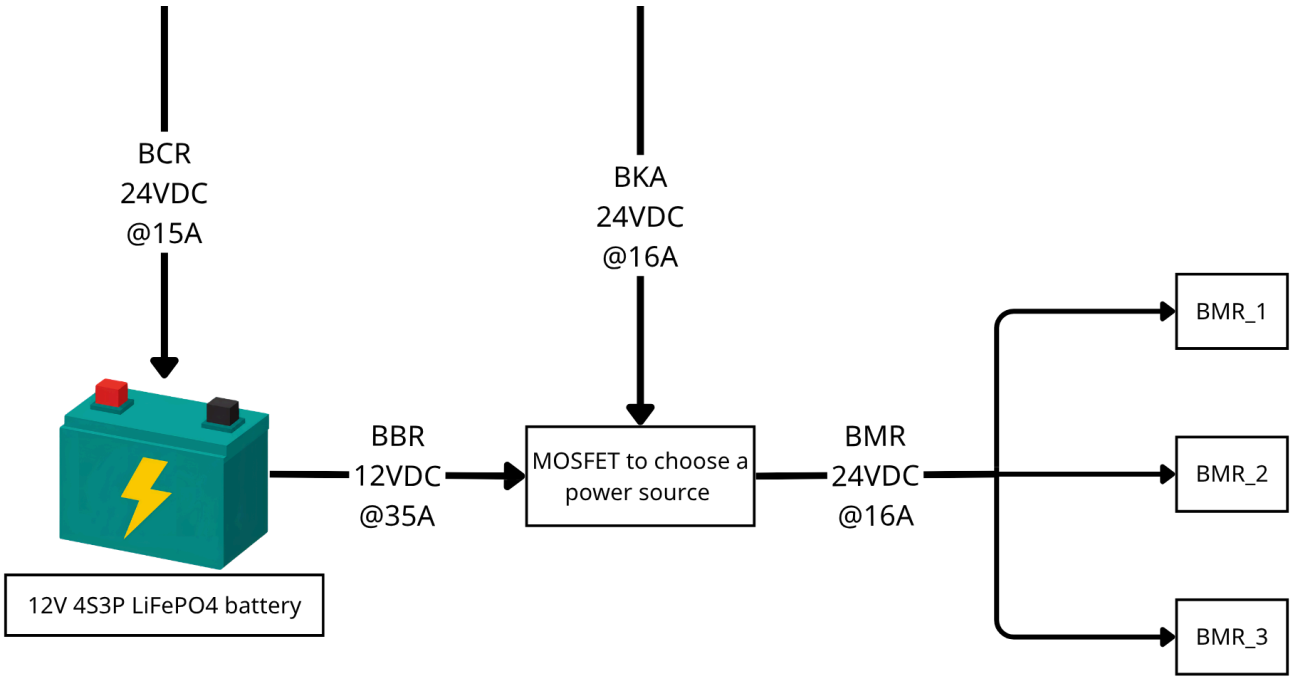


Basic layout of bot side power system

The power connection sequence is as follows:

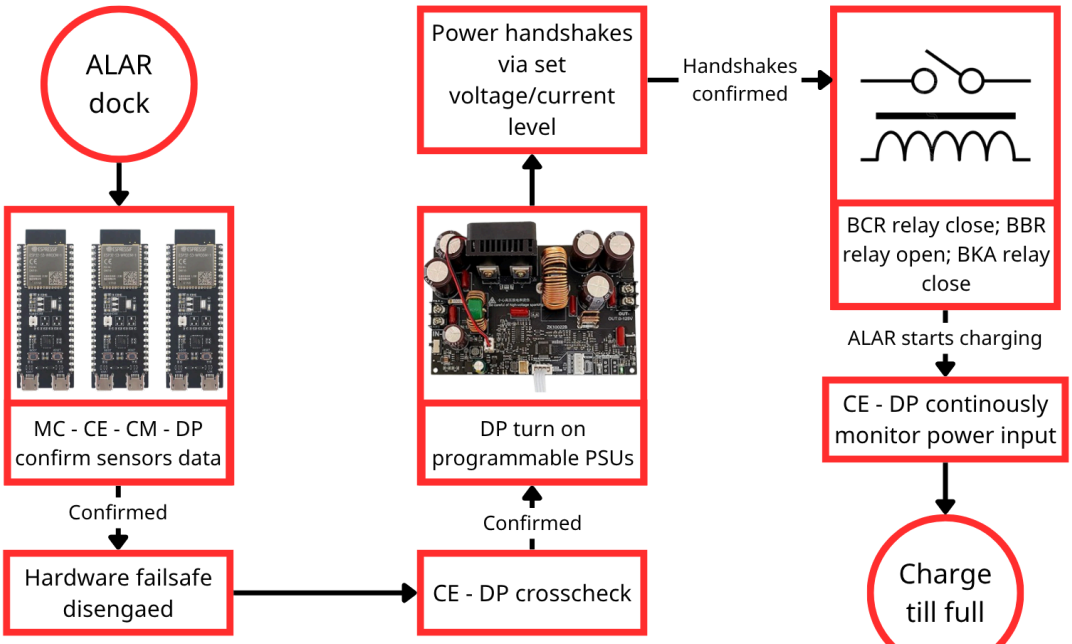

Power connection sequence

The power disconnection sequence is as follows:

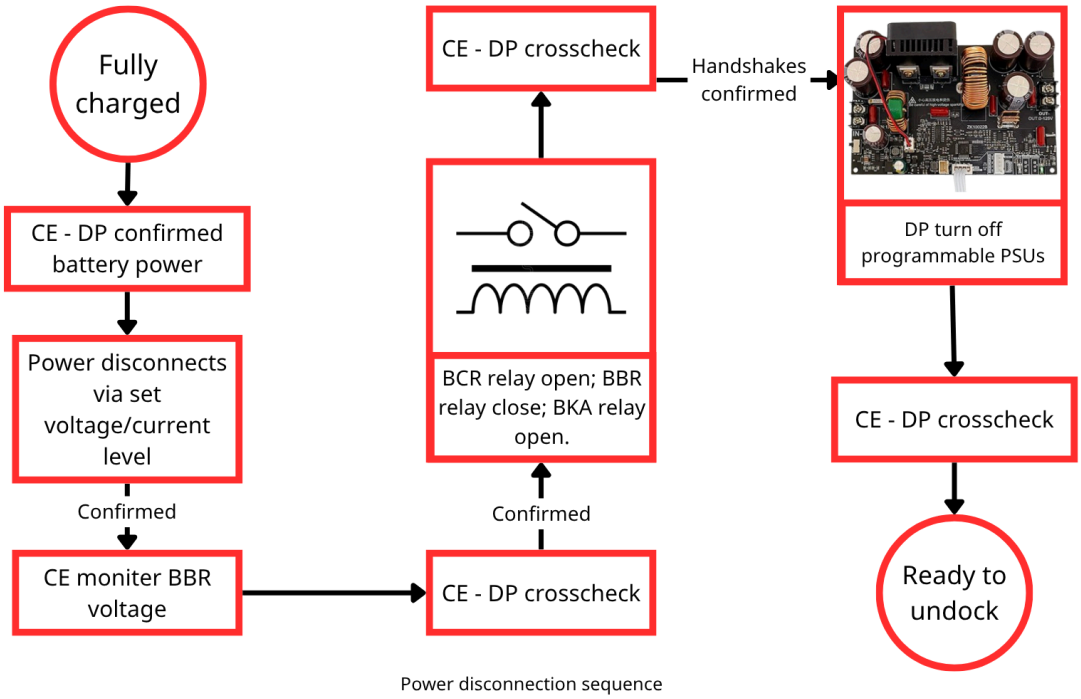

Power disconnection sequence

Navigation:


Hardware: ALAR makes use of a mini pc as the main navigation computer, combined

with LiDAR for surrounding tracking; a front depth camera for object recognition and distance analysis; a back camera for safety monitoring and docking; a webcam for people following and user interactions; IMUs for acceleration, tipping-over detection, and heading tracking; motor encoders to accurately track the path that has been made to recalibrate navigation systems.

Software: All the data will be fed into ROS2, a dedicated robot operating system, on the mini pc. It will then be split into different toolboxes like:

- SLAM toolbox
- AMCL
- NAV2
- AprilTags
- YOLOv8
- MediaPipe
- robot_localization
- OpenNav
- isDocked & isCharging Handshakes
- Costmap 2D
- ByteTrack
- DeepSORT
- FollowTarget

These toolboxes will make development easier, as well as save time to develop other things such as user interface, failsafe algorithms, data packet architecture, detailed mapping algorithm, and power sequence algorithm.

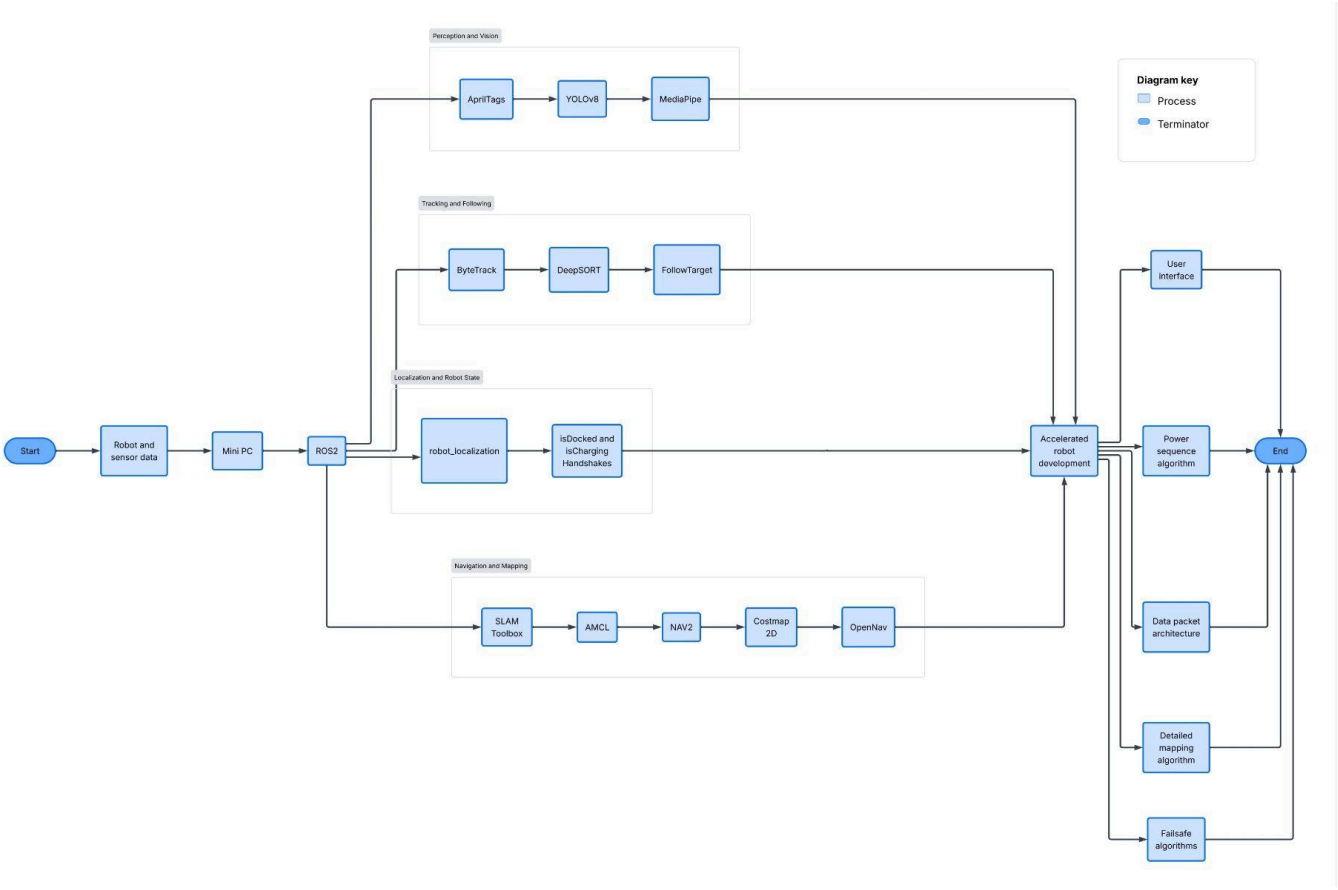

ROS2 Navigation Workflow

User Interaction (UI):

User Detection and Recognition: ALAR uses onboard cameras to detect users approaching the robot. When a user enters the detection area, the camera captures the user's image and provides visual information to the recognition system. This function allows ALAR to proactively assist ìf needed without requiring the user to operate the robot manually.

User Request and Communication: The robot can communicate with users through a visual display, and the user can provide a request to the robot, particularly when searching for a specific book or bookshelf. ALAR receives the user's request through its interaction interface and processes the provided information to determine the required service. The system then identifies the target book or location before starting the navigation process. This interaction is designed to reduce the number of actions required from the user when searching for books in the library.

Interface design: ALAR's interface follows principles of simplicity, friendliness, and usability. The system avoids unnecessary functions and focuses on the essential

interactions needed to assist library users. Information presented on the display should be clear and easy to understand.

Safety:

Mechanical: To give ALAR passive stability, we keep the battery and the heaviest components lower in the base to keep the center of gravity low to help prevent tipping over. Limiting the acceleration and turn rate in firmware as another defense line alongside hardware designs. Conduct load tests for the center multipurpose area to determine the safe operational limit weight. E-Stop button in an easy-to-reach location for hard shutdown in case of system malfunction.

Autonomy: If the communication between MC - CE - CM stops receiving a validated signal within a specific timeout, the system will autonomously stop the motors and disable the main power bus. Geofencing with QR-Tag to help the robot recalibrate its location and determine safe zones. Prevent bot recharge if MC - CE - DP - CM disagree on system status such as location on dock, sensor alignment, power rail validations, etc.

III. SCOPE OF WORK

Tasks to be performed by research team members:

No.	Name	Role	Notes
1	Bùi Vũ Hoàng	UI design/Hardware construction/Charging system/Product testing	
2	Võ Minh Đăng	Power system/Charging system/Hardware construction	
3	Tạ Hiếu Đông	Chassis and Dock Design/Hardware construction	
4	Trịnh Gia Bảo	Chassis and Dock Design/Hardware construction	
5	Trần Quốc Thống	Navigation sytem/System communication/UI design	

IV. OUTCOME

The detail outcomes/products are as follows: (a prototype, a final report, attending a seminar....)

By the end of the research period, we will deliver a working prototype that fits into the library system. On its own, the robot will perform specific autonomous tasks, including:

- Guiding people to the desired area in the library.

- Acting as an autonomous shelf to assist with inventory management.

- Creating a dynamic map of the library layout daily, with the ability to create a heat map specializing in frequent/famous areas.

- The ability to self-sustain without extensive human intervention.

Apart from the prototype, a detailed technical report that documents the development process will be created. The report will describe the engineering parts of the robot such as the sensor-fusion navigation algorithm, the computer-vision pipeline, electrical and power-management systems, hardware architecture, and challenges we faced alongside with what we did to mitigate those challenges. This report will be open-sourced to give a reference and be a base for future robotics projects.

Finally, we designed the system with modularity in mind. By separating the core navigation and power systems from the library-specific vision component, the base architecture can be easily adapted for autonomous tasks across the university campus, such as document delivery or security patrols. This lets the robot technologies be reused or further developed in different applications.

V. TIMELINE

Please provide a general timeline for your research project, the completion date, and the current status of your project

Duration (*A project duration is no longer than 12 months from the date of signing the contract): 12 months*
Duration: 12 months Current Status: Project planning, feasibility studies, and mockup planning. Detailed Schedule:

Phase 1: Component Sourcing, System Design & Individual Component Testing (Months 1 – 2)

Tasks:

Search, select, and procure hardware components (ASUS NUC 14, ESP32-S3, Ydlidar X3, Depth Camera, LFP Batteries, power modules, and sensors),

Design initial system architecture (mechanical frame CAD, electrical circuit schematics, and ROS software topology),

Perform bench testing and unit testing on individual components (power converters, INA238/INA226 current monitoring, motor drivers, and sensor communication protocols).

Key Deliverables: Procured components, completed system design schematics, and unit test results for core electronics.

Phase 2: Basic Hardware Development (Mini Prototype / Proof-of-Concept) (Months 3 – 4)

Tasks:

Build a simplified, mini-scale physical base chassis (mockup frame),

Assemble basic power distribution circuit (LFP battery, basic buck/boost converters, relays),

Mount stepper motors, basic drivetrain, and essential safety/limit sensors onto the mini frame,

Key Deliverables: Functional scaled-down hardware prototype base capable of physical movement.

Phase 3: Basic Software & Navigation Stack Development (Months 5 – 6)

Tasks:

Develop low-level motor control firmware on ESP32-S3 for the mini prototype,

Set up basic ROS 2 navigation stack on ASUS NUC: 2D/3D SLAM mapping using Ydlidar X3 and Depth Camera,

Implement and test basic autonomous movement, line-following, and dynamic obstacle avoidance algorithms on the mini product

Key Deliverables: Working embedded control firmware and verified basic navigation stack on the mini prototype

---

Phase 4: Full-Scale Product Fabrication & Complete System Integration (Months 7 – 8)

Tasks:

Fabricate full-scale mechanical body, housing structure, and book-holding shelves for the final robot.

Assemble high-power electrical distribution system (Ideal diodes 65A/100A, JQX relays, ZK1022 PSU, INA telemetry sensors),

Integrate complete sensor suite (Ydlidar X3, Depth Camera, Webcam, JSN-SR04T, Hall sensors) and 13-inch Touchscreen UI,

Deploy full software suite: high-level navigation, touchscreen UI, computer vision, and ESP32 low-level controller onto the final product.

Key Deliverables: Fully built, full-scale ALAR robot with all hardware and software integrated

---

Phase 5: Laboratory Testing & System Debugging (Months 9 – 10)

Tasks:

Conduct indoor lab testing: continuous motion stress testing, battery endurance, thermal check, and power efficiency monitoring,

Perform controlled obstacle avoidance, mapping accuracy, and emergency safety mechanism tests in lab environments,

Debug software bugs, tune PID motor control loops, and optimize navigation parameters.

Key Deliverables: Fully calibrated, debugged, and lab-verified ALAR robot prototype

---

Phase 6: Real-World Library Field Testing, Evaluation & Project Closure (Months 11 – 12)

Tasks:

Deploy the ALAR robot to the VGU Library for actual field testing: mapping library layout,

navigating between book stacks, avoiding visitors, and user interaction via touchscreen,

Evaluate real-world navigation accuracy, user feedback, and operational uptime,

Compile the comprehensive final research report and present results at the VGU final assessment meeting and research seminar,

Complete financial settlement and contract liquidation with the Research Management Department (RMD) and the Finance and Accounting Department (FAD).

Key Deliverables: Field-tested ALAR robot, final research report, seminar presentation, and completed contract liquidation documents.

VI. BUDGET

Please complete the following form by listing the itemized projected expenses for your research project. When expenses are not known, make a conservative estimate. Remember that receipts will be required for reimbursement of all expenses from VGU. Items that you expect to fund from sources other than the anticipated grant should be included in the 'total estimated cost' line, but excluded from the 'total requested funding' line.

Item	Estimated cost	Requested funding	Note
ESP32-S3	768,000	768,000	Cost for 3 ESP32-S3
ASUS NUC ESSENTIAL 14	4,200,000	4,200,000	
60A Power sensor	340,000	340,000	
30A Power sensor	920,000	920,000	Cost for 4 INA226
40A Relay	680,000	680,000	Cost for 4 JQX-40F
60A Relay	360,000	360,000	Cost for 2 JQX-62F
8A Buck converter	450,000	450,000	Cost for 5 XL4016
42V Buck converter	250,000	250,000	
ZK1022 PSU	1,600,000	1,600,000	Cost for 2 ZK1022
12V to 24V Voltage boost	1,000,000	1,000,000	
AC to DC PSU	1,000,000	1,000,000	1000W
Electrical components	3,000,000	3,000,000	Fuses, Relays, Diodes, LEDs,...
Stepper Motors	1,140,000	1,140,000	Cost for 2 Stepper Motors
Lidar	1,300,000	1,300,000	
Ultrasonic sensor	410,000	410,000	Cost for 4 JSN-SR04T
13inch Touch screen	2,000,000	2,000,000	

Webcam	900,000	900,000	Cost for 2 webcams
Speaker	500,000	500,000	
Depth camera	1,100,000	1,100,000	
LFP Battery packs	2,400,000	2,400,000	Cost for 3 LFP packs
16GB RAM DDR5 4800Mhz	5,000,000	5,000,000	
256 SSD	1,500,000	1,500,000	
Build materials	5,000,000	5,000,000	
TOTAL:	35,818,00	35,818,00	

Student's signature *date*

VII. ACADEMIC SUPERVISOR

I have reviewed this project description and projected budget, and I support this undergraduate research grant request.

Supervisor's signature *date*

VIII. ACADEMIC RESEARCH

The proposed undergraduate research project is supported by the following research grants solely or jointly administered by me (*leave blank if not applicable)*:

Supervisor's signature

Grant title:
Principal Investigator:

Project number:
Source of funding:

DO NOT WRITE BELOW THIS LINE

(This part is filled in by the Chair of the Evaluation Committee)

Comments:

Decision:

Funded amount:

Date:

Signature:

Name: