



Congratulations! You passed!

[Next Item](#)1. Which reference path is the **most compact** and **easy to construct**?

1 / 1 point

☒ Track straight line segment**Correct**

Correct! The easiest approach is to define a sequence of straight line segments, by requiring a sequence of endpoint vertices that are connected linearly. This path definition can be very compact and easy to construct, assuming points are well spaced and the environment allows for mostly straight line motion.

- ☐ Track waypoints
- ☐ Track parameterized curves
- ☐ None of the above

2. What is the most **ACCURATE** and **PRECISE** definition of the crosstrack error?

0 / 1 point

☒ The crosstrack error is the difference between path heading and the vehicle heading at a reference point along the path**This should not be selected**

Incorrect, please review Lesson 1: Introduction to Lateral Vehicle Control.

- ☐ The crosstrack error is the distance between the vehicle reference point and the closest point on the reference path
- ☐ The crosstrack error is the sum of the absolute difference between each coordinate of the vehicle reference point and the corresponding closest point on the desired path
- ☐ None of the above

3. What vehicle reference frame is used in a **pure pursuit controller**?

1 / 1 point

- ☐ Center of gravity
- ☐ Center of the front axle
- ☒ Center of the rear axle

Correct

Correct! In this method, the centre of the rear axle is used as the vehicle reference frame. Also, recall that we define the line that connects the centre of the rear axle to the target reference point as the lookahead distance.

- ☐ None of the above

4. **Compute the radius** from the instantaneous center of rotation to the center of the vehicle rear axle (in m) required for an autonomous vehicle to follow the desired path based on the information below.

1 / 1 point

The lookahead distance is 10 m; the car length is 4 m; the angle between the vehicle's body heading and the lookahead line is 30°. Your answer should be an integer.

10

Correct Response

Correct!

$$R = \frac{l_d}{2 \sin \alpha} = \frac{10}{2 \sin 30^\circ} = \frac{10}{2 \cdot 1/2} = 10$$

5. **Compute the steering angle (in degrees)** required for an autonomous vehicle with pure pursuit lateral control for following the desired path based on the information below.

1 / 1
point

The lookahead distance is 15 m; the car length is 5 m; the angle between the vehicle's body heading and the lookahead line is 60°.

If you need help formatting math functions, [read this article](#).

30

Correct Response

Correct!

$$\delta = \arctan\left(\frac{2L\sin\alpha}{l_d}\right) = \arctan\left(\frac{2 \cdot 5 \cdot \sin 60^\circ}{15}\right) = \arctan\left(\frac{2\sqrt{3}/2}{3}\right) = \arctan\left(\frac{1}{\sqrt{3}}\right) = 30^\circ$$



1 / 1
point

6. Consider a situation in which a vehicle traveling speed has decreased from 100 km/h to 50 km/h. This vehicle lateral control is implemented with a pure pursuit controller where l_d is assigned as a function of vehicle speed. **How should l_d change in this situation?**

☐ l_d should increase

☒ l_d should decrease

Correct

Correct! The pursuit controller with a fixed value of l_d does not take into account the vehicle speed. This means that the selected steering angle would be the same regardless of whether the vehicle is going 10 km/h or 100 km/h, leading to very different lateral accelerations. A controller tuned for high speed would be far too sluggish at low speed, and one tuned for low speed would be dangerously aggressive at high speed. To overcome this limitation, we define the lookahead distance to increase proportional to vehicle forward speed.

☐ l_d should stay the same

☐ l_d can increase or decrease depending on how the controller is tuned

☐ None of the above

0.67 / 1
point

7. What are **major components** of the Stanley controller? (Select all that apply)

☐ Derivative control is introduced for minimizing the heading error

Un-selected is correct

☒ Proportional control is introduced for minimizing the crosstrack error

Correct

Correct! This is a major component of the Stanley controller that differs it from the pure pursuit controller.

☐ Crosstrack error is eliminated

This should not be selected

Incorrect, please review Lesson 3: Limits of Geometric Steering Control.

☐ Steering angle is set equal to the heading direction to eliminate heading error relative to the path

This should be selected

☐ Integral control is added for both the heading and the crosstrack errors optimization

Un-selected is correct

☒ Steering angle command is restricted to the min and max steering angles

Correct

Correct! This is a major component of the Stanley controller that differs it from the pure pursuit controller.



8. What is the **correct figure** of the crosstrack error dynamics for a small error value (where $e'(t) = -ke(t)$)?

Figure 4:


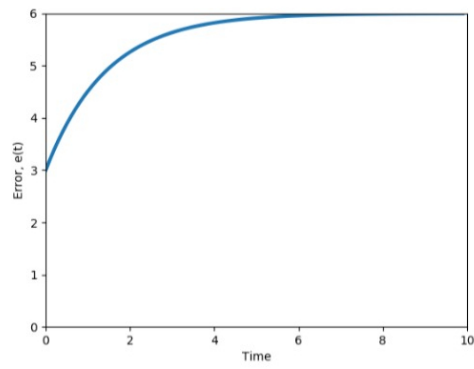


Figure 3:

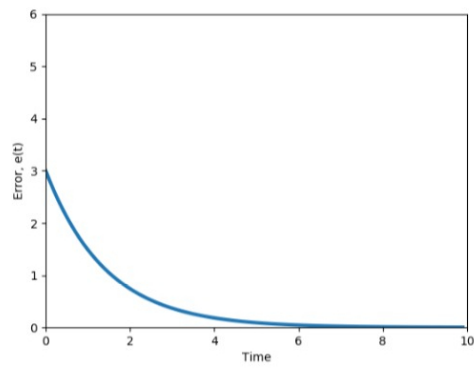

Correct

Correct! Solving the differential equation of the crosstrack error dynamic results in the following function $e(t) = e(0)e^{-kt}$ and this function is plotted above

Figure 1:



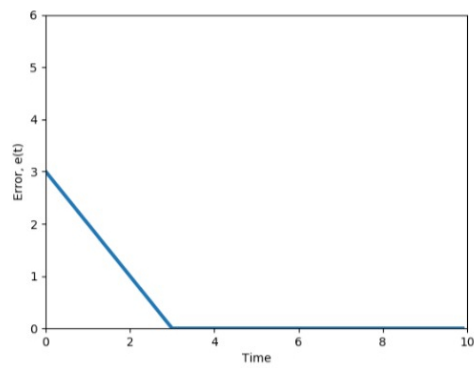


Figure 2:

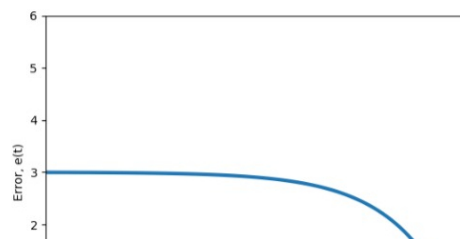



9. What is the value of the crosstrack error, governed by the ODE $e'(t) = -ke(t)$, at $t = 2$ given that $e(0) = 4$ and $k = 1$?

0 / 1 point

Please give your answer with the precision of 2 decimal places.

2.86

Incorrect Response

Incorrect, try solving the differential equation of the crosstrack error and using the resulting function with given parameters for finding the solution. You can also review Lesson 3: Limits of Geometric Steering Control.



10. Which of the statements below about Model Predictive Control (MPC) are **TRUE**? (Select all that apply)

1 / 1 point



The formulation of an MPC controller is straightforward

Correct

Correct! The formulation of an MPC controller is straightforward, requiring the definition of an objective function and relevant constraints that are then optimized using well-established solvers.



MPC works for both linear and nonlinear models

Correct

Correct! The controller can be explicitly applied to the linear or nonlinear models of the vehicle and its subsystems, meaning that we can use the same approach even as our models change or improve over time.



MPC is an optimized version of Receding Horizon Control

Un-selected is correct



MPC can impose constraints on the states and the input simultaneously

Correct

Correct! The states and control signals in MPC can be constrained to stay within safe operating bounds, and controls can be selected to maximize multiple objectives simultaneously. Both hard constraints and soft penalties can be employed, leading to a rich set of solutions for constrained control problems.



11. What is the typical way of finding the solution for a **nonlinear vehicle dynamics model** given an input function?

1 / 1 point



Laplace transform



Numerical optimization

Correct

Correct! No closed form solution exists for a nonlinear dynamic model, and so we rely on numerical optimization to find a solution.



Using existing closed form solution



None of the above



12. What is the output of the **Model Predictive Controller** described in this course? (Select all that apply)

1 / 1 point



Throttling/braking

Un-selected is correct

☐ Steering angle

Un-selected is correct

☒ Longitudinal forces

Correct

Correct! The Model Predictive Control takes the reference path, velocity and the vehicle states at each time step as an input and outputs the longitudinal force needed to follow the desired trajectory.

☒ Lateral forces

Correct

Correct! The Model Predictive Control takes the reference path, velocity and the vehicle states at each time step as an input and outputs the lateral force needed to follow the desired trajectory.

☐ None of the above

Un-selected is correct