


TRUSS SCHEDULE

PALACIOS				
NAME	QUANTITY	SPAN	PITCH	
CJ-1A	4	2'-8"	5,000	
CJ-1B	4	1'-0 3/16"	0,000	
CJ-2A	2	5'-6 15/16"	5,000	
CJ-2B	2	3'-6 15/16"	5,000	
CJ-2C	2	1'-6 15/16"	5,000	
CJ-4A	2	3'-4 15/16"	5,000	
CJ-4B	2	1'-4 15/16"	5,000	
EJ-1	3	2'-8"	5,000	
EJ-2	9	7'-8"	5,000	
EJ-4	3	5'-6"	5,000	
EJ-4A	1	5'-6"	5,000	
FT-1A	1	14'-4"	5,000	
FT-1B	1	14'-4"	5,000	
FT-1C	1	14'-4"	5,000	
FT-1D	1	14'-4"	5,000	
FT-1E	1	14'-4"	5,000	
FT-2A	1	26'-0 1/8"	5,000	
FT-3A	1	39'-8 1/16"	5,000	
FT-3B	1	39'-8 1/16"	5,000	
FT-3C	1	39'-8 1/16"	5,000	
FT-3D	1	39'-8 1/16"	5,000	
FT-5A	1	19'-7 1/2"	5,000	
FT-5B	1	19'-7 1/2"	5,000	
FT-5C	1	19'-7 1/2"	5,000	
FT-5D	1	19'-7 1/2"	5,000	
FT-5E	1	19'-7 1/2"	5,000	
FT-6A	1	7'-1"	5,000	
FT-6B	1	7'-1"	5,000	
FT-6C	1	7'-1"	5,000	
GT-5	1	20'-0"	5,000	
GT-6	1	10'-6"	5,000	
HG-1	1	14'-4"	5,000	
HG-2	1	26'-0 1/8"	5,000	
HG-4	1	12'-9 1/2"	5,000	
KJ-1	2	3'-9 1/4"	3,536	
KJ-2	1	10'-8 5/8"	3,536	
KJ-4	1	7'-7 13/16"	3,536	
T-3	8	39'-8 1/16"	5,000	
T-3A	2	39'-8 1/16"	5,000	
T-3B	8	39'-8 1/16"	5,000	
T-3C	1	39'-8 1/16"	5,000	
T-4	3	12'-9 1/2"	5,000	
T-4A	1	12'-9 1/2"	5,000	
T-4B	1	12'-9 1/2"	5,000	
T-4C	1	12'-9 1/2"	5,000	
T-5	1	20'-0"	5,000	
T-5A	1	19'-7 1/2"	5,000	
T-5B	1	19'-7 1/2"	5,000	
T-5C	1	19'-7 1/2"	5,000	
T-5D	1	19'-7 1/2"	5,000	
T-5E	1	19'-7 1/2"	5,000	
T-6	4	10'-6"	5,000	
T-6A	2	7'-1"	5,000	
T-6B	1	7'-1"	5,000	

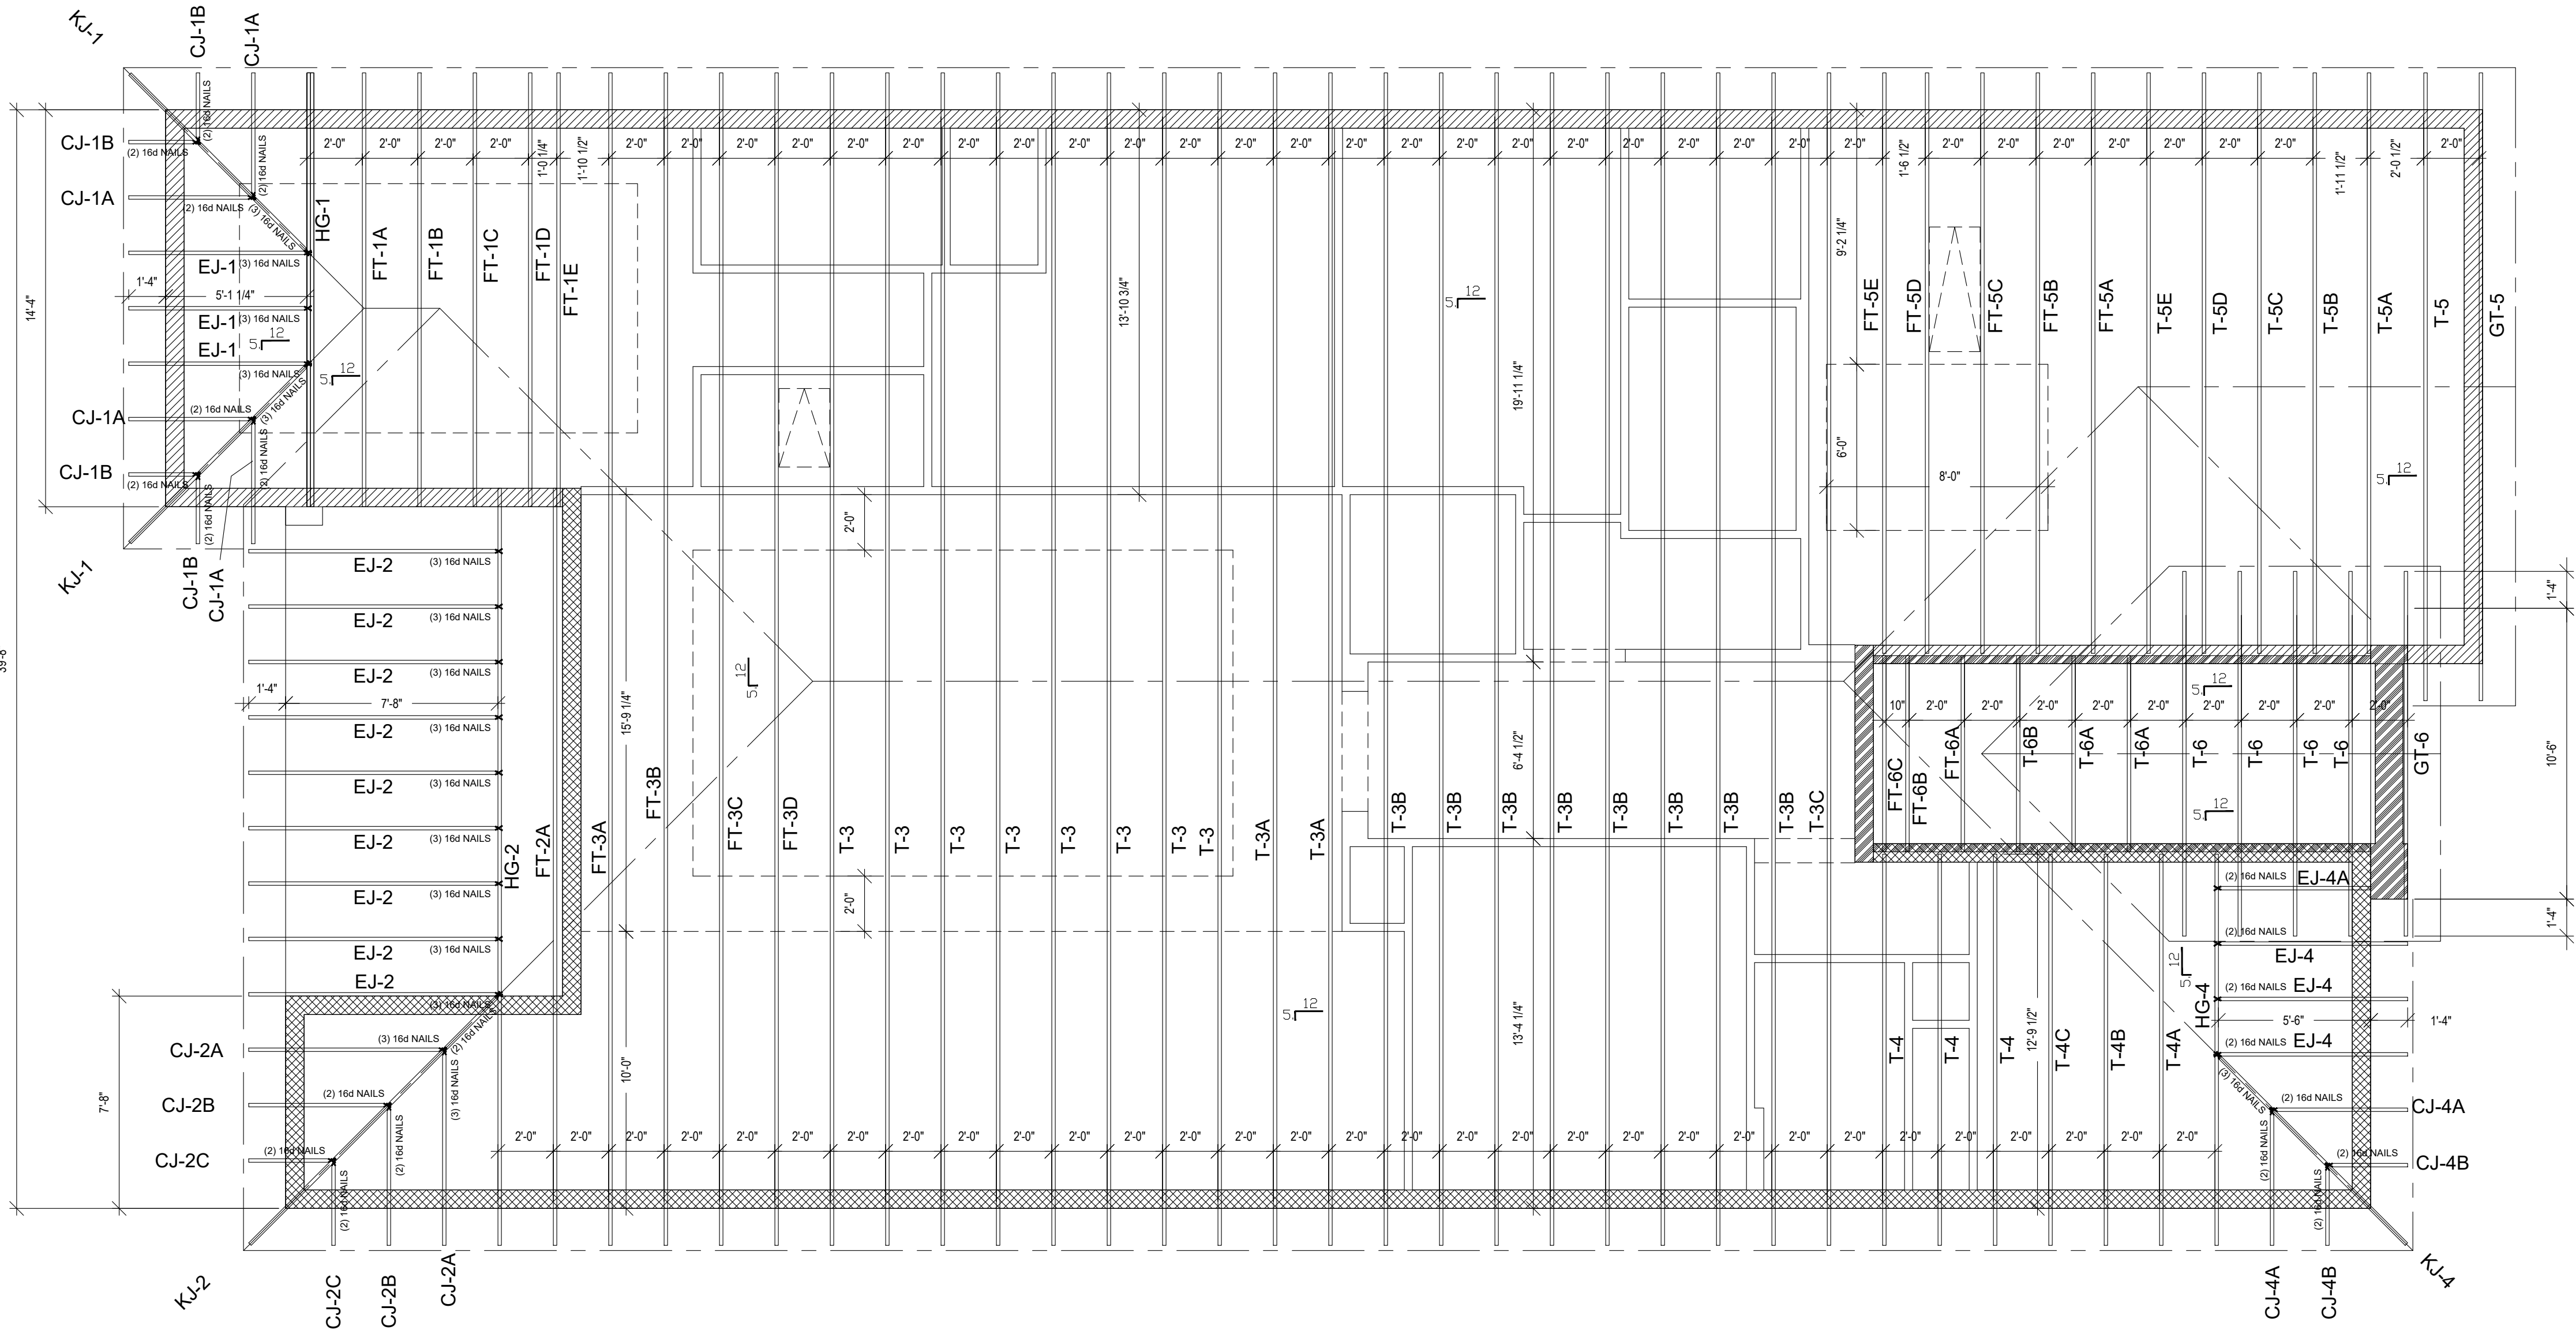

CONNECTOR SCHEDULE

NAME	QUANTITY
TBP8	161

NOTE: UNDER NO CIRCUMSTANCES SHOULD TRUSSES BE CUT OR DRILLED!!!

NOTE: OTHER THAN TRUSS TO TRUSS CONNECTION AND TRUSS FIELD ASSEMBLY REQUIREMENTS, THE BUILDING DESIGNER, PER ANSI/TPI-1, MUST VERIFY ALL ANCHORAGE DESIGNS REQUIRED TO RESIST UPLIFT, GRAVITY, AND LATERAL LOADS, INCLUDING TRUSS-TO-STRUCTURAL ELEMENT CONNECTIONS.

NOTE: This Truss Placement Diagram was not created by an engineer but rather by the Clearspan Components, Inc. staff and is purely to be used as an installation guide and does not require a seal. Complete truss engineering and analysis can be found on the Truss Design Drawings which shall be sealed by the Truss Design Engineer.

NOTE: SCHEDULE APPLIES TO COMPLETE ROOF SYSTEM. LEFT/RIGHT END REFERS TO LEFT/RIGHT END OF TRUSS AS ORIENTED ON INDIVIDUAL TRUSS DESIGN DRAWINGS. ALL HANGERS LISTED ARE SIMPSON STRONG-TIE® HANGERS RECOMMENDED ARE MINIMUM REQUIRED AND MAY BE SUBSTITUTED WITH HANGERS OF EQUAL OR GREATER VALUE. ALL NAIL HOLES IN HANGER MUST BE FILLED WITH THE NAIL TYPE & SIZE SPECIFIED TO ACHIEVE FULL DESIGN VALUE. HANGERS ARE PROVIDED ONLY IF INDICATED IN CONTRACT.

FOR APPROVAL

THE CONTRACTOR MUST VERIFY AND BE RESPONSIBLE FOR ALL DIMENSION AND CONDITIONS ON THE JOB. ALSO, THE CONTRACTOR MUST VERIFY COMPLIANCE OF SHOP DRAWINGS TO ARCHITECTURAL AND STRUCTURAL PLANS AND SPECIFICATIONS INCLUDING DOOR AND WINDOW ROUGH OPENINGS AND BUILDING MATERIALS.

PALACIOS CARIBBEAN

SCALE: 1/4"=1'-0"

PRELIMINARY
PENDING APPROVAL

REVISIONS	BY	DATE

PALACIOS CARIBBEAN

PROJECT: ISLES AT LAKEWOOD RANCH
CONTRACTOR: TOLL INTEGRATED SYSTEMS
ARCHITECT: TOLL BROTHERS

CLEARSPAN COMPONENTS INC.
6110 OLD HWY. 80 WEST
MERIDIAN, MS 39304
PHONE: 601.483.3941 ~ FAX: 601.693.7493



PROJECT#: CDDH DRAWN BY: DNH DATE: 1-28-2022 PAGE: 1