movinglife transavia

كيف ترسلون إلى ترانسافيا

سكوتر ATTO · بطارية ليثيوم 48V / 5.2Ah / 249.6Wh · موديل البطارية GD009-13S2P · تلبّي متطلبات IATA

ماذا في هذا الملف: هذه الصفحة · صفحة ليوم الرحلة · نموذج شركة الطيران · رسالة المصنّع · شهادات البطارية (MSDS وUN 38.3)

1 ماذا تملأون في النموذج

- الاسم الكامل بالإنجليزية، رقم الحجز، الرحلات والتواريخ، الهاتف والبريد
- التوقيع والتاريخ
- في نموذج ترانسافيا الإلكتروني انسخوا: الأبعاد وهو مطوي 72 × 42 × 39 سم، الوزن 28.2 كغ بدون البطارية، بطارية ليثيوم أيون قابلة للإزالة 249.6Wh

2 أرسلوه إلى شركة الطيران

- عند الحجز علّموا أنكم تسافرون مع سكوتر. إذا حجزتم مسبقًا تواصلوا مع خدمة عملاء ترانسافيا: **transavia.com/help**
- يصلكم بريد برابط لنموذج إلكتروني. املأوا فيه الأبعاد والوزن ونوع البطارية
- انتظروا بريد التأكيد من ترانسافيا. بدونه لا يمكن السفر مع السكوتر

⏱ الموعد: قبل 48 ساعة على الأقل من الرحلة

⚠ في ترانسافيا لا تكفي رسالة المصنّع وموافقة IATA. يجب ملء النموذج الإلكتروني وتلقّي بريد تأكيد

3 يوم الرحلة

- أحضروا بريد تأكيد ترانسافيا، مطبوعًا أو على الهاتف
- أحضروا الملف مطبوعًا
- عند الكاونتر اطووا السكوتر وأطفئوه وأخرجوا البطارية
- تصعد البطارية معكم إلى الطائرة في حقيبة اليد، والأقطاب مغطاة

* أداة مساعدة وتسهيل فقط. أُعدّ الملف تلقائيًا بحسب التفاصيل المُدخلة وقد يحتوي على أخطاء أو نواقص. المسؤولية عن فحص التفاصيل واستكمال أي مستند ناقص وإرساله إلى شركة الطيران تقع على المستخدم وحده. MovingLife غير مسؤولة بأي شكل عن أي خطأ أو نقص أو رفض أو تأخير أو شرط من شركة الطيران أو المطار، ولن تُقبل أي مطالبة ضدها. القرار النهائي لشركة الطيران وحدها.
info@movinglife.com · 073 391 3999 · MovingLife

movinglife

transavia

يوم الرحلة ✈

1. احضروا إلى المطار **قبل 3 ساعات من الرحلة**
2. أحضروا **هذا الملف** مطبوعًا
3. عند الكاونتر **اطووا** السكوتر و**أطفئوه**
4. **أخرجوا البطارية.** تصعد معكم إلى الطائرة في حقيبة اليد
5. خذوا **الشاحن** الخاص بالسكوتر في حقيبة اليد، وليس في الحقيبة الكبيرة
6. عندكم طقم طيران؟ **ألبسوه** للسكوتر قبل التسليم
7. إذا سألوا، اعرضوا **رسالة المصنّع** و**شهادات الطيران**



اطووا إلى وضع العربة



أخرجوا البطارية وخذوها في حقيبة اليد



ننصح بالسفر مع طقم الطيران لـ ATTO

غطاء واقٍ يحمي السكوتر أثناء تحميله على الطائرة.

للطلب: **073 391 3999** · تفاصيل: movinglife.co.il/products/atto-flight-kit

הצהרה להטסת כלי ניידות ממונע: טרנסאביה

Powered Mobility Device Declaration: Transavia

כלי ניידות: קלנועית ATTO מתוצרת Movinglife LTD · יש להגיש לפחות 48 שעות לפני הטיסה

פרטי הנוסע והטיסה / Passenger & flight	
שם מלא (אנגלית) · Full name (English)	
מספר הזמנה · Booking reference	
מספרי טיסות ותאריכים · Flight numbers & dates	
טלפון / מייל · Phone / Email	

פרטי כלי הניידות / Mobility device	
סוג כלי הניידות · Device type	**קלנועית חשמלית מתקפלת / Electric folding mobility scooter**
יצרן · Manufacturer	**Movinglife LTD**
דגם · Model	**ATTO**
משקל (ללא סוללה) / סוללה · Weight (w/o battery) / battery	**28.2 kg / 1.8 kg**
מידות במצב מקופל (א×ר×ג) · Folded dimensions (L×W×H)	**39 × 42 × 72 cm**
מידות במצב פתוח (א×ר×ג) · Unfolded dimensions (L×W×H)	**120 × 56 × 89 cm**
נדרשים כלים להכנה לטיסה? · Tools required for preparation?	**לא / No**

פרטי הסוללה / Battery	
סוג סוללה · Battery type	**ליתיום יון, יבשה ואטומה / Lithium-ion, dry, non-spillable**
מספר סוללות להפעלה · Number of batteries	**1**
מתח / קיבולת · Voltage / Capacity	**48V / 5.2Ah**
אנרגיה (וואט שעה) · Energy rating	**249.6 Wh**
דגם סוללה · Battery model	**GD009-13S2P**
יצרן סוללה · Battery manufacturer	**Dongguan Kingin Power Co., Ltd**
תקן בדיקה · Test standard	**UN 38.3 · report MRI1AVBG2672847U5**
הטסה · Air transport	**עומדת בדרישות IATA / Meets IATA DGR requirements**
משקל סוללה · Battery weight	**1.8 kg**
האם הסוללה נשלפת? · Is the battery removable?	**כן / Yes**
האם ניתן לנתק את הסוללה? · Can the battery be disconnected?	**כן / Yes**
סוללה מקורית של היצרן? · Original manufacturer battery?	**כן / Yes**
סוללות רזרביות · Spare batteries	**0**

הכנה לטיסה / Preparation for flight

- קיפול הקלנועית למצב טרולי, כיבוי המתג בכידון. Fold to trolley mode, power OFF at the tiller.
- שליפת סוללת הליתיום ונשיאתה בתא הנוסעים בשקית/נרתיק מגן, עם הגנה על המגעים מפני קצר. Remove the Li-ion battery and carry it in the cabin in a protective pouch, terminals protected against short circuit.
- המטען נלקח עם הנוסע ואינו נארז במזוודה. Charger carried by the passenger, not in checked baggage.

מסמכים מצורפים / Attached documents

- ☐ מכתב יצרן המאשר את הקלנועית והסוללה להטסה Manufacturer's air-transport confirmation letter
- ☐ מפרט טכני של הקלנועית Device technical specification
- ☐ מפרט / צילום מדבקת הסוללה (כולל Wh) Battery spec / label photo (incl. Wh)
- ☐ גיליון בטיחות (MSDS) ואישור UN 38.3 Safety data sheet (MSDS) and UN 38.3 summary
- ☐ ספר הוראות היצרן (להביא לשדה) Manufacturer's manual (bring to the airport)

יצירת קשר / Where to send

מסמנים בהזמנה שטסים עם קלנועית (או מבקשים זאת ממוקד השירות של טרנסאביה). מקבלים במייל קישור לטופס מקוון, וממלאים בו מידות, משקל וסוג סוללה לפי הצהרה זו, לפחות 48 שעות לפני הטיסה. רק אחרי מייל האישור של טרנסאביה אפשר לטוס עם הקלנועית. אישור IATA לבדו לא מספיק.

חתימת הנוסע/ת: _____ תאריך: _____

אני מצהיר/ה כי הפרטים לעיל נכונים ותואמים את כלי הניידות שאיתו אטוס. · I declare the above details are correct and match the device I will travel with.

Movinglife LTD

www.movinglife.com · Israel +972 73 391 3999 · info@movinglife.com

To: Airline Check-in / Dangerous Goods Acceptance Staff

Subject: Air Transport Confirmation, ATTO Mobility Scooter and Lithium ion Battery

This letter confirms that the mobility device described below is a battery-powered mobility aid manufactured / supplied by Movinglife LTD, and that its battery meets the requirements for carriage by air as a passenger mobility aid.

Device	**ATTO electric folding mobility scooter**
Manufacturer	**Movinglife LTD**
Weight / folded dimensions	**28.2 kg without battery (battery 1.8 kg) · 39 × 42 × 72 cm (L×W×H)**
Battery type	**Lithium-ion, removable, original manufacturer battery**
Battery model / manufacturer	**GD009-13S2P · Dongguan Kingin Power Co., Ltd**
Rating	**48V · 5.2Ah · 249.6 Wh (one battery)**
Testing	**UN Manual of Tests and Criteria, Part III, sub-section 38.3 (UN 38.3) · report MRI1AVBG2672847U5**

Transport instructions: fold the scooter into trolley mode and switch it off. Remove the lithium-ion battery (249.6 Wh, in accordance with the IATA Dangerous Goods Regulations for battery-powered mobility aids) and carry it in the passenger cabin, with the terminals protected against short circuit and the battery placed in a protective pouch. No tools are required. The scooter frame contains no other battery.

The battery's Material Safety Data Sheet (MSDS), including the UN 38.3 transport information, is attached (ATTO Flight Safety Certificates).

movinglife

ATTO MOBILITY SCOOTER

Flight Safety Certificates

LITHIUM-ION BATTERY 249.6 Wh

DRY, NON SPILLABLE

Battery dimensions: 32x14x11cm Weight 1.8kg

Page	Document	Standard / Doc
2	OVERVIEW	FDA / CE
3-14	BATTERY SAFETY DATA SHEET	MSDS
15	SCOOTER DIMENSIONS	

movinglife

www.movinglife.com

Take to Airport


Li-ion

FDA APPROVED

CE



FREE WHEEL HANDLE

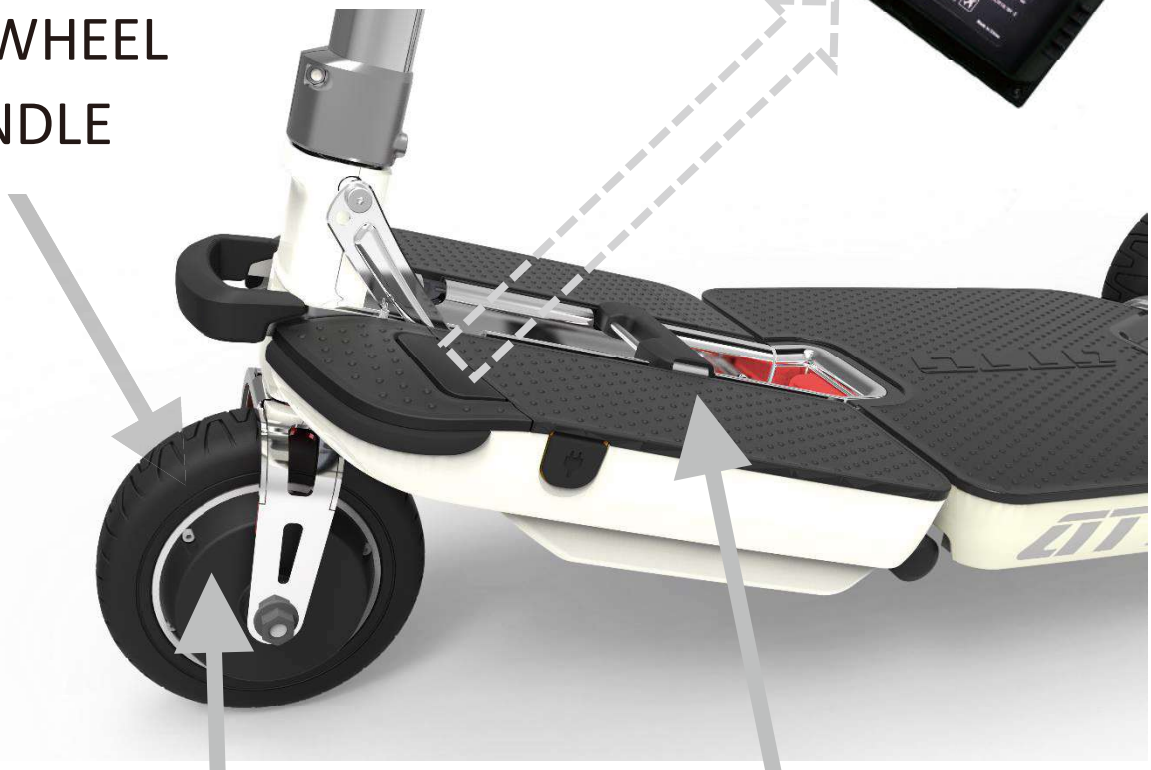

MOTOR

BATTERY

MATERIAL SAFETY DATA SHEET

Rechargeable Li-ion Battery

Model: GD009-13S2P

Prepared by	Approved by
Cindy Chen	Jack Zhou
Jun 5, 2023	Jun 6, 2023

Material Safety Data Sheet

Reference to ST/SG/AC.10/30/Rev.9(GHS)

Section 1 - Chemical Product and Company Identification

Chemical Product Identification
Sample Name: Lithium-ion Battery pack
Sample Model: GD009-13S2P
Recommended Uses: N/A
Restrictions on Use: N/A
Supplier Name: Dongguan Kingin Power Co., Ltd.
Address: No.702, Floor 7th, Block B, Honghai Intelligent Valley, No.50, Jinjiaotang Fumin Road, Zhutang Village, Fenggang Town, Dongguan City
Phone Number: 15283330307
FAX: 0769-88023775
E-mail: zhuozhiguang@kingin.cn
Emergency Phone Number: 0769-88023775

Section 2 - Hazards Identification

Emergency overview: This product is a battery. Intended use of the product should not result in exposure to the chemical substance. In case of rupture the below hazards exist.

Classification according to GHS
Acute toxicity, oral (4)
Skin corrosion/irritation (2)
Serious eye damage/eye irritation (2A)
Specific target organ toxicity, single exposure; Respiratory tract irritation (3)

Label elements

Hazard pictogram(s);



Signal word: Warning

Hazard statement(s):

H302 Harmful if swallowed

H315 Causes skin irritation

H319 Causes serious eye irritation

H335 May cause respiratory irritation

Precautionary statement(s):

Prevention:

P264 Wash skin and clothing thoroughly after handling.

P270 Do not eat, drink or smoke when using this product.

P280 Wear protective gloves, protective clothing, eye protection, face protection.

P261 Avoid breathing dust, fume, gas, mist, vapours, spray.

P271 Use only outdoors or in a well-ventilated area.

Response:

P301 + P312 IF SWALLOWED: Call a POISON CENTER if you feel unwell.

P330 Rinse mouth.

P302 + P352 IF ON SKIN: Wash with plenty water.

P321 Specific treatment (See additional emergency instructions).

P333 + P313 If skin irritation or rash occurs: Get medical advice.

P362 + P364 Take off contaminated clothing and wash it before reuse.

P305 + P351 + P338 IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.

P337 + P313 If eye irritation persists: Get medical advice.

P304 + P340 IF INHALED: Remove person to fresh air and keep comfortable for breathing.

P312 Call a POISON CENTER, if you feel unwell.

Storage

P403 + P233 Store in a well-ventilated place. Keep container tightly closed.

P405 Store locked up.

Disposal:

P501 Send contents to approved waste treatment plants.

Other hazards

Physical and chemical hazards: See Section 10

Human health hazards: See Section 11

Environmental hazards: See Section 12

Section 3 - Composition/Information on Ingredients

Chemical characterization: Mixture

Chemical Composition	CAS No.	EC#	Weight (%)
Cobaltate, lithium	12190-79-3	235-362-0	41
Graphite	7782-42-5	231-955-3	25
Polypropylene	9003-07-0	618-352-4	2
Copper	7440-50-8	231-159-6	5
Aluminium	7429-90-5	231-072-3	8
Nickel	7440-02-0	231-111-4	3
Rubber, chloroprene, gas	69028-37-1	---	2
Phosphate(1-), hexafluoro-, lithium	21324-40-3	244-334-7	9
Polyvinylidene fluoride resin	24937-79-9	607-458-6	2
Cellulose, carboxymethyl ether	9000-11-7	618-326-2	3

Section 4 - First Aid Measures

Description of first aid measures

General information No special measures required.

After eye contact

Flush eyes with plenty of water for several minutes while holding eyelids open. Get medical attention if irritation persists.

After skin contact

Remove contaminated clothing and shoes. Immediately wash with water and soap and rinse thoroughly. Wash clothing and shoes before reuse. If irritation occurs, get medical attention.

After inhalation

Remove victim to fresh area. Administer artificial respiration if breathing is difficult. Seek medical attention.

After swallowing

Do not induce vomiting. Get medical attention.

Personal protective equipment for first-aid responders: No data available.

Most important symptoms/effects, acute and delayed: No data available.

Indication of immediate medical attention and special treatment needed: Treat symptomatically.

Section 5 - Fire Fighting Measures

Suitable extinguishing media:

Small Fire**:** Dry chemical, CO_2, water spray or regular foam. Large Fire**:** Water spray, fog or regular foam.

Move containers from fire area if you can do it without risk.

Unsuitable extinguishing media:

No data available.

Specific Hazards arising from the chemical:

Special hazards arising from the substance or mixture

Battery may burst and release hazardous decomposition products when exposed to a fire situation. Lithium ion batteries contain flammable electrolyte that may vent, ignite and produce sparks when subjected to high temperature (>150 °C (302 °F)), when damaged or abused (e.g. mechanical damage or electrical overcharging); may burn rapidly with flare-burning effect; may ignite other batteries in close proximity.

Specific protective actions for fire-fighters:

Wear positive pressure self-contained breathing apparatus (SCBA). Structural firefighters' protective clothing will only provide limited protection.

Section 6 - Accidental Release Measures

Personal precautions:

As an immediate precautionary measure, isolate spill or leak area for at least 25 meters (75 feet) in all directions. Keep unauthorized personnel away. Stay upwind, uphill and/or upstream. Ventilate closed spaces before entering. Large Spill: Consider initial downwind evacuation for at least 100 meters (330 feet).

Protective equipment:

No data available.

Emergency procedures:

ELIMINATE all ignition sources (no smoking, flares, sparks or flames in immediate area). Do not touch or walk through spilled material. Absorb with earth, sand or other non-combustible material. Leaking batteries and contaminated absorbent material should be placed in metal containers.

Environmental precautions:

Do not allow material to be released to the environment without proper governmental permits.

Methods and materials for containment and cleaning up:

For all waste handing must refer to United Nations, National and Local Regulations for disposal.

See Section 7 for information on safe handling.

See Section 8 for information on personal protection equipment.

See Section 13 for disposal information.

Section 7 - Handling and Storage

Precautions for safe handling:

Avoid short circuiting the battery. Avoid mechanical damage of the battery. Do not open or disassemble.

Batteries may explode or cause burns, if disassembled, crushed or exposed to fire or high temperatures. Do not short or install with incorrect polarity. Avoid all personal contact, including inhalation. Wear protective clothing when risk of exposure occurs. Use in a well-ventilated area. Prevent concentration in hollows and sumps.

Conditions for safe storage, including any incompatibilities:

Store in a cool, dry, well-ventilated place. Keep away from heat, avoiding the long time of sunlight.

Section 8 - Exposure Controls/Personal Protection

Control parameters

CAS No.	ACGIH	NIOSH	OSHA
12190-79-3	N/A	N/A	N/A
7782-42-5	TLV-TWA 2mg/m^3	REL-TWA 2.5mg/m^3	PEL-TWA 15mppcf PEL-TWA 20mppcf
9003-07-0	N/A	N/A	N/A
7440-50-8	TLV-TWA 0.2mg/m^3 TLV-TWA 1mg/m^3	REL-TWA 1mg/m^3 REL-TWA 0.1mg/m^3	PEL-TWA 0.1mg/m^3 PEL-TWA 1mg/m^3
7429-90-5	TLV-TWA 1mg/m^3	REL-TWA 2mg/m^3 REL-TWA 5mg/m^3 REL-TWA 10mg/m^3	PEL-TWA 5mg/m^3 PEL-TWA 15mg/m^3
7440-02-0	TLV-TWA 1.5mg/m^3	REL-TWA 0.015mg/m^3	PEL-TWA 1mg/m^3
69028-37-1	N/A	N/A	N/A
21324-40-3	N/A	N/A	N/A
24937-79-9	N/A	N/A	N/A
9000-11-7	N/A	N/A	N/A

Appropriate engineering controls:

The usual precautionary measures for handling chemicals should be followed.

Keep away from foodstuffs, beverages and feed.

Remove all soiled and contaminated clothing immediately.

Wash hands before breaks and at the end of work.

Personal Protective Equipment:

Respiratory protection: Wear suitable protective mask. For a large large number of battery leakages, wear chemical protective clothing, including self-contained breathing apparatus.

Hand Protection: Wear appropriate protective gloves to reduce skin contact.

Eye Protection: Wear safety goggles or eye protection combined with respiratory protection.

Skin and Body Protection: Working environment required, wear suitable protective clothing to minimize contact with skin. The type of protective equipment must be according to the concentration and the content of certain hazardous substances in the workplace.

Section 9 - Physical and Chemical Properties

Information on basic physical and chemical properties	
Colour:	Black.
Physical State:	Prismatic.
Odour:	Not available.
pH:	Not available.
Melting point/freezing point:	Not available.
Boiling point or initial boiling point and boiling range:	Not available.
Flash Point:	Not available.
Flammability:	Not available.
Solubility:	Not available.
Lower and upper explosion limit/flammability limit:	Not available.
Auto-ignition temperature:	Not available.
Decomposition temperature:	Not available.
Kinematic viscosity:	Not available.
Partition coefficient: n-octanol/water (log value):	Not available.
Vapour pressure:	Not available.
Density and/or relative density:	Not available.
Relative vapour density:	Not available.
Particle characteristics:	Not available.
Other information:	
Voltage	48V
Electric capacity	5200mAh
Electric Energy	249.6Wh

Section 10 - Stability and Reactivity

Reactivity: No data available.
Chemical stability: Stable.
Possibility of hazardous reactions: No data available.
Conditions to Avoid: Flames, sparks, and other sources of ignition, incompatible materials.
Incompatible materials: Oxidizing agents, acid base.
Hazardous decomposition products: Carbon monoxide, carbon dioxide, lithium oxide fumes.

Section 11 - Toxicological Information

Acute Toxicity:

CAS No.	LC50/LD50
12190-79-3	No data available.
7782-42-5	No data available.
9003-07-0	No data available.
7440-50-8	No data available.
7429-90-5	No data available.
7440-02-0	LD50 Rat (oral): >9000mg/kg
69028-37-1	No data available.
21324-40-3	No data available.
24937-79-9	No data available.
9000-11-7	No data available.

Skin corrosion/irritation: No data available.
Serious eye damage/irritation: No data available.
Respiratory or Skin sensitization: No data available.
Germ Cell mutagenicity: No data available.
Carcinogenicity: No data available.
Reproductive toxicity: No data available.
Specific target organ toxicity-Single exposure: No data available.
Specific target organ toxicity-Repeated exposure: No data available.
Aspiration hazard: No data available.
Information on the likely routes of exposure: No data available.
Eye: No data available.
Skin: No data available.
Ingestion: No data available.
Inhalation: No data available.

Section 12 - Ecological Information

Ecological Toxicity: No data available.
Persistence and degradability: No data available.
Bioaccumulative Potential: No data available.
Mobility in Soil: No data available.
Other adverse effects: No data available.

Section 13 - Disposal Considerations

Disposal methods:


Recommendation:

Consult state, local or national regulations to ensure proper disposal.

Uncleaned packaging

Recommendation: Disposal must be made according to official regulations.

Section 14 - Transport Information

UN or ID Number		
IATA	UN3480	UN3171
IMDG	UN3480	UN3171
Model Regulation	UN3480	UN3171
Proper Shipping Name/Description		
IATA	Lithium ion batteries Battery-powered vehicle	
IMDG	LITHIUM ION BATTERIES BATTERY-POWERED VEHICLE	
Model Regulation	LITHIUM ION BATTERIES BATTERY-POWERED VEHICLE	
Class or Div.(Sub Hazard)		
IATA	9	
IMDG	9	
Model Regulation	9	
Packing group		
IATA	N/A	
IMDG	N/A	
Model Regulation	N/A	
Hazard Label **IATA** **IMDG** **Model Regulation**	 965:	 952:
Environmental hazards **Marine pollutant:**	No	
IMDG EmS:	F-A. S-I	
Special precautions for user	No information available.	

Transport information: The Lithium-ion battery pack GD009-13S2P has passed the test UN38.3, according

to the report ID: MRI1AVBG2672847U5.

Watt-hour exceeds the standard. The goods are packaged according to the packaging Instruction 965 section IA of IATA DGR 64th Edition for transportation, Cargo aircraft only.

Watt-hour exceeds the standard. The goods are packaged according to the special provision 230, 348, 384 of IMDG (40-20).

Watt-hour exceeds the standard. The goods are packaged according to the special provision 230, 348, 384 of <<Recommendations On The Transport Of Dangerous Goods-Model Regulations>> (22nd).

The goods are packaged according to the packaging Instruction 952 of IATA DGR 64th Edition for transportation, it belongs to dangerous goods. Be shipped by passenger and cargo aircraft.

The goods are packaged according to the special provision 388, 962, 971 of IMDG (40-20), it belongs to dangerous goods.

The goods are packaged according to the special provision 388 of <<Recommendations On The Transport Of Dangerous Goods-Model Regulations>> (22nd), it belongs to dangerous goods.

Separate batteries to prevent short-circuiting. and they should be packed in strong package during transport. Lithium cell or battery should incorporate a safety venting device or be designed to prevent a violent rupture under normal transport conditions. Keep away from high temperature and open flames.

Note: State of Charge (SoC) not exceeding 30% of their rated capacity. (By air, Lithium ion batteries)
Batteries weight in the package <5kg. (By air, Batteries installed in equipment)

Transport Fashion: By air, by sea, by railway, by road.

Section 15 - Regulatory Information

Safety, health and environmental regulations/legislation specific for the substance or mixture

CAS No.	TSCA	IECSC	DSL/NDSL	EINECS/ ELINCS/ NLP
12190-79-3	Listed	Listed	Listed DSL	Listed
7782-42-5	Listed	Listed	Listed DSL	Listed
9003-07-0	Listed	Listed	Listed DSL	Listed
7440-50-8	Listed	Listed	Listed DSL	Listed
7429-90-5	Listed	Listed	Listed DSL	Listed
7440-02-0	Listed	Listed	Listed DSL	Listed
69028-37-1	Listed	Listed	Listed DSL	Listed
21324-40-3	Listed	Listed	Listed DSL	Listed

24937-79-9	Listed	Listed	Listed DSL	Listed
9000-11-7	Listed	Listed	Listed DSL	Listed

Section 16 - Other Information

Issue Date: 2023-03-13
Issue Department: Technical department
Modification record:
Notice to reader

To the best of our knowledge, the information contained herein is accurate. However, neither the above named supplier nor any of its subsidiaries assumes any liability whatsoever for the accuracy or completeness of the information contained herein.

Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.

Other Information:
CAS: (Chemical Abstracts Service);
EC: (European Commission);
ACGIH: (American Conference of Governmental Industrial Hygienists);
NIOSH: (US National Institute for Occupational Safety and Health);
OSHA: (US Occupational Safety and Health);
TLV: (Threshold Limit Value)
TWA: (Time Weighted Average);
STEL: (Short Term Exposure Limit);
PEL: (Permissible Exposure Level);
REL: (Recommended Exposure Limit);
PC-STEL: (Permissible concentration-short time exposure limit);
PC-TWA: (Permissible concentration-time weighted average);
IARC: (International Agency for Research on Cancer);
LC50: (Lethal concentration, 50 percent kill);
LD50: (Lethal dose, 50 percent kill);
EC50: (Median effective concentration);
BCF: (Bioconcentration Factor);
BOD: (Biochemical oxygen demand);
IECSC: (Inventory of Existing Chemical Substances in China);
NOEC: (No observed effect concentration);
NTP: (US National Toxicology Program);
RTECS: (Registry of Toxic Effects of Chemical Substances);
TOC: (Total Organic Carbon);
TSCA: (Toxic Substances Control Act of USA);

DSL: (the Domestic Substances List of Canada);
NDSL: (the Non-domestic Substances List of Canada);
IATA: (International Air Transport Association);
IMDG: (International Maritime Dangerous Goods);
TDG: (Recommendations on the TRANSPORT OF DANGEROUS GOODS Model Regulations)
The original report which report No. is MRICF6CG2915147U3 be replaced by this report, and it will be canceled immediately and doesn't have any legal validity. Please compliance with this report.
2023-03-13

End of report

Scooter Sizes & Dimensions

- For sending to the cargo bay:

  In trolley mode (folded, as shown in picture) 72x42x39 cm



Trolley Mode
62.2 lbs (28.2 Kg)
w/out battery

For more information please contact Moving Life



USA +1-347-761-3317

UK +44-(0)20-3769 7530

Israel +972-(0)73-391 3999



info@movinglife.com

Take to Airport

All Rights Reserved © 2023 Moving Life Ltd.