Robotics Lab

Report Homework 2

Daniele Fontana P38000297

GitHub Link

•https://github.com/danieffe/7-DOF-robotic-manipulator-arm-dynamic-control.git

Contents

1			4
	1.1	Substitution of the current trapezoidal velocity profile with	
		a cubic polinomial linear trajectory	4
2			7
	2.1	Creation of circular trajectories for the robot	7
3			10
	3.1	Test of the trajectories	10
4			16
	4.1	Develop an inverse dynamics operational space controller	16
	4.2	Plot of the torques in the operation space for the given tra-	
		iectories	19

1.1 Substitution of the current trapezoidal velocity profile with a cubic polinomial linear trajectory

First of all I downloaded the "ros2 _kdl_package" package from the Github repository.

```
$ git clone https://github.com/RoboticsLab2024/
ros2_kdl_package.git
```

After that I modified appropriately the KDLPlanner class, inside the files "kdl_planner.h" and "kdl_planner.cpp", in order to define a new KDLPlanner::trapezoidal_vel function that takes the current time t and the acceleration time t_c as double arguments and returns three double variables s, \dot{s} and \ddot{s} that represent the curvilinear abscissa of our trajectory. Considering that a trapezoidal velocity profile for a curvilinear abscissa $s \in [0,1]$ is defined as:

$$s(t) = \begin{cases} \frac{1}{2}s_c t^2 & \text{se } 0 \le t \le t_c, \\ s_c t_c (t - t_c/2) & \text{se } t_c < t \le t_f - t_c, \\ 1 - \frac{1}{2}s_c (t_f - t)^2 & \text{se } t_f - t_c < t \le t_f. \end{cases}$$

```
//Implementation in kdl_planner.cpp
void KDLPlanner::trapezoidal_vel(double time, double
    accDuration, double& s, double& s_dot, double&
    s_ddot){
```

```
/* trapezoidal velocity profile with accDuration
        acceleration time period and trajDuration_ total
       duration.
        time = current time
        trajDuration_ = final time
        accDuration
                     = acceleration time
        trajInit_ = trajectory initial point
        trajEnd_ = trajectory final point */
    double sc_ddot=-1.0/(std::pow(accDuration,2)-
        trajDuration_*accDuration);
    if(time <= accDuration)</pre>
11
    {
      s = 0.5*sc_ddot*std::pow(time,2);
      s_dot = sc_ddot*time;
14
       s_ddot = sc_ddot;
15
    else if(time <= trajDuration_-accDuration)</pre>
      s = sc_ddot*accDuration*(time-(accDuration/2));
19
       s_dot = sc_ddot*accDuration;
       s_ddot = 0.0;
21
    }
    else
      s = 1 - 0.5*sc_ddot*std::pow(trajDuration_-time,2);
      s_dot = sc_ddot*(trajDuration_-time);
       s_ddot = -sc_ddot;
    }
28
  }
```

From there, I created another function named KDLPlanner::cubic_polynomial that creates the cubic polynomial curvilinear abscissa for our trajectory. In this case, we considered the formula:

$$s(t) = a_3 t^3 + a_2 t^2 + a_1 t + a_0$$

So I added in both previous files the prototype and its implementation.

```
//Definition of the prototype in kdl_planner.h
void cubic_polynomial(double t, double& s, double&
s_dot, double& s_ddot);
```

```
//Implementation in kdl_planner.cpp
void KDLPlanner::cubic_polynomial(double t, double& s,
double& s_dot, double& s_ddot){
```

```
double a0, a1, a2, a3, s0, sDot0, sDotf, sf; //
        Coefficienti del polinomio cubico
    //condizioni iniziali
    s0 = 0;
    sDot0 = 0;
6
    sDotf = 0;
    sf = 1;
    // Calcola i coefficienti del polinomio cubico
    a0 = s0;
10
    a1 = sDot0;
11
    a2 = (3 * (sf - s0) / (trajDuration_ * trajDuration_)
12
       ) - ((2 * sDot0 + sDotf) / trajDuration_);
    a3 = (-2 * (sf - s0) / (trajDuration_ * trajDuration_
        * trajDuration_)) + ((sDot0 + sDotf) / (
       trajDuration_ * trajDuration_));
14
    // Calcola s(t), s'(t) e s''(t) usando i coefficienti
15
        a0, a1, a2, a3
    s = a3 * t * t * t + a2 * t * t + a1 * t + a0;
    s_{dot} = 3 * a3 * t * t + 2 * a2 * t + a1;
17
    s_ddot = 6 * a3 * t + 2 * a2;
  }
19
```

The function takes as argument a double t representing time and returns three double s, \dot{s} and \ddot{s} that represent the curvilinear abscissa of our trajectory.

2.1 Creation of circular trajectories for the robot

I began by creating a new constructor KDLPlanner::KDLPlanner that takes as arguments the time duration, the starting point and the radius of our trajectory and store them in the corresponding class variables.

As before, I updated "kdl _planner.h" and "kdl_planner.cpp".

```
//Definition in kdl_planner.h

KDLPlanner(double _trajDuration, Eigen::Vector3d _trajInit, double _trajRadius);
```

In order to obtain the desidered trajectories, I implemented the positional path directly in the function KDLPlanner::compute_trajectory and in KDLPlanner::compute_trajectory_circ.

```
trajectory_point traj;
    traj.pos = trajInit_ + s*(trajEnd_-trajInit_);
    traj.vel = s_dot*(trajEnd_-trajInit_);
    traj.acc = s_ddot*(trajEnd_-trajInit_);
10
     return traj;
11
  }
13
14
  //Computing trajectories for rectilinear path and
      cubic_polynomial
  trajectory_point KDLPlanner::compute_trajectory(double
     time)
  {
17
    double s,s_dot,s_ddot;
18
     this->cubic_polynomial(time, s, s_dot, s_ddot);
19
     trajectory_point traj;
    traj.pos = trajInit_ + s*(trajEnd_-trajInit_);
    traj.vel = s_dot*(trajEnd_-trajInit_);
    traj.acc = s_ddot*(trajEnd_-trajInit_);
24
    return traj;
25
26
  }
```

```
//Computing trajectories for circular path and
     trapezoidal
  trajectory_point KDLPlanner::compute_trajectory_circ(
     double time, double accDuration)
  {
3
    double s,s_dot,s_ddot;
4
    this->trapezoidal_vel(time, accDuration, s, s_dot,
       s_ddot);
    trajectory_point traj;
    traj.pos.x() = trajInit_.x();
    traj.pos.y() = trajInit_.y() - trajRadius_*cos(2*M_PI
       *s);
    traj.pos.z() = trajInit_.z() - trajRadius_*sin(2*M_PI
       *s);
    traj.vel.x() = 0; //s_dot*(trajEnd_-trajInit_);
11
    traj.vel.y() = trajRadius_*sin(2*M_PI*s)*2*M_PI*s_dot
13
    traj.vel.z() = -trajRadius_*cos(2*M_PI*s)*2*M_PI*
       s_dot;
    traj.acc.x() = 0;
```

```
traj.acc.y() = -trajRadius_*2*M_PI*(-2*M_PI*sin(2*
       M_PI*s))*pow(s_dot,2)+cos(2*M_PI*s)*s_ddot;
    traj.acc.z() = -trajRadius_*2*M_PI*(-trajRadius_*sin
16
        (2*M_PI*s)*pow(s_dot,2)+cos(2*M_PI*s)*s_ddot);
17
     //traj.acc = s_ddot*(trajEnd_-trajInit_);
18
     return traj;
  }
21
22
23
  //Computing trajectories for circular path and
     trapezoidal
  trajectory_point KDLPlanner::compute_trajectory_circ(
     double time)
  {
26
     double s,s_dot,s_ddot;
27
     this->cubic_polynomial(time, s, s_dot, s_ddot);
     trajectory_point traj;
     traj.pos.x() = trajInit_.x();
31
    traj.pos.y() = trajInit_.y() - trajRadius_*cos(2*M_PI
32
       *s);
    traj.pos.z() = trajInit_.z() - trajRadius_*sin(2*M_PI
        *s);
    traj.vel.x() = 0; //s_dot*(trajEnd_-trajInit_);
34
     traj.vel.y() = trajRadius_*sin(2*M_PI*s)*2*M_PI*s_dot
35
     traj.vel.z() = -trajRadius_*cos(2*M_PI*s)*2*M_PI*
        s_dot;
    traj.acc.x() = 0;
37
     traj.acc.y() = -trajRadius_*2*M_PI*(-2*M_PI*sin(2*
        M_PI*s))*pow(s_dot,2)+cos(2*M_PI*s)*s_ddot;
     traj.acc.z() = -trajRadius_*2*M_PI*(-trajRadius_*sin
        (2*M_PI*s)*pow(s_dot,2)+cos(2*M_PI*s)*s_ddot);
     //traj.acc = s_ddot*(trajEnd_-trajInit_);
    return traj;
42
43
  }
44
```

3.1 Test of the trajectories

Considering the trajectories obtained in the previous chapter, I tested them with the joint space inverse dynamic controller. Before plotting, the torques sent to the manipulator, I tuned appropriately the gains K_p and K_d to reach a smooth behavior.

The function that return the torques by taking as inputs the desire joints position, velocity and acceleration:

```
Eigen::VectorXd KDLController::idCntr(KDL::JntArray
          \& _qd,
                                          KDL:: JntArray &
                                             _dqd,
                                          KDL:: JntArray &
                                             _ddqd,
                                          double _Kp,
                                             double _Kd)
  {
      // read current state
      Eigen::VectorXd q = robot_->getJntValues();
      Eigen::VectorXd dq = robot_->getJntVelocities();
      // calculate errors
      Eigen::VectorXd e = _qd.data - q;
      Eigen::VectorXd de = _dqd.data - dq;
12
13
      Eigen::VectorXd ddqd = _ddqd.data;
      return robot_->getJsim() * (ddqd + _Kd*de + _Kp*e)
               + robot_->getCoriolis(); //+ robot_->
                  getGravity() /*friction compensation?*/;
                     // gravity has been set to 0 in the .
                  world
```

As follow, the node's implementation is:

```
11
           JOINT SPACE INVERSE DYNAMICS CONTROL
                       // Compute differential IK
                       joint_velocities_old_.data =
                          joint_velocities_.data;
6
                       Vector6d cartvel; cartvel << p.vel
                          + 5*error, o_error;
                       joint_velocities_.data =
                          pseudoinverse(robot_->
                          getEEJacobian().data)*cartvel;
                       joint_positions_.data =
                          joint_positions_.data +
                          joint_velocities_.data*dt;
                       joint_accelerations_d_.data = (
                          joint_velocities_.data -
                          joint_velocities_old_.data)/dt;
11
                       KDLController controller_(*robot_);
                       joint_efforts_.data = controller_.
14
                          idCntr(joint_positions_,
                          joint_velocities_,
                          joint_accelerations_d_, 50.0,
                          5.0);
15
                       KDL::Frame frame_final = robot_->
16
                          getEEFrame();
                       KDL::Twist velocities_final;
17
                          velocities_final.vel=KDL::Vector
                          ::Zero(); velocities_final.rot=
                          KDL::Vector::Zero();
                       KDL::Twist acceleration_final;
18
                          acceleration_final.vel=KDL::
                          Vector::Zero();
                          acceleration_final.rot=KDL::
                          Vector::Zero();
```

Moreover, to ensure Gazebo starts at launch the default value of "use_sim" has been set to true in both the "iiwa.launch.py" file and the "iiwa.config.xacro" file.

```
<xacro:arg name="use_sim" default="true" />
```

To run our world, it has been added in "iiwa.launch.py" the following code:

The effort_controller has added inside the file "iiwa_controllers.yaml":

```
effort_controller:
type: effort_controllers/
JointGroupEffortController
```

```
effort_controller:
     ros__parameters:
       command_interfaces:
         - effort
       state_interfaces:
         - position
         - velocity
         - effort
       joints:
         - joint_a1
         - joint_a2
11
         - joint_a3
12
         - joint_a4
         - joint_a5
         - joint_a6
15
         - joint_a7
16
17
18
       state_publish_rate: 200.0
       action_monitor_rate: 20.0
```

In the file "empty.world" has been added two links from internet:

To visualize them it's possible to use the command:

```
$ ros2 run rqt_plot rqt_plot
```

Then, we selected /effort_controller/commands/data[i] for all the seven joints.

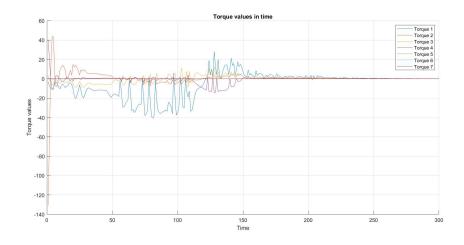


Figure 3.1: Torques values in joints space for a linear trapezoidal trajectory

After that, I created a script in MATLAB which receive a bag file that contains the informations about the torques of each joint. In order to create this bag file we used the command:

```
$ ros2 bag record effort_controller/commands/data -
    o my_bag
```

This bag file was sent to a MATLAB script to retrieve the desidered plot of the torques. This file is available in the repository.

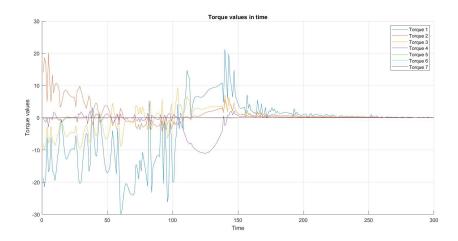


Figure 3.2: Torques values in joints space for a linear cubic_polynomial trajectory $\frac{1}{2}$

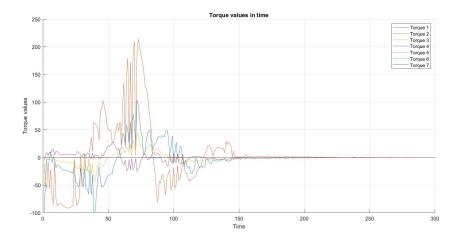


Figure 3.3: Torques values in joints space for a circular trapezoidal trajectory $\frac{1}{2}$

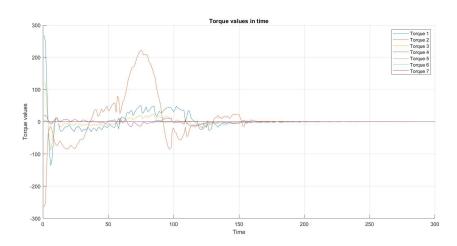


Figure 3.4: Torques values in joints space for a circular cubic_polynomial trajectory $\,$

4.1 Develop an inverse dynamics operational space controller

Then the four trajectories have been implemented with the operational space inverse dynamic controller tuning appropriately the gains Kpp, Kpo, Kdp, Kdo to reach a smooth behaviour and making sure the manipulator stays at rest after completing the trajectory. The operational space controller function takes as inputs the desired frame, velocity and acceleration and the four gains and returns the torque. The operational space controller has been tested on the four trajectories and the joint torque commands has been plot. The code is:

```
Eigen::VectorXd KDLController::idCntr(KDL::Frame &
          _desPos,
                                           KDL::Twist &
                                               _desVel,
                                           KDL::Twist &
                                               _desAcc,
                                           double _Kpp,
                                               double _Kpo,
                                           double _Kdp,
                                               double _Kdo)
  {
       // read current state
       KDL::Frame x = robot_->getEEFrame();
       KDL::Twist dx = robot_->getEEVelocity();
9
       Vector6d x_tilde, dot_x_tilde;
11
       Eigen::Matrix < double, 6,6 > Kp;
13
       Eigen::Matrix<double,6,6> Kd;
14
15
       Kp.setZero();
       Kd.setZero();
```

```
Kp.block(0,0,3,3) = _Kpp*Eigen::Matrix3d::Identity
      Kp.block(3,3,3,3) = _Kpo*Eigen::Matrix3d::Identity
19
          ();
      Kd.block(0,0,3,3) = _Kdp*Eigen::Matrix3d::Identity
20
      Kd.block(3,3,3,3) = _Kdo*Eigen::Matrix3d::Identity
          ();
22
       computeErrors(_desPos,x,_desVel,dx,x_tilde,
23
          dot_x_tilde);
      for (unsigned int i=0;i<3;i++){x_tilde(i)=_Kpp*</pre>
          x_tilde(i); dot_x_tilde(i)=_Kdp*dot_x_tilde(i);}
      for (unsigned int i=3;i<6;i++){x_tilde(i)=_Kpo*</pre>
          x_tilde(i); dot_x_tilde(i) = _Kdo*dot_x_tilde(i);}
      Eigen::Matrix < double, 7, 1> y;
      y = pseudoinverse(robot_->getEEJacobian().data)*(
          toEigen(_desAcc)+x_tilde+dot_x_tilde-robot_->
          getEEJacDotqDot());
30
      return robot_->getJsim()*y + robot_->getCoriolis()
31
          ; //+ robot_->getGravity();
                                            // gravity has
          been set to 0 in the .world
  }
32
```

```
// OPERATIONAL SPACE INVERSE DYNAMICS CONTROL
                        Kpp = 250.0;
                        Kpo = 250.0;
                        Kdp = 50.0;
                        Kdo = 50.0;
                        KDL::Frame desired_frame;
                        desired_frame.p = toKDL(p.pos);
                        desired_frame.M = cartpos.M;
11
                        KDL::Twist desired_vel;
                        desired_vel.vel = toKDL(p.vel);
14
                        KDL::Twist desired_accel;
15
                        desired_accel.vel = toKDL(p.acc);
16
17
                        robot_->getInverseKinematics(
                           desired_frame,
```

```
des_joint_positions_);
                        robot_->getInverseKinematicsVel(
19
                           desired_vel,
                           des_joint_velocities_);
                        robot_ ->getInverseKinematicsAcc(
20
                           desired_accel,
                           joint_accelerations_d_);
                           defined in utils.h
21
                        joint_efforts_.data=controller_.
22
                           idCntr(desired_frame, desired_vel
                           ,desired_accel,Kpp, Kpo, Kdp,
                           Kdo);
                   }
23
```

To stop the manipulator, the code is:

```
if(cmd_interface_ == "effort")
2
                        KDLController controller_(*robot_);
                        des_joint_velocities_.data=Eigen::
                           VectorXd::Zero(7,1);
                        des_joint_accelerations_.data=Eigen
                           :: VectorXd:: Zero(7,1);
                        joint_efforts_.data=controller_.
                           KDLController::idCntr(
                           joint_positions_,
                           des_joint_velocities_,
                           des_joint_accelerations_, 50.0,
                           5.0);
                        robot_->update(toStdVector(
                           joint_positions_.data),
                           toStdVector(joint_velocities_.
                           data));
10
                        for (long int i = 0; i <
                           joint_velocities_.data.size();
                           ++i) {
                            desired_commands_[i] =
12
                               joint_efforts_.data[i];
                        }
13
                   }
14
```

4.2 Plot of the torques in the operation space for the given trajectories

As follow, the plot of the torques in the operational space:

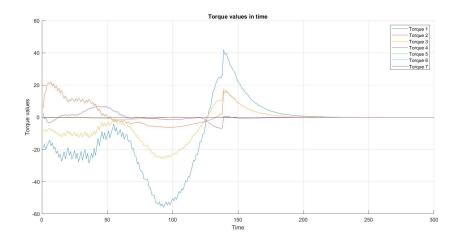


Figure 4.1: Torques values in operational space for a linear trapezoidal trajectory \mathbf{r}

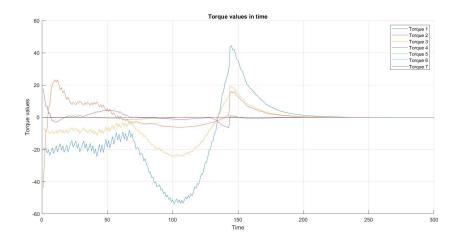


Figure 4.2: Torques values in operational space for a linear cubic_polynomial trajectory

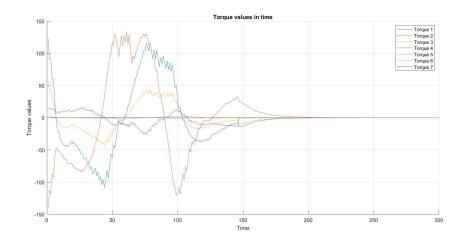


Figure 4.3: Torques values in operational space for a circular trapezoidal trajectory

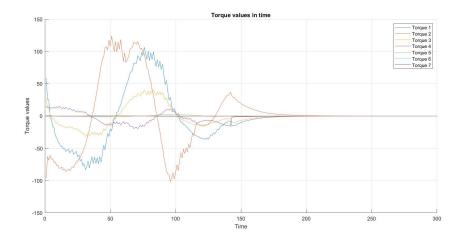


Figure 4.4: Torques values in operational space for a circular cubic_polynomial trajectory $\frac{1}{2}$