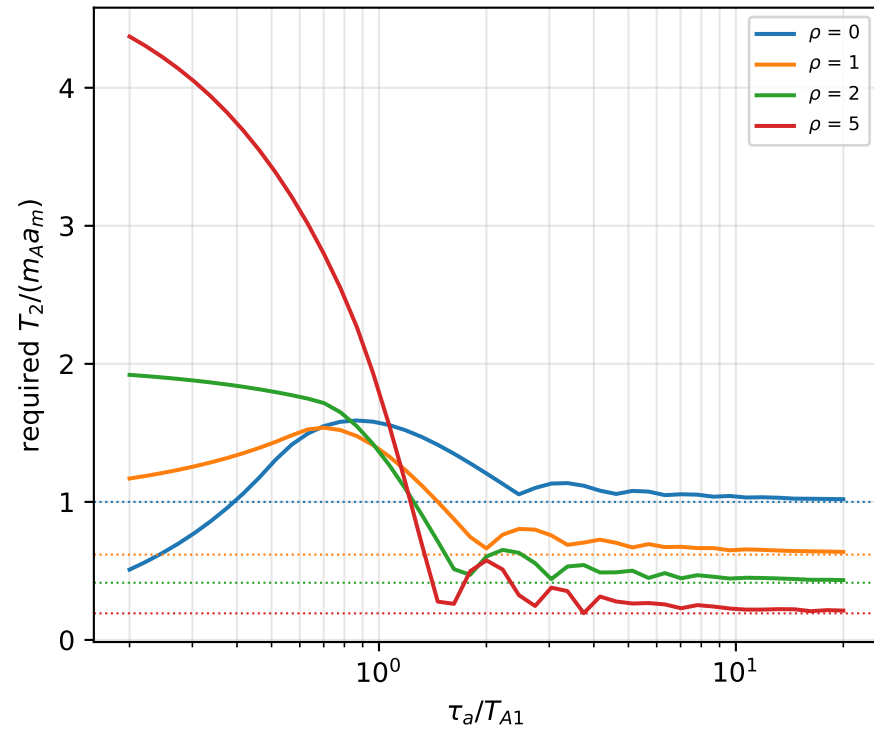
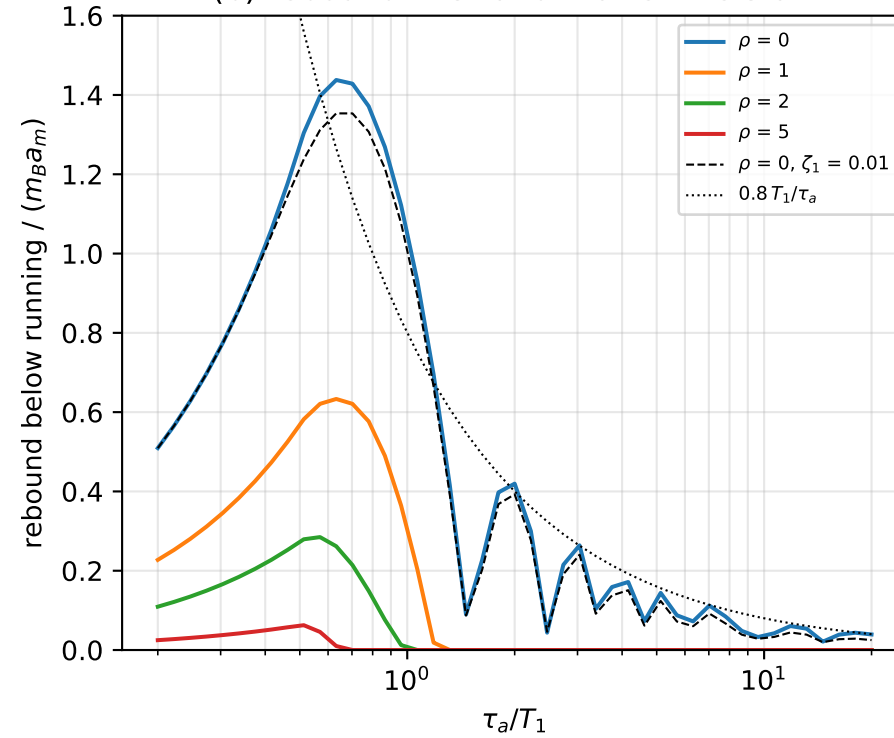


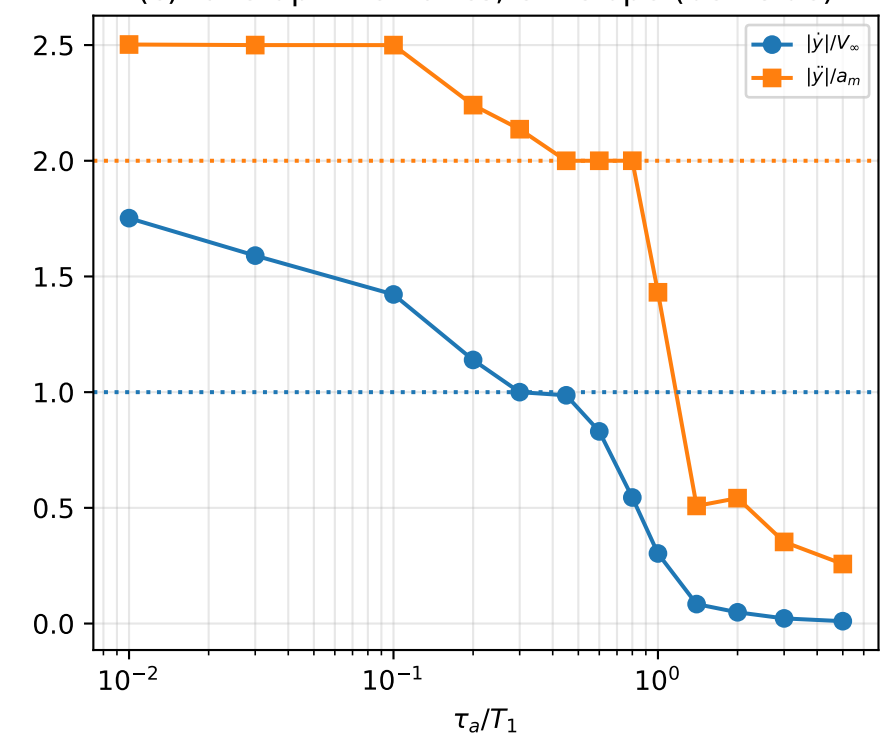
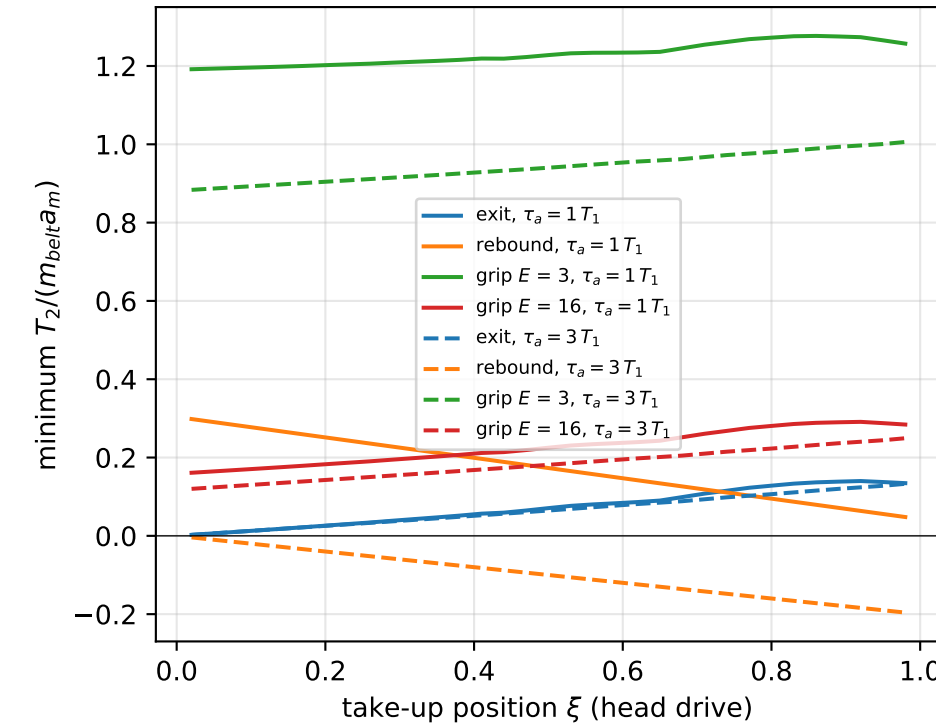
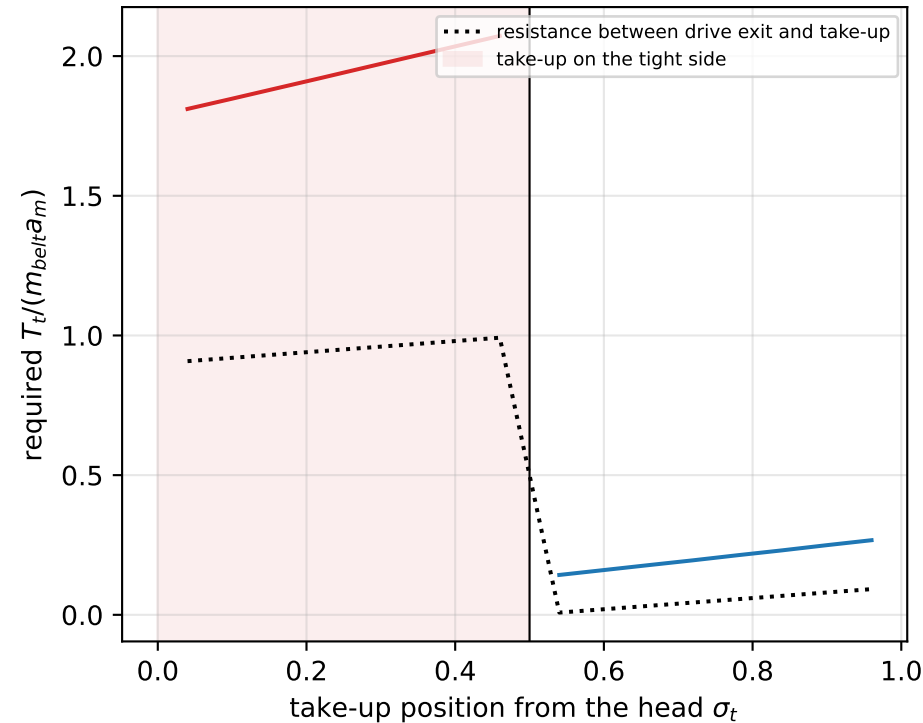
(a) slack at the drive exit, strand A (dotted: slow start)



(b) rebound in strand B after the start



(c) take-up kinematics, envelope (belt side)

(d) minimum T_2 , head drive, $\gamma = 2, \rho = 1$ (e) drive at $\sigma_d = 0.5$ (full loop, $E = 16$)(f) β_{min} , direct counterweight, $\gamma = 2$ 