

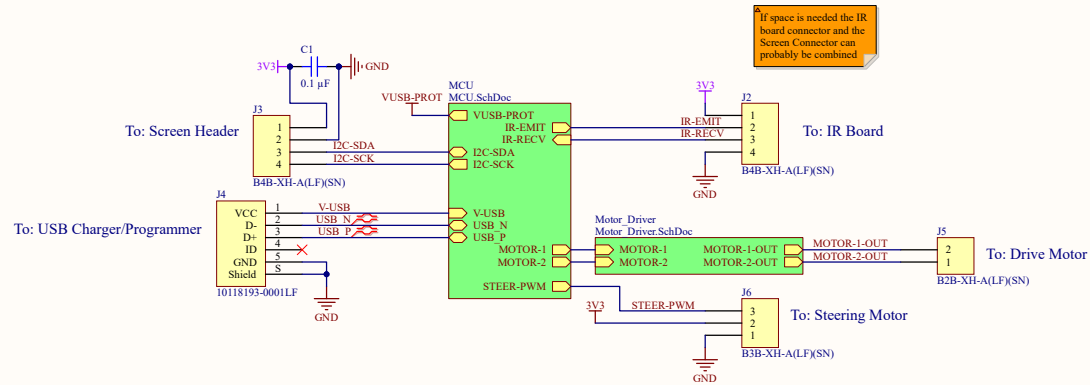

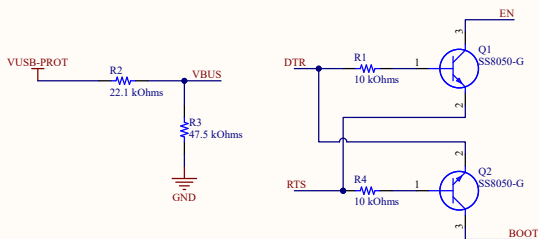



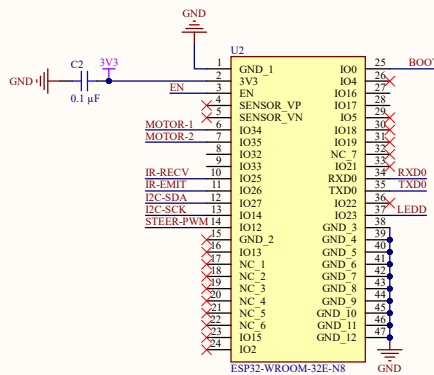


Insert really cool logo here	Really_Cool_Title: Remote Control Car Laser Tag (RCCLT)
Version: 2	Engineer: Daniel Mortenson
Revision: 0	
Description: It's RC Cars that play Laser Tag! totally home made, totally 3D printer, totall cool tell your friends	



this page is basically this
https://dl.espressif.com/dl/schematics/esp32_devkitc_v4-sck-20180607a.pdf



ESP32 has five strapping pins:
• MTD1 - IO12
• GPIO0 - IO0
• GPIO2 - IO2
• MTD0 - IO15
• GPIO5 - IO5
Don't use these for non-boot functions

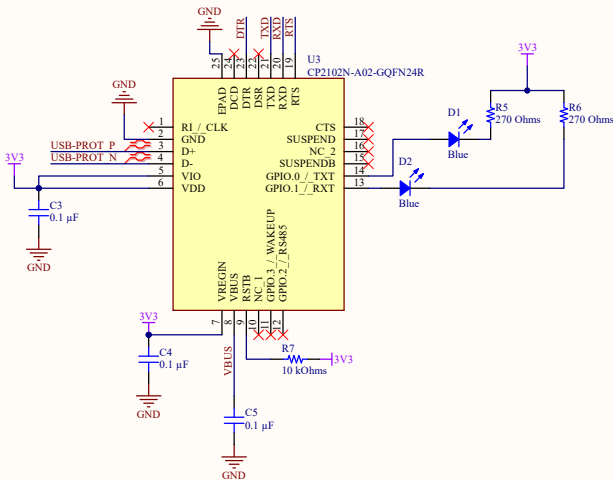





datasheet recommends adding a 4.7µf next to each bypass cap... seems excessive for this project

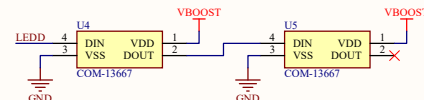


This is so I can swap these if I screw it up, these can be solder bridges rather than resistors

these are two capacitors on the same net??

Really_Cool_Title: Remote Control Car Laser Tag (RCCLT)
Version: 2
Revision: 0
Description: It's RC Cars that play Laser Tag! totally home made, totally 3D printer, totally cool tell your friends
Engineer: Daniel Mortenson

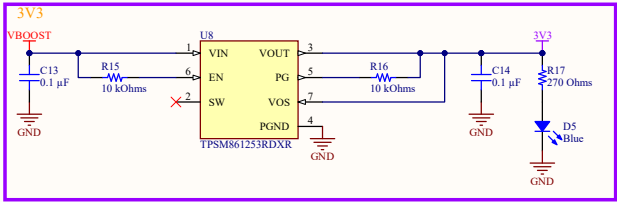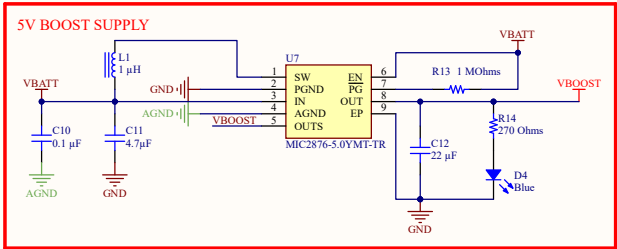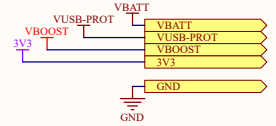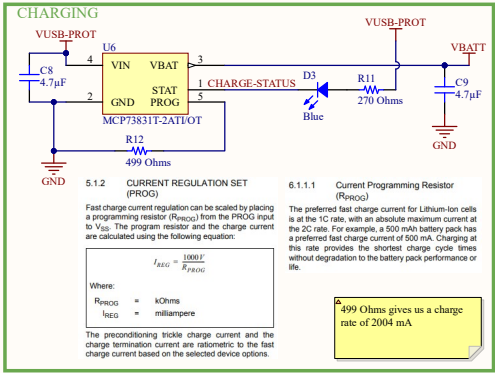

Insert really cool logo here	Really_Cool_Title: Remote Control Car Laser Tag (RCCLT)
Version: 2	Engineer: Daniel Mortenson
Revision: 0	
Description: It's RC Cars that play Laser Tag! totally home made, totally 3D printer, totall cool tell your friends	

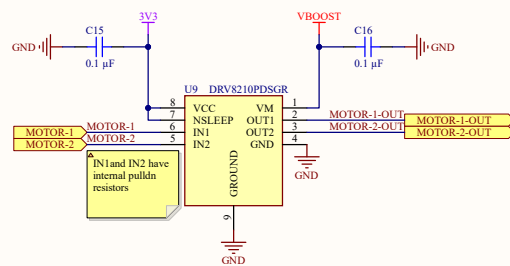

Insert really cool logo here	Really_Cool_Title: Remote Control Car Laser Tag (RCCLT)	
	Version: 2	Engineer: Daniel Mortenson
	Revision: 0	
	Description: It's RC Cars that play Laser Tag! totally home made, totally 3D printer, totall cool tell your friends	