

Planche IV

C. Vue d'Artiste, Module au Repos

A. Guidages Idéales + Ressorts Idéaux



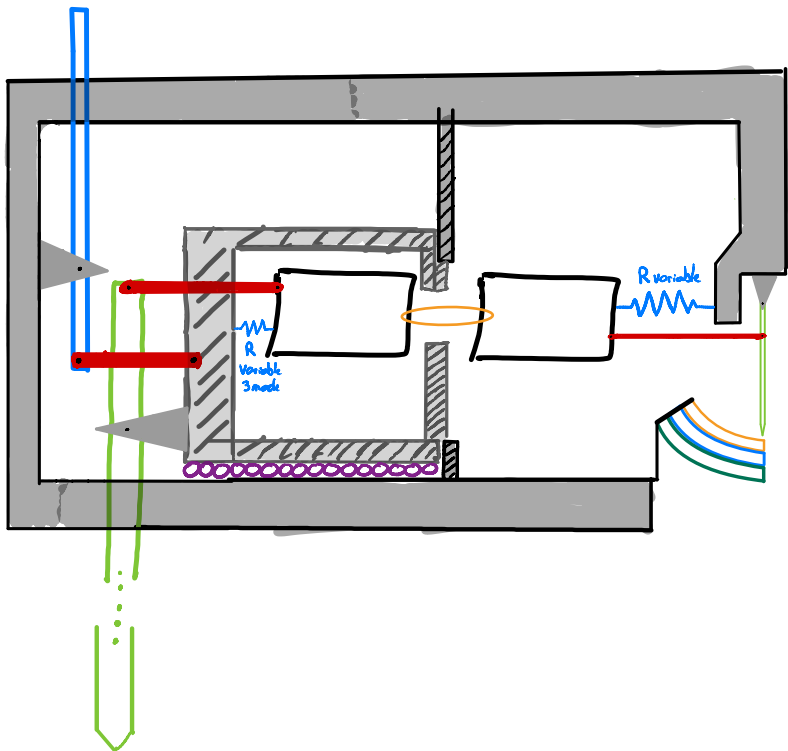


Schéma guidage flexible, Ph I

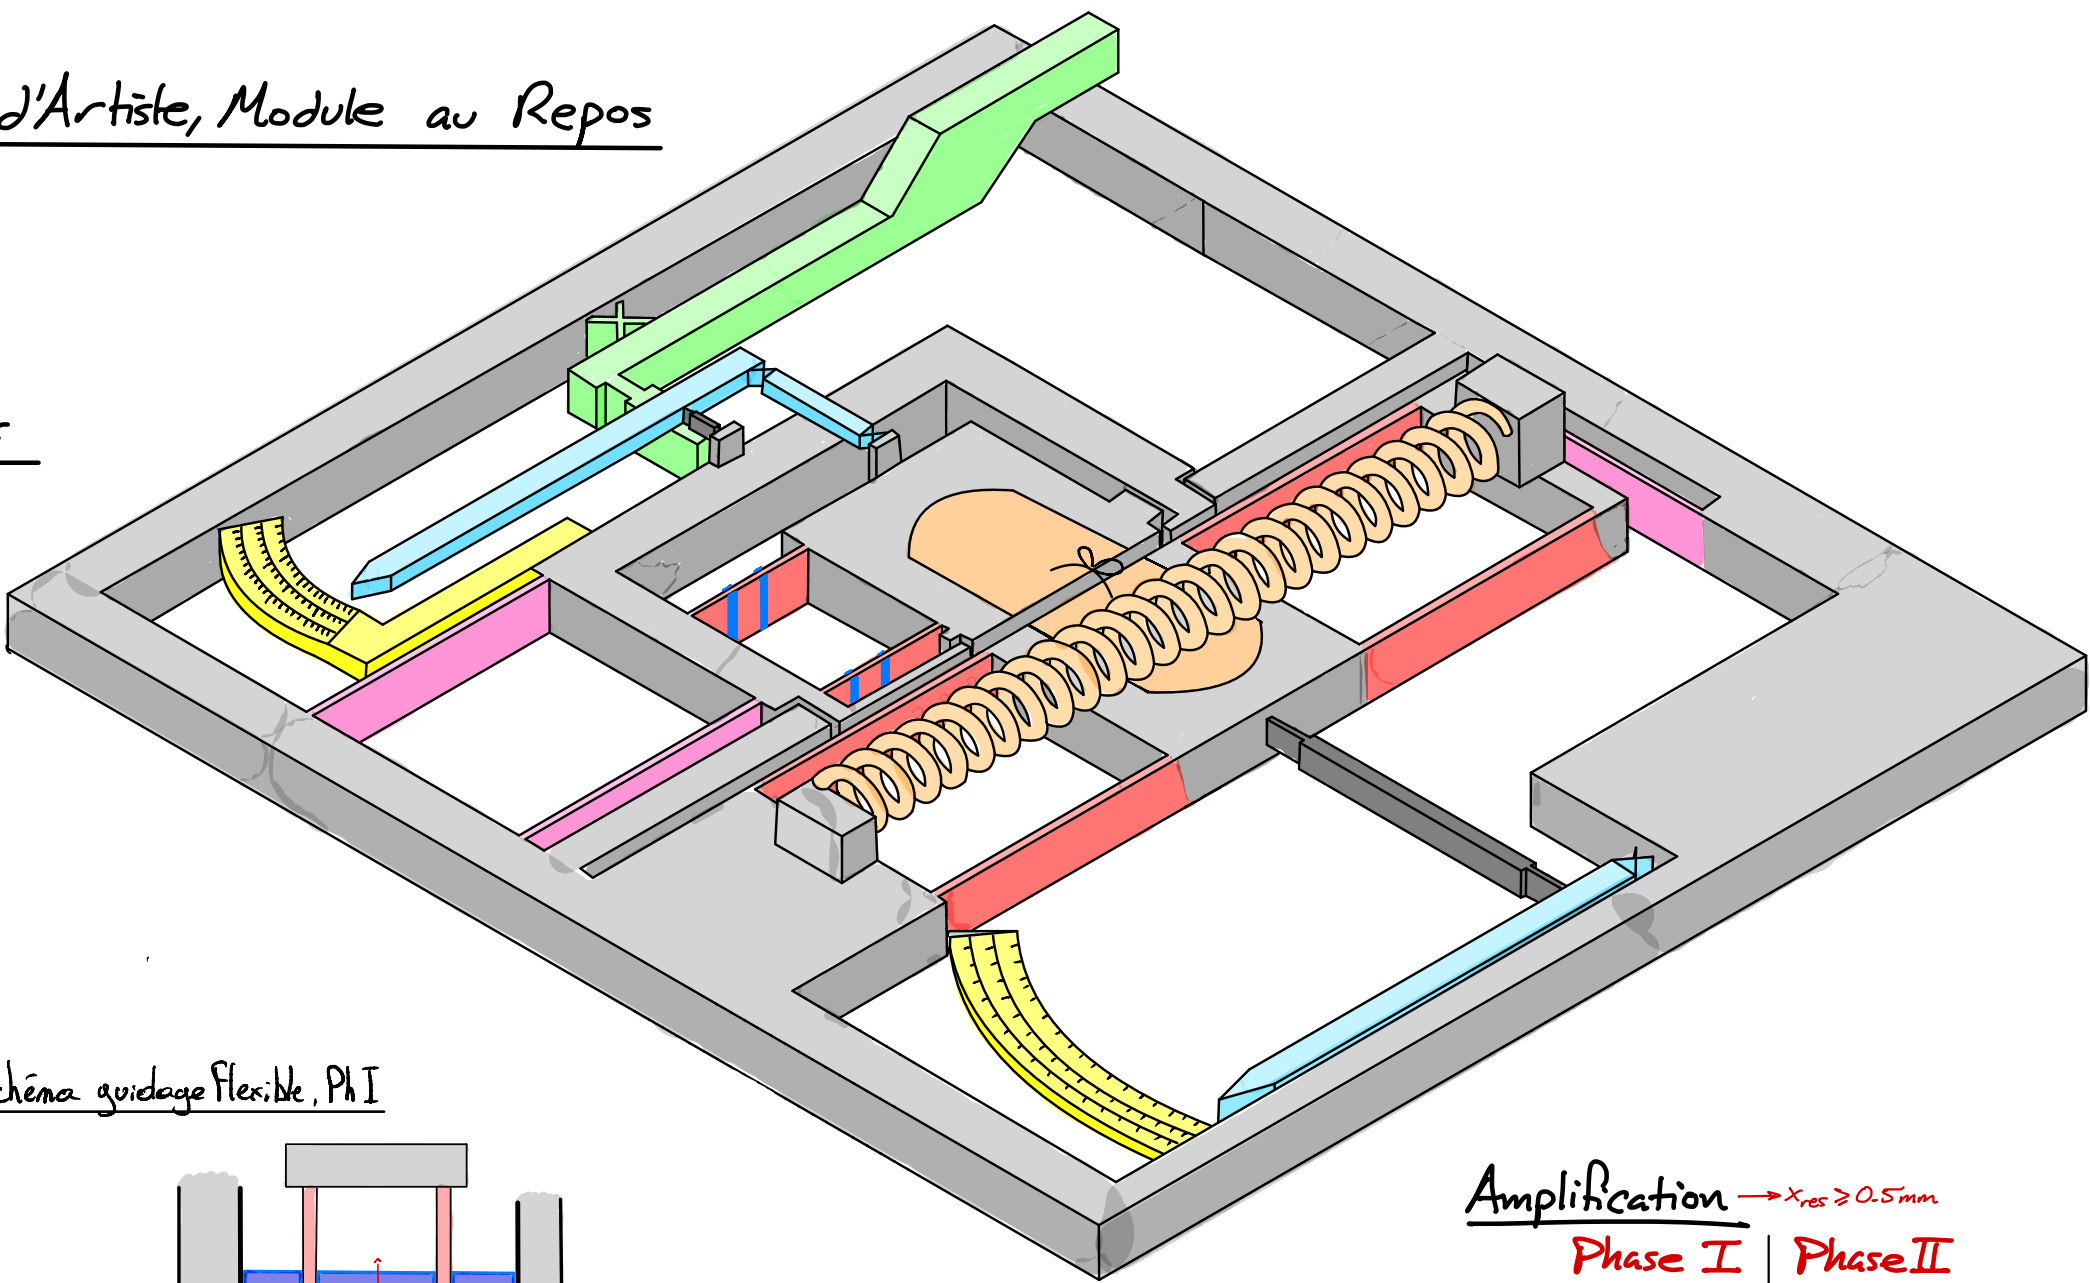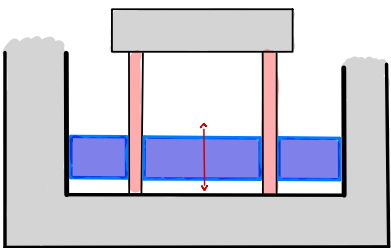


Amplification → $x_{res} \geq 0.5 mm$


	Phase I	Phase II
A	10	15
$\Delta x = 2 mm$		$\Delta x = 4 mm$
	$2 cm = 40 (0.5 mm)$	$6 cm = 120 (0.5 mm)$

B. Guidages Idéales, Système Complet


Repos

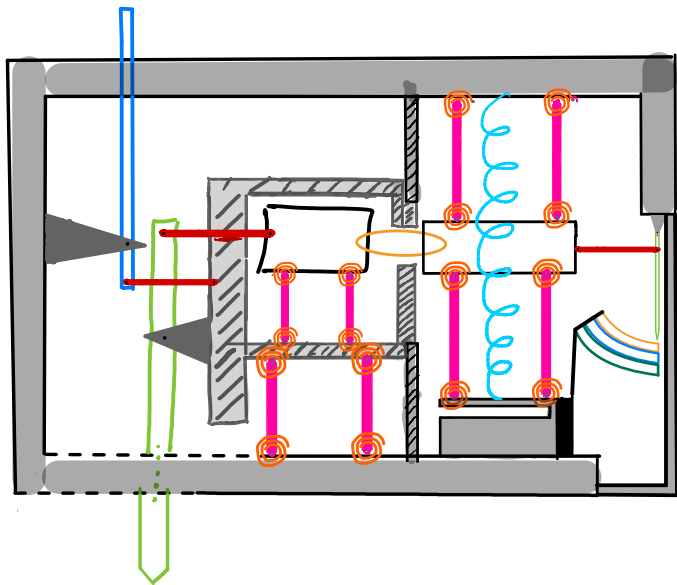

Ph I

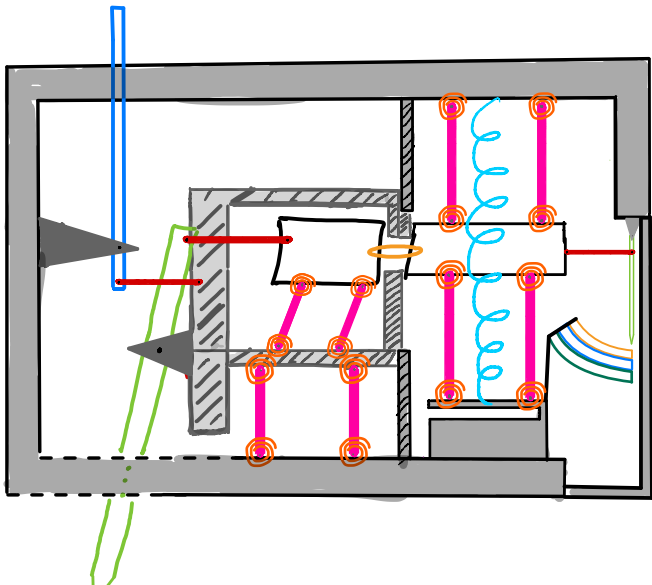

Ph II

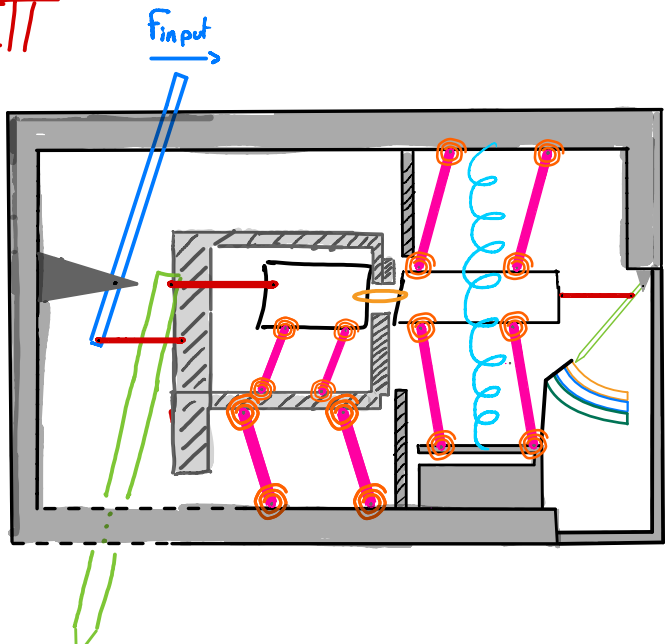

Rigidités

	Phase I	Phase II
EP2	500 N/m	1000 N/m
EP6	2000 N/m	12'000 N/m
EP9	4000 N/m	24'000 N/m
Δx	2 mm	~ 4 mm