MCUXpresso SDK USB Stack Device Reference Manual

NXP Semiconductors

Contents

Contents

Contents

Contents

Contents

Title

Chapter   **USB OS Adapter**

Chapter 1
Overview

1.1   Introduction

The USB device stack is composed of the USB controller driver only, which consists of the common controller driver and the controller (like: xHCI in Kinetis) driver. The device class driver and the USB framework to handle the standard enumeration and request defined by USB specification 2.0 are moved to the application layer. These two parts are example-specific to reduce the footprint of the examples.

Note

   The xHCI represents either EHCI or KHCI, not the XHCI for USB 3.0.

In the USB Device stack, there are two different USB applications. One is the lite version and the other is similar to the examples in the previous USB stack.

The whole architecture and components of USB stack are shown below:
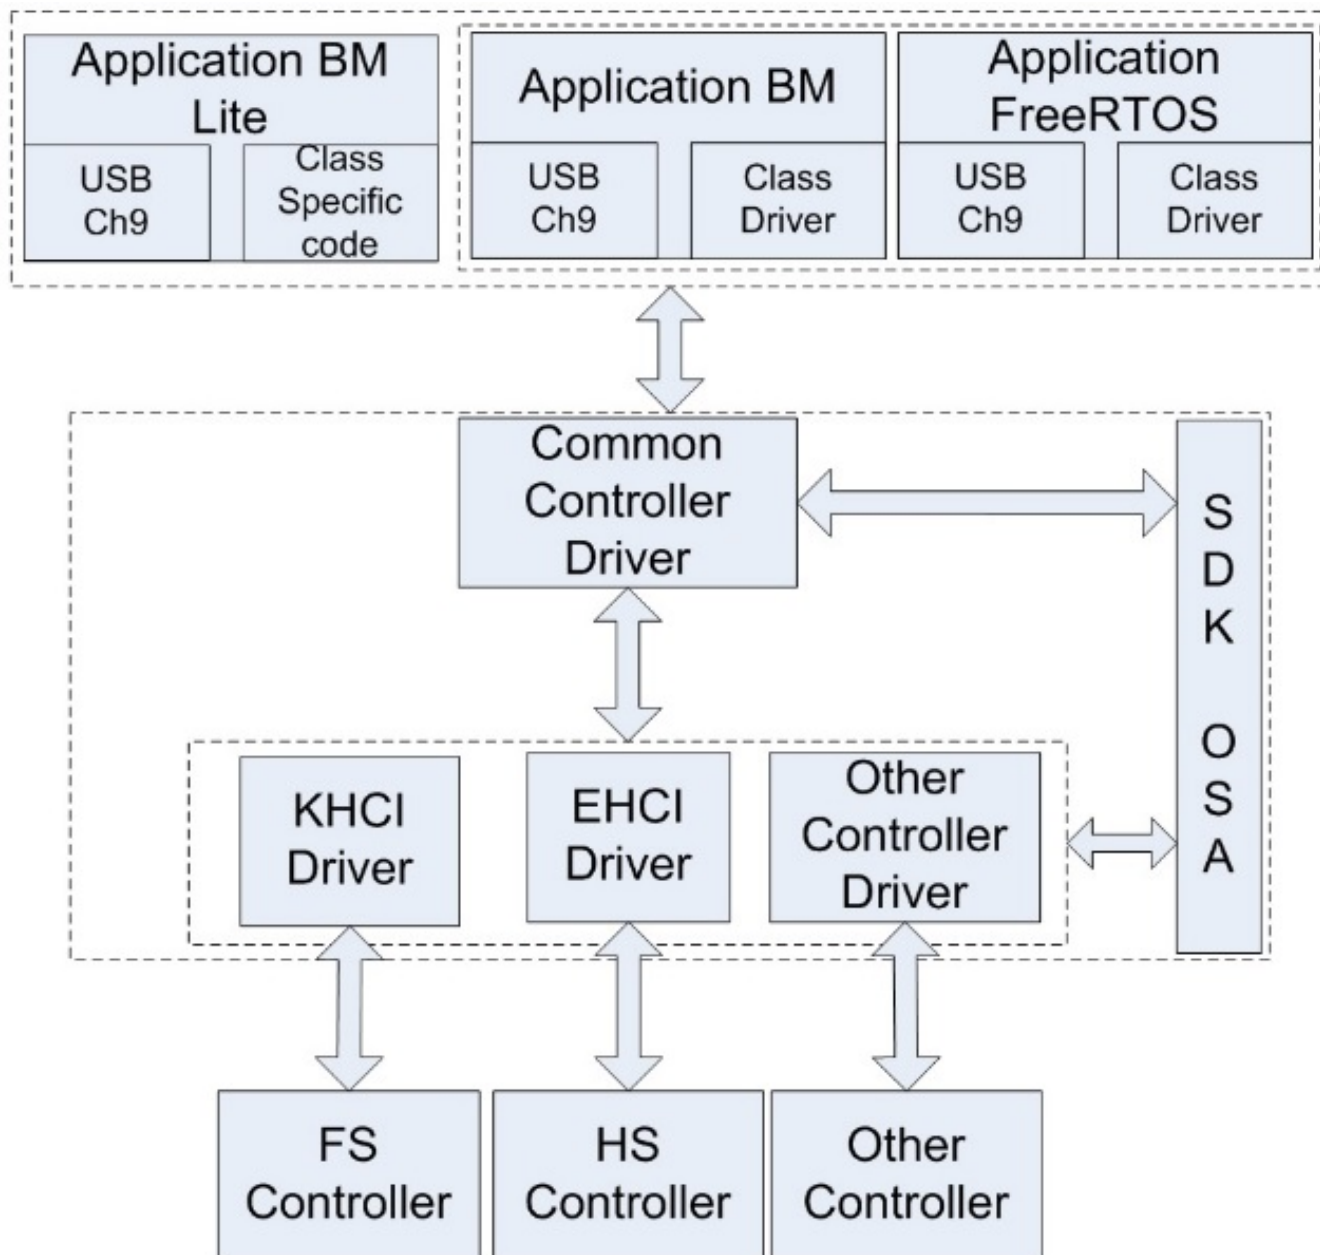
Figure 1.1.1: USB device stack architecture

For the lite version application, the code size is smaller than the non-lite version because the lite's class driver/ch9 implementation is example-specific, while the non-lite's class driver/ch9 implementation is a generic implementation. However, an obvious drawback of the new architecture is that customers need to use the controller driver API to implement the standard enumeration process, the class-specific process, and the customer-specific functionality.

The device stack initialization sequence for the lite version application is as follows:

1. Initialize the Pin Mux, USB clock, and so on. If the SoC has a USB KHCI-dedicated RAM, the RAM memory needs to be clear after the KHCI clock is enabled. When the demo uses USB EHCI IP, the USB KHCI dedicated-RAM can't be used and the memory can't be accessed.
2. Initialize the USB device stack by calling the API USB_DeviceInit.
3. When the device task is enabled, create the USB device task by using the device handle, returned from USB_DeviceInit, as the task parameter when the environment is an RTOS.
4. Install the USB ISR.
5. Enable the USB interrupt and the interrupt priority.
6. Start the USB device by calling the USB_DeviceRun.
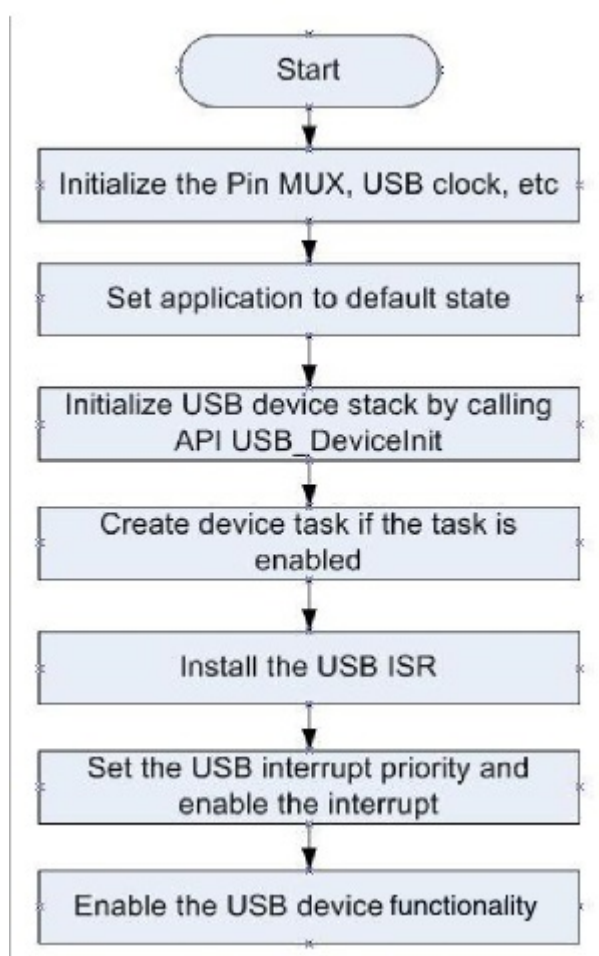
Figure 1.1.2: USB device initialization for lite version

To assist customers with less concerns about the footprint and focus on ease of use of the USB stack, a generic usb_ch9 implementation is provided and the specified class driver, such as HID class driver, CDC class driver, and so on. This implementation is more generic, it can be reused in different examples and the APIs are easier to use. However, some callback functions need to be implemented and the code size is larger.

Introduction

The device stack initialization sequence for non-lite version application is as follows:

1. Initialize the Pin Mux, USB clock, and so on. If the SOC has the USB KHCI-dedicated RAM, the RAM memory needs to be clear after the KHCI clock is enabled. When the demo uses USB EHCI IP, the USB KHCI-dedicated RAM can't be used and the memory can't be accessed.

   Note

   > The USB_GLOBAL, USB_BDT, and USB_RAM_ADDRESS_ALIGNMENT(n) are only used for USB device stack. The USB device global variables are put into the section m_-usb_global or m_usb_bdt by using the MACRO USB_GLOBAL and USB_BDT. In this way, the USB device global variables can be linked into USB dedicated RAM by changing the linker file. This feature can only be enabled when the USB dedicated RAM is not less than 2 K Bytes.

2. Initialize the USB device stack by calling the API USB_DeviceClassInit. Initialize each application.
3. Get each class handle from the usb_device_class_config_struct_t::classHandle.
4. When the device task is enabled, create the USB device task by using the device handle, returned from USB_DeviceClassInit, as the task parameter when the environment is RTOS.
5. Install the USB ISR.
6. Enable the USB interrupt and the interrupt priority.
7. Start the USB device by calling the USB_DeviceRun.
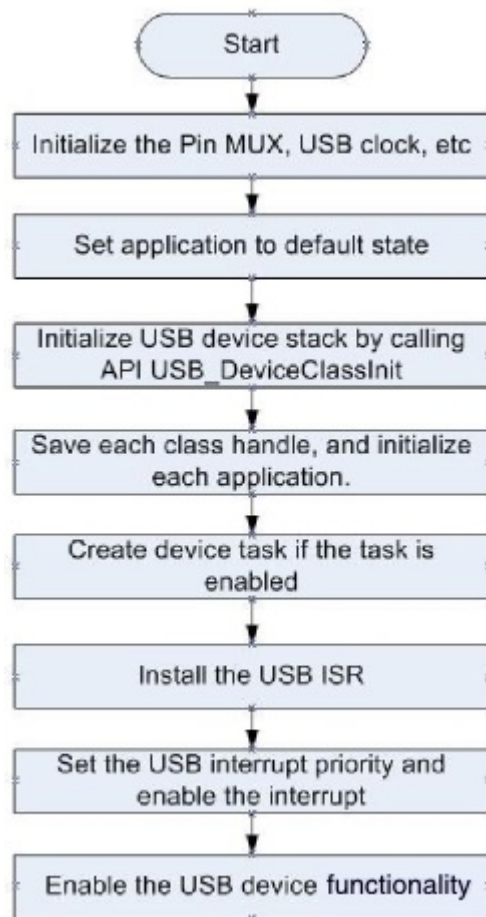
Figure 1.1.3: USB device initialization for non-lite version

To support different RTOSes with the same code base, the OSA is used inside the USB stack to wrap the differences between RTOSes.

Note

The OSA should not be used in the USB application. As a result, from the USB application's viewpoint, the OSA is invisible.

1.2 USB Device Callback Work Flow

The device callback is registered when the USB_DeviceInit function is called.

The following events should be processed in this callback function:

- kUsbDeviceEventBusReset
  When the application receives this event, the device has received a BUS RESET signal. In the event, the control pipe should be initialized. See the work flow. The parameter eventParam is not used.
- kUsbDeviceEventSetConfiguration

When the application receives this event, the host has sent a set configuration request. The configuration value can be received from the parameter eventParam. In the event, the application configuration can be set. Initialize each interface in the current configuration by using zero as an alternate setting.

- kUsbDeviceEventSetInterface

When the application receives this event, the host sent a set alternate setting request of an interface. The interface and alternate setting value can be received from the parameter eventParam. The eventParam points to a uint16_t variable. The high 8-bit is interface value and the low 8-bit is alternate setting. In the event, the application changes the alternate setting of this interface if the new alternate setting is not equal to the current setting.

Normally, change the steps as follows:

1. Cancel all transfers of the current alternate setting in this interface.
2. De-initialize all pipes of the current alternate setting in this interface.
3. Initialize all pipes of the new alternate setting in this interface.
4. Prime the transfers of the new setting.

For example,

```
uint16_t*   temp16 = (uint16_t*)eventParam;
uint8_t       interface = (uint8_t)((*temp16&0xFF00)>>0x08);
currentAlternateSetting[interface] = (uint8_t)(*temp16&0x00FF);
```

The device callback event work flow:
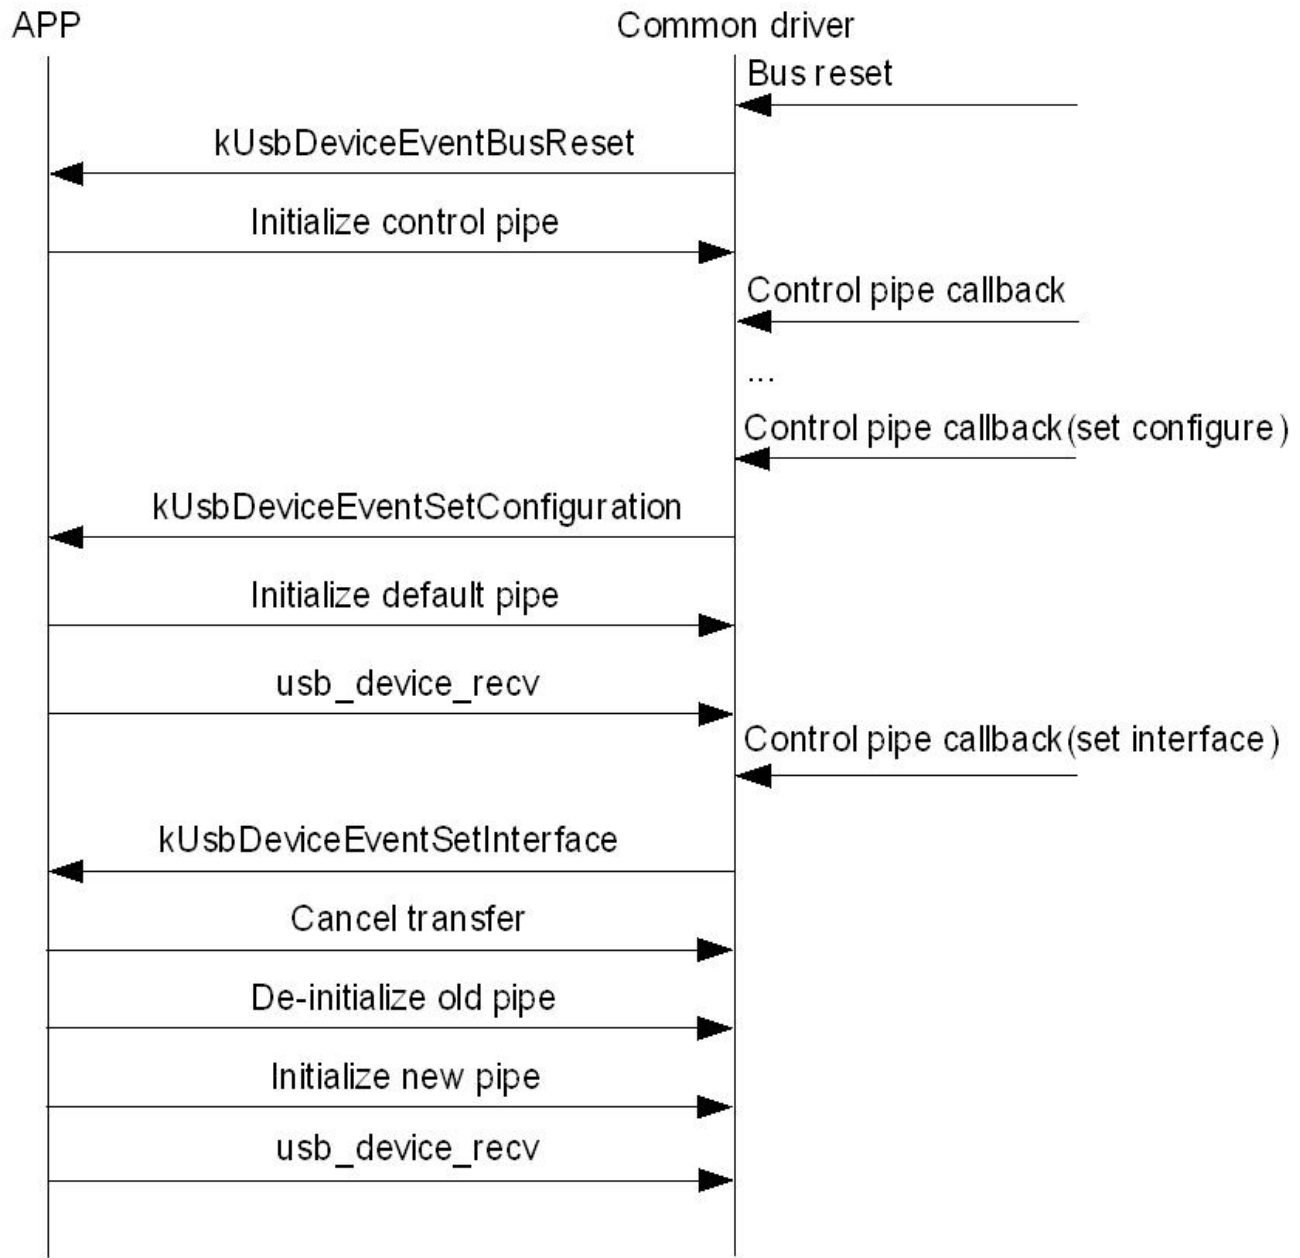
Figure 1.2.1: USB device callback working flow

1.3   USB Device Class-Specific Request Work Flow

The class sepcific request can be classified into two types according to whether these is the data stage in a setup transfer. The section describes class specific request with data stage only. For the class-specific request without data stage, the case is quite simple, we don't describe here. Depend on the data direction, there are two cases, host wants to send data to device and host wants to get data from device.

USB Device Class-Specific Request with Data Sent from Host
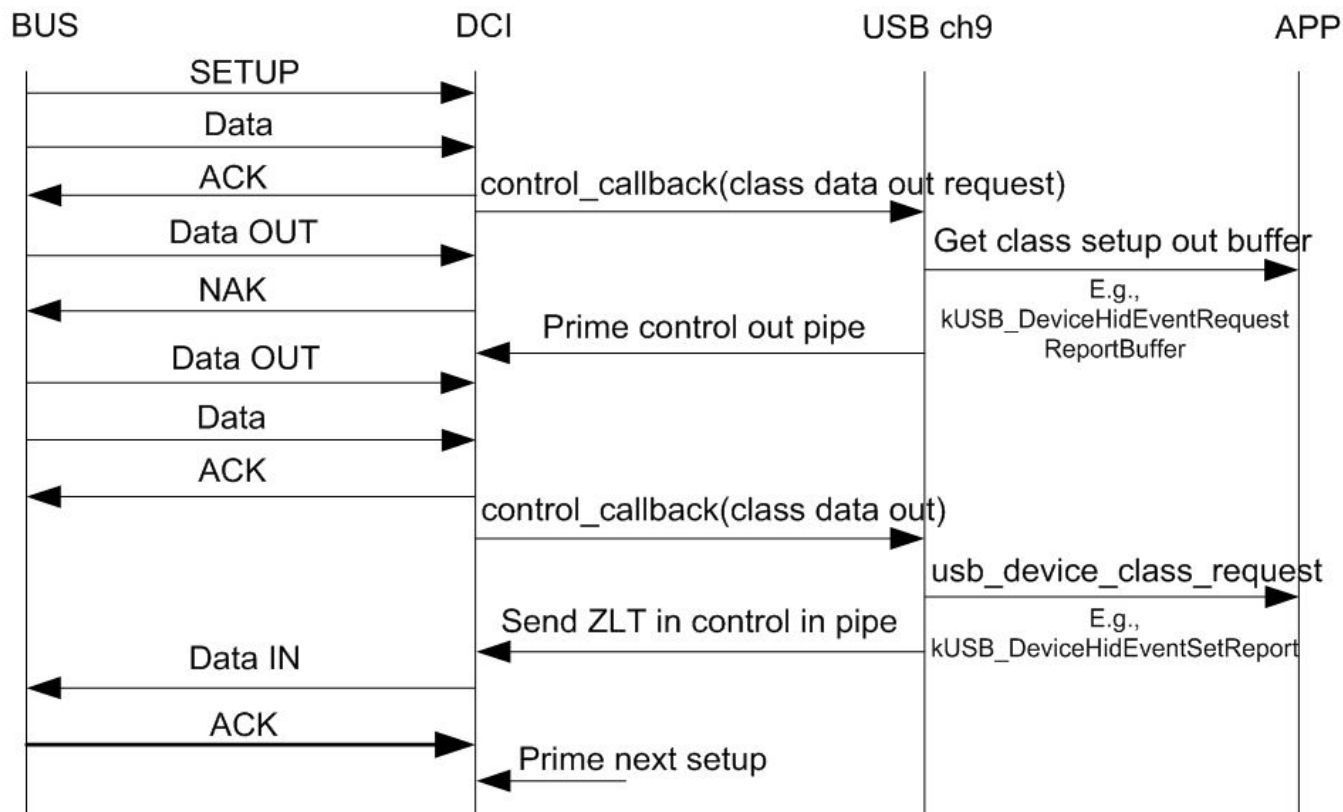
Figure 1.3.1: USB Device Class-Specific Request with Data Sent from Host

USB Device Class-Specific Request with Data Sent to Host
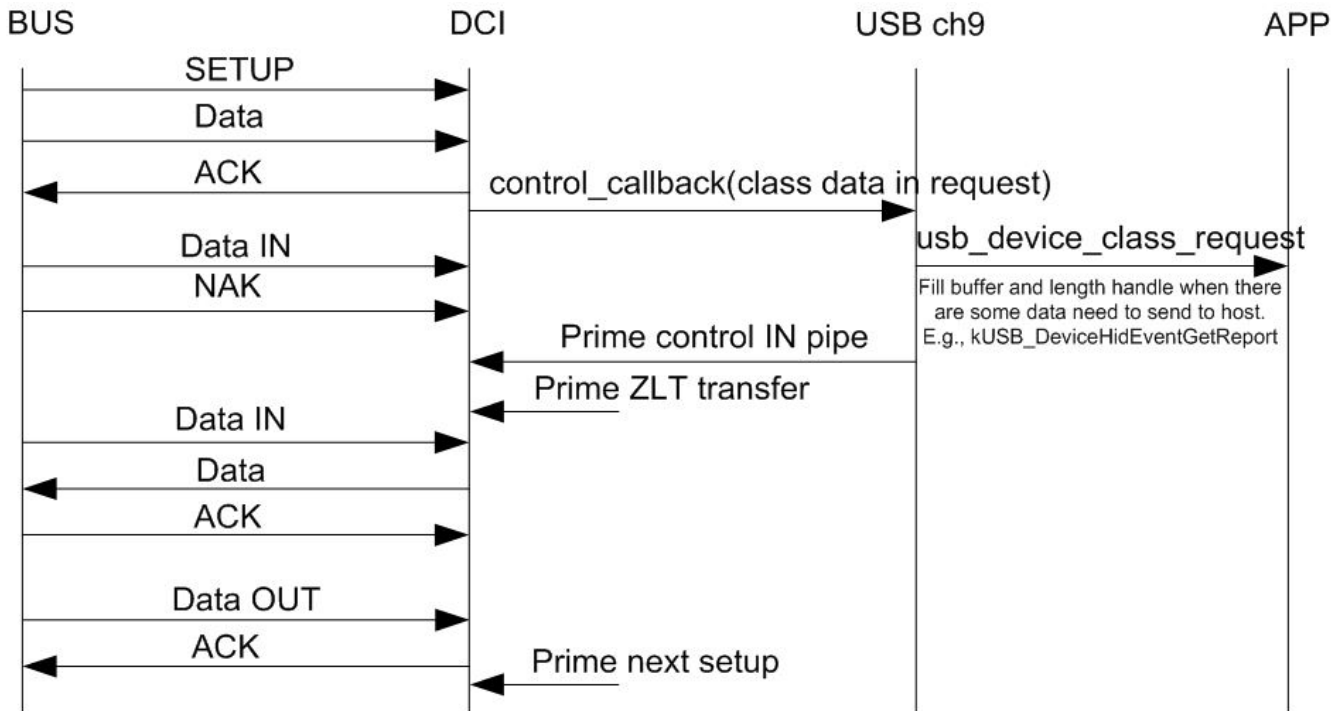
Figure 1.3.2: USB Device Class-Specific Request with Data Sent to Host

Chapter 2
Definitions and structures

2.1 Overview

This lists the common definitions and structures for the USB stack.

Data Structures

- struct usb_version_t
  USB stack version fields. More...

Macros

- #define USB_STACK_VERSION_MAJOR (0x01UL)
  Defines USB stack major version.
- #define USB_STACK_VERSION_MINOR (0x00UL)
  Defines USB stack minor version.
- #define USB_STACK_VERSION_BUGFIX (0x00U)
  Defines USB stack bugfix version.
- #define USB_MAKE_VERSION(major, minor, bugfix) (((major) << 16) | ((minor) << 8) | (bugfix))
  USB stack version definition.
- #define USB_STACK_COMPONENT_VERSION MAKE_VERSION(USB_STACK_VERSION_MAJOR, USB_STACK_VERSION_MINOR, USB_STACK_VERSION_BUGFIX)
  USB stack component version definition, changed with component in yaml together.

Typedefs

- typedef void ∗ usb_host_handle
  USB host handle type define.
- typedef void ∗ usb_device_handle
  USB device handle type define.
- typedef void ∗ usb_otg_handle
  USB OTG handle type define.

Enumerations

- enum usb_status_t {
  kStatus_USB_Success = 0x00U,
  kStatus_USB_Error,
  kStatus_USB_Busy,
  kStatus_USB_InvalidHandle,
  kStatus_USB_InvalidParameter,
  kStatus_USB_InvalidRequest,
  kStatus_USB_ControllerNotFound,
  kStatus_USB_InvalidControllerInterface,
  kStatus_USB_NotSupported,
  kStatus_USB_Retry,
  kStatus_USB_TransferStall,
  kStatus_USB_TransferFailed,
  kStatus_USB_AllocFail,
  kStatus_USB_LackSwapBuffer,
  kStatus_USB_TransferCancel,
  kStatus_USB_BandwidthFail,
  kStatus_USB_MSDStatusFail ,
  kStatus_USB_DataOverRun }

    USB error code.

- enum usb_controller_index_t {
  kUSB_ControllerKhci0 = 0U,
  kUSB_ControllerKhci1 = 1U,
  kUSB_ControllerEhci0 = 2U,
  kUSB_ControllerEhci1 = 3U,
  kUSB_ControllerLpcIp3511Fs0 = 4U,
  kUSB_ControllerLpcIp3511Fs1 = 5U,
  kUSB_ControllerLpcIp3511Hs0 = 6U,
  kUSB_ControllerLpcIp3511Hs1 = 7U,
  kUSB_ControllerOhci0 = 8U,
  kUSB_ControllerOhci1 = 9U,
  kUSB_ControllerIp3516Hs0 = 10U,
  kUSB_ControllerIp3516Hs1 = 11U,
  kUSB_ControllerDwc30 = 12U,
  kUSB_ControllerDwc31 = 13U }

    USB controller ID.

2.2 Data Structure Documentation

2.2.1 struct usb_version_t

Data Fields

- uint8_t major

Major.
- uint8_t minor
    Minor.
- uint8_t bugfix
    Bug fix.

2.3 Typedef Documentation

2.3.1 typedef void∗ usb_device_handle

For device stack it is the whole device handle; for host stack it is the attached device instance handle

2.4 Enumeration Type Documentation

2.4.1 enum usb_status_t

Enumerator

kStatus_USB_Success Success.
kStatus_USB_Error Failed.
kStatus_USB_Busy Busy.
kStatus_USB_InvalidHandle Invalid handle.
kStatus_USB_InvalidParameter Invalid parameter.
kStatus_USB_InvalidRequest Invalid request.
kStatus_USB_ControllerNotFound Controller cannot be found.
kStatus_USB_InvalidControllerInterface Invalid controller interface.
kStatus_USB_NotSupported Configuration is not supported.
kStatus_USB_Retry Enumeration get configuration retry.
kStatus_USB_TransferStall Transfer stalled.
kStatus_USB_TransferFailed Transfer failed.
kStatus_USB_AllocFail Allocation failed.
kStatus_USB_LackSwapBuffer Insufficient swap buffer for KHCI.
kStatus_USB_TransferCancel The transfer cancelled.
kStatus_USB_BandwidthFail Allocate bandwidth failed.
kStatus_USB_MSDStatusFail For MSD, the CSW status means fail.
kStatus_USB_DataOverRun The amount of data returned by the endpoint exceeded either the size
    of the maximum data packet allowed from the endpoint or the remaining buffer size.

2.4.2 enum usb_controller_index_t

Enumerator

kUSB_ControllerKhci0 KHCI 0U.
kUSB_ControllerKhci1 KHCI 1U, Currently, there are no platforms which have two KHCI IPs, this
    is reserved to be used in the future.

Enumeration Type Documentation

> ***kUSB_ControllerEhci0***   EHCI 0U.
>
> ***kUSB_ControllerEhci1***   EHCI 1U, Currently, there are no platforms which have two EHCI IPs, this is reserved to be used in the future.
>
> ***kUSB_ControllerLpcIp3511Fs0***   LPC USB IP3511 FS controller 0.
>
> ***kUSB_ControllerLpcIp3511Fs1***   LPC USB IP3511 FS controller 1, there are no platforms which have two IP3511 IPs, this is reserved to be used in the future.
>
> ***kUSB_ControllerLpcIp3511Hs0***   LPC USB IP3511 HS controller 0.
>
> ***kUSB_ControllerLpcIp3511Hs1***   LPC USB IP3511 HS controller 1, there are no platforms which have two IP3511 IPs, this is reserved to be used in the future.
>
> ***kUSB_ControllerOhci0***   OHCI 0U.
>
> ***kUSB_ControllerOhci1***   OHCI 1U, Currently, there are no platforms which have two OHCI IPs, this is reserved to be used in the future.
>
> ***kUSB_ControllerIp3516Hs0***   IP3516HS 0U.
>
> ***kUSB_ControllerIp3516Hs1***   IP3516HS 1U, Currently, there are no platforms which have two IP3516HS IPs, this is reserved to be used in the future.
>
> ***kUSB_ControllerDwc30***   DWC3 0U.
>
> ***kUSB_ControllerDwc31***   DWC3 1U Currently, there are no platforms which have two Dwc IPs, this is reserved to be used in the future.

Chapter 3
USB Class driver

3.1 Overview

Modules

- USB AUDIO Class driver
- USB CCID Class driver
- USB CDC Class driver
- USB DFU Class driver
- USB HID Class driver
- USB MSC Class driver
- USB MTP Class driver
- USB PHDC Class driver
- USB PRINTER Class driver
- USB VIDEO Class driver

Data Structures

- struct usb_device_endpoint_struct_t

  Obtains the endpoint data structure. More...
- struct usb_device_endpoint_list_t

  Obtains the endpoint group. More...
- struct usb_device_interface_struct_t

  Obtains the interface list data structure. More...
- struct usb_device_interfaces_struct_t

  Obtains the interface data structure. More...
- struct usb_device_interface_list_t

  Obtains the interface group. More...
- struct usb_device_class_struct_t

  Obtains the class data structure. More...
- struct usb_device_class_config_struct_t

  Obtains the device class information structure. More...
- struct usb_device_class_config_list_struct_t

  Obtains the device class configuration structure. More...
- struct usb_device_control_request_struct_t

  Obtains the control request structure. More...
- struct usb_device_get_descriptor_common_struct_t

  Obtains the control get descriptor request common structure. More...
- struct usb_device_get_device_descriptor_struct_t

  Obtains the control get device descriptor request structure. More...
- struct usb_device_get_device_qualifier_descriptor_struct_t

  Obtains the control get device qualifier descriptor request structure. More...
- struct usb_device_get_configuration_descriptor_struct_t

  Obtains the control get configuration descriptor request structure. More...
- struct usb_device_get_bos_descriptor_struct_t

  Obtains the control get bos descriptor request structure. More...
- struct usb_device_get_string_descriptor_struct_t

Obtains the control get string descriptor request structure. More...
- struct usb_device_get_hid_descriptor_struct_t

  Obtains the control get HID descriptor request structure. More...
- struct usb_device_get_hid_report_descriptor_struct_t

  Obtains the control get HID report descriptor request structure. More...
- struct usb_device_get_hid_physical_descriptor_struct_t

  Obtains the control get HID physical descriptor request structure. More...
- union usb_device_get_descriptor_common_union_t

  Obtains the control get descriptor request common union. More...
- struct usb_device_class_map_t

  Define class driver interface structure. More...
- struct usb_device_common_class_struct_t

  Structure holding common class state information. More...

Typedefs

- typedef void ∗ class_handle_t

  Macro to define class handle.
- typedef usb_status_t(∗ usb_device_class_init_call_t)(uint8_t controllerId, usb_device_class_-config_struct_t ∗classConfig, class_handle_t ∗classHandle)

  Define function type for class device instance initialization.
- typedef usb_status_t(∗ usb_device_class_deinit_call_t)(class_handle_t handle)

  Define function type for class device instance deinitialization, internal.
- typedef usb_status_t(∗ usb_device_class_event_callback_t)(void ∗classHandle, uint32_t event, void ∗param)

  Define function type for class device instance Event change.

Enumerations

- enum usb_device_class_type_t

  Available class types.
- enum usb_device_class_event_t

  Available common class events.

Functions

- usb_status_t USB_DeviceClassInit (uint8_t controllerId, usb_device_class_config_list_struct_t ∗configList, usb_device_handle ∗handle)

  Initializes the common class and the supported classes.
- usb_status_t USB_DeviceClassDeinit (uint8_t controllerId)

  Deinitializes the common class and the supported classes.
- usb_status_t USB_DeviceClassGetSpeed (uint8_t controllerId, uint8_t ∗speed)

  Gets the USB bus speed.
- usb_status_t USB_DeviceClassEvent (usb_device_handle handle, usb_device_class_event_t event, void ∗param)

  Handles the event passed to the class drivers.
- usb_status_t USB_DeviceClassCallback (usb_device_handle handle, uint32_t event, void ∗param)

  Handles the common class callback.
- usb_status_t USB_DeviceClassGetDeviceHandle (uint8_t controllerId, usb_device_handle ∗handle)

Gets the device handle according to the controller ID.

3.2 Data Structure Documentation

3.2.1 struct usb_device_endpoint_struct_t

Define the endpoint data structure.

Data Fields

- uint8_t endpointAddress
    Endpoint address.
- uint8_t transferType
    Endpoint transfer type.
- uint16_t maxPacketSize
    Endpoint maximum packet size.
- uint8_t interval
    Endpoint interval.

3.2.2 struct usb_device_endpoint_list_t

Structure representing endpoints and the number of endpoints that the user wants.

Data Fields

- uint8_t count
    How many endpoints in current interface.
- usb_device_endpoint_struct_t ∗ endpoint
    Endpoint structure list.

3.2.3 struct usb_device_interface_struct_t

Structure representing an interface.

Data Fields

- uint8_t alternateSetting
    Alternate setting number.
- usb_device_endpoint_list_t endpointList
    Endpoints of the interface.
- void ∗ classSpecific
    Class specific structure handle.

3.2.4   struct usb_device_interfaces_struct_t

Structure representing interface.

Data Fields

- uint8_t classCode
    Class code of the interface.
- uint8_t subclassCode
    Subclass code of the interface.
- uint8_t protocolCode
    Protocol code of the interface.
- uint8_t interfaceNumber
    Interface number.
- usb_device_interface_struct_t ∗ interface
    Interface structure list.
- uint8_t count
    Number of interfaces in the current interface.

3.2.5   struct usb_device_interface_list_t

Structure representing how many interfaces in one class type.

Data Fields

- uint8_t count
    Number of interfaces of the class.
- usb_device_interfaces_struct_t ∗ interfaces
    All interfaces.

3.2.6   struct usb_device_class_struct_t

Structure representing how many configurations in one class type.

Data Fields

- usb_device_interface_list_t ∗ interfaceList
    Interfaces of the class.
- usb_device_class_type_t type
    Class type.
- uint8_t configurations
    Number of configurations of the class.

3.2.7 struct usb_device_class_config_struct_t

Structure representing the device class information. This structure only can be stored in RAM space.

Data Fields

- usb_device_class_callback_t classCallback
  Class callback function to handle the device status-related event for the specified type of class.
- class_handle_t classHandle
  The class handle of the class, filled by the common driver.
- usb_device_class_struct_t ∗ classInfomation
  Detailed information of the class.

3.2.7.0.0.1   Field Documentation

3.2.7.0.0.1.1   class_handle_t usb_device_class_config_struct_t::classHandle

3.2.8 struct usb_device_class_config_list_struct_t

Structure representing the device class configuration information.

Data Fields

- usb_device_class_config_struct_t ∗ config
  Array of class configuration structures.
- usb_device_callback_t deviceCallback
  Device callback function.
- uint8_t count
  Number of class supported.

3.2.9 struct usb_device_control_request_struct_t

This structure is used to pass the control request information. The structure is used in following two cases.

1. Case one, the host wants to send data to the device in the control data stage:
   a. If a setup packet is received, the structure is used to pass the setup packet data and wants to get the buffer to receive data sent from the host. The field isSetup is 1. The length is the requested buffer length. The buffer is filled by the class or application by using the valid buffer address. The setup is the setup packet address. b. If the data received is sent by the host, the structure is used to pass the data buffer address and the data length sent by the host. In this way, the field isSetup is 0. The buffer is the address of the data sent from the host. The length is the received data length. The setup is the setup packet address.
2. Case two, the host wants to get data from the device in control data stage:

If the setup packet is received, the structure is used to pass the setup packet data and wants to get the data buffer address to send data to the host. The field isSetup is 1. The length is the requested data length. The buffer is filled by the class or application by using the valid buffer address. The setup is the setup packet address.

Data Fields

- usb_setup_struct_t ∗ setup
  The pointer of the setup packet data.
- uint8_t ∗ buffer
  Pass the buffer address.
- uint32_t length
  Pass the buffer length or requested length.
- uint8_t isSetup
  Indicates whether a setup packet is received.

3.2.9.0.0.2 Field Documentation

3.2.9.0.0.2.1 usb_setup_struct_t∗ usb_device_control_request_struct_t::setup

3.2.9.0.0.2.2 uint8_t∗ usb_device_control_request_struct_t::buffer

3.2.9.0.0.2.3 uint32_t usb_device_control_request_struct_t::length

3.2.9.0.0.2.4 uint8_t usb_device_control_request_struct_t::isSetup

3.2.10 struct usb_device_get_descriptor_common_struct_t

Data Fields

- uint8_t ∗ buffer
  Pass the buffer address.
- uint32_t length
  Pass the buffer length.

3.2.10.0.0.3 Field Documentation

3.2.10.0.0.3.1 uint8_t∗ usb_device_get_descriptor_common_struct_t::buffer

3.2.10.0.0.3.2 uint32_t usb_device_get_descriptor_common_struct_t::length

3.2.11 struct usb_device_get_device_descriptor_struct_t

Data Fields

- uint8_t ∗ buffer
  Pass the buffer address.

- uint32_t length
  Pass the buffer length.

3.2.11.0.0.4   Field Documentation

3.2.11.0.0.4.1   uint8_t∗ usb_device_get_device_descriptor_struct_t::buffer

3.2.11.0.0.4.2   uint32_t usb_device_get_device_descriptor_struct_t::length

3.2.12   struct usb_device_get_device_qualifier_descriptor_struct_t

Data Fields

- uint8_t ∗ buffer
  Pass the buffer address.
- uint32_t length
  Pass the buffer length.

3.2.12.0.0.5   Field Documentation

3.2.12.0.0.5.1   uint8_t∗ usb_device_get_device_qualifier_descriptor_struct_t::buffer

3.2.12.0.0.5.2   uint32_t usb_device_get_device_qualifier_descriptor_struct_t::length

3.2.13   struct usb_device_get_configuration_descriptor_struct_t

Data Fields

- uint8_t ∗ buffer
  Pass the buffer address.
- uint32_t length
  Pass the buffer length.
- uint8_t configuration
  The configuration number.

3.2.13.0.0.6   Field Documentation

3.2.13.0.0.6.1   uint8_t∗ usb_device_get_configuration_descriptor_struct_t::buffer

3.2.13.0.0.6.2   uint32_t usb_device_get_configuration_descriptor_struct_t::length

3.2.13.0.0.6.3   uint8_t usb_device_get_configuration_descriptor_struct_t::configuration

3.2.14   struct usb_device_get_bos_descriptor_struct_t

Data Fields

- uint8_t ∗ buffer

Pass the buffer address.
- uint32_t length
    Pass the buffer length.

3.2.14.0.0.7   Field Documentation

3.2.14.0.0.7.1   uint8_t∗ usb_device_get_bos_descriptor_struct_t::buffer

3.2.14.0.0.7.2   uint32_t usb_device_get_bos_descriptor_struct_t::length

3.2.15   struct usb_device_get_string_descriptor_struct_t

Data Fields

- uint8_t ∗ buffer
    Pass the buffer address.
- uint32_t length
    Pass the buffer length.
- uint16_t languageId
    Language ID.
- uint8_t stringIndex
    String index.

3.2.15.0.0.8   Field Documentation

3.2.15.0.0.8.1   uint8_t∗ usb_device_get_string_descriptor_struct_t::buffer

3.2.15.0.0.8.2   uint32_t usb_device_get_string_descriptor_struct_t::length

3.2.15.0.0.8.3   uint16_t usb_device_get_string_descriptor_struct_t::languageId

3.2.15.0.0.8.4   uint8_t usb_device_get_string_descriptor_struct_t::stringIndex

3.2.16   struct usb_device_get_hid_descriptor_struct_t

Data Fields

- uint8_t ∗ buffer
    Pass the buffer address.
- uint32_t length
    Pass the buffer length.
- uint8_t interfaceNumber
    The interface number.

3.2.16.0.0.9 Field Documentation

3.2.16.0.0.9.1 uint8_t∗ usb_device_get_hid_descriptor_struct_t::buffer

3.2.16.0.0.9.2 uint32_t usb_device_get_hid_descriptor_struct_t::length

3.2.16.0.0.9.3 uint8_t usb_device_get_hid_descriptor_struct_t::interfaceNumber

3.2.17 struct usb_device_get_hid_report_descriptor_struct_t

Data Fields

- uint8_t ∗ buffer
    Pass the buffer address.
- uint32_t length
    Pass the buffer length.
- uint8_t interfaceNumber
    The interface number.

3.2.17.0.0.10 Field Documentation

3.2.17.0.0.10.1 uint8_t∗ usb_device_get_hid_report_descriptor_struct_t::buffer

3.2.17.0.0.10.2 uint32_t usb_device_get_hid_report_descriptor_struct_t::length

3.2.17.0.0.10.3 uint8_t usb_device_get_hid_report_descriptor_struct_t::interfaceNumber

3.2.18 struct usb_device_get_hid_physical_descriptor_struct_t

Data Fields

- uint8_t ∗ buffer
    Pass the buffer address.
- uint32_t length
    Pass the buffer length.
- uint8_t index
    Physical index.
- uint8_t interfaceNumber
    The interface number.

3.2.18.0.0.11   Field Documentation

3.2.18.0.0.11.1   uint8_t∗ usb_device_get_hid_physical_descriptor_struct_t::buffer

3.2.18.0.0.11.2   uint32_t usb_device_get_hid_physical_descriptor_struct_t::length

3.2.18.0.0.11.3   uint8_t usb_device_get_hid_physical_descriptor_struct_t::interfaceNumber

3.2.19   union usb_device_get_descriptor_common_union_t

Data Fields

- usb_device_get_descriptor_common_struct_t commonDescriptor
  - *Common structure.*
- usb_device_get_device_descriptor_struct_t deviceDescriptor
  - *The structure to get device descriptor.*
- usb_device_get_device_qualifier_descriptor_struct_t deviceQualifierDescriptor
  - *The structure to get device qualifier descriptor.*
- usb_device_get_configuration_descriptor_struct_t configurationDescriptor
  - *The structure to get configuration descriptor.*
- usb_device_get_string_descriptor_struct_t stringDescriptor
  - *The structure to get string descriptor.*
- usb_device_get_hid_descriptor_struct_t hidDescriptor
  - *The structure to get HID descriptor.*
- usb_device_get_hid_report_descriptor_struct_t hidReportDescriptor
  - *The structure to get HID report descriptor.*
- usb_device_get_hid_physical_descriptor_struct_t hidPhysicalDescriptor
  - *The structure to get HID physical descriptor.*

3.2.19.0.0.12   Field Documentation

3.2.19.0.0.12.1   usb_device_get_descriptor_common_struct_t usb_device_get_descriptor_-common_union_t::commonDescriptor

3.2.19.0.0.12.2   usb_device_get_device_descriptor_struct_t usb_device_get_descriptor_common_-union_t::deviceDescriptor

3.2.19.0.0.12.3   usb_device_get_device_qualifier_descriptor_struct_t usb_device_get_descriptor_-common_union_t::deviceQualifierDescriptor

3.2.19.0.0.12.4   usb_device_get_configuration_descriptor_struct_t usb_device_get_descriptor_-common_union_t::configurationDescriptor

3.2.19.0.0.12.5   usb_device_get_string_descriptor_struct_t usb_device_get_descriptor_common_-union_t::stringDescriptor

3.2.19.0.0.12.6   usb_device_get_hid_descriptor_struct_t usb_device_get_descriptor_common_-union_t::hidDescriptor

3.2.19.0.0.12.7   usb_device_get_hid_report_descriptor_struct_t usb_device_get_descriptor_-common_union_t::hidReportDescriptor

3.2.19.0.0.12.8   usb_device_get_hid_physical_descriptor_struct_t usb_device_get_descriptor_-common_union_t::hidPhysicalDescriptor

3.2.20   struct usb_device_class_map_t

Data Fields

- usb_device_class_init_call_t classInit
    Class driver initialization- entry of the class driver.
- usb_device_class_deinit_call_t classDeinit
    Class driver de-initialization.
- usb_device_class_event_callback_t classEventCallback
    Class driver event callback.
- usb_device_class_type_t type
    Class type.

3.2.21   struct usb_device_common_class_struct_t

Data Fields

- usb_device_handle handle
    USB device handle.
- usb_device_class_config_list_struct_t ∗ configList
    USB device configure list.

Function Documentation

- uint8_t ∗ setupBuffer

  Setup packet data buffer.
- uint16_t standardTranscationBuffer

  This variable is used in: get status request get configuration request get interface request set interface request get sync frame request.
- uint8_t controllerId

  Controller ID.

3.3 Enumeration Type Documentation

3.3.1 enum usb_device_class_type_t

3.3.2 enum usb_device_class_event_t

3.4 Function Documentation

3.4.1 usb_status_t USB_DeviceClassInit (uint8_t *controllerId,* usb_device-_class_config_list_struct_t ∗ *configList,* usb_device_handle ∗ *handle*)

This function is used to initialize the common class and the supported classes.

Parameters

in	controllerId	The controller ID of the USB IP. See the enumeration usb_controller_-index_t.
in	configList	The class configurations. The pointer must point to the global variable. See the structure usb_device_class_config_list_struct_t.
out	handle	A parameter used to return pointer of the device handle to the caller. The value of the parameter is a pointer to the device handle. This design is used to make a simple device align with the composite device. For the composite device, there are many kinds of class handles. However, there is only one device handle. Therefore, the handle points to a device instead of a class. The class handle can be received from the usb_device-_class_config_struct_t::classHandle after the function successfully.

Returns

A USB error code or kStatus_USB_Success.

3.4.2 usb_status_t USB_DeviceClassDeinit (uint8_t *controllerId*)

This function is used to deinitialize the common class and the supported classes.

Parameters

in	*controllerId*	The controller ID of the USB IP. See the enumeration usb_controller_-index_t.

Returns

A USB error code or kStatus_USB_Success.

3.4.3 usb_status_t USB_DeviceClassGetSpeed (uint8_t *controllerId,* uint8_t ∗ *speed*)

This function is used to get the USB bus speed.

Parameters

in	*controllerId*	The controller ID of the USB IP. See the enumeration usb_controller_-index_t.
out	*speed*	It is an OUT parameter, which returns the current speed of the controller.

Returns

A USB error code or kStatus_USB_Success.

3.4.4 usb_status_t USB_DeviceClassEvent (usb_device_handle *handle,* usb_device_class_event_t *event,* void ∗ *param*)

This function handles the event passed to the class drivers.

Parameters

in	*handle*	The device handle received from the USB_DeviceInit.
in	*event*	The event codes. See the enumeration usb_device_class_event_t.
in,out	*param*	The parameter type is determined by the event code.

Returns

A USB error code or kStatus_USB_Success.

Function Documentation

Return values

kStatus_USB_Success	A valid request has been handled.
kStatus_USB_Invalid-Parameter	The device handle not be found.
kStatus_USB_Invalid-Request	The request is invalid, and the control pipe is stalled by the caller.

3.4.5 usb_status_t USB_DeviceClassCallback (usb_device_handle *handle,* uint32_t *event,* void ∗ *param*)

This function handles the common class callback.

Parameters

in	*handle*	The device handle received from the USB_DeviceInit.
in	*event*	The event codes. See the enumeration usb_device_event_t.
in,out	*param*	The parameter type is determined by the event code.

Returns

A USB error code or kStatus_USB_Success.

3.4.6 usb_status_t USB_DeviceClassGetDeviceHandle (uint8_t *controllerId,* usb_device_handle ∗ *handle*)

This function gets the device handle according to the controller ID.

Parameters

in	*controllerId*	The controller ID of the USB IP. See the enumeration usb_controller_-index_t.
out	*handle*	An out parameter used to return the pointer of the device handle to the caller.

Return values

kStatus_USB_Success	Get device handle successfully.
kStatus_USB_Invalid-Parameter	The device handle can't be found.

3.5 USB MSC Class driver

3.5.1 Overview

The USB mass storage device class defines the protocols for file transfers between the host and the device. The MCUXpresso SDK USB stack provides support for MSC class driver which implements the bulk only transport specification and the UFI command specification.

Modules

- USB MSC UFI driver
- USB MSC driver

3.5.2 USB MSC driver

3.5.2.1 Overview

Data Structures

- struct usb_device_msc_cbw_t
    Command Block Wrapper(CBW) More...
- struct usb_device_msc_csw_t
    Command Status Wrapper(CSW) More...
- struct usb_lba_transfer_information_struct_t
    Read/write information. More...
- struct usb_device_logical_unit_information_struct_t
    device information More...
- struct usb_device_lba_information_struct_t
    device information More...
- struct usb_device_lba_app_struct_t
    Data transfer information. More...
- struct usb_device_ufi_app_struct_t
    command and Data transfer information for UFI command More...
- struct usb_device_msc_thirteen_case_struct_t
    The thirteen possible use cases of host expectations and device intent in the absence of overriding error conditions. More...
- struct usb_device_msc_ufi_struct_t
    The MSC device UFI command status structure. More...
- struct usb_device_msc_struct_t
    The MSC device structure. More...

Macros

- #define USB_DEVICE_CONFIG_MSC_SUPPORT_DISK_LOCKING_MECHANISM (0U)
    prevent media removal flag
- #define USB_DEVICE_CONFIG_MSC_CLASS_CODE (0x08U)
    The class code of the MSC class.
- #define USB_DEVICE_MSC_BULK_ONLY_MASS_STORAGE_RESET (0xFFU)
    Bulk-Only Mass Storage Reset (class-specific request)
- #define USB_DEVICE_MSC_GET_MAX_LUN (0xFEU)
    Get Maximum LUN (class-specific request)
- #define USB_DEVICE_MSC_DCBWSIGNATURE USB_LONG_TO_BIG_ENDIAN(0x55534243-UL)
    CBW dCBWSignature.
- #define USB_DEVICE_MSC_DCSWSIGNATURE USB_LONG_TO_BIG_ENDIAN(0x55534253-UL)
    CSW dCSSWSignature.
- #define USB_DEVICE_MSC_CBW_DIRECTION_BIT (0x80U)
    CSW bmCBWFlags bit7.
- #define USB_DEVICE_MSC_CBW_LENGTH (31U)
    CBW command length.
- #define USB_DEVICE_MSC_CSW_LENGTH (13U)

CSW command length.
- #define USB_DEVICE_MSC_COMMAND_PASSED (0x00U)
  Command Block Status Values.
- #define USB_DEVICE_MSC_INQUIRY_COMMAND (0x12U)
  UFI Commands code.

Enumerations

- enum usb_device_msc_stall_type {
  USB_DEVICE_MSC_STALL_IN_CBW = 1U,
  USB_DEVICE_MSC_STALL_IN_DATA,
  USB_DEVICE_MSC_STALL_IN_CSW }
    stall flag
- enum USB_DeviceMscEvent_t {
  kUSB_DeviceMscEventReadResponse,
  kUSB_DeviceMscEventWriteResponse,
  kUSB_DeviceMscEventWriteRequest,
  kUSB_DeviceMscEventReadRequest,
  kUSB_DeviceMscEventGetLbaInformation,
  kUSB_DeviceMscEventFormatComplete,
  kUSB_DeviceMscEventTestUnitReady,
  kUSB_DeviceMscEventInquiry,
  kUSB_DeviceMscEventModeSense,
  kUSB_DeviceMscEventModeSelect,
  kUSB_DeviceMscEventModeSelectResponse,
  kUSB_DeviceMscEventRemovalRequest,
  kUSB_DeviceMscEventSendDiagnostic,
  kUSB_DeviceMscEventStopEjectMedia,
  kUSB_DeviceMscEventRequestSense,
  kUSB_DeviceMscEventReadCapacity,
  kUSB_DeviceMscEventReadFormatCapacity }
    Available common EVENT types in MSC class callback.

USB device MSC class APIs

- usb_status_t USB_DeviceMscInit (uint8_t controllerId, usb_device_class_config_struct_t ∗config,
  class_handle_t ∗handle)
    Initializes the MSC class.
- usb_status_t USB_DeviceMscDeinit (class_handle_t handle)
    Deinitializes the device MSC class.

3.5.2.2 Data Structure Documentation

3.5.2.2.1 struct usb_device_msc_cbw_t

Data Fields

- uint32_t signature
    Byte 0-3 dCBWSignature.
- uint32_t tag
    Byte 4-7 dCBWTag.
- uint32_t dataTransferLength
    Byte 8-11 dCBWDataTransferLength.
- uint8_t flags
    Byte 12 bmCBWFlags.
- uint8_t logicalUnitNumber
    Byte 13 bCBWLUN.
- uint8_t cbLength
    Byte 14 bCBWCBLength.
- uint8_t cbwcb [16]
    Byte 15-30 CBWCB, CBWCB is used to store UFI command.

3.5.2.2.2 struct usb_device_msc_csw_t

Data Fields

- uint32_t signature
    Byte 0-3 dCSWSignature.
- uint32_t tag
    Byte 4-7 dCSWTag.
- uint32_t dataResidue
    Byte 8-11 dCSWDataResidue.
- uint8_t cswStatus
    Byte 12 bCSWStatus.

3.5.2.2.3 struct usb_lba_transfer_information_struct_t

Data Fields

- uint32_t startingLogicalBlockAddress
    The logical block at which the read/write operation shall begin.
- uint32_t transferNumber
    The number of contiguous logical blocks of data that shall be transferred.

3.5.2.2.4 struct usb_device_logical_unit_information_struct_t

Data Fields

- uint32_t totalLbaNumberSupports

Total blocks number supported.
- uint32_t lengthOfEachLba
  Length of each block.
- uint32_t bulkInBufferSize
  Bulk in buffer size.
- uint32_t bulkOutBufferSize
  Bulk out buffer size.

3.5.2.2.5   struct usb_device_lba_information_struct_t

Data Fields

- uint32_t logicalUnitNumberSupported
  Number of LUN.

3.5.2.2.6   struct usb_device_lba_app_struct_t

Data Fields

- uint32_t offset
  Offset of the block need to access.
- uint32_t size
  Size of the transferred data.
- uint8_t ∗ buffer
  Buffer address of the transferred data.

3.5.2.2.7   struct usb_device_ufi_app_struct_t

Data Fields

- uint8_t ∗ cbwcb
  current ufi command block strored in the CBW
- uint32_t size
  Size of the transferred data if commmand has data flow.
- uint8_t ∗ buffer
  Buffer address of the transferred data if commmand has data flow.
- usb_device_request_sense_data_struct_t ∗ requestSense
  sense data for the current command
- uint8_t logicalUnitNumber
  Logical Unit Number.

3.5.2.2.8   struct usb_device_msc_thirteen_case_struct_t

Data Fields

- uint32_t hostExpectedDataLength
  The number of bytes of data that the host expects to transfer.

- uint32_t deviceExpectedDataLength
    The number of bytes of data that the device expects to transfer.
- uint8_t ∗ buffer
    Data buffer.
- usb_lba_transfer_information_struct_t lbaInformation
    Read/write information.
- uint8_t lbaSendRecvSelect
    Whether the command is read or write command.
- uint8_t hostExpectedDirection
    Host expected data direction.
- uint8_t deviceExpectedDirection
    Device expected data direction.

3.5.2.2.9 struct usb_device_msc_ufi_struct_t

Data Fields

- usb_device_request_sense_data_struct_t ∗ requestSense
    Request Sense Standard Data.
- usb_device_msc_thirteen_case_struct_t thirteenCase
    Thirteen possible cases.
- usb_device_read_capacity_struct_t ∗ readCapacity
    READ CAPACITY Data.
- usb_device_read_capacity16_data_struct_t ∗ readCapacity16
    READ CAPACITY Data.
- usb_device_mode_parameters_header_struct_t ModeParametersHeader
    Mode Parameter Header.
- uint8_t formattedDisk
    ∗Formatted or unformatted media
- uint8_t ∗ formatCapacityData
    Capacity List.

3.5.2.2.10 struct usb_device_msc_struct_t

Data Fields

- usb_device_handle handle
    The device handle.
- usb_device_class_config_struct_t ∗ configurationStruct
    The configuration of the class.
- usb_device_interface_struct_t ∗ interfaceHandle
    Current interface handle.
- uint32_t transferRemaining
    Transfer remaining data.
- uint32_t currentOffset
    Current address offset.
- uint32_t implementingDiskDrive
    Disk drive.
- usb_device_msc_cbw_t ∗ mscCbw

CBW structure.
- usb_device_msc_csw_t ∗ mscCsw
  CSW structure.
- usb_device_msc_ufi_struct_t mscUfi
  UFI command information structure.
- uint8_t dataOutFlag
  CBW indicating bulk out transfer, clear this flag when data transfer done.
- uint8_t dataInFlag
  CBW indicating bulk in transfer, clear this flag when data transfer done.
- uint8_t inEndpointStallFlag
  In endpoint stall flag.
- uint8_t outEndpointStallFlag
  Out endpoint stall flag.
- uint8_t cbwValidFlag
  The CBW was received after the device had sent a CSW or after a reset ,or else it is invalid.
- uint8_t performResetRecover
  Device need reset command from host.
- uint8_t performResetDoneFlag
  Device has perform reset command.
- uint8_t needInStallFlag
  In endpoint should be stalled.
- uint8_t needOutStallFlag
  Out endpoint should be stalled.
- uint8_t cbwPrimeFlag
  CBW prime flag, prime means device MSC has been ready to receive CBW, the bulk out endpoint has got the prepared buffer.
- uint8_t cswPrimeFlag
  CSW prime flag, prime means device MSC has been ready to receive CSW, the bulk in endpoint has got the prepared buffer.
- uint8_t stallStatus
  Stall status.
- uint8_t logicalUnitNumber
  Supported logical units number of device.
- uint8_t bulkInEndpoint
  Bulk in endpoint number.
- uint8_t bulkOutEndpoint
  Bulk out endpoint number.
- uint8_t alternate
  Current alternate setting of the interface.
- uint8_t configuration
  Current configuration.
- uint8_t interfaceNumber
  The interface number of the class.
- uint8_t inEndpointCswCancelFlag
  the state when calcel function happens, and need send the csw after cancel

3.5.2.2.10.1   Field Documentation

3.5.2.2.10.1.1   uint8_t usb_device_msc_struct_t::logicalUnitNumber

See bulk only specification 3.2 Get Maximum LUN (class-specific request)

3.5.2.3 Enumeration Type Documentation

3.5.2.3.1 enum usb_device_msc_stall_type

Enumerator

USB_DEVICE_MSC_STALL_IN_CBW   Stall in CBW.
USB_DEVICE_MSC_STALL_IN_DATA   Stall in data transfer.
USB_DEVICE_MSC_STALL_IN_CSW   Stall in CSW.

3.5.2.3.2 enum USB_DeviceMscEvent_t

Enumerator

kUSB_DeviceMscEventReadResponse   host has already read the whole data from device or device send is cancelled etc

kUSB_DeviceMscEventWriteResponse   devcie has already received the data from host or device receive is cancelled etc.

kUSB_DeviceMscEventWriteRequest   Host want to write data to device through write command, devcie need prepare one buffer to store the data from host.

kUSB_DeviceMscEventReadRequest   Host want to read data from device through read command, device need prepare one buffer containing data pending for transfer.

kUSB_DeviceMscEventGetLbaInformation   Get device information.

kUSB_DeviceMscEventFormatComplete   Format complete.

kUSB_DeviceMscEventTestUnitReady   Test Unit Ready command.

kUSB_DeviceMscEventInquiry   Inquiry Command command.

kUSB_DeviceMscEventModeSense   mode sense command

kUSB_DeviceMscEventModeSelect   mode select command, prepare data buffer and buffer length to store data for mode select

kUSB_DeviceMscEventModeSelectResponse   got data of mode select command

kUSB_DeviceMscEventRemovalRequest   Prevent_allow_medium_command.

kUSB_DeviceMscEventSendDiagnostic   Send Diagnostic command.

kUSB_DeviceMscEventStopEjectMedia   Start_stop_unit_command.

kUSB_DeviceMscEventRequestSense   Request Sense command.

kUSB_DeviceMscEventReadCapacity   ReadCapacity command.

kUSB_DeviceMscEventReadFormatCapacity   Read Format Capacity command.

3.5.2.4 Function Documentation

3.5.2.4.1 usb_status_t USB_DeviceMscInit (uint8_t *controllerId,* usb_device_class_config_struct_t ∗ *config,* class_handle_t ∗ *handle*)

This function is used to initialize the MSC class.

Parameters

controllerId	The controller ID of the USB IP. See the enumeration usb_controller_index_t.
config	The class configuration information.
handle	A parameter used to return pointer of the MSC class handle to the caller.

Returns

A USB error code or kStatus_USB_Success.

3.5.2.4.2 usb_status_t USB_DeviceMscDeinit (class_handle_t *handle*)

The function deinitializes the device MSC class.

Parameters

handle	The MSC class handle received from usb_device_class_config_struct_t::classHandle.

Returns

A USB error code or kStatus_USB_Success.

3.5.3   USB MSC UFI driver

3.5.3.1   Overview

Data Structures

- struct usb_device_inquiry_command_struct_t

  UFI inquiry command structure. More...
- struct usb_device_request_sense_command_struct_t

  UFI request sense command structure. More...
- struct usb_device_read_format_capacities_command_struct_t

  UFI read format capacities command structure. More...
- struct usb_device_read_capacities_command_struct_t

  UFI read capacities command structure. More...
- struct usb_device_read_write_10_command_struct_t

  UFI read write 10 structure. More...
- struct usb_device_test_unit_ready_struct_t

  UFI Test Unit Ready structure. More...
- struct usb_device_inquiry_data_fromat_struct_t

  UFI inquiry data format structure. More...
- struct usb_device_request_sense_data_struct_t

  UFI request sense data structure. More...
- struct usb_device_read_capacity_struct_t

  UFI read capacity data structure. More...
- struct usb_device_read_capacity16_data_struct_t

  UFI read capacity data structure. More...
- struct usb_device_capacity_list_header_struct_t

  UFI capacity list header structure. More...
- struct usb_device_current_max_capacity_descriptor_struct_t

  UFI current maximum capacity structure. More...
- struct usb_device_formattable_capacity_descriptor_struct_t

  UFI formatting capacity structure. More...
- struct usb_device_mode_parameters_header_struct_t

  UFI mode parameters header structure. More...
- struct usb_device_format_capacity_response_data_struct_t

  UFI Capacity List structure. More...

Macros

- #define USB_DEVICE_MSC_UFI_NO_SENSE 0x00U

  Indicates that there is no specific sense key information to be reported.
- #define USB_DEVICE_MSC_UFI_RECOVERED_ERROR 0x01U

  Indicates that the last command completed successfully with some recovery action performed by the UFI device.
- #define USB_DEVICE_MSC_UFI_NOT_READY 0x02U

  Indicates that the UFI device cannot be accessed.
- #define USB_DEVICE_MSC_UFI_MEDIUM_ERROR 0x03U

  Indicates that the command terminated with a non-recovered error condition that was probably caused by a flaw in the medium or an error in the recorded data.
- #define USB_DEVICE_MSC_UFI_HARDWARE_ERROR 0x04U

Indicates that the UFI device detected a non-recoverable hardware failure while performing the command or during a self test.

- #define USB_DEVICE_MSC_UFI_ILLEGAL_REQUEST 0x05U

  Indicates that there was an illegal parameter in the Command Packet or in the additional parameters supplied as data for some commands.
- #define USB_DEVICE_MSC_UFI_UNIT_ATTENTION 0x06U

  Indicates that the removable medium may have been changed or the UFI device has been reset.
- #define USB_DEVICE_MSC_UFI_DATA_PROTECT 0x07U

  Indicates that a command that writes the medium was attempted on a block that is protected from this operation.
- #define USB_DEVICE_MSC_UFI_BLANK_CHECK 0x08U

  Indicates that a write-once device or a sequential-access device encountered blank medium or format-defined end-of-data indication while reading or a write-once device encountered a non-blank medium while writing.
- #define USB_DEVICE_MSC_UFI_VENDOR_SPECIFIC_ERROR 0x09U

  This sense key is available for reporting vendor-specific conditions.
- #define USB_DEVICE_MSC_UFI_ABORTED_COMMAND 0x0BU

  Indicates that the UFI device has aborted the command The host may be able to recover by trying the command again.
- #define USB_DEVICE_MSC_UFI_VOLUME_OVERFLOW 0x0DU

  Indicates that a buffered peripheral device has reached the end-of-partition and data may remain in the buffer that has not been written to the medium.
- #define USB_DEVICE_MSC_UFI_MISCOMPARE 0x0EU

  Indicates that the source data did not match the data read from the medium.
- #define USB_DEVICE_MSC_UFI_ASC_MEDIUM_NOT_PRESENT 0x3AU

  additional sense code
- #define USB_DEVICE_MSC_UFI_ASC_MEDIUM_CHANGE 0x28U

  additional sense code not ready to ready transition- media change
- #define USB_DEVICE_MSC_UFI_INVALID_COMMAND_OPCODE 0x20U

  Invalid command operation code.
- #define USB_DEVICE_MSC_UFI_WRITE_FAULT 0x03U

  Write fault.
- #define USB_DEVICE_MSC_UFI_UNRECOVERED_READ_ERROR 0x11U

  Not recovered read error.
- #define USB_DEVICE_MSC_UFI_UNKNOWN_ERROR 0xFFU

  Unknown error.
- #define USB_DEVICE_MSC_UFI_INVALID_FIELD_IN_COMMAND_PKT 0x24U

  Invalid field in command packet.
- #define USB_DEVICE_MSC_UFI_LBA_OUT_OF_RANGE 0x21U

  Invalid logical block address out of range.
- #define USB_DEVICE_MSC_UFI_REQ_SENSE_VALID_ERROR_CODE 0x70U

  Valid error code, 70h indicate current errors.
- #define USB_DEVICE_MSC_UFI_REQ_SENSE_ADDITIONAL_SENSE_LEN 0x0AU

  The UFI device sets the value of this field to ten, to indicate that ten more bytes of sense data follow this field.
- #define USB_DEVICE_MSC_UFI_PREVENT_ALLOW_REMOVAL_MASK 0x01U

  Prevent media removal flag.
- #define USB_DEVICE_MSC_UFI_LOAD_EJECT_START_MASK 0x03U

  LoEj Start flag.
- #define USB_DEVICE_MSC_UFI_FORMATTED_MEDIA 0x02U

  Formatted Media - Current media capacity.

- #define USB_DEVICE_MSC_UFI_UNFORMATTED_MEDIA 0x01U
  Unformatted Media - Maximum formatting capacity for this cartridge.
- #define USB_DEVICE_MSC_UFI_NO_CARTRIDGE_IN_DRIVE 0x03U
  No Cartridge in Drive - Maximum formating capacity for any cartridge.
- #define USB_DEVICE_MSC_UFI_INQUIRY_ALLOCATION_LENGTH 0x24U
  INQUIRY Data length of INQUIRY Command.
- #define USB_DEVICE_MSC_UFI_REQ_SENSE_DATA_LENGTH 18U
  Request Sense Data length of REQUEST SENSE Command.
- #define USB_DEVICE_MSC_UFI_READ_CAPACITY_DATA_LENGTH 0x08U
  READ CAPACITY Data length of READ CAPACITY Command.
- #define USB_DEVICE_MSC_UFI_READ_CAPACITY16_DATA_LENGTH 0x0CU
  READ CAPACITY Data length of READ CAPACITY Command.
- #define USB_DEVICE_MSC_UFI_PERIPHERAL_QUALIFIER 0U
  Reserved.
- #define USB_DEVICE_MSC_UFI_PERIPHERAL_QUALIFIER_SHIFT 5U
  Peripheral Device Type shift.
- #define USB_DEVICE_MSC_UFI_VERSIONS 4U
  Version value.
- #define USB_DEVICE_MSC_UFI_PERIPHERAL_DEVICE_TYPE 0x00U
  Peripheral Device Type value of INQUIRY Data.
- #define USB_DEVICE_MSC_UFI_REMOVABLE_MEDIUM_BIT 1U
  Removable Media Bit value, this shall be set to one to indicate removable media.
- #define USB_DEVICE_MSC_UFI_REMOVABLE_MEDIUM_BIT_SHIFT 7U
  Removable Media Bit shift.
- #define USB_DEVICE_MSC_UFI_ADDITIONAL_LENGTH 0x20U
  Additional Length.

3.5.3.2 Data Structure Documentation

3.5.3.2.1 struct usb_device_inquiry_command_struct_t

Data Fields

- uint8_t operationCode
  Operation Code.
- uint8_t logicalUnitNumber
  Specifies the logical unit (0∼7) for which Inquiry data should be returned.
- uint8_t pageCode
  Page Code.
- uint8_t reserved
  Reserved.
- uint8_t allocationLength
  Specifies the maximum number of bytes of inquiry data to be returned.
- uint8_t reserved1 [7]
  Reserved.

3.5.3.2.2 struct usb_device_request_sense_command_struct_t

Data Fields

- uint8_t operationCode
    - *Operation Code.*
- uint8_t logicalUnitNumber
    - *Logical Unit Number.*
- uint8_t reserved [2]
    - *reserved*
- uint8_t allocationLength
    - *Allocation Length.*
- uint8_t reserved1 [7]
    - *reserved*

3.5.3.2.3 struct usb_device_read_format_capacities_command_struct_t

Data Fields

- uint8_t operationCode
    - *Operation Code.*
- uint8_t logicalUnitNumber
    - *Logical Unit Number.*
- uint8_t reserved [5]
    - *reserved*
- uint16_t allocationLength
    - *Allocation Length.*
- uint8_t reserved1 [3]
    - *reserved*

3.5.3.2.4 struct usb_device_read_capacities_command_struct_t

Data Fields

- uint8_t operationCode
    - *Operation Code.*
- uint8_t logicalUnitNumber
    - *Logical Unit Number.*
- uint32_t lba
    - *Logical Block Address.*
- uint8_t reserved [2]
    - *Reserved.*
- uint8_t pmi
    - *This bit should be set to zero for UFI.*
- uint8_t reserved1 [3]
    - *Reserved.*

3.5.3.2.5   struct usb_device_read_write_10_command_struct_t

Data Fields

- uint8_t operationCode
    Operation Code.
- uint8_t lunDpoFuaReladr
    Logical Unit Number DPO FUA RelAdr.
- uint32_t lba
    Logical Block Address.
- uint8_t reserved
    Reserved.
- uint8_t transferLengthMsb
    Transfer Length (MSB)
- uint8_t transferLengthLsb
    Transfer Length (LSB)
- uint8_t reserved1 [3]
    Reserved.

3.5.3.2.6   struct usb_device_test_unit_ready_struct_t

Data Fields

- uint8_t operationCode
    Operation Code.
- uint8_t logicalUnitNumber
    Logical Unit Number.
- uint8_t reserved1 [10]
    Reserved.

3.5.3.2.7   struct usb_device_inquiry_data_fromat_struct_t

Data Fields

- uint8_t peripheralDeviceType
    Peripheral Device Type.
- uint8_t rmb
    Removable Media Bit.
- uint8_t versions
    ISO Version, ECMA Version, ANSI Version.
- uint8_t responseDataFormat
    Response Data Format.
- uint8_t additionalLength
    The Additional Length field shall specify the length in bytes of the parameters.
- uint8_t reserved [3]
    reserved
- uint8_t vendorInformatin [8]
    Vendor Identification.
- uint8_t productId [16]

Product Identification.
- uint8_t productVersionLevel [4]
  Product Revision Level.

3.5.3.2.8 struct usb_device_request_sense_data_struct_t

Data Fields

- uint8_t validErrorCode
  Error Code.
- uint8_t reserved
  reserved
- uint8_t senseKey
  Sense Key.
- uint8_t information [4]
  Information.
- uint8_t additionalSenseLength
  Additional Sense Length.
- uint8_t reserved1 [4]
  reserved
- uint8_t additionalSenseCode
  Additional Sense Code.
- uint8_t additionalSenseQualifer
  Additional Sense Code Qualifier.
- uint8_t reserved2 [4]
  reserved

3.5.3.2.9 struct usb_device_read_capacity_struct_t

Data Fields

- uint32_t lastLogicalBlockAddress
  Last Logical Block Address.
- uint32_t blockSize
  Block Length In Bytes.

3.5.3.2.10 struct usb_device_read_capacity16_data_struct_t

Data Fields

- uint32_t lastLogicalBlockAddress0
  Last Logical Block Address.
- uint32_t lastLogicalBlockAddress1
  Last Logical Block Address.
- uint32_t blockSize
  Block Length In Bytes.

3.5.3.2.11   struct usb_device_capacity_list_header_struct_t

Data Fields

- uint8_t reserverd [3]
  reserved
- uint8_t capacityListLength
  Capacity List Length.

3.5.3.2.12   struct usb_device_current_max_capacity_descriptor_struct_t

Data Fields

- uint32_t blockNumber
  Number of Blocks.
- uint32_t descriptorCodeBlockLength
  Byte 4 Descriptor Code , byte 5-7 Block Length.

3.5.3.2.13   struct usb_device_formattable_capacity_descriptor_struct_t

Data Fields

- uint32_t blockNumber
  Number of Blocks.
- uint32_t blockLength
  Block Length.

3.5.3.2.14   struct usb_device_mode_parameters_header_struct_t

Data Fields

- uint16_t modeDataLength
  Mode Data Length.
- uint8_t mediumTypeCode
  The Medium Type Code field specifies the inserted medium type.
- uint8_t wpDpfua
  WP and DPOFUA bit.
- uint8_t reserved [4]
  Reserved.

3.5.3.2.15   struct usb_device_format_capacity_response_data_struct_t

Data Fields

- uint8_t capacityListHead [sizeof(usb_device_capacity_list_header_struct_t)]
  Capacity List Header.

- uint8_t   currentMaxCapacityDesccriptor   [sizeof(usb_device_current_max_capacity_descriptor_-struct_t)]

     Current/Maximum Capacity Header.
- uint8_t   formattableCapacityDesccriptor   [sizeof(usb_device_formattable_capacity_descriptor_-struct_t)*3]

     Formatting Capacity Descriptor.

3.5.3.3   Macro Definition Documentation

3.5.3.3.1   #define USB_DEVICE_MSC_UFI_ASC_MEDIUM_NOT_PRESENT 0x3AU

additional sense code medium not present

3.6 USB CDC Class driver

3.6.1 Overview

The USB communications device class (or USB CDC) is a composite Universal Serial Bus device class. The class may include more than one interface, such as a custom control interface, data interface, audio, or mass storage-related interfaces. The MCUXpresso SDK USB stack provides support for CDC ACM, which is defined in CDC PSTN Subclass. In addition, the Microsoft® RNDIS is also implemented upon the CDC ACM driver.

Modules

- USB CDC ACM Class driver
- USB CDC RNDIS driver

3.7   USB DFU Class driver

3.7.1   Overview

Data Structures

- struct usb_device_dfu_struct_t
  The DFU device class status structure. More...

Macros

- #define USB_DEVICE_CONFIG_DFU_CLASS_CODE (0xFEU)
  The class code of the DFU class.
- #define USB_DEVICE_DFU_DETACH (0x00U)
  DFU class request.

Enumerations

- enum usb_device_dfu_event_t {
  kUSB_DeviceDfuEventDetach = 0x01U,
  kUSB_DeviceDfuEventDownLoad,
  kUSB_DeviceDfuEventUpLoad,
  kUSB_DeviceDfuEventGetStatus,
  kUSB_DeviceDfuEventClearStatus,
  kUSB_DeviceDfuEventGetState,
  kUSB_DeviceDfuEventAbort }
    Available common EVENT types in dfu class callback.

Functions

- usb_status_t USB_DeviceDfuInit (uint8_t controllerId, usb_device_class_config_struct_t ∗config, class_handle_t ∗handle)
    Initialize the dfu class.
- usb_status_t USB_DeviceDfuDeinit (class_handle_t handle)
    De-initialize the device dfu class.
- usb_status_t USB_DeviceDfuEvent (void ∗handle, uint32_t event, void ∗param)
    Handle the event passed to the dfu class.

3.7.2 Data Structure Documentation

3.7.2.1 struct usb_device_dfu_struct_t

Data Fields

- usb_device_handle handle
  The device handle.
- usb_device_class_config_struct_t ∗ configStruct
  The configuration of the class.

3.7.2.1.0.1 Field Documentation

3.7.2.1.0.1.1 usb_device_class_config_struct_t∗ usb_device_dfu_struct_t::configStruct

3.7.3 Enumeration Type Documentation

3.7.3.1 enum usb_device_dfu_event_t

Enumerator

kUSB_DeviceDfuEventDetach   Detach request.
kUSB_DeviceDfuEventDownLoad   Download request.
kUSB_DeviceDfuEventUpLoad   Upload request.
kUSB_DeviceDfuEventGetStatus   Get status request.
kUSB_DeviceDfuEventClearStatus   Clear status request.
kUSB_DeviceDfuEventGetState   Get state request.
kUSB_DeviceDfuEventAbort   Abort request.

3.7.4 Function Documentation

3.7.4.1 usb_status_t USB_DeviceDfuInit (uint8_t *controllerId,* usb_device_class_config_-struct_t ∗ *config,* class_handle_t ∗ *handle*)

This function is used to initialize the dfu class. This function only can be called by USB_DeviceClassInit.

Parameters

in	*controllerId*	The controller id of the USB IP. Please refer to the enumeration usb_-controller_index_t.

in	*config*	The class configuration information.
out	*handle*	It is out parameter, is used to return pointer of the dfu class handle to the caller.

Returns

A USB error code or kStatus_USB_Success.

3.7.4.2 usb_status_t USB_DeviceDfuDeinit (class_handle_t *handle*)

The function de-initializes the device dfu class. This function only can be called by USB_DeviceClass-Deinit.

Parameters

in	*handle*	The dfu class handle got from usb_device_class_config_struct_t::class-Handle.

Returns

A USB error code or kStatus_USB_Success.

3.7.4.3 usb_status_t USB_DeviceDfuEvent (void ∗ *handle,* uint32_t *event,* void ∗ *param*)

This function handles the event passed to the dfu class. This function can only be called by USB_Device-ClassEvent.

Parameters

in	*handle*	The dfu class handle, got from the usb_device_class_config_struct_t-::classHandle.
in	*event*	The event codes. Please refer to the enumeration usb_device_class_-event_t.
in,out	*param*	The param type is determined by the event code.

Returns

A USB error code or kStatus_USB_Success.

Return values

kStatus_USB_Success	Free device handle successfully.
kStatus_USB_Invalid-Parameter	The device handle not be found.
kStatus_USB_Invalid-Request	The request is invalid, and the control pipe will be stalled by the caller.

3.7.5 USB CDC ACM Class driver

3.7.5.1 Overview

This section describes the programming interface of the USB CDC ACM class driver. The USB CDC ACM class driver handles the specific control requests for CDC ACM, transfers data packets to and from the host through the bulk pipe, as well as provides notification to host through the interrupt pipe.

3.7.5.2 USB CDC ACM Device structures

The driver uses an instantiation of the usb_device_cdc_acm_struct_t structure to maintain the current state of a particular USB CDC ACM instance module driver. This structure holds the USB device handle and keeps track of the configuration value, alternate setting, pipes and interfaces that are enumerated for this USB ACM device.

The USB CDC ACM class driver populates the structure members.

3.7.5.3 USB CDC ACM Initialization

The usb_device_cdc_acm_init is called from usb_device_class_init when it matches the class type of CDC with the one in configure structure passed from application. In this function it associates the configure structure with the USB CDC ACM device, resets the configuration value and creates mutex for each pipe.

3.7.5.4 USB CDC ACM Endpoint Initialization

After the enumeration procedure is done, all the endpoints, other than the control endpoint, are initialized with their own attributes, for example, endpoint address, transfer type and maximum packet size. Most of the attributes can be drawn from the configure structure. Each endpoint is assigned a callback function to serve the corresponding event.

3.7.5.5 USB CDC ACM Event Handling

The usb_device_cdc_acm_event is called from usb_device_class_event when there occurs a class-specific event and it matches the class type of CDC with the one in configure structure. For some events which need to notify the application, the callback function defined in application is invoked with the dedicated event type.

3.7.5.6 USB CDC ACM Send data

The usb_device_cdc_acm_send is called to send packet to host through the bulk pipe. Users need to specify the USB CDC ACM class handle, the endpoint address, the buffer address and the length of the

buffer to prime a sending transfer. Note that the transfer is initiated by the host so this transfer is not accomplished until the kUsbDeviceCdcEventSendResponse event occurs.

It allows only one transfer at a time, so the call to usb_device_cdc_acm_send returns kStatus_USB_Busy if the previous transfer is not done yet.

3.7.5.7 USB CDC ACM Receive data

The usb_device_cdc_acm_recv is called to receive packet from host through the bulk pipe. Users need to specify the USB CDC ACM class handle, the endpoint address, the buffer address and the length of the buffer to prime a receiving transfer. Note that the transfer is initiated by the host so this transfer is not accomplished until the kUsbDeviceCdcEventRecvResponse event occurs.

It allows only one transfer at a time, so the call to usb_device_cdc_acm_send returns kStatus_USB_Busy if the previous transfer is not done yet.

Data Structures

- struct usb_device_cdc_acm_request_param_struct_t
  - *Definition of parameters for CDC ACM request. More...*
- struct usb_device_cdc_acm_pipe_t
  - *Definition of pipe structure. More...*
- struct usb_device_cdc_acm_struct_t
  - *Definition of structure for CDC ACM device. More...*

Macros

- #define USB_DEVICE_CONFIG_CDC_ACM_MAX_INSTANCE (1U)
  - *The maximum number of CDC device instance.*
- #define USB_DEVICE_CONFIG_CDC_COMM_CLASS_CODE (0x02U)
  - *The CDC communication class code.*
- #define USB_DEVICE_CONFIG_CDC_DATA_CLASS_CODE (0x0AU)
  - *The CDC data class code.*
- #define USB_DEVICE_CDC_REQUEST_SEND_ENCAPSULATED_COMMAND (0x00)
  - *The CDC class request code for SEND_ENCAPSULATED_COMMAND.*
- #define USB_DEVICE_CDC_REQUEST_GET_ENCAPSULATED_RESPONSE (0x01)
  - *The CDC class request code for GET_ENCAPSULATED_RESPONSE.*
- #define USB_DEVICE_CDC_REQUEST_SET_COMM_FEATURE (0x02)
  - *The CDC class request code for SET_COMM_FEATURE.*
- #define USB_DEVICE_CDC_REQUEST_GET_COMM_FEATURE (0x03)
  - *The CDC class request code for GET_COMM_FEATURE.*
- #define USB_DEVICE_CDC_REQUEST_CLEAR_COMM_FEATURE (0x04)
  - *The CDC class request code for CLEAR_COMM_FEATURE.*
- #define USB_DEVICE_CDC_REQUEST_SET_AUX_LINE_STATE (0x10)
  - *The CDC class request code for SET_AUX_LINE_STATE.*
- #define USB_DEVICE_CDC_REQUEST_SET_HOOK_STATE (0x11)
  - *The CDC class request code for SET_HOOK_STATE.*
- #define USB_DEVICE_CDC_REQUEST_PULSE_SETUP (0x12)

The CDC class request code for PULSE_SETUP.
- #define USB_DEVICE_CDC_REQUEST_SEND_PULSE (0x13)

    The CDC class request code for SEND_PULSE.
- #define USB_DEVICE_CDC_REQUEST_SET_PULSE_TIME (0x14)

    The CDC class request code for SET_PULSE_TIME.
- #define USB_DEVICE_CDC_REQUEST_RING_AUX_JACK (0x15)

    The CDC class request code for RING_AUX_JACK.
- #define USB_DEVICE_CDC_REQUEST_SET_LINE_CODING (0x20)

    The CDC class request code for SET_LINE_CODING.
- #define USB_DEVICE_CDC_REQUEST_GET_LINE_CODING (0x21)

    The CDC class request code for GET_LINE_CODING.
- #define USB_DEVICE_CDC_REQUEST_SET_CONTROL_LINE_STATE (0x22)

    The CDC class request code for SET_CONTROL_LINE_STATE.
- #define USB_DEVICE_CDC_REQUEST_SEND_BREAK (0x23)

    The CDC class request code for SEND_BREAK.
- #define USB_DEVICE_CDC_REQUEST_SET_RINGER_PARAMS (0x30)

    The CDC class request code for SET_RINGER_PARAMS.
- #define USB_DEVICE_CDC_REQUEST_GET_RINGER_PARAMS (0x31)

    The CDC class request code for GET_RINGER_PARAMS.
- #define USB_DEVICE_CDC_REQUEST_SET_OPERATION_PARAM (0x32)

    The CDC class request code for SET_OPERATION_PARAM.
- #define USB_DEVICE_CDC_REQUEST_GET_OPERATION_PARAM (0x33)

    The CDC class request code for GET_OPERATION_PARAM.
- #define USB_DEVICE_CDC_REQUEST_SET_LINE_PARAMS (0x34)

    The CDC class request code for SET_LINE_PARAMS.
- #define USB_DEVICE_CDC_REQUEST_GET_LINE_PARAMS (0x35)

    The CDC class request code for GET_LINE_PARAMS.
- #define USB_DEVICE_CDC_REQUEST_DIAL_DIGITS (0x36)

    The CDC class request code for DIAL_DIGITS.
- #define USB_DEVICE_CDC_REQUEST_SET_UNIT_PARAMETER (0x37)

    The CDC class request code for SET_UNIT_PARAMETER.
- #define USB_DEVICE_CDC_REQUEST_GET_UNIT_PARAMETER (0x38)

    The CDC class request code for GET_UNIT_PARAMETER.
- #define USB_DEVICE_CDC_REQUEST_CLEAR_UNIT_PARAMETER (0x39)

    The CDC class request code for CLEAR_UNIT_PARAMETER.
- #define USB_DEVICE_CDC_REQUEST_SET_ETHERNET_MULTICAST_FILTERS (0x40)

    The CDC class request code for SET_ETHERNET_MULTICAST_FILTERS.
- #define USB_DEVICE_CDC_REQUEST_SET_ETHERNET_POW_PATTER_FILTER (0x41)

    The CDC class request code for SET_ETHERNET_POW_PATTER_FILTER.
- #define USB_DEVICE_CDC_REQUEST_GET_ETHERNET_POW_PATTER_FILTER (0x42)

    The CDC class request code for GET_ETHERNET_POW_PATTER_FILTER.
- #define USB_DEVICE_CDC_REQUEST_SET_ETHERNET_PACKET_FILTER (0x43)

    The CDC class request code for SET_ETHERNET_PACKET_FILTER.
- #define USB_DEVICE_CDC_REQUEST_GET_ETHERNET_STATISTIC (0x44)

    The CDC class request code for GET_ETHERNET_STATISTIC.
- #define USB_DEVICE_CDC_REQUEST_SET_ATM_DATA_FORMAT (0x50)

    The CDC class request code for SET_ATM_DATA_FORMAT.
- #define USB_DEVICE_CDC_REQUEST_GET_ATM_DEVICE_STATISTICS (0x51)

    The CDC class request code for GET_ATM_DEVICE_STATISTICS.
- #define USB_DEVICE_CDC_REQUEST_SET_ATM_DEFAULT_VC (0x52)

    The CDC class request code for SET_ATM_DEFAULT_VC.

- #define USB_DEVICE_CDC_REQUEST_GET_ATM_VC_STATISTICS (0x53)

    The CDC class request code for GET_ATM_VC_STATISTICS.
- #define USB_DEVICE_CDC_REQUEST_MDLM_SPECIFIC_REQUESTS_MASK (0x7F)

    The CDC class request code for MDLM_SPECIFIC_REQUESTS_MASK.
- #define USB_DEVICE_CDC_NOTIF_NETWORK_CONNECTION (0x00)

    The CDC class notify code for NETWORK_CONNECTION.
- #define USB_DEVICE_CDC_NOTIF_RESPONSE_AVAIL (0x01)

    The CDC class notify code for RESPONSE_AVAIL.
- #define USB_DEVICE_CDC_NOTIF_AUX_JACK_HOOK_STATE (0x08)

    The CDC class notify code for AUX_JACK_HOOK_STATE.
- #define USB_DEVICE_CDC_NOTIF_RING_DETECT (0x09)

    The CDC class notify code for RING_DETECT.
- #define USB_DEVICE_CDC_NOTIF_SERIAL_STATE (0x20)

    The CDC class notify code for SERIAL_STATE.
- #define USB_DEVICE_CDC_NOTIF_CALL_STATE_CHANGE (0x28)

    The CDC class notify code for CALL_STATE_CHANGE.
- #define USB_DEVICE_CDC_NOTIF_LINE_STATE_CHANGE (0x29)

    The CDC class notify code for LINE_STATE_CHANGE.
- #define USB_DEVICE_CDC_NOTIF_CONNECTION_SPEED_CHANGE (0x2A)

    The CDC class notify code for CONNECTION_SPEED_CHANGE.
- #define USB_DEVICE_CDC_FEATURE_ABSTRACT_STATE (0x01)

    The CDC class feature select code for ABSTRACT_STATE.
- #define USB_DEVICE_CDC_FEATURE_COUNTRY_SETTING (0x02)

    The CDC class feature select code for COUNTRY_SETTING.
- #define USB_DEVICE_CDC_CONTROL_SIG_BITMAP_CARRIER_ACTIVATION (0x02)

    The CDC class control signal bitmap value for CARRIER_ACTIVATION.
- #define USB_DEVICE_CDC_CONTROL_SIG_BITMAP_DTE_PRESENCE (0x01)

    The CDC class control signal bitmap value for DTE_PRESENCE.
- #define USB_DEVICE_CDC_UART_STATE_RX_CARRIER (0x01)

    The UART state bitmap value of RX_CARRIER.
- #define USB_DEVICE_CDC_UART_STATE_TX_CARRIER (0x02)

    The UART state bitmap value of TX_CARRIER.
- #define USB_DEVICE_CDC_UART_STATE_BREAK (0x04)

    The UART state bitmap value of BREAK.
- #define USB_DEVICE_CDC_UART_STATE_RING_SIGNAL (0x08)

    The UART state bitmap value of RING_SIGNAL.
- #define USB_DEVICE_CDC_UART_STATE_FRAMING (0x10)

    The UART state bitmap value of FRAMING.
- #define USB_DEVICE_CDC_UART_STATE_PARITY (0x20)

    The UART state bitmap value of PARITY.
- #define USB_DEVICE_CDC_UART_STATE_OVERRUN (0x40)

    The UART state bitmap value of OVERRUN.

USB DFU Class driver

Enumerations

- enum usb_device_cdc_acm_event_t {
  kUSB_DeviceCdcEventSendResponse = 0x01,
  kUSB_DeviceCdcEventRecvResponse,
  kUSB_DeviceCdcEventSerialStateNotif,
  kUSB_DeviceCdcEventSendEncapsulatedCommand,
  kUSB_DeviceCdcEventGetEncapsulatedResponse,
  kUSB_DeviceCdcEventSetCommFeature,
  kUSB_DeviceCdcEventGetCommFeature,
  kUSB_DeviceCdcEventClearCommFeature,
  kUSB_DeviceCdcEventGetLineCoding,
  kUSB_DeviceCdcEventSetLineCoding,
  kUSB_DeviceCdcEventSetControlLineState,
  kUSB_DeviceCdcEventSendBreak }
  Definition of CDC class event.

USB CDC ACM Class Driver

- usb_status_t USB_DeviceCdcAcmInit (uint8_t controllerId, usb_device_class_config_struct_t ∗config, class_handle_t ∗handle)
  Initializes the USB CDC ACM class.
- usb_status_t USB_DeviceCdcAcmDeinit (class_handle_t handle)
  Deinitializes the USB CDC ACM class.
- usb_status_t USB_DeviceCdcAcmEvent (void ∗handle, uint32_t event, void ∗param)
  Handles the CDC ACM class event.
- usb_status_t USB_DeviceCdcAcmSend (class_handle_t handle, uint8_t ep, uint8_t ∗buffer, uint32-_t length)
  Primes the endpoint to send packet to host.
- usb_status_t USB_DeviceCdcAcmRecv (class_handle_t handle, uint8_t ep, uint8_t ∗buffer, uint32-_t length)
  Primes the endpoint to receive packet from host.

3.7.5.8 Data Structure Documentation

3.7.5.8.1 struct usb_device_cdc_acm_request_param_struct_t

Data Fields

- uint8_t ∗∗ buffer
  The pointer to the address of the buffer for CDC class request.
- uint32_t ∗ length
  The pointer to the length of the buffer for CDC class request.
- uint16_t interfaceIndex
  The interface index of the setup packet.
- uint16_t setupValue
  The wValue field of the setup packet.

- uint8_t isSetup
    The flag indicates if it is a setup packet, 1: yes, 0: no.

3.7.5.8.1.1 Field Documentation

3.7.5.8.1.1.1 uint8_t∗∗ usb_device_cdc_acm_request_param_struct_t::buffer

3.7.5.8.1.1.2 uint32_t∗ usb_device_cdc_acm_request_param_struct_t::length

3.7.5.8.1.1.3 uint16_t usb_device_cdc_acm_request_param_struct_t::interfaceIndex

3.7.5.8.1.1.4 uint16_t usb_device_cdc_acm_request_param_struct_t::setupValue

3.7.5.8.1.1.5 uint8_t usb_device_cdc_acm_request_param_struct_t::isSetup

3.7.5.8.2 struct usb_device_cdc_acm_pipe_t

Data Fields

- osa_mutex_handle_t mutex
    The mutex of the pipe.
- uint8_t ∗ pipeDataBuffer
    pipe data buffer backup when stall
- uint32_t pipeDataLen
    pipe data length backup when stall
- uint8_t pipeStall
    pipe is stall
- uint8_t ep
    The endpoint number of the pipe.
- uint8_t isBusy
    1: The pipe is transferring packet, 0: The pipe is idle.

3.7.5.8.2.1 Field Documentation

3.7.5.8.2.1.1 osa_mutex_handle_t usb_device_cdc_acm_pipe_t::mutex

3.7.5.8.2.1.2 uint8_t usb_device_cdc_acm_pipe_t::ep

3.7.5.8.2.1.3 uint8_t usb_device_cdc_acm_pipe_t::isBusy

3.7.5.8.3 struct usb_device_cdc_acm_struct_t

Data Fields

- usb_device_handle handle
    The handle of the USB device.
- usb_device_class_config_struct_t ∗ configStruct
    The class configure structure.
- usb_device_interface_struct_t ∗ commInterfaceHandle
    The CDC communication interface handle.
- usb_device_interface_struct_t ∗ dataInterfaceHandle

The CDC data interface handle.
- usb_device_cdc_acm_pipe_t bulkIn

  The bulk in pipe for sending packet to host.
- usb_device_cdc_acm_pipe_t bulkOut

  The bulk out pipe for receiving packet from host.
- usb_device_cdc_acm_pipe_t interruptIn

  The interrupt in pipe for notifying the device state to host.
- uint8_t configuration

  The current configuration value.
- uint8_t interfaceNumber

  The current interface number.
- uint8_t alternate

  The alternate setting value of the interface.
- uint8_t hasSentState

  1: The device has primed the state in interrupt pipe, 0: Not primed the state.

3.7.5.8.3.1 Field Documentation

3.7.5.8.3.1.1 usb_device_handle usb_device_cdc_acm_struct_t::handle

3.7.5.8.3.1.2 usb_device_class_config_struct_t∗ usb_device_cdc_acm_struct_t::configStruct

3.7.5.8.3.1.3 usb_device_interface_struct_t∗ usb_device_cdc_acm_struct_t::commInterface-Handle

3.7.5.8.3.1.4 usb_device_interface_struct_t∗ usb_device_cdc_acm_struct_t::dataInterfaceHandle

3.7.5.8.3.1.5 usb_device_cdc_acm_pipe_t usb_device_cdc_acm_struct_t::bulkIn

3.7.5.8.3.1.6 usb_device_cdc_acm_pipe_t usb_device_cdc_acm_struct_t::bulkOut

3.7.5.8.3.1.7 usb_device_cdc_acm_pipe_t usb_device_cdc_acm_struct_t::interruptIn

3.7.5.8.3.1.8 uint8_t usb_device_cdc_acm_struct_t::configuration

3.7.5.8.3.1.9 uint8_t usb_device_cdc_acm_struct_t::interfaceNumber

3.7.5.8.3.1.10   uint8_t usb_device_cdc_acm_struct_t::alternate

3.7.5.8.3.1.11   uint8_t usb_device_cdc_acm_struct_t::hasSentState

3.7.5.9   Macro Definition Documentation

3.7.5.9.1   #define USB_DEVICE_CONFIG_CDC_ACM_MAX_INSTANCE (1U)

3.7.5.9.2   #define USB_DEVICE_CONFIG_CDC_COMM_CLASS_CODE (0x02U)

3.7.5.9.3   #define USB_DEVICE_CONFIG_CDC_DATA_CLASS_CODE (0x0AU)

3.7.5.9.4   #define USB_DEVICE_CDC_REQUEST_SEND_ENCAPSULATED_COMMAND (0x00)

3.7.5.9.5   #define USB_DEVICE_CDC_REQUEST_GET_ENCAPSULATED_RESPONSE (0x01)

3.7.5.9.6   #define USB_DEVICE_CDC_REQUEST_SET_COMM_FEATURE (0x02)

3.7.5.9.7   #define USB_DEVICE_CDC_REQUEST_GET_COMM_FEATURE (0x03)

3.7.5.9.8   #define USB_DEVICE_CDC_REQUEST_CLEAR_COMM_FEATURE (0x04)

3.7.5.9.9   #define USB_DEVICE_CDC_REQUEST_SET_AUX_LINE_STATE (0x10)

3.7.5.9.10   #define USB_DEVICE_CDC_REQUEST_SET_HOOK_STATE (0x11)

3.7.5.9.11   #define USB_DEVICE_CDC_REQUEST_PULSE_SETUP (0x12)

3.7.5.9.12   #define USB_DEVICE_CDC_REQUEST_SEND_PULSE (0x13)

3.7.5.9.13   #define USB_DEVICE_CDC_REQUEST_SET_PULSE_TIME (0x14)

kUSB_DeviceCdcEventRecvResponse This event indicates the bulk receive transfer is complete or cancelled etc.

kUSB_DeviceCdcEventSerialStateNotif This event indicates the serial state has been sent to the host.

kUSB_DeviceCdcEventSendEncapsulatedCommand This event indicates the device received the SEND_ENCAPSULATED_COMMAND request.

kUSB_DeviceCdcEventGetEncapsulatedResponse This event indicates the device received the G-ET_ENCAPSULATED_RESPONSE request.

kUSB_DeviceCdcEventSetCommFeature This event indicates the device received the SET_COMM-M_FEATURE request.

kUSB_DeviceCdcEventGetCommFeature This event indicates the device received the GET_COMM-M_FEATURE request.

kUSB_DeviceCdcEventClearCommFeature This event indicates the device received the CLEAR_-COMM_FEATURE request.

kUSB_DeviceCdcEventGetLineCoding This event indicates the device received the GET_LINE_-CODING request.

kUSB_DeviceCdcEventSetLineCoding This event indicates the device received the SET_LINE_C-ODING request.

kUSB_DeviceCdcEventSetControlLineState This event indicates the device received the SET_CO-NTRL_LINE_STATE request.

kUSB_DeviceCdcEventSendBreak This event indicates the device received the SEND_BREAK request.

3.7.5.11 Function Documentation

3.7.5.11.1 usb_status_t USB_DeviceCdcAcmInit (uint8_t *controllerId,* usb_device_class_config_-struct_t ∗ *config,* class_handle_t ∗ *handle*)

This function obtains a USB device handle according to the controller ID, initializes the CDC ACM class with the class configure parameters and creates the mutex for each pipe.

Parameters

controllerId	The ID of the controller. The value can be chosen from the kUSB_ControllerKhci0, kUSB_ControllerKhci1, kUSB_ControllerEhci0, or kUSB_ControllerEhci1.
config	The user configuration structure of type usb_device_class_config_struct_t. The user populates the members of this structure and passes the pointer of this structure into this function.

handle	It is out parameter. The class handle of the CDC ACM class.

Returns

A USB error code or kStatus_USB_Success.

Return values

kStatus_USB_Success	The CDC ACM class is initialized successfully.
kStatus_USB_Busy	No CDC ACM device handle available for allocation.
kStatus_USB_Invalid-Handle	The CDC ACM device handle allocation failure.
kStatus_USB_Invalid-Parameter	The USB device handle allocation failure.

3.7.5.11.2   usb_status_t USB_DeviceCdcAcmDeinit (class_handle_t *handle*)

This function destroys the mutex for each pipe, deinitializes each endpoint of the CDC ACM class and frees the CDC ACM class handle.

Parameters

handle	The class handle of the CDC ACM class.

Returns

A USB error code or kStatus_USB_Success.

Return values

kStatus_USB_Success	The CDC ACM class is de-initialized successfully.
kStatus_USB_Error	The endpoint deinitialization failure.
kStatus_USB_Invalid-Handle	The CDC ACM device handle or the CDC ACM class handle is invalid.

kStatus_USB_Invalid-Parameter	The endpoint number of the CDC ACM class handle is invalid.

3.7.5.11.3 usb_status_t USB_DeviceCdcAcmEvent (void ∗ *handle,* uint32_t *event,* void ∗ *param*)

This function responds to various events including the common device events and the class-specific events. For class-specific events, it calls the class callback defined in the application to deal with the class-specific event.

Parameters

handle	The class handle of the CDC ACM class.
event	The event type.
param	The class handle of the CDC ACM class.

Returns

A USB error code or kStatus_USB_Success.

Return values

kStatus_USB_Success	The CDC ACM class is de-initialized successfully.
kStatus_USB_Error	The configure structure of the CDC ACM class handle is invalid.
kStatus_USB_Invalid-Handle	The CDC ACM device handle or the CDC ACM class handle is invalid.
kStatus_USB_Invalid-Parameter	The endpoint number of the CDC ACM class handle is invalid.
Others	The error code returned by class callback in application.

3.7.5.11.4 usb_status_t USB_DeviceCdcAcmSend (class_handle_t *handle,* uint8_t *ep,* uint8_t ∗ *buffer,* uint32_t *length*)

This function checks whether the endpoint is sending packet, then it primes the endpoint with the buffer address and the buffer length if the pipe is not busy. Otherwise, it ignores this transfer by returning an error code.

Parameters

handle	The class handle of the CDC ACM class.
ep	The endpoint number of the transfer.
buffer	The pointer to the buffer to be transferred.
length	The length of the buffer to be transferred.

Returns

A USB error code or kStatus_USB_Success.

Return values

kStatus_USB_Success	Prime to send packet successfully.
kStatus_USB_Busy	The endpoint is busy in transferring.
kStatus_USB_Invalid-Handle	The CDC ACM device handle or the CDC ACM class handle is invalid.
kStatus_USB_Controller-NotFound	The controller interface is invalid.

Note

The function can only be called in the same context.

3.7.5.11.5 usb_status_t USB_DeviceCdcAcmRecv (class_handle_t *handle,* uint8_t *ep,* uint8_t ∗ *buffer,* uint32_t *length*)

This function checks whether the endpoint is receiving packet, then it primes the endpoint with the buffer address and the buffer length if the pipe is not busy. Otherwise, it ignores this transfer by returning an error code.

Parameters

handle	The class handle of the CDC ACM class.
ep	The endpoint number of the transfer.

buffer	The pointer to the buffer to be transferred.
length	The length of the buffer to be transferred.

Returns

A USB error code or kStatus_USB_Success.

Return values

kStatus_USB_Success	Prime to receive packet successfully.
kStatus_USB_Busy	The endpoint is busy in transferring.
kStatus_USB_Invalid-Handle	The CDC ACM device handle or the CDC ACM class handle is invalid.
kStatus_USB_Controller-NotFound	The controller interface is invalid.

Note

The function can only be called in the same context.

3.7.6 USB CDC RNDIS driver

3.7.6.1 Overview

This section describes the programming interface of the USB CDC RNDIS driver. The USB CDC RND-IS driver implements the various control messages and data message defined by Microsoft RNDIS. The control messages is sent through the SEND_ENCAPSULATED_COMMAND and GET_ENCAPSULA-TED_COMMAND CDC class request.

3.7.6.2 USB CDC RNDIS Device structures

The driver uses an instantiation of the usb_device_cdc_rndis_struct_t structure to maintain the current state of a particular CDC RNDIS instance module driver.

The CDC RNDIS driver populates the structure members.

3.7.6.3 CDC RNDIS Initialization

The CDC RNDIS device is initialized with the configure structure of type usb_device_cdc_rndis_config-_struct_t. It specifies the RNDIS request specific callback function and the maximum transmit size for device. Besides, the device state, hardware state and the media status is set to their initial value.

3.7.6.4 CDC RNDIS Control Message

The control messages is sent through the SEND_ENCAPSULATED_COMMAND and GET_ENCAPS-ULATED_COMMAND CDC class request. Take the RNDIS_INITIALIZE_MSG as an example, the host sends a SEND_ENCAPSULATED_COMMAND request which carries the message type of RNDIS_IN-ITIALIZE_MSG to the device, then the device sends back a notification through interrupt pipe to indicate that the response is available. Next the host sends a GET_ENCAPSULATED_COMMAND request which carries the message type of RNDIS_INITIALIZE_CMPLT to the device to obtain the proper information.

Data Structures

- struct rndis_init_msg_struct_t
    Define message structure for REMOTE_NDIS_INITIALIZE_MSG. More...
- struct rndis_init_cmplt_struct_t
    Define message structure for REMOTE_NDIS_INITIALIZE_CMPLT. More...
- struct rndis_halt_msg_struct_t
    Define message structure for REMOTE_NDIS_HALT_MSG. More...
- struct rndis_query_msg_struct_t
    Define message structure for REMOTE_NDIS_QUERY_MSG. More...
- struct rndis_query_cmplt_struct_t
    Define message structure for REMOTE_NDIS_QUERY_CMPLT. More...
- struct rndis_set_msg_struct_t

Define message structure for REMOTE_NDIS_SET_MSG. More...
- struct rndis_set_cmplt_struct_t

    Define message structure for REMOTE_NDIS_SET_CMPLT. More...
- struct rndis_reset_msg_struct_t

    Define message structure for REMOTE_NDIS_RESET_MSG. More...
- struct rndis_reset_cmplt_struct_t

    Define message structure for REMOTE_NDIS_RESET_CMPLT. More...
- struct rndis_indicate_status_msg_struct_t

    Define message structure for REMOTE_NDIS_INDICATE_STATUS_MSG. More...
- struct rndis_keepalive_msg_struct_t

    Define message structure for REMOTE_NDIS_KEEPALIVE_MSG. More...
- struct rndis_keepalive_cmplt_struct_t

    Define message structure for REMOTE_NDIS_KEEPALIVE_CMPLT. More...
- struct rndis_packet_msg_struct_t

    Define message structure for RNDIS_PACKET_MSG. More...
- struct usb_device_cdc_rndis_struct_t

    Define structure for CDC RNDIS device. More...
- struct usb_device_cdc_rndis_config_struct_t

    Define structure for CDC RNDIS device. More...
- struct usb_device_cdc_rndis_request_param_struct_t

    Define parameters for CDC RNDIS request. More...

Macros

- #define USB_DEVICE_CONFIG_CDC_RNDIS_MAX_INSTANCE (1U)

    The maximum number of USB CDC RNDIS device instance.
- #define RNDIS_DF_CONNECTIONLESS (0x00000001U)

    The Miniport driver type is connectionless.
- #define RNDIS_DF_CONNECTION_ORIENTED (0x00000002U)

    The Miniport driver type is connection-oriented.
- #define RNDIS_SINGLE_PACKET_TRANSFER (0x00000001U)

    The number of RNDIS data messages that the device can handle in a single transfer.
- #define RNDIS_PACKET_ALIGNMENT_FACTOR (0x00000003U)

    The byte alignment that the device expects for each RNDIS message that is part of a multimessage transfer.
- #define RNDIS_NUM_OIDS_SUPPORTED (25U)

    The number of OIDs the RNDIS device supported.
- #define RNDIS_VENDOR_ID (0xFFFFFFU)

    The vendor ID of the RNDIS device.
- #define RNDIS_NIC_IDENTIFIER_VENDOR (0x01U)

    A single byte that the vendor assigns to identify a particular NIC.
- #define RNDIS_MAX_EXPECTED_COMMAND_SIZE (76U)

    DataLength : Data length of communication feature.
- #define RNDIS_MAX_EXPECTED_RESPONSE_SIZE (RNDIS_RESPONSE_QUERY_MSG_-SIZE + (RNDIS_NUM_OIDS_SUPPORTED << 2U))

    This is the maximum observed command size we get on control endpoint – Memory for commands is allocated at initialization, instead of being dynamically allocated when command is received to avoid memory fragmentation.
- #define RNDIS_ETHER_ADDR_SIZE (6U)

    Size of Ethernet address.
- #define RNDIS_USB_HEADER_SIZE (44U)

Size of USB header for RNDIS packet.
- #define RNDIS_MULTICAST_LIST_SIZE (0U)
  Maximum size of multicast address list.

Enumerations

- enum ndis_physical_medium_enum_t
  Physical Medium Type definitions.
- enum rndis_state_enum_t {
  RNDIS_UNINITIALIZED = 0U,
  RNDIS_INITIALIZED,
  RNDIS_DATA_INITIALIZED }
  Define RNDIS device state.
- enum rndis_event_enum_t {
  kUSB_DeviceCdcEventAppGetLinkSpeed,
  kUSB_DeviceCdcEventAppGetSendPacketSize,
  kUSB_DeviceCdcEventAppGetRecvPacketSize,
  kUSB_DeviceCdcEventAppGetMacAddress,
  kUSB_DeviceCdcEventAppGetLinkStatus,
  kUSB_DeviceCdcEventAppGetMaxFrameSize }
  Define RNDIS event.

RNDIS Control Message Type

See MSDN for details.

- #define **RNDIS_PACKET_MSG** (0x00000001U)
- #define **RNDIS_INITIALIZE_MSG** (0x00000002U)
- #define **RNDIS_HALT_MSG** (0x00000003U)
- #define **RNDIS_QUERY_MSG** (0x00000004U)
- #define **RNDIS_SET_MSG** (0x00000005U)
- #define **RNDIS_RESET_MSG** (0x00000006U)
- #define **RNDIS_INDICATE_STATUS_MSG** (0x00000007U)
- #define **RNDIS_KEEPALIVE_MSG** (0x00000008U)
- #define **RNDIS_INITIALIZE_CMPLT** (0x80000002U)
- #define **RNDIS_QUERY_CMPLT** (0x80000004U)
- #define **RNDIS_SET_CMPLT** (0x80000005U)
- #define **RNDIS_RESET_CMPLT** (0x80000006U)
- #define **RNDIS_KEEPALIVE_CMPLT** (0x80000008U)

Object Identifiers used by NdisRequest Query/Set Information

See MSDN for details.

- #define **NDIS_OID_GEN_SUPPORTED_LIST** (0x00010101U)
- #define **NDIS_OID_GEN_HARDWARE_STATUS** (0x00010102U)
- #define **NDIS_OID_GEN_MEDIA_SUPPORTED** (0x00010103U)
- #define **NDIS_OID_GEN_MEDIA_IN_USE** (0x00010104U)
- #define **NDIS_OID_GEN_MAXIMUM_LOOKAHEAD** (0x00010105U)

- #define **NDIS_OID_GEN_MAXIMUM_FRAME_SIZE** (0x00010106U)
- #define **NDIS_OID_GEN_LINK_SPEED** (0x00010107U)
- #define **NDIS_OID_GEN_TRANSMIT_BUFFER_SPACE** (0x00010108U)
- #define **NDIS_OID_GEN_RECEIVE_BUFFER_SPACE** (0x00010109U)
- #define **NDIS_OID_GEN_TRANSMIT_BLOCK_SIZE** (0x0001010AU)
- #define **NDIS_OID_GEN_RECEIVE_BLOCK_SIZE** (0x0001010BU)
- #define **NDIS_OID_GEN_VENDOR_ID** (0x0001010CU)
- #define **NDIS_OID_GEN_VENDOR_DESCRIPTION** (0x0001010DU)
- #define **NDIS_OID_GEN_CURRENT_PACKET_FILTER** (0x0001010EU)
- #define **NDIS_OID_GEN_CURRENT_LOOKAHEAD** (0x0001010FU)
- #define **NDIS_OID_GEN_DRIVER_VERSION** (0x00010110U)
- #define **NDIS_OID_GEN_MAXIMUM_TOTAL_SIZE** (0x00010111U)
- #define **NDIS_OID_GEN_PROTOCOL_OPTIONS** (0x00010112U)
- #define **NDIS_OID_GEN_MAC_OPTIONS** (0x00010113U)
- #define **NDIS_OID_GEN_MEDIA_CONNECT_STATUS** (0x00010114U)
- #define **NDIS_OID_GEN_MAXIMUM_SEND_PACKETS** (0x00010115U)
- #define **NDIS_OID_GEN_XMIT_OK** (0x00020101U)
- #define **NDIS_OID_GEN_RCV_OK** (0x00020102U)
- #define **NDIS_OID_GEN_XMIT_ERROR** (0x00020103U)
- #define **NDIS_OID_GEN_RCV_ERROR** (0x00020104U)
- #define **NDIS_OID_GEN_RCV_NO_BUFFER** (0x00020105U)
- #define **NDIS_OID_GEN_DIRECTED_BYTES_XMIT** (0x00020201U)
- #define **NDIS_OID_GEN_DIRECTED_FRAMES_XMIT** (0x00020202U)
- #define **NDIS_OID_GEN_MULTICAST_BYTES_XMIT** (0x00020203U)
- #define **NDIS_OID_GEN_MULTICAST_FRAMES_XMIT** (0x00020204U)
- #define **NDIS_OID_GEN_BROADCAST_BYTES_XMIT** (0x00020205U)
- #define **NDIS_OID_GEN_BROADCAST_FRAMES_XMIT** (0x00020206U)
- #define **NDIS_OID_GEN_DIRECTED_BYTES_RCV** (0x00020207U)
- #define **NDIS_OID_GEN_DIRECTED_FRAMES_RCV** (0x00020208U)
- #define **NDIS_OID_GEN_MULTICAST_BYTES_RCV** (0x00020209U)
- #define **NDIS_OID_GEN_MULTICAST_FRAMES_RCV** (0x0002020AU)
- #define **NDIS_OID_GEN_BROADCAST_BYTES_RCV** (0x0002020BU)
- #define **NDIS_OID_GEN_BROADCAST_FRAMES_RCV** (0x0002020CU)
- #define **NDIS_OID_GEN_RCV_CRC_ERROR** (0x0002020DU)
- #define **NDIS_OID_GEN_TRANSMIT_QUEUE_LENGTH** (0x0002020EU)
- #define **NDIS_OID_GEN_GET_TIME_CAPS** (0x0002020FU)
- #define **NDIS_OID_GEN_GET_NETCARD_TIME** (0x00020210U)
- #define **NDIS_OID_802_3_PERMANENT_ADDRESS** (0x01010101U)
- #define **NDIS_OID_802_3_CURRENT_ADDRESS** (0x01010102U)
- #define **NDIS_OID_802_3_MULTICAST_LIST** (0x01010103U)
- #define **NDIS_OID_802_3_MAXIMUM_LIST_SIZE** (0x01010104U)
- #define **NDIS_OID_802_3_MAC_OPTIONS** (0x01010105U)
- #define **NDIS_802_3_MAC_OPTION_PRIORITY** (0x00000001U)
- #define **NDIS_OID_802_3_RCV_ERROR_ALIGNMENT** (0x01020101U)
- #define **NDIS_OID_802_3_XMIT_ONE_COLLISION** (0x01020102U)
- #define **NDIS_OID_802_3_XMIT_MORE_COLLISIONS** (0x01020103U)
- #define **NDIS_OID_802_3_XMIT_DEFERRED** (0x01020201U)
- #define **NDIS_OID_802_3_XMIT_MAX_COLLISIONS** (0x01020202U)
- #define **NDIS_OID_802_3_RCV_OVERRUN** (0x01020203U)
- #define **NDIS_OID_802_3_XMIT_UNDERRUN** (0x01020204U)
- #define **NDIS_OID_802_3_XMIT_HEARTBEAT_FAILURE** (0x01020205U)
- #define **NDIS_OID_802_3_XMIT_TIMES_CRS_LOST** (0x01020206U)
- #define **NDIS_OID_802_3_XMIT_LATE_COLLISIONS** (0x01020207U)
- #define **NDIS_OID_GEN_VENDOR_DRIVER_VERSION** (0x00010116U)
- #define **NDIS_OID_GEN_SUPPORTED_GUIDS** (0x00010117U)
- #define **NDIS_OID_GEN_NETWORK_LAYER_ADDRESSES** (0x00010118U) /∗ Set only ∗/

- #define **NDIS_OID_GEN_TRANSPORT_HEADER_OFFSET** (0x00010119U) /∗ Set only ∗/
- #define **NDIS_OID_GEN_MACHINE_NAME** (0x0001021AU)
- #define **NDIS_OID_GEN_RNDIS_CONFIG_PARAMETER** (0x0001021BU) /∗ Set only ∗/
- #define **NDIS_OID_GEN_VLAN_ID** (0x0001021CU)
- #define **NDIS_OID_GEN_MEDIA_CAPABILITIES** (0x00010201U)
- #define **NDIS_OID_GEN_PHYSICAL_MEDIUM** (0x00010202U)

NDIS Hardware status codes for OID_GEN_HARDWARE_STATUS

See MSDN for details.

- #define NDIS_HARDWARE_STATUS_READY (0x00000000U)
  Available and capable of sending and receiving data over the wire.
- #define NDIS_HARDWARE_STATUS_INITIALIZING (0x00000001U)
  Initializing.
- #define NDIS_HARDWARE_STATUS_RESET (0x00000002U)
  Resetting.
- #define NDIS_HARDWARE_STATUS_CLOSING (0x00000003U)
  Closing.
- #define NDIS_HARDWARE_STATUS_NOT_READY (0x00000004U)
  Not ready.

NDIS media types that the NIC can support

See MSDN for details.

- #define NDIS_MEDIUM802_3 (0x00000000U)
  Ethernet (802.3) is not supported for NDIS 6.0 drivers.
- #define NDIS_MEDIUM802_5 (0x00000001U)
  Token Ring (802.5) is not supported for NDIS 6.0 drivers.
- #define NDIS_MEDIUM_FDDI (0x00000002U)
  FDDI is not supported on Windows® Vista.
- #define NDIS_MEDIUM_WAN (0x00000003U)
  WAN.
- #define NDIS_MEDIUM_LOCAL_TALK (0x00000004U)
  LocalTalk.
- #define NDIS_MEDIUM_DIX (0x00000005U)
  DEC/Intel/Xerox (DIX) Ethernet.
- #define NDIS_MEDIUM_ARCNET_RAW (0x00000006U)
  ARCNET (raw) is not supported on Windows Vista.
- #define NDIS_MEDIUM_ARCNET878_2 (0x00000007U)
  ARCNET (878.2) is not supported on Windows Vista.
- #define NDIS_MEDIUM_ATM (0x00000008U)
  ATM is not supported for NDIS 6.0 drivers.
- #define NDIS_MEDIUM_NATIVE802_11 (0x00000009U)
  Native 802.11.
- #define NDIS_MEDIUM_WIRELESS_WAN (0x0000000AU)
  Various types of NdisWirelessXxx media Note This media type is not available for use beginning with Windows Vista.
- #define NDIS_MEDIUM_IRDA (0x0000000BU)

> *Infrared (IrDA)*
- #define NDIS_MEDIUM_COWAN (0x0000000CU)
  > *Connection-oriented WAN.*
- #define NDIS_MEDIUM1394 (0x0000000DU)
  > *IEEE 1394 (firewire) bus.*
- #define NDIS_MEDIUM_BPC (0x0000000EU)
  > *Broadcast PC network.*
- #define NDIS_MEDIUM_INFINI_BAND (0x0000000FU)
  > *InfiniBand network.*
- #define NDIS_MEDIUM_TUNNEL (0x00000010U)
  > *Tunnel network.*
- #define NDIS_MEDIUM_LOOPBACK (0x00000011U)
  > *NDIS loopback network.*

NDIS Packet Filter Bits for OID_GEN_CURRENT_PACKET_FILTER.

See MSDN for details.

- #define NDIS_PACKET_TYPE_DIRECTED (0x0001U)
  > *Directed packets.*
- #define NDIS_PACKET_TYPE_MULTICAST (0x0002U)
  > *Multicast address packets sent to addresses in the multicast address list.*
- #define NDIS_PACKET_TYPE_ALL_MULTICAST (0x0004U)
  > *All multicast address packets, not just the ones enumerated in the multicast address list.*
- #define NDIS_PACKET_TYPE_BROADCAST (0x0008U)
  > *Broadcast packets.*
- #define NDIS_PACKET_TYPE_SOURCE_ROUTING (0x0010U)
  > *All source routing packets.*
- #define NDIS_PACKET_TYPE_PROMISCUOUS (0x0020U)
  > *Specifies all packets.*
- #define NDIS_PACKET_TYPE_SMT (0x0040U)
  > *SMT packets that an FDDI NIC receives.*
- #define NDIS_PACKET_TYPE_ALL_LOCAL (0x0080U)
  > *All packets sent by installed protocols and all packets indicated by the NIC that is identified by a given NdisBindingHandle.*
- #define NDIS_PACKET_TYPE_MAC_FRAME (0x8000U)
  > *NIC driver frames that a Token Ring NIC receives.*
- #define NDIS_PACKET_TYPE_FUNCTIONAL (0x4000U)
  > *Functional address packets sent to addresses included in the current functional address.*
- #define NDIS_PACKET_TYPE_ALL_FUNCTIONAL (0x2000U)
  > *All functional address packets, not just the ones in the current functional address.*
- #define NDIS_PACKET_TYPE_GROUP (0x1000U)
  > *Packets sent to the current group address.*

RNDIS status values

See MSDN for details.

- #define RNDIS_STATUS_SUCCESS (0x00000000U)

The requested operation completed successfully.
- #define RNDIS_STATUS_NOT_RECOGNIZED (0x00010001U)

  The underlying driver does not support the requested operation.
- #define RNDIS_STATUS_NOT_SUPPORTED (0xC00000BBU)

  Unsupported request error (equivalent to STATUS_NOT_SUPPORTED).
- #define RNDIS_STATUS_NOT_ACCEPTED (0x00010003U)

  The underlying driver attempted the requested operation, usually a set, on its NIC but it was aborted by the Netcard.
- #define RNDIS_STATUS_FAILURE (0xC0000001U)

  This value usually is a non specific default, returned when none of the more specific NDIS_STATUS_XXX causes the underlying driver to fail the request.
- #define RNDIS_STATUS_RESOURCES (0xC000009AU)

  The request can't be satisfied due to a resource shortage.
- #define RNDIS_STATUS_CLOSING (0xC0010002U)

  The underlying driver failed the requested operation because a close is in progress.
- #define RNDIS_STATUS_CLOSING_INDICATING (0xC001000EU)

  The underlying driver failed the requested operation because indicating a close is in progress.
- #define RNDIS_STATUS_RESET_IN_PROGRESS (0xC001000DU)

  The underlying NIC driver cannot satisfy the request at this time because it is currently resetting the Netcard.
- #define RNDIS_STATUS_INVALID_LENGTH (0xC0010014U)

  The value specified in the InformationBufferLength member of the NDIS_REQUEST-structured buffer at NdisRequest does not match the requirements for the given OID_XXX code.
- #define RNDIS_STATUS_BUFFER_TOO_SHORT (0xC0010016U)

  The information buffer is too small.
- #define RNDIS_STATUS_INVALID_DATA (0xC0010015U)

  The data supplied at InformationBuffer in the given NDIS_REQUEST structure is invalid for the given OID_XXX code.
- #define RNDIS_STATUS_INVALID_OID (0xC0010017U)

  The OID_XXX code specified in the OID member of the NDIS_REQUEST-structured buffer at NdisRequest is invalid or unsupported by the underlying driver.
- #define RNDIS_STATUS_MEDIA_CONNECT (0x4001000BU)

  Device is connected to network medium.
- #define RNDIS_STATUS_MEDIA_DISCONNECT (0x4001000CU)

  Device is disconnected from network medium.

RNDIS Response sizes

Definitions of the size of response of various message types.

- #define RNDIS_RESPONSE_INITIALIZE_MSG_SIZE (52U)

  Response size of INITIALIZE_MSG.
- #define RNDIS_RESPONSE_QUERY_MSG_SIZE (24U)

  Response size of QUERY_MSG.
- #define RNDIS_RESPONSE_SET_MSG_SIZE (16U)

  Response size of SET_MSG.
- #define RNDIS_RESPONSE_RESET_MSG_SIZE (16U)

  Response size of RESET_MSG.
- #define RNDIS_RESPONSE_KEEPALIVE_MSG_SIZE (16U)

  Response size of KEEPALIVE_MSG.

RNDIS device connection status

Definitions of the status value of NIC connection.

- #define NDIS_MEDIA_STATE_CONNECTED (0x00000000U)
  The network connection has been lost.
- #define NDIS_MEDIA_STATE_DISCONNECTED (0x00000001U)
  The network connection has been restored.
- #define NDIS_MEDIA_STATE_UNKNOWN (0xFFFFFFFFU)
  The initial value of the connection status.

Reserved for connection oriented devices. Set value to zero.

- #define **RNDIS_AF_LIST_OFFSET** (0x00000000U)
- #define **RNDIS_AF_LIST_SIZE** (0x00000000U)

USB CDC ACM Class Driver

- usb_status_t USB_DeviceCdcRndisInit (class_handle_t classHandle, usb_device_cdc_rndis_-
  config_struct_t ∗config, usb_device_cdc_rndis_struct_t ∗∗handle)
  Initializes the USB CDC RNDIS device.
- usb_status_t USB_DeviceCdcRndisDeinit (usb_device_cdc_rndis_struct_t ∗handle)
  Deinitializes the USB CDC RNDIS device.
- usb_status_t USB_DeviceCdcRndisMessageSet (usb_device_cdc_rndis_struct_t ∗handle, uint8_-
  t ∗∗message, uint32_t ∗len)
  Responds to kUSB_DeviceCdcEventSendEncapsulatedCommand.
- usb_status_t USB_DeviceCdcRndisMessageGet (usb_device_cdc_rndis_struct_t ∗handle, uint8_-
  t ∗∗message, uint32_t ∗len)
  Responds to kUSB_DeviceCdcEventGetEncapsulatedResponse.
- usb_status_t USB_DeviceCdcRndisResetCommand (usb_device_cdc_rndis_struct_t ∗handle,
  uint8_t ∗∗message, uint32_t ∗len)
  Soft reset the RNDIS device.
- usb_status_t USB_DeviceCdcRndisHaltCommand (usb_device_cdc_rndis_struct_t ∗handle)
  Halts the RNDIS device.

3.7.6.5   Data Structure Documentation

3.7.6.5.1   struct rndis_init_msg_struct_t

3.7.6.5.2   struct rndis_init_cmplt_struct_t

3.7.6.5.3   struct rndis_halt_msg_struct_t

3.7.6.5.4   struct rndis_query_msg_struct_t

3.7.6.5.5   struct rndis_query_cmplt_struct_t

3.7.6.5.6   struct rndis_set_msg_struct_t

3.7.6.5.7   struct rndis_set_cmplt_struct_t

3.7.6.5.8   struct rndis_reset_msg_struct_t

3.7.6.5.9   struct rndis_reset_cmplt_struct_t

3.7.6.5.10   struct rndis_indicate_status_msg_struct_t

3.7.6.5.11   struct rndis_keepalive_msg_struct_t

3.7.6.5.12   struct rndis_keepalive_cmplt_struct_t

3.7.6.5.13   struct rndis_packet_msg_struct_t

3.7.6.5.14   struct usb_device_cdc_rndis_struct_t

Data Fields

- class_handle_t cdcAcmHandle
    USB CDC ACM class handle.
- uint8_t ∗ rndisCommand
    The pointer to the buffer of the RNDIS request.
- uint8_t ∗ responseData
    The pointer to the buffer of the RNDIS response.
- uint32_t rndisHostMaxTxSize
    The maximum transmit size in byte of the host.
- uint32_t rndisDevMaxTxSize
    The maximum transmit size in byte of the device.
- uint32_t rndisHwState
    The hardware state of the RNDIS device.
- uint32_t rndisPacketFilter
    The packet filter of the RNDIS device.
- uint32_t rndisMediaConnectStatus
    The media connection status of the RNDIS device.

- uint32_t numFramesTxOk

  The number of the frames sent successfully.
- uint32_t numFramesRxOk

  The number of the frames received successfully.
- uint32_t numFramesTxError

  The number of the frames sent failed.
- uint32_t numFramesRxError

  The number of the frames received failed.
- uint32_t numRecvFramesMissed

  The number of the frames missed to receive.
- uint32_t numRecvFramesAlignmentError

  The number of the frames received that has alignment error.
- uint32_t numFramesTxOneCollision

  The number of the frames sent that has one collision.
- uint32_t numFramesTxManyCollision

  The number of the frames sent that has many collision.
- uint8_t rndisDeviceState

  The RNDIS device state.
- osa_mutex_handle_t statusMutex

  The mutex to guarantee the consistent access to the device state.
- usb_status_t(∗ rndisCallback)(class_handle_t handle, uint32_t event, void ∗param)

  The callback function provided by application for the RNDIS request.

3.7.6.5.14.1   Field Documentation

3.7.6.5.14.1.1   class_handle_t usb_device_cdc_rndis_struct_t::cdcAcmHandle

3.7.6.5.14.1.2   uint8_t∗ usb_device_cdc_rndis_struct_t::rndisCommand

3.7.6.5.14.1.3   uint8_t∗ usb_device_cdc_rndis_struct_t::responseData

3.7.6.5.14.1.4   uint32_t usb_device_cdc_rndis_struct_t::rndisHostMaxTxSize

3.7.6.5.14.1.5   uint32_t usb_device_cdc_rndis_struct_t::rndisDevMaxTxSize

3.7.6.5.14.1.6   uint32_t usb_device_cdc_rndis_struct_t::rndisHwState

3.7.6.5.14.1.7   uint32_t usb_device_cdc_rndis_struct_t::rndisPacketFilter

3.7.6.5.14.1.8   uint32_t usb_device_cdc_rndis_struct_t::rndisMediaConnectStatus

3.7.6.5.14.1.9   uint32_t usb_device_cdc_rndis_struct_t::numFramesTxOk

3.7.6.5.14.1.10   uint32_t usb_device_cdc_rndis_struct_t::numFramesRxOk

3.7.6.5.14.1.11   uint32_t usb_device_cdc_rndis_struct_t::numFramesTxError

3.7.6.5.14.1.12   uint32_t usb_device_cdc_rndis_struct_t::numFramesRxError

3.7.6.5.14.1.13   uint32_t usb_device_cdc_rndis_struct_t::numRecvFramesMissed

3.7.6.5.14.1.14   uint32_t usb_device_cdc_rndis_struct_t::numRecvFramesAlignmentError

3.7.6.5.14.1.15   uint32_t usb_device_cdc_rndis_struct_t::numFramesTxOneCollision

3.7.6.5.14.1.16   uint32_t usb_device_cdc_rndis_struct_t::numFramesTxManyCollision

3.7.6.5.14.1.17   uint8_t usb_device_cdc_rndis_struct_t::rndisDeviceState

3.7.6.5.14.1.18   osa_mutex_handle_t usb_device_cdc_rndis_struct_t::statusMutex

3.7.6.5.14.1.19   usb_status_t(∗ usb_device_cdc_rndis_struct_t::rndisCallback)(class_handle_t handle, uint32_t event, void ∗param)

3.7.6.5.15   struct usb_device_cdc_rndis_config_struct_t

Data Fields

- uint32_t devMaxTxSize
    The maximum transmit size in byte of the device.
- usb_status_t(∗ rndisCallback)(class_handle_t handle, uint32_t event, void ∗param)
    The callback function provided by application for the RNDIS request.

3.7.6.5.15.1   Field Documentation

3.7.6.5.15.1.1   uint32_t usb_device_cdc_rndis_config_struct_t::devMaxTxSize

This value is configured by application.

**3.7.6.5.15.1.2   usb_status_t(∗ usb_device_cdc_rndis_config_struct_t::rndisCallback)(class_-
handle_t handle, uint32_t event, void ∗param)**

3.7.6.5.16   struct usb_device_cdc_rndis_request_param_struct_t

Data Fields

- uint8_t ∗ buffer
  The pointer to the buffer for RNDIS request.
- uint32_t length
  The length of the buffer for RNDIS request.

3.7.6.5.16.1   Field Documentation

3.7.6.5.16.1.1   uint8_t∗ usb_device_cdc_rndis_request_param_struct_t::buffer

3.7.6.5.16.1.2   uint32_t usb_device_cdc_rndis_request_param_struct_t::length

3.7.6.6   Macro Definition Documentation

3.7.6.6.1   #define NDIS_MEDIUM802_3 (0x00000000U)

Note NDIS 5.x Miniport drivers that conform to the IEEE$^{®}$ 802.11 interface must use this media type.
For more information about the 802.11 interface, see 802.11 Wireless LAN Miniport Drivers.

3.7.6.6.2   #define NDIS_MEDIUM802_5 (0x00000001U)

3.7.6.6.3   #define NDIS_MEDIUM_FDDI (0x00000002U)

3.7.6.6.4   #define NDIS_MEDIUM_ARCNET_RAW (0x00000006U)

3.7.6.6.5   #define NDIS_MEDIUM_ARCNET878_2 (0x00000007U)

3.7.6.6.6   #define NDIS_MEDIUM_ATM (0x00000008U)

3.7.6.6.7   #define NDIS_MEDIUM_NATIVE802_11 (0x00000009U)

This media type is used by Miniport drivers that conform to the Native 802.11 interface. For more in-
formation about this interface, see Native 802.11 Wireless LAN Miniport Drivers. Note: Native 802.11
interface is supported in NDIS 6.0 and later versions

3.7.6.6.8   #define NDIS_MEDIUM_BPC (0x0000000EU)

3.7.6.6.9   #define NDIS_MEDIUM_INFINI_BAND (0x0000000FU)

3.7.6.6.10   #define NDIS_MEDIUM_TUNNEL (0x00000010U)

3.7.6.6.11   #define NDIS_MEDIUM_LOOPBACK (0x00000011U)

3.7.6.6.12   #define NDIS_PACKET_TYPE_DIRECTED (0x0001U)

Directed packets contain a destination address equal to the station address of the NIC.

3.7.6.6.13   #define NDIS_PACKET_TYPE_MULTICAST (0x0002U)

A protocol driver can receive Ethernet (802.3) multicast packets or Token Ring (802.5) functional address packets by specifying the multicast or functional address packet type. Setting the multicast address list or functional address determines which multicast address groups the NIC driver enables.

3.7.6.6.14   #define NDIS_PACKET_TYPE_BROADCAST (0x0008U)

3.7.6.6.15   #define NDIS_PACKET_TYPE_SOURCE_ROUTING (0x0010U)

If the protocol driver sets this bit, the NDIS library attempts to act as a source routing bridge.

3.7.6.6.16   #define NDIS_PACKET_TYPE_PROMISCUOUS (0x0020U)

3.7.6.6.17   #define NDIS_PACKET_TYPE_SMT (0x0040U)

3.7.6.6.18   #define NDIS_PACKET_TYPE_MAC_FRAME (0x8000U)

3.7.6.6.19   #define NDIS_PACKET_TYPE_GROUP (0x1000U)

3.7.6.6.20   #define RNDIS_STATUS_SUCCESS (0x00000000U)

3.7.6.6.21   #define RNDIS_STATUS_NOT_RECOGNIZED (0x00010001U)

3.7.6.6.22   #define RNDIS_STATUS_NOT_SUPPORTED (0xC00000BBU)

3.7.6.6.23   #define RNDIS_STATUS_NOT_ACCEPTED (0x00010003U)

For example, an attempt to set too many multicast addresses might cause the return of this value.

3.7.6.6.24   #define RNDIS_STATUS_RESOURCES (0xC000009AU)

Usually, this return indicates that an attempt to allocate memory was unsuccessful, but it does not necessarily indicate that the same request, submitted later, it is aborted for the same reason.

3.7.6.6.25   #define RNDIS_STATUS_CLOSING (0xC0010002U)

3.7.6.6.26   #define RNDIS_STATUS_CLOSING_INDICATING (0xC001000EU)

3.7.6.6.27   #define RNDIS_STATUS_INVALID_LENGTH (0xC0010014U)

If the information buffer is too small, the BytesNeeded member contains the correct value for InformationBufferLength on return from NdisRequest.

3.7.6.6.28   #define RNDIS_STATUS_BUFFER_TOO_SHORT (0xC0010016U)

3.7.6.6.29   #define RNDIS_STATUS_MEDIA_CONNECT (0x4001000BU)

3.7.6.6.30   #define RNDIS_STATUS_MEDIA_DISCONNECT (0x4001000CU)

3.7.6.6.31   #define RNDIS_RESPONSE_INITIALIZE_MSG_SIZE (52U)

3.7.6.6.32   #define RNDIS_RESPONSE_QUERY_MSG_SIZE (24U)

3.7.6.6.33   #define RNDIS_RESPONSE_SET_MSG_SIZE (16U)

3.7.6.6.34   #define RNDIS_RESPONSE_RESET_MSG_SIZE (16U)

3.7.6.6.35   #define RNDIS_RESPONSE_KEEPALIVE_MSG_SIZE (16U)

3.7.6.6.36   #define RNDIS_DF_CONNECTIONLESS (0x00000001U)

3.7.6.6.37   #define RNDIS_DF_CONNECTION_ORIENTED (0x00000002U)

3.7.6.6.38   #define RNDIS_SINGLE_PACKET_TRANSFER (0x00000001U)

3.7.6.6.39   #define RNDIS_PACKET_ALIGNMENT_FACTOR (0x00000003U)

3.7.6.6.40   #define RNDIS_NUM_OIDS_SUPPORTED (25U)

3.7.6.6.41   #define RNDIS_VENDOR_ID (0xFFFFFFU)

Vendors without an IEEE-registered code should use the value 0xFFFFFF.

3.7.6.6.42 #define NDIS_MEDIA_STATE_CONNECTED (0x00000000U)

3.7.6.6.43 #define NDIS_MEDIA_STATE_DISCONNECTED (0x00000001U)

3.7.6.6.44 #define NDIS_MEDIA_STATE_UNKNOWN (0xFFFFFFFFU)

3.7.6.6.45 #define RNDIS_MAX_EXPECTED_COMMAND_SIZE (76U)

3.7.6.6.46 #define RNDIS_ETHER_ADDR_SIZE (6U)

3.7.6.6.47 #define RNDIS_USB_HEADER_SIZE (44U)

3.7.6.6.48 #define RNDIS_MULTICAST_LIST_SIZE (0U)

3.7.6.7 Enumeration Type Documentation

3.7.6.7.1 enum ndis_physical_medium_enum_t

Used with OID_GEN_PHYSICAL_MEDIUM.

3.7.6.7.2 enum rndis_state_enum_t

See MSDN for details.

Enumerator

RNDIS_UNINITIALIZED Following bus-level initialization, the device is said to be in the RN-DIS-uninitialized state. If the device receives a REMOTE_NDIS_HALT_MSG, a bus-level disconnects, or a hard-reset at any time, it forces the device to the RNDIS-uninitialized state.

RNDIS_INITIALIZED After the device receives a REMOTE_NDIS_INITIALIZE_MSG and responds with a REMOTE_NDIS_INITIALIZE_CMPLT with a status of RNDIS_STATUS_S-UCCESS, the device enters the RNDIS-initialized state. If the device is in the RNDIS-data-initialized state when it receives a REMOTE_NDIS_SET_MSG specifying a zero filter value for OID_GEN_CURRENT_PACKET_FILTER, this event forces the device back to the RNDI-S-initialized state.

RNDIS_DATA_INITIALIZED If the device receives a REMOTE_NDIS_SET_MSG that specifies a non-zero filter value for OID_GEN_CURRENT_PACKET_FILTER, the device enters the R-NDIS-data-initialized state.

3.7.6.7.3 enum rndis_event_enum_t

Enumerator

kUSB_DeviceCdcEventAppGetLinkSpeed This event indicates to get the link speed of the Ethernet.

kUSB_DeviceCdcEventAppGetSendPacketSize   This event indicates to get the USB send packet size.

kUSB_DeviceCdcEventAppGetRecvPacketSize   This event indicates to get the USB receive packet size.

kUSB_DeviceCdcEventAppGetMacAddress   This event indicates to get the mac address of the device.

kUSB_DeviceCdcEventAppGetLinkStatus   This event indicates to get the link status of the Ethernet.

kUSB_DeviceCdcEventAppGetMaxFrameSize   This event indicates to get the Ethernet maximum frame size.

3.7.6.8 Function Documentation

3.7.6.8.1   usb_status_t USB_DeviceCdcRndisInit (class_handle_t *classHandle,* usb_device_cdc_rndis_config_struct_t ∗ *config,* usb_device_cdc_rndis_struct_t ∗∗ *handle*)

This function sets the initial value for RNDIS device state, hardware state and media connection status, configures the maximum transmit size and the RNDIS request callback according to the user configuration structure. It also creates the mutex for accessing the device state.

Parameters

classHandle	The class handle of the CDC ACM class.
config	The configure structure of the RNDIS device.
handle	This is a out parameter. It points to the address of the USB CDC RNDIS device handle.

Returns

A USB error code or kStatus_USB_Success.

Return values

kStatus_USB_Success	Initialize the RNDIS device successfully.
kStatus_USB_Error	Fails to allocate for the RNDIS device handle.

3.7.6.8.2   usb_status_t USB_DeviceCdcRndisDeinit (usb_device_cdc_rndis_struct_t ∗ *handle*)

This function destroys the mutex of the device state and frees the RNDIS device handle.

Parameters

handle	This is a pointer to the USB CDC RNDIS device handle.

Returns

A USB error code or kStatus_USB_Success.

Return values

kStatus_USB_Success	De-Initialize the RNDIS device successfully.
kStatus_USB_Error	Fails to free the RNDIS device handle.
kStatus_USB_Invalid-Handle	The RNDIS device handle is invalid.

3.7.6.8.3 usb_status_t USB_DeviceCdcRndisMessageSet (usb_device_cdc_rndis_struct_t ∗ handle, uint8_t ∗∗ message, uint32_t ∗ len)

This function checks the message length to see if it exceeds the maximum of the RNDIS request size and sets the device state or prepares notification for various message type accordingly.

Parameters

handle	This is a pointer to the USB CDC RNDIS device handle.
message	This is a pointer to the address of the RNDIS request buffer.
len	This is a pointer to the variable of data size for the RNDIS request.

Returns

A USB error code or kStatus_USB_Success.

Return values

kStatus_USB_Success	Responds to the host successfully.
kStatus_USB_Error	The message length exceeds the maximum of the RNDIS request.
kStatus_USB_Invalid-Handle	The RNDIS device handle is invalid.

3.7.6.8.4   usb_status_t USB_DeviceCdcRndisMessageGet (usb_device_cdc_rndis_struct_t ∗ handle, uint8_t ∗∗ message, uint32_t ∗ len)

This function prepares the response for various message type which is stored in SendEncapsulated-Command.

Parameters

handle	This is a pointer to the USB CDC RNDIS device handle.
message	This is an out parameter. It is a pointer to the address of the RNDIS response buffer.
len	This is an out parameter. It is a pointer to the variable of data size for the RNDIS response.

Returns

A USB error code or kStatus_USB_Success.

Return values

kStatus_USB_Success	Prepares for the response to the host successfully.
kStatus_USB_Invalid-Request	The message type is not supported.
kStatus_USB_Invalid-Handle	The RNDIS device handle is invalid.

3.7.6.8.5 usb_status_t USB_DeviceCdcRndisResetCommand (usb_device_cdc_rndis_struct_t ∗ *handle,* uint8_t ∗∗ *message,* uint32_t ∗ *len*)

This function is called to soft reset the RNDIS device.

Parameters

handle	This is a pointer to the USB CDC RNDIS device handle.
message	This is an out parameter. It is a pointer to the address of the RNDIS response buffer.
len	This is an out parameter. It is a pointer to the variable of data size for the RNDIS response.

Returns

A USB error code or kStatus_USB_Success.

Return values

kStatus_USB_Success	Prepares for the response to the host successfully.
kStatus_USB_Invalid-Handle	The RNDIS device handle is invalid.

3.7.6.8.6   usb_status_t USB_DeviceCdcRndisHaltCommand (usb_device_cdc_rndis_struct_t ∗ *handle*)

This function is called to halt the RNDIS device.

Parameters

handle	This is a pointer to the USB CDC RNDIS device handle.

Returns

A USB error code or kStatus_USB_Success.

Return values

kStatus_USB_Success	Halt the RNDIS device successfully.
kStatus_USB_Invalid-Handle	The RNDIS device handle is invalid.

3.8 USB AUDIO Class driver

3.8.1 Overview

Data Structures

- struct usb_device_audio_entity_struct_t
  The audio device class-specific information. More...
- struct usb_device_audio_entities_struct_t
  The audio device class-specific information list. More...
- struct usb_device_audio_struct_t
  The audio device class status structure. More...

Enumerations

- enum usb_device_audio_event_t {
  kUSB_DeviceAudioEventStreamSendResponse = 0x01U,
  kUSB_DeviceAudioEventStreamRecvResponse,
  kUSB_DeviceAudioEventControlSendResponse }
  Available common EVENT types in audio class callback.

USB Audio class codes

- #define USB_DEVICE_CONFIG_AUDIO_CLASS_CODE (0x01U)
  Audio device class code.
- #define USB_DEVICE_AUDIO_STREAM_SUBCLASS (0x02U)
  Audio device subclass code.
- #define **USB_DEVICE_AUDIO_CONTROL_SUBCLASS** (0x01U)
- #define USB_DESCRIPTOR_TYPE_AUDIO_CS_INTERFACE (0x24)
  Audio device class-specific descriptor type.
- #define **USB_DESCRIPTOR_TYPE_AUDIO_CS_ENDPOINT** (0x25)
- #define USB_DESCRIPTOR_SUBTYPE_AUDIO_CONTROL_HEADER (0x01)
  Audio device class-specific control interface descriptor subtype.
- #define **USB_DESCRIPTOR_SUBTYPE_AUDIO_CONTROL_INPUT_TERMINAL** (0x02)
- #define **USB_DESCRIPTOR_SUBTYPE_AUDIO_CONTROL_OUTPUT_TERMINA-L** (0x03)
- #define **USB_DESCRIPTOR_SUBTYPE_AUDIO_CONTROL_MIXER_UNIT** (0x04)
- #define **USB_DESCRIPTOR_SUBTYPE_AUDIO_CONTROL_SELECTOR_UNIT** (0x05)
- #define **USB_DESCRIPTOR_SUBTYPE_AUDIO_CONTROL_FEATURE_UNIT** (0x06)
- #define **USB_DESCRIPTOR_SUBTYPE_AUDIO_CONTROL_PROCESSING_UNIT** (0x07)
- #define **USB_DESCRIPTOR_SUBTYPE_AUDIO_CONTROL_EXTENSION_UNIT** (0x08)
- #define USB_DESCRIPTOR_AUDIO_CONTROL_PROCESSING_UNIT_UPDOWNMIX_PR-OCESS_TYPE (0x01)
  Audio device class-specific control interface effect unit effect type.
- #define **USB_DESCRIPTOR_AUDIO_CONTROL_PROCESSING_UNIT_DOLBY_PROL-OGIC_PROCESS_TYPE** (0x02)
- #define **USB_DESCRIPTOR_AUDIO_CONTROL_PROCESSING_UNIT_STEREO_EXTE-NDER_PROCESS_TYPE** (0x03)

- #define **USB_DESCRIPTOR_AUDIO_CONTROL_PROCESSING_UNIT_REVERBERATI-ON_PROCESS_TYPE** (0x04)
- #define **USB_DESCRIPTOR_AUDIO_CONTROL_PROCESSING_UNIT_CHORUS_PRO-CESS_TYPE** (0x05)
- #define **USB_DESCRIPTOR_AUDIO_CONTROL_PROCESSING_UNIT_DYN_RANGE_-COMP_PROCESS_TYPE** (0x06)
- #define USB_DESCRIPTOR_SUBTYPE_AUDIO_STREAMING_AS_GENERAL (0x01)

  Audio device class-specific stream interface descriptor subtype.
- #define **USB_DESCRIPTOR_SUBTYPE_AUDIO_STREAMING_FORMAT_TYPE** (0x02)
- #define **USB_DESCRIPTOR_SUBTYPE_AUDIO_STREAMING_FORMAT_SPECIFI-C** (0x03)
- #define USB_AUDIO_FORMAT_TYPE_UNDEFINED (0x00)

  Audio device Format Type Codes.
- #define **USB_AUDIO_FORMAT_TYPE_I** (0x01)
- #define **USB_AUDIO_FORMAT_TYPE_II** (0x02)
- #define **USB_AUDIO_FORMAT_TYPE_III** (0x03)
- #define USB_DEVICE_AUDIO_SET_CUR_REQUEST (0x01)

  Audio device class-specific stream interface Encoder/Decoder Type Codes.
- #define **USB_DEVICE_AUDIO_GET_CUR_REQUEST** (0x81)
- #define **USB_DEVICE_AUDIO_SET_MIN_REQUEST** (0x02)
- #define **USB_DEVICE_AUDIO_GET_MIN_REQUEST** (0x82)
- #define **USB_DEVICE_AUDIO_SET_MAX_REQUEST** (0x03)
- #define **USB_DEVICE_AUDIO_GET_MAX_REQUEST** (0x83)
- #define **USB_DEVICE_AUDIO_SET_RES_REQUEST** (0x04)
- #define **USB_DEVICE_AUDIO_GET_RES_REQUEST** (0x84)
- #define **USB_DEVICE_AUDIO_SET_MEM_REQUEST** (0x05)
- #define **USB_DEVICE_AUDIO_GET_MEM_REQUEST** (0x85)
- #define USB_DEVICE_AUDIO_FU_MUTE_CONTROL_SELECTOR (0x01)

  Commands for USB device AUDIO control feature unit control selector.
- #define **USB_DEVICE_AUDIO_FU_VOLUME_CONTROL_SELECTOR** (0x02)
- #define **USB_DEVICE_AUDIO_FU_BASS_CONTROL_SELECTOR** (0x03)
- #define **USB_DEVICE_AUDIO_FU_MID_CONTROL_SELECTOR** (0x04)
- #define **USB_DEVICE_AUDIO_FU_TREBLE_CONTROL_SELECTOR** (0x05)
- #define **USB_DEVICE_AUDIO_FU_GRAPHIC_EQUALIZER_CONTROL_SELECTO-R** (0x06)
- #define **USB_DEVICE_AUDIO_FU_AUTOMATIC_GAIN_CONTROL_SELECTOR** (0x07)
- #define **USB_DEVICE_AUDIO_FU_DELAY_CONTROL_SELECTOR** (0x08)
- #define **USB_DEVICE_AUDIO_FU_BASS_BOOST_CONTROL_SELECTOR** (0x09)
- #define **USB_DEVICE_AUDIO_FU_LOUDNESS_CONTROL_SELECTOR** (0x0A)
- #define USB_DEVICE_AUDIO_PU_UD_ENABLE_CONTROL (0x01)

  Commands for USB device AUDIO control Up/Down-mix Processing Unit Control Selectors.
- #define **USB_DEVICE_AUDIO_PU_UD_MODE_SELECT_CONTROL** (0x02)
- #define USB_DEVICE_AUDIO_PU_DP_ENABLE_CONTROL (0x01)

  Commands for USB device AUDIO control Dolby Prologic Processing Unit Control Selectors.
- #define **USB_DEVICE_AUDIO_PU_DP_MODE_SELECT_CONTROL** (0x02)
- #define USB_DEVICE_AUDIO_PU_3D_ENABLE_CONTROL (0x01)

  Commands for USB device AUDIO control (3D,audio 1.0) Stereo Extender Processing Unit Control Selectors.
- #define **USB_DEVICE_AUDIO_PU_SPACIOUSNESS_CONTROL** (0x03)
- #define USB_DEVICE_AUDIO_PU_RV_ENABLE_CONTROL (0x01)

  Commands for USB device AUDIO control Reverberation Processing Unit Control Selectors.
- #define **USB_DEVICE_AUDIO_PU_RV_LEVEL_CONTROL** (0x02)
- #define **USB_DEVICE_AUDIO_PU_RV_TIME_CONTROL** (0x03)

- #define **USB_DEVICE_AUDIO_PU_RV_FEEDBACK_CONTROL** (0x04)
- #define USB_DEVICE_AUDIO_PU_CH_ENABLE_CONTROL (0x01)

  Commands for USB device AUDIO control Chorus Processing Unit Control Selectors.
- #define **USB_DEVICE_AUDIO_PU_CH_LEVEL_CONTROL** (0x02)
- #define **USB_DEVICE_AUDIO_PU_CH_RATE_CONTROL** (0x03)
- #define **USB_DEVICE_AUDIO_PU_CH_DEPTH_CONTROL** (0x04)
- #define USB_DEVICE_AUDIO_PU_DR_ENABLE_CONTROL (0x01)

  Commands for USB device AUDIO control Dynamic Range Compressor Processing Unit Control Selectors.
- #define **USB_DEVICE_AUDIO_PU_DR_COMPRESSION_RATE_CONTROL** (0x02)
- #define **USB_DEVICE_AUDIO_PU_DR_MAXAMPL_CONTROL** (0x03)
- #define **USB_DEVICE_AUDIO_PU_DR_THRESHOLD_CONTROL** (0x04)
- #define **USB_DEVICE_AUDIO_PU_DR_ATTACK_TIME** (0x05)
- #define **USB_DEVICE_AUDIO_PU_DR_RELEASE_TIME** (0x06)
- #define USB_DEVICE_AUDIO_MP_DUAL_CHANNEL_CONTROL (0x01)

  Commands for USB device AUDIO streaming MPEG control selector.
- #define **USB_DEVICE_AUDIO_MP_SECOND_STEREO_CONTROL** (0x02)
- #define **USB_DEVICE_AUDIO_MP_MULTILINGUAL_CONTROL** (0x03)
- #define **USB_DEVICE_AUDIO_MP_DYN_RANGE_CONTROL** (0x04)
- #define **USB_DEVICE_AUDIO_MP_SCALING_CONTROL** (0x05)
- #define **USB_DEVICE_AUDIO_MP_HILO_SCALING_CONTROL** (0x06)
- #define USB_DEVICE_AUDIO_AC_MODE_CONTROL (0x01)

  Commands for USB device AUDIO streaming AC-3 Control Selectors.
- #define **USB_DEVICE_AUDIO_AC_DYN_RANGE_CONTRO** (0x02)
- #define **USB_DEVICE_AUDIO_AC_SCALING_CONTROL** (0x03)
- #define **USB_DEVICE_AUDIO_AC_HILO_SCALING_CONTROL** (0x04)
- #define USB_DEVICE_AUDIO_EP_CONTROL_UNDEFINED (0x00)

  Commands for USB device AUDIO streaming endpoint control selector.
- #define **USB_DEVICE_AUDIO_EP_SAMPLING_FREQ_CONTROL_SELECTOR** (0x01)
- #define **USB_DEVICE_AUDIO_EP_PITCH_CONTROL_SELECTOR** (0x02)
- #define **USB_DEVICE_AUDIO_TE_CONTROL_UNDEFINED** (0x00)
- #define **USB_DEVICE_AUDIO_TE_COPY_PROTECT_CONTROL** (0x01)
- #define USB_DEVICE_AUDIO_FU_GET_CUR_MUTE_CONTROL (0x8101)

  Audio device class-specific FU GET CUR COMMAND.
- #define **USB_DEVICE_AUDIO_FU_GET_CUR_VOLUME_CONTROL** (0x8102)
- #define **USB_DEVICE_AUDIO_FU_GET_CUR_BASS_CONTROL** (0x8103)
- #define **USB_DEVICE_AUDIO_FU_GET_CUR_MID_CONTROL** (0x8104)
- #define **USB_DEVICE_AUDIO_FU_GET_CUR_TREBLE_CONTROL** (0x8105)
- #define **USB_DEVICE_AUDIO_FU_GET_CUR_GRAPHIC_EQUALIZER_CONTROL** (0x8106)
- #define **USB_DEVICE_AUDIO_FU_GET_CUR_AUTOMATIC_GAIN_CONTROL** (0x8107)
- #define **USB_DEVICE_AUDIO_FU_GET_CUR_DELAY_CONTROL** (0x8108)
- #define **USB_DEVICE_AUDIO_FU_GET_CUR_BASS_BOOST_CONTROL** (0x8109)
- #define **USB_DEVICE_AUDIO_FU_GET_CUR_LOUDNESS_CONTROL** (0x810A)
- #define USB_DEVICE_AUDIO_FU_GET_MIN_VOLUME_CONTROL (0x8202)

  Audio device class-specific FU GET MIN COMMAND.
- #define **USB_DEVICE_AUDIO_FU_GET_MIN_BASS_CONTROL** (0x8203)
- #define **USB_DEVICE_AUDIO_FU_GET_MIN_MID_CONTROL** (0x8204)
- #define **USB_DEVICE_AUDIO_FU_GET_MIN_TREBLE_CONTROL** (0x8205)
- #define **USB_DEVICE_AUDIO_FU_GET_MIN_GRAPHIC_EQUALIZER_CONTROL** (0x8206)
- #define **USB_DEVICE_AUDIO_FU_GET_MIN_DELAY_CONTROL** (0x8208)
- #define USB_DEVICE_AUDIO_FU_GET_MAX_VOLUME_CONTROL (0x8302)

  Audio device class-specific FU GET MAX COMMAND.

- #define **USB_DEVICE_AUDIO_FU_GET_MAX_BASS_CONTROL** (0x8303)
- #define **USB_DEVICE_AUDIO_FU_GET_MAX_MID_CONTROL** (0x8304)
- #define **USB_DEVICE_AUDIO_FU_GET_MAX_TREBLE_CONTROL** (0x8305)
- #define **USB_DEVICE_AUDIO_FU_GET_MAX_GRAPHIC_EQUALIZER_CONTRO-L** (0x8306)
- #define **USB_DEVICE_AUDIO_FU_GET_MAX_DELAY_CONTROL** (0x8308)
- #define USB_DEVICE_AUDIO_FU_GET_RES_VOLUME_CONTROL (0x8402)
  Audio device class-specific FU GET RES COMMAND.
- #define **USB_DEVICE_AUDIO_FU_GET_RES_BASS_CONTROL** (0x8403)
- #define **USB_DEVICE_AUDIO_FU_GET_RES_MID_CONTROL** (0x8404)
- #define **USB_DEVICE_AUDIO_FU_GET_RES_TREBLE_CONTROL** (0x8405)
- #define **USB_DEVICE_AUDIO_FU_GET_RES_GRAPHIC_EQUALIZER_CONTRO-L** (0x8406)
- #define **USB_DEVICE_AUDIO_FU_GET_RES_DELAY_CONTROL** (0x8408)
- #define USB_DEVICE_AUDIO_FU_SET_CUR_MUTE_CONTROL (0x0101)
  Audio device class-specific FU SET CUR COMMAND.
- #define **USB_DEVICE_AUDIO_FU_SET_CUR_VOLUME_CONTROL** (0x0102)
- #define **USB_DEVICE_AUDIO_FU_SET_CUR_BASS_CONTROL** (0x0103)
- #define **USB_DEVICE_AUDIO_FU_SET_CUR_MID_CONTROL** (0x0104)
- #define **USB_DEVICE_AUDIO_FU_SET_CUR_TREBLE_CONTROL** (0x0105)
- #define **USB_DEVICE_AUDIO_FU_SET_CUR_GRAPHIC_EQUALIZER_CONTRO-L** (0x0106)
- #define **USB_DEVICE_AUDIO_FU_SET_CUR_AUTOMATIC_GAIN_CONTROL** (0x0107)
- #define **USB_DEVICE_AUDIO_FU_SET_CUR_DELAY_CONTROL** (0x0108)
- #define **USB_DEVICE_AUDIO_FU_SET_CUR_BASS_BOOST_CONTROL** (0x0109)
- #define **USB_DEVICE_AUDIO_FU_SET_CUR_LOUDNESS_CONTROL** (0x010A)
- #define USB_DEVICE_AUDIO_FU_SET_MIN_VOLUME_CONTROL (0x0202)
  Audio device class-specific FU SET MIN COMMAND.
- #define **USB_DEVICE_AUDIO_FU_SET_MIN_BASS_CONTROL** (0x0203)
- #define **USB_DEVICE_AUDIO_FU_SET_MIN_MID_CONTROL** (0x0204)
- #define **USB_DEVICE_AUDIO_FU_SET_MIN_TREBLE_CONTROL** (0x0205)
- #define **USB_DEVICE_AUDIO_FU_SET_MIN_GRAPHIC_EQUALIZER_CONTRO-L** (0x0206)
- #define **USB_DEVICE_AUDIO_FU_SET_MIN_DELAY_CONTROL** (0x0208)
- #define USB_DEVICE_AUDIO_FU_SET_MAX_VOLUME_CONTROL (0x0302)
  Audio device class-specific FU SET MAX COMMAND.
- #define **USB_DEVICE_AUDIO_FU_SET_MAX_BASS_CONTROL** (0x0303)
- #define **USB_DEVICE_AUDIO_FU_SET_MAX_MID_CONTROL** (0x0304)
- #define **USB_DEVICE_AUDIO_FU_SET_MAX_TREBLE_CONTROL** (0x0305)
- #define **USB_DEVICE_AUDIO_FU_SET_MAX_GRAPHIC_EQUALIZER_CONTRO-L** (0x0306)
- #define **USB_DEVICE_AUDIO_FU_SET_MAX_DELAY_CONTROL** (0x0308)
- #define USB_DEVICE_AUDIO_FU_SET_RES_VOLUME_CONTROL (0x0402)
  Audio device class-specific FU SET RES COMMAND.
- #define **USB_DEVICE_AUDIO_FU_SET_RES_BASS_CONTROL** (0x0403)
- #define **USB_DEVICE_AUDIO_FU_SET_RES_MID_CONTROL** (0x0404)
- #define **USB_DEVICE_AUDIO_FU_SET_RES_TREBLE_CONTROL** (0x0405)
- #define **USB_DEVICE_AUDIO_FU_SET_RES_GRAPHIC_EQUALIZER_CONTRO-L** (0x0406)
- #define **USB_DEVICE_AUDIO_FU_SET_RES_DELAY_CONTROL** (0x0408)
- #define USB_DEVICE_AUDIO_EP_SET_CUR_PITCH_CONTROL (0x0120)
  Audio device class-specific ENDP SET CUR COMMAND.
- #define **USB_DEVICE_AUDIO_EP_SET_CUR_SAMPLING_FREQ_CONTROL** (0x0121)

- #define USB_DEVICE_AUDIO_EP_SET_MIN_SAMPLING_FREQ_CONTROL (0x0220)
  Audio device class-specific ENDP SET MIN COMMAND.
- #define USB_DEVICE_AUDIO_EP_SET_MAX_SAMPLING_FREQ_CONTROL (0x0320)
  Audio device class-specific ENDP SET MAX COMMAND.
- #define USB_DEVICE_AUDIO_EP_SET_RES_SAMPLING_FREQ_CONTROL (0x0420)
  Audio device class-specific ENDP SET RES COMMAND.
- #define USB_DEVICE_AUDIO_EP_GET_CUR_SAMPLING_FREQ_CONTROL (0x8120)
  Audio device class-specific ENDP GET CUR COMMAND.
- #define USB_DEVICE_AUDIO_EP_GET_MIN_SAMPLING_FREQ_CONTROL (0x8220)
  Audio device class-specific ENDP GET MIN COMMAND.
- #define USB_DEVICE_AUDIO_EP_GET_MAX_SAMPLING_FREQ_CONTROL (0x8320)
  Audio device class-specific ENDP GET MAX COMMAND.
- #define USB_DEVICE_AUDIO_EP_GET_RES_SAMPLING_FREQ_CONTROL (0x8420)
  Audio device class-specific ENDP GET RES COMMAND.
- #define USB_DEVICE_AUDIO_TE_GET_CUR_COPY_PROTECT_CONTROL (0x8150)
  Audio device class-specific TE GET CUR COMMAND.
- #define USB_DEVICE_AUDIO_TE_SET_CUR_COPY_PROTECT_CONTROL (0x0150)
  Audio device class-specific TE SET CUR COMMAND.

USB Audio class setup request types

- #define USB_DEVICE_AUDIO_SET_REQUEST_INTERFACE (0x21)
  Audio device class setup request set type.
- #define **USB_DEVICE_AUDIO_SET_REQUEST_ENDPOINT** (0x22)
- #define USB_DEVICE_AUDIO_GET_REQUEST_INTERFACE (0xA1)
  Audio device class setup request get type.
- #define **USB_DEVICE_AUDIO_GET_REQUEST_ENDPOINT** (0xA2)

USB Audio Class Driver

- usb_status_t USB_DeviceAudioInit (uint8_t controllerId, usb_device_class_config_struct_-t *config, class_handle_t *handle)
  Initializes the USB audio class.
- usb_status_t USB_DeviceAudioDeinit (class_handle_t handle)
  Deinitializes the USB audio class.
- usb_status_t USB_DeviceAudioEvent (void *handle, uint32_t event, void *param)
  Handles the USB audio class event.
- usb_status_t USB_DeviceAudioSend (class_handle_t handle, uint8_t ep, uint8_t *buffer, uint32_t length)
  Primes the endpoint to send a packet to the host.
- usb_status_t USB_DeviceAudioRecv (class_handle_t handle, uint8_t ep, uint8_t *buffer, uint32_t length)
  Primes the endpoint to receive a packet from the host.

3.8.2 Data Structure Documentation

3.8.2.1 struct usb_device_audio_entity_struct_t

The structure is used to pass the audio entity information filled by application. Such as entity id (unit or terminal ID), entity type (unit or terminal type), and terminal type if the entity is a terminal.

3.8.2.2 struct usb_device_audio_entities_struct_t

The structure is used to pass the audio entity informations filled by the application. The type of each entity is usb_device_audio_entity_struct_t. The structure pointer is kept in the usb_device_interface_struct_t::classSpecific, such as, if there are three entities (an out terminal, camera terminal, and processing unit), the value of the count field is 3 and the entity field saves the every entity information.

3.8.2.3 struct usb_device_audio_struct_t

Data Fields

- usb_device_handle handle
    The device handle.
- usb_device_class_config_struct_t ∗ configStruct
    The configuration of the class.
- usb_device_interface_struct_t ∗ controlInterfaceHandle
    Current control interface handle.
- usb_device_interface_struct_t ∗ streamInterfaceHandle
    Current stream interface handle.
- uint8_t configuration
    Current configuration.
- uint8_t controlInterfaceNumber
    The control interface number of the class.
- uint8_t controlAlternate
    Current alternate setting of the control interface.
- uint8_t streamInterfaceNumber
    The stream interface number of the class.
- uint8_t streamAlternate
    Current alternate setting of the stream interface.
- uint8_t streamInPipeBusy
    Stream IN pipe busy flag.
- uint8_t streamOutPipeBusy
    Stream OUT pipe busy flag.

3.8.2.3.0.1   Field Documentation

3.8.2.3.0.1.1   usb_device_class_config_struct_t∗ usb_device_audio_struct_t::configStruct

3.8.3   Macro Definition Documentation

3.8.3.1   #define USB_DESCRIPTOR_AUDIO_CONTROL_PROCESSING_UNIT_UPDOWNMI-X_PROCESS_TYPE (0x01)

Audio device class-specific control interface processing unit process type

3.8.3.2   #define USB_DEVICE_AUDIO_SET_CUR_REQUEST (0x01)

Commands for USB device AUDIO Class specific request codes

3.8.4   Enumeration Type Documentation

3.8.4.1   enum usb_device_audio_event_t

Enumerator

kUSB_DeviceAudioEventStreamSendResponse Send data completed or cancelled etc in stream pipe.
kUSB_DeviceAudioEventStreamRecvResponse Data received or cancelled etc in stream pipe.
kUSB_DeviceAudioEventControlSendResponse Send data completed or cancelled etc in audio control pipe.

3.8.5   Function Documentation

3.8.5.1   usb_status_t USB_DeviceAudioInit (uint8_t *controllerId,* usb_-device_class_config_struct_t ∗ *config,* class_handle_t ∗ *handle*)

This function obtains a USB device handle according to the controller ID, initializes the audio class with the class configuration parameters, and creates the mutex for each pipe.

Parameters

controllerId	The ID of the controller. The value can be chosen from the kUSB_ControllerKhci0, kUSB_ControllerKhci1, kUSB_ControllerEhci0, or kUSB_ControllerEhci1.
config	The user configuration structure of type usb_device_class_config_struct_t. The user populates the members of this structure and passes the pointer of this structure into this function.
handle	An out parameter. The class handle of the audio class.

Returns

> A USB error code or kStatus_USB_Success.

Return values

kStatus_USB_Success	The audio class is initialized successfully.
kStatus_USB_Busy	No audio device handle available for allocation.
kStatus_USB_Invalid-Handle	The audio device handle allocation failure.
kStatus_USB_Invalid-Parameter	The USB device handle allocation failure.

3.8.5.2 usb_status_t USB_DeviceAudioDeinit (class_handle_t *handle*)

This function destroys the mutex for each pipe, deinitializes each endpoint of the audio class, and frees the audio class handle.

Parameters

handle	The class handle of the audio class.

Returns

> A USB error code or kStatus_USB_Success.

Return values

kStatus_USB_Success	The audio class is deinitialized successfully.

kStatus_USB_Error	The endpoint deinitialization failure.
kStatus_USB_Invalid-Handle	The audio device handle or the audio class handle is invalid.
kStatus_USB_Invalid-Parameter	The endpoint number of the audio class handle is invalid.

3.8.5.3 usb_status_t USB_DeviceAudioEvent (void ∗ *handle,* uint32_t *event,* void ∗ *param*)

This function responds to various events including the common device events and the class-specific events. For class-specific events, it calls the class callback defined in the application to deal with the class-specific event.

Parameters

handle	The class handle of the audio class.
event	The event type.
param	The class handle of the audio class.

Returns

A USB error code or kStatus_USB_Success.

Return values

kStatus_USB_Success	The audio class is deinitialized successfully.
kStatus_USB_Error	The configure structure of the audio class handle is invalid.
kStatus_USB_Invalid-Handle	The audio device handle or the audio class handle is invalid.
kStatus_USB_Invalid-Parameter	The endpoint number of the audio class handle is invalid.
Others	The error code returned by class callback in application.

3.8.5.4 usb_status_t USB_DeviceAudioSend (class_handle_t *handle,* uint8_t *ep,* uint8_t ∗ *buffer,* uint32_t *length*)

This function checks whether the endpoint is sending packet, then it primes the endpoint with the buffer address and the buffer length if the pipe is not busy. Otherwise, it ignores this transfer by returning an error code.

Parameters

handle	The class handle of the audio class.
ep	The endpoint number of the transfer.
buffer	The pointer to the buffer to be transferred.
length	The length of the buffer to be transferred.

Returns

A USB error code or kStatus_USB_Success.

Return values

kStatus_USB_Success	Prime to send packet successfully.
kStatus_USB_Busy	The endpoint is busy in transferring.
kStatus_USB_Invalid-Handle	The audio device handle or the audio class handle is invalid.
kStatus_USB_Controller-NotFound	The controller interface is invalid.

Note

The function can only be called in the same context.

3.8.5.5 usb_status_t USB_DeviceAudioRecv (class_handle_t *handle,* uint8_t *ep,* uint8_t ∗ *buffer,* uint32_t *length*)

This function checks whether the endpoint is receiving packet, then it primes the endpoint with the buffer address and the buffer length if the pipe is not busy. Otherwise, it ignores this transfer by returning an error code.

Parameters

handle	The class handle of the audio class.
ep	The endpoint number of the transfer.

buffer	The pointer to the buffer to be transferred.
length	The length of the buffer to be transferred.

Returns

A USB error code or kStatus_USB_Success.

Return values

kStatus_USB_Success	Prime to receive packet successfully.
kStatus_USB_Busy	The endpoint is busy in transferring.
kStatus_USB_Invalid-Handle	The audio device handle or the audio class handle is invalid.
kStatus_USB_Controller-NotFound	The controller interface is invalid.

Note

The function can only be called in the same context.

3.9 USB MTP Class driver

3.9.1 Overview

Data Structures

- struct usb_device_mtp_container_t

  MTP generic container structure. More...
- struct usb_device_mtp_event_container_t

  MTP asynchronous event interrupt data format. More...
- struct usb_device_mtp_device_status_t

  MTP format of get device status request data. More...
- struct usb_device_mtp_cancel_request_t

  MTP format of cancel request data. More...
- struct usb_device_mtp_extended_event_data_t

  MTP format of get extended event data request. More...
- struct usb_device_mtp_cmd_data_struct_t

  MTP command callback structure. More...
- struct usb_device_mtp_response_struct_t

  MTP response callback structure. More...
- struct usb_device_mtp_event_struct_t

  MTP event callback structure. More...
- struct usb_device_mtp_extended_event_struct_t

  MTP get extended event callback structure. More...
- struct usb_device_mtp_struct_t

  The MTP device structure. More...

Macros

- #define USB_DEVICE_CONFIG_MTP_CLASS_CODE (0x06U)

  The class code of the MTP class.
- #define USB_DEVICE_MTP_CANCEL_REQUEST (0x64U)

  Cancel Request (class-specific request)
- #define USB_DEVICE_MTP_GET_EXTENDED_EVENT_DATA (0x65U)

  Get Extended Event Data (class-specific request)
- #define USB_DEVICE_MTP_DEVICE_RESET_REQUEST (0x66U)

  Device Reset Request (class-specific request)
- #define USB_DEVICE_MTP_GET_DEVICE_STATUS_REQUEST (0x67U)

  Device Reset Request (class-specific request)
- #define USB_DEVICE_MTP_MINIMUM_CONTAINER_LENGTH (12U)

  Minimum container length.
- #define USB_DEVICE_MTP_COMMAND_LENGTH (32U)

  Command container length.
- #define USB_DEVICE_MTP_MAX_UINT32_VAL (0xFFFFFFFFU)

  Default invalid value, parameter in the operation or maximum container length.
- #define USB_DEVICE_MTP_MAX_UINT64_VAL (0xFFFFFFFFFFFFFFFFU)

  Default invalid value is used to support >4GB file transfer.

USB MTP Class driver

Enumerations

- enum usb_device_mtp_callback_event_t {
  kUSB_DeviceMtpEventInvalid = 0U,
  kUSB_DeviceMtpEventOpenSession,
  kUSB_DeviceMtpEventCloseSession,
  kUSB_DeviceMtpEventGetDeviceInfo,
  kUSB_DeviceMtpEventGetDevicePropDesc,
  kUSB_DeviceMtpEventGetObjPropsSupported,
  kUSB_DeviceMtpEventGetStorageIDs,
  kUSB_DeviceMtpEventGetStorageInfo,
  kUSB_DeviceMtpEventGetObjHandles,
  kUSB_DeviceMtpEventGetObjPropDesc,
  kUSB_DeviceMtpEventGetObjPropList,
  kUSB_DeviceMtpEventGetObjInfo,
  kUSB_DeviceMtpEventGetObj,
  kUSB_DeviceMtpEventSendObjInfo,
  kUSB_DeviceMtpEventSendObj,
  kUSB_DeviceMtpEventDeleteObj,
  kUSB_DeviceMtpEventGetDevicePropVal,
  kUSB_DeviceMtpEventSetDevicePropVal,
  kUSB_DeviceMtpEventGetObjPropVal,
  kUSB_DeviceMtpEventSetObjPropVal,
  kUSB_DeviceMtpEventGetObjReferences,
  kUSB_DeviceMtpEventMoveObj,
  kUSB_DeviceMtpEventCopyObj,
  kUSB_DeviceMtpEventSendResponseError,
  kUSB_DeviceMtpEventSendResponseSuccess,
  kUSB_DeviceMtpEventDeviceResetRequest,
  kUSB_DeviceMtpEventGetExtendedEventData }
      MTP callback event.

Functions

- usb_status_t USB_DeviceMtpInit (uint8_t controllerId, usb_device_class_config_struct_t ∗config,
  class_handle_t ∗handle)
      Initializes the MTP class.
- usb_status_t USB_DeviceMtpDeinit (class_handle_t handle)
      Deinitializes the device MTP class.
- usb_status_t USB_DeviceMtpEvent (void ∗handle, uint32_t event, void ∗param)
      Handles the event passed to the MTP class.

USB MTP current phase

- #define **USB_DEVICE_MTP_PHASE_COMMAND** (1U)
- #define **USB_DEVICE_MTP_PHASE_DATA** (2U)
- #define **USB_DEVICE_MTP_PHASE_RESPONSE** (3U)
- #define **USB_DEVICE_MTP_PHASE_CANCELLATION** (4U)

USB MTP container type

- #define **USB_DEVICE_MTP_CONTAINER_TYPE_UNDEFINED** (0U)
- #define **USB_DEVICE_MTP_CONTAINER_TYPE_COMMAND** (1U)
- #define **USB_DEVICE_MTP_CONTAINER_TYPE_DATA** (2U)
- #define **USB_DEVICE_MTP_CONTAINER_TYPE_RESPONSE** (3U)
- #define **USB_DEVICE_MTP_CONTAINER_TYPE_EVENT** (4U)

USB device MTP class APIs

- usb_status_t USB_DeviceMtpEventSend (class_handle_t handle, usb_device_mtp_event_struct_t ∗event)

  Send event through interrupt in endpoint.
- usb_status_t USB_DeviceMtpResponseSend (class_handle_t handle, usb_device_mtp_response_struct_t ∗response)

  Send response through bulk in endpoint.
- usb_status_t USB_DeviceMtpCancelCurrentTransaction (class_handle_t handle)

  Cancel current transacion.

USB MTP data type code

- #define MTP_TYPE_UNDEFINED 0x0000U

  Undefined.
- #define MTP_TYPE_INT8 0x0001U

  Signed 8-bit integer.
- #define MTP_TYPE_UINT8 0x0002U

  Unsigned 8-bit integer.
- #define MTP_TYPE_INT16 0x0003U

  Signed 16-bit integer.
- #define MTP_TYPE_UINT16 0x0004U

  Unsigned 16-bit integer.
- #define MTP_TYPE_INT32 0x0005U

  Signed 32-bit integer.
- #define MTP_TYPE_UINT32 0x0006U

  Unsigned 32-bit integer.
- #define MTP_TYPE_INT64 0x0007U

  Signed 64-bit integer.
- #define MTP_TYPE_UINT64 0x0008U

  Unsigned 64-bit integer.
- #define MTP_TYPE_INT128 0x0009U

Signed 128-bit integer.
- #define MTP_TYPE_UINT128 0x000AU

  Unsigned 128-bit integer.
- #define MTP_TYPE_AINT8 0x4001U

  Array of signed 8-bit integers.
- #define MTP_TYPE_AUINT8 0x4002U

  Array of unsigned 8-bit integers.
- #define MTP_TYPE_AINT16 0x4003U

  Array of signed 16-bit integers.
- #define MTP_TYPE_AUINT16 0x4004U

  Array of unsigned 16-bit integers.
- #define MTP_TYPE_AINT32 0x4005U

  Array of signed 32-bit integers.
- #define MTP_TYPE_AUINT32 0x4006U

  Array of unsigned 32-bit integers.
- #define MTP_TYPE_AINT64 0x4007U

  Array of signed 64-bit integers.
- #define MTP_TYPE_AUINT64 0x4008U

  Array of unsigned 64-bit integers.
- #define MTP_TYPE_AINT128 0x4009U

  Array of signed 128-bit integers.
- #define MTP_TYPE_AUINT128 0x400AU

  Array of unsigned 128-bit integers.
- #define MTP_TYPE_STR 0xFFFFU

  Variable-length Unicode string.

USB MTP functional mode

- #define **MTP_FUNCTIONAL_MODE_STANDARD_MODE** 0x0000U
- #define **MTP_FUNCTIONAL_MODE_SLEEP_MODE** 0x0001U
- #define **MTP_FUNCTIONAL_MODE_NON_RESPONSIVE_PLAYBACK** 0xC001U
- #define **MTP_FUNCTIONAL_MODE_RESPONSIVE_PLAYBACK** 0xC002U

USB MTP format code

- #define **MTP_FORMAT_UNDEFINED** 0x3000U
- #define **MTP_FORMAT_ASSOCIATION** 0x3001U
- #define **MTP_FORMAT_SCRIPT** 0x3002U
- #define **MTP_FORMAT_EXECUTABLE** 0x3003U
- #define **MTP_FORMAT_TEXT** 0x3004U
- #define **MTP_FORMAT_HTML** 0x3005U
- #define **MTP_FORMAT_DPOF** 0x3006U
- #define **MTP_FORMAT_AIFF** 0x3007U
- #define **MTP_FORMAT_WAV** 0x3008U
- #define **MTP_FORMAT_MP3** 0x3009U
- #define **MTP_FORMAT_AVI** 0x300AU
- #define **MTP_FORMAT_MPEG** 0x300BU
- #define **MTP_FORMAT_ASF** 0x300CU
- #define **MTP_FORMAT_UNDEFINED_IMAGE** 0x3800U
- #define **MTP_FORMAT_EXIF_JPEG** 0x3801U

- #define **MTP_FORMAT_TIFF_EP** 0x3802U
- #define **MTP_FORMAT_FLASHPIX** 0x3803U
- #define **MTP_FORMAT_BMP** 0x3804U
- #define **MTP_FORMAT_CIFF** 0x3805U
- #define **MTP_FORMAT_UNDEFINED_1** 0x3806U
- #define **MTP_FORMAT_GIF** 0x3807U
- #define **MTP_FORMAT_JFIF** 0x3808U
- #define **MTP_FORMAT_CD** 0x3809U
- #define **MTP_FORMAT_PICT** 0x380AU
- #define **MTP_FORMAT_PNG** 0x380BU
- #define **MTP_FORMAT_UNDEFINED_2** 0x380CU
- #define **MTP_FORMAT_TIFF** 0x380DU
- #define **MTP_FORMAT_TIFF_IT** 0x380EU
- #define **MTP_FORMAT_JP2** 0x380FU
- #define **MTP_FORMAT_JPX** 0x3810U
- #define **MTP_FORMAT_UNDEFINED_FIRMWARE** 0xB802U
- #define **MTP_FORMAT_WBMP** 0xB803U
- #define **MTP_FORMAT_JPEG_XR** 0xB804U
- #define **MTP_FORMAT_WINDOWS_IMAGE_FORMAT** 0xB881U
- #define **MTP_FORMAT_UNDEFINED_AUDIO** 0xB900U
- #define **MTP_FORMAT_WMA** 0xB901U
- #define **MTP_FORMAT_OGG** 0xB902U
- #define **MTP_FORMAT_AAC** 0xB903U
- #define **MTP_FORMAT_AUDIBLE** 0xB904U
- #define **MTP_FORMAT_FLAC** 0xB906U
- #define **MTP_FORMAT_QCELP** 0xB907U
- #define **MTP_FORMAT_AMR** 0xB908U
- #define **MTP_FORMAT_UNDEFINED_VIDEO** 0xB980U
- #define **MTP_FORMAT_WMV** 0xB981U
- #define **MTP_FORMAT_MP4_CONTAINER** 0xB982U
- #define **MTP_FORMAT_MP2** 0xB983U
- #define **MTP_FORMAT_3GP_CONTAINER** 0xB984U
- #define **MTP_FORMAT_3GP2** 0xB985U
- #define **MTP_FORMAT_AVCHD** 0xB986U
- #define **MTP_FORMAT_ATSC_TS** 0xB987U
- #define **MTP_FORMAT_DVB_TS** 0xB988U
- #define **MTP_FORMAT_UNDEFINED_COLLECTION** 0xBA00U
- #define **MTP_FORMAT_ABSTRACT_MULTIMEDIA_ALBUM** 0xBA01U
- #define **MTP_FORMAT_ABSTRACT_IMAGE_ALBUM** 0xBA02U
- #define **MTP_FORMAT_ABSTRACT_AUDIO_ALBUM** 0xBA03U
- #define **MTP_FORMAT_ABSTRACT_VIDEO_ALBUM** 0xBA04U
- #define **MTP_FORMAT_ABSTRACT_AUDIO_VIDEO_PLAYLIST** 0xBA05U
- #define **MTP_FORMAT_ABSTRACT_CONTACT_GROUP** 0xBA06U
- #define **MTP_FORMAT_ABSTRACT_MESSAGE_FOLDER** 0xBA07U
- #define **MTP_FORMAT_ABSTRACT_CHAPTERED_PRODUCTION** 0xBA08U
- #define **MTP_FORMAT_ABSTRACT_AUDIO_PLAYLIST** 0xBA09U
- #define **MTP_FORMAT_ABSTRACT_VIDEO_PLAYLIST** 0xBA0AU
- #define **MTP_FORMAT_ABSTRACT_MEDIACAST** 0xBA0BU
- #define **MTP_FORMAT_WPL_PLAYLIST** 0xBA10U
- #define **MTP_FORMAT_M3U_PLAYLIST** 0xBA11U
- #define **MTP_FORMAT_MPL_PLAYLIST** 0xBA12U
- #define **MTP_FORMAT_ASX_PLAYLIST** 0xBA13U
- #define **MTP_FORMAT_PLS_PLAYLIST** 0xBA14U
- #define **MTP_FORMAT_UNDEFINED_DOCUMENT** 0xBA80U
- #define **MTP_FORMAT_ABSTRACT_DOCUMENT** 0xBA81U
- #define **MTP_FORMAT_XML_DOCUMENT** 0xBA82U

- #define **MTP_FORMAT_MICROSOFT_WORD_DOCUMENT** 0xBA83U
- #define **MTP_FORMAT_MHT_COMPILED_HTML_DOCUMENT** 0xBA84U
- #define **MTP_FORMAT_MICROSOFT_EXCEL_SPREADSHEET** 0xBA85U
- #define **MTP_FORMAT_MICROSOFT_POWERPOINT_PRESENTATION** 0xBA86U
- #define **MTP_FORMAT_UNDEFINED_MESSAGE** 0xBB00U
- #define **MTP_FORMAT_ABSTRACT_MESSSAGE** 0xBB01U
- #define **MTP_FORMAT_UNDEFINED_BOOKMARK** 0xBB10U
- #define **MTP_FORMAT_ABSTRACT_BOOKMARK** 0xBB11U
- #define **MTP_FORMAT_UNDEFINED_APPOINTMENT** 0xBB20U
- #define **MTP_FORMAT_ABSTRACT_APPOINTMENT** 0xBB21U
- #define **MTP_FORMAT_VCALENDAR_1_0** 0xBB22U
- #define **MTP_FORMAT_UNDEFINED_TASK** 0xBB40U
- #define **MTP_FORMAT_ABSTRACT_TASK** 0xBB41U
- #define **MTP_FORMAT_ICALENDAR** 0xBB42U
- #define **MTP_FORMAT_UNDEFINED_CONTACT** 0xBB80U
- #define **MTP_FORMAT_ABSTRACT_CONTACT** 0xBB81U
- #define **MTP_FORMAT_VCARD_2** 0xBB82U
- #define **MTP_FORMAT_VCARD_3** 0xBB83U

USB MTP object property code

- #define **MTP_OBJECT_PROPERTY_STORAGE_ID** 0xDC01U
- #define **MTP_OBJECT_PROPERTY_OBJECT_FORMAT** 0xDC02U
- #define **MTP_OBJECT_PROPERTY_PROTECTION_STATUS** 0xDC03U
- #define **MTP_OBJECT_PROPERTY_OBJECT_SIZE** 0xDC04U
- #define **MTP_OBJECT_PROPERTY_ASSOCIATION_TYPE** 0xDC05U
- #define **MTP_OBJECT_PROPERTY_ASSOCIATION_DESC** 0xDC06U
- #define **MTP_OBJECT_PROPERTY_OBJECT_FILE_NAME** 0xDC07U
- #define **MTP_OBJECT_PROPERTY_DATE_CREATED** 0xDC08U
- #define **MTP_OBJECT_PROPERTY_DATE_MODIFIED** 0xDC09U
- #define **MTP_OBJECT_PROPERTY_KEYWORDS** 0xDC0AU
- #define **MTP_OBJECT_PROPERTY_PARENT_OBJECT** 0xDC0BU
- #define **MTP_OBJECT_PROPERTY_ALLOWED_FOLDER_CONTENTS** 0xDC0CU
- #define **MTP_OBJECT_PROPERTY_HIDDEN** 0xDC0DU
- #define **MTP_OBJECT_PROPERTY_SYSTEM_OBJECT** 0xDC0EU
- #define **MTP_OBJECT_PROPERTY_PERSISTENT_UID** 0xDC41U
- #define **MTP_OBJECT_PROPERTY_SYNC_ID** 0xDC42U
- #define **MTP_OBJECT_PROPERTY_PROPERTY_BAG** 0xDC43U
- #define **MTP_OBJECT_PROPERTY_NAME** 0xDC44U
- #define **MTP_OBJECT_PROPERTY_CREATED_BY** 0xDC45U
- #define **MTP_OBJECT_PROPERTY_ARTIST** 0xDC46U
- #define **MTP_OBJECT_PROPERTY_DATE_AUTHORED** 0xDC47U
- #define **MTP_OBJECT_PROPERTY_DESCRIPTION** 0xDC48U
- #define **MTP_OBJECT_PROPERTY_URL_REFERENCE** 0xDC49U
- #define **MTP_OBJECT_PROPERTY_LANGUAGE_LOCALE** 0xDC4AU
- #define **MTP_OBJECT_PROPERTY_COPYRIGHT_INFORMATION** 0xDC4BU
- #define **MTP_OBJECT_PROPERTY_SOURCE** 0xDC4CU
- #define **MTP_OBJECT_PROPERTY_ORIGIN_LOCATION** 0xDC4DU
- #define **MTP_OBJECT_PROPERTY_DATE_ADDED** 0xDC4EU
- #define **MTP_OBJECT_PROPERTY_NON_CONSUMABLE** 0xDC4FU
- #define **MTP_OBJECT_PROPERTY_CORRUPT_UNPLAYABLE** 0xDC50U
- #define **MTP_OBJECT_PROPERTY_PRODUCER_SERIAL_NUMBER** 0xDC51U
- #define **MTP_OBJECT_PROPERTY_REPRESENTATIVE_SAMPLE_FORMAT** 0xDC81U
- #define **MTP_OBJECT_PROPERTY_REPRESENTATIVE_SAMPLE_SIZE** 0xDC82U

- #define **MTP_OBJECT_PROPERTY_REPRESENTATIVE_SAMPLE_HEIGHT** 0xDC83U
- #define **MTP_OBJECT_PROPERTY_REPRESENTATIVE_SAMPLE_WIDTH** 0xDC84U
- #define **MTP_OBJECT_PROPERTY_REPRESENTATIVE_SAMPLE_DURATION** 0xD-C85U
- #define **MTP_OBJECT_PROPERTY_REPRESENTATIVE_SAMPLE_DATA** 0xDC86U
- #define **MTP_OBJECT_PROPERTY_WIDTH** 0xDC87U
- #define **MTP_OBJECT_PROPERTY_HEIGHT** 0xDC88U
- #define **MTP_OBJECT_PROPERTY_DURATION** 0xDC89U
- #define **MTP_OBJECT_PROPERTY_RATING** 0xDC8AU
- #define **MTP_OBJECT_PROPERTY_TRACK** 0xDC8BU
- #define **MTP_OBJECT_PROPERTY_GENRE** 0xDC8CU
- #define **MTP_OBJECT_PROPERTY_CREDITS** 0xDC8DU
- #define **MTP_OBJECT_PROPERTY_LYRICS** 0xDC8EU
- #define **MTP_OBJECT_PROPERTY_SUBSCRIPTION_CONTENT_ID** 0xDC8FU
- #define **MTP_OBJECT_PROPERTY_PRODUCED_BY** 0xDC90U
- #define **MTP_OBJECT_PROPERTY_USE_COUNT** 0xDC91U
- #define **MTP_OBJECT_PROPERTY_SKIP_COUNT** 0xDC92U
- #define **MTP_OBJECT_PROPERTY_LAST_ACCESSED** 0xDC93U
- #define **MTP_OBJECT_PROPERTY_PARENTAL_RATING** 0xDC94U
- #define **MTP_OBJECT_PROPERTY_META_GENRE** 0xDC95U
- #define **MTP_OBJECT_PROPERTY_COMPOSER** 0xDC96U
- #define **MTP_OBJECT_PROPERTY_EFFECTIVE_RATING** 0xDC97U
- #define **MTP_OBJECT_PROPERTY_SUBTITLE** 0xDC98U
- #define **MTP_OBJECT_PROPERTY_ORIGINAL_RELEASE_DATE** 0xDC99U
- #define **MTP_OBJECT_PROPERTY_ALBUM_NAME** 0xDC9AU
- #define **MTP_OBJECT_PROPERTY_ALBUM_ARTIST** 0xDC9BU
- #define **MTP_OBJECT_PROPERTY_MOOD** 0xDC9CU
- #define **MTP_OBJECT_PROPERTY_DRM_STATUS** 0xDC9DU
- #define **MTP_OBJECT_PROPERTY_SUB_DESCRIPTION** 0xDC9EU
- #define **MTP_OBJECT_PROPERTY_IS_CROPPED** 0xDCD1U
- #define **MTP_OBJECT_PROPERTY_IS_COLOUR_CORRECTED** 0xDCD2U
- #define **MTP_OBJECT_PROPERTY_IMAGE_BIT_DEPTH** 0xDCD3U
- #define **MTP_OBJECT_PROPERTY_FNUMBER** 0xDCD4U
- #define **MTP_OBJECT_PROPERTY_EXPOSURE_TIME** 0xDCD5U
- #define **MTP_OBJECT_PROPERTY_EXPOSURE_INDEX** 0xDCD6U
- #define **MTP_OBJECT_PROPERTY_TOTAL_BITRATE** 0xDE91U
- #define **MTP_OBJECT_PROPERTY_BITRATE_TYPE** 0xDE92U
- #define **MTP_OBJECT_PROPERTY_SAMPLE_RATE** 0xDE93U
- #define **MTP_OBJECT_PROPERTY_NUMBER_OF_CHANNELS** 0xDE94U
- #define **MTP_OBJECT_PROPERTY_AUDIO_BIT_DEPTH** 0xDE95U
- #define **MTP_OBJECT_PROPERTY_SCAN_TYPE** 0xDE97U
- #define **MTP_OBJECT_PROPERTY_AUDIO_WAVE_CODEC** 0xDE99U
- #define **MTP_OBJECT_PROPERTY_AUDIO_BITRATE** 0xDE9AU
- #define **MTP_OBJECT_PROPERTY_VIDEO_FOURCC_CODEC** 0xDE9BU
- #define **MTP_OBJECT_PROPERTY_VIDEO_BITRATE** 0xDE9CU
- #define **MTP_OBJECT_PROPERTY_FRAMES_PER_THOUSAND_SECONDS** 0xDE9DU
- #define **MTP_OBJECT_PROPERTY_KEYFRAME_DISTANCE** 0xDE9EU
- #define **MTP_OBJECT_PROPERTY_BUFFER_SIZE** 0xDE9FU
- #define **MTP_OBJECT_PROPERTY_ENCODING_QUALITY** 0xDEA0U
- #define **MTP_OBJECT_PROPERTY_ENCODING_PROFILE** 0xDEA1U
- #define **MTP_OBJECT_PROPERTY_DISPLAY_NAME** 0xDCE0U
- #define **MTP_OBJECT_PROPERTY_BODY_TEXT** 0xDCE1U
- #define **MTP_OBJECT_PROPERTY_SUBJECT** 0xDCE2U
- #define **MTP_OBJECT_PROPERTY_PRIORITY** 0xDCE3U
- #define **MTP_OBJECT_PROPERTY_GIVEN_NAME** 0xDD00U
- #define **MTP_OBJECT_PROPERTY_MIDDLE_NAMES** 0xDD01U

- #define **MTP_OBJECT_PROPERTY_FAMILY_NAME** 0xDD02U
- #define **MTP_OBJECT_PROPERTY_PREFIX** 0xDD03U
- #define **MTP_OBJECT_PROPERTY_SUFFIX** 0xDD04U
- #define **MTP_OBJECT_PROPERTY_PHONETIC_GIVEN_NAME** 0xDD05U
- #define **MTP_OBJECT_PROPERTY_PHONETIC_FAMILY_NAME** 0xDD06U
- #define **MTP_OBJECT_PROPERTY_EMAIL_PRIMARY** 0xDD07U
- #define **MTP_OBJECT_PROPERTY_EMAIL_PERSONAL_1** 0xDD08U
- #define **MTP_OBJECT_PROPERTY_EMAIL_PERSONAL_2** 0xDD09U
- #define **MTP_OBJECT_PROPERTY_EMAIL_BUSINESS_1** 0xDD0AU
- #define **MTP_OBJECT_PROPERTY_EMAIL_BUSINESS_2** 0xDD0BU
- #define **MTP_OBJECT_PROPERTY_EMAIL_OTHERS** 0xDD0CU
- #define **MTP_OBJECT_PROPERTY_PHONE_NUMBER_PRIMARY** 0xDD0DU
- #define **MTP_OBJECT_PROPERTY_PHONE_NUMBER_PERSONAL** 0xDD0EU
- #define **MTP_OBJECT_PROPERTY_PHONE_NUMBER_PERSONAL_2** 0xDD0FU
- #define **MTP_OBJECT_PROPERTY_PHONE_NUMBER_BUSINESS** 0xDD10U
- #define **MTP_OBJECT_PROPERTY_PHONE_NUMBER_BUSINESS_2** 0xDD11U
- #define **MTP_OBJECT_PROPERTY_PHONE_NUMBER_MOBILE** 0xDD12U
- #define **MTP_OBJECT_PROPERTY_PHONE_NUMBER_MOBILE_2** 0xDD13U
- #define **MTP_OBJECT_PROPERTY_FAX_NUMBER_PRIMARY** 0xDD14U
- #define **MTP_OBJECT_PROPERTY_FAX_NUMBER_PERSONAL** 0xDD15U
- #define **MTP_OBJECT_PROPERTY_FAX_NUMBER_BUSINESS** 0xDD16U
- #define **MTP_OBJECT_PROPERTY_PAGER_NUMBER** 0xDD17U
- #define **MTP_OBJECT_PROPERTY_PHONE_NUMBER_OTHERS** 0xDD18U
- #define **MTP_OBJECT_PROPERTY_PRIMARY_WEB_ADDRESS** 0xDD19U
- #define **MTP_OBJECT_PROPERTY_PERSONAL_WEB_ADDRESS** 0xDD1AU
- #define **MTP_OBJECT_PROPERTY_BUSINESS_WEB_ADDRESS** 0xDD1BU
- #define **MTP_OBJECT_PROPERTY_INSTANT_MESSANGER_ADDRESS** 0xDD1CU
- #define **MTP_OBJECT_PROPERTY_INSTANT_MESSANGER_ADDRESS_2** 0xDD1DU
- #define **MTP_OBJECT_PROPERTY_INSTANT_MESSANGER_ADDRESS_3** 0xDD1EU
- #define **MTP_OBJECT_PROPERTY_POSTAL_ADDRESS_PERSONAL_FULL** 0xDD1FU
- #define **MTP_OBJECT_PROPERTY_POSTAL_ADDRESS_PERSONAL_LINE_1** 0xDD20-U
- #define **MTP_OBJECT_PROPERTY_POSTAL_ADDRESS_PERSONAL_LINE_2** 0xDD21-U
- #define **MTP_OBJECT_PROPERTY_POSTAL_ADDRESS_PERSONAL_CITY** 0xDD22U
- #define **MTP_OBJECT_PROPERTY_POSTAL_ADDRESS_PERSONAL_REGION** 0xDD23U
- #define **MTP_OBJECT_PROPERTY_POSTAL_ADDRESS_PERSONAL_POSTAL_COD-E** 0xDD24U
- #define **MTP_OBJECT_PROPERTY_POSTAL_ADDRESS_PERSONAL_COUNTRY** 0xDD25U
- #define **MTP_OBJECT_PROPERTY_POSTAL_ADDRESS_BUSINESS_FULL** 0xDD26U
- #define **MTP_OBJECT_PROPERTY_POSTAL_ADDRESS_BUSINESS_LINE_1** 0xDD27U
- #define **MTP_OBJECT_PROPERTY_POSTAL_ADDRESS_BUSINESS_LINE_2** 0xDD28U
- #define **MTP_OBJECT_PROPERTY_POSTAL_ADDRESS_BUSINESS_CITY** 0xDD29U
- #define **MTP_OBJECT_PROPERTY_POSTAL_ADDRESS_BUSINESS_REGION** 0xDD2A-U
- #define **MTP_OBJECT_PROPERTY_POSTAL_ADDRESS_BUSINESS_POSTAL_COD-E** 0xDD2BU
- #define **MTP_OBJECT_PROPERTY_POSTAL_ADDRESS_BUSINESS_COUNTRY** 0xDD2CU
- #define **MTP_OBJECT_PROPERTY_POSTAL_ADDRESS_OTHER_FULL** 0xDD2DU
- #define **MTP_OBJECT_PROPERTY_POSTAL_ADDRESS_OTHER_LINE_1** 0xDD2EU
- #define **MTP_OBJECT_PROPERTY_POSTAL_ADDRESS_OTHER_LINE_2** 0xDD2FU

- #define **MTP_OBJECT_PROPERTY_POSTAL_ADDRESS_OTHER_CITY** 0xDD30U
- #define **MTP_OBJECT_PROPERTY_POSTAL_ADDRESS_OTHER_REGION** 0xDD31U
- #define **MTP_OBJECT_PROPERTY_POSTAL_ADDRESS_OTHER_POSTAL_CODE** 0x-DD32U
- #define **MTP_OBJECT_PROPERTY_POSTAL_ADDRESS_OTHER_COUNTRY** 0xDD33U
- #define **MTP_OBJECT_PROPERTY_ORGANIZATION_NAME** 0xDD34U
- #define **MTP_OBJECT_PROPERTY_PHONETIC_ORGANIZATION_NAME** 0xDD35U
- #define **MTP_OBJECT_PROPERTY_ROLE** 0xDD36U
- #define **MTP_OBJECT_PROPERTY_BIRTHDATE** 0xDD37U
- #define **MTP_OBJECT_PROPERTY_MESSAGE_TO** 0xDD40U
- #define **MTP_OBJECT_PROPERTY_MESSAGE_CC** 0xDD41U
- #define **MTP_OBJECT_PROPERTY_MESSAGE_BCC** 0xDD42U
- #define **MTP_OBJECT_PROPERTY_MESSAGE_READ** 0xDD43U
- #define **MTP_OBJECT_PROPERTY_MESSAGE_RECEIVED_TIME** 0xDD44U
- #define **MTP_OBJECT_PROPERTY_MESSAGE_SENDER** 0xDD45U
- #define **MTP_OBJECT_PROPERTY_ACTIVITY_BEGIN_TIME** 0xDD50U
- #define **MTP_OBJECT_PROPERTY_ACTIVITY_END_TIME** 0xDD51U
- #define **MTP_OBJECT_PROPERTY_ACTIVITY_LOCATION** 0xDD52U
- #define **MTP_OBJECT_PROPERTY_ACTIVITY_REQUIRED_ATTENDEES** 0xDD54U
- #define **MTP_OBJECT_PROPERTY_ACTIVITY_OPTIONAL_ATTENDEES** 0xDD55U
- #define **MTP_OBJECT_PROPERTY_ACTIVITY_RESOURCES** 0xDD56U
- #define **MTP_OBJECT_PROPERTY_ACTIVITY_ACCEPTED** 0xDD57U
- #define **MTP_OBJECT_PROPERTY_ACTIVITY_TENTATIVE** 0xDD58U
- #define **MTP_OBJECT_PROPERTY_ACTIVITY_DECLINED** 0xDD59U
- #define **MTP_OBJECT_PROPERTY_ACTIVITY_REMAINDER_TIME** 0xDD5AU
- #define **MTP_OBJECT_PROPERTY_ACTIVITY_OWNER** 0xDD5BU
- #define **MTP_OBJECT_PROPERTY_ACTIVITY_STATUS** 0xDD5CU
- #define **MTP_OBJECT_PROPERTY_OWNER** 0xDD5DU
- #define **MTP_OBJECT_PROPERTY_EDITOR** 0xDD5EU
- #define **MTP_OBJECT_PROPERTY_WEBMASTER** 0xDD5FU
- #define **MTP_OBJECT_PROPERTY_URL_SOURCE** 0xDD60U
- #define **MTP_OBJECT_PROPERTY_URL_DESTINATION** 0xDD61U
- #define **MTP_OBJECT_PROPERTY_TIME_BOOKMARK** 0xDD62U
- #define **MTP_OBJECT_PROPERTY_OBJECT_BOOKMARK** 0xDD63U
- #define **MTP_OBJECT_PROPERTY_BYTE_BOOKMARK** 0xDD64U
- #define **MTP_OBJECT_PROPERTY_LAST_BUILD_DATE** 0xDD70U
- #define **MTP_OBJECT_PROPERTY_TIME_TO_LIVE** 0xDD71U
- #define **MTP_OBJECT_PROPERTY_MEDIA_GUID** 0xDD72U

USB MTP device property code

- #define **MTP_DEVICE_PROPERTY_UNDEFINED** 0x5000U
- #define **MTP_DEVICE_PROPERTY_BATTERY_LEVEL** 0x5001U
- #define **MTP_DEVICE_PROPERTY_FUNCTIONAL_MODE** 0x5002U
- #define **MTP_DEVICE_PROPERTY_IMAGE_SIZE** 0x5003U
- #define **MTP_DEVICE_PROPERTY_COMPRESSION_SETTING** 0x5004U
- #define **MTP_DEVICE_PROPERTY_WHITE_BALANCE** 0x5005U
- #define **MTP_DEVICE_PROPERTY_RGB_GAIN** 0x5006U
- #define **MTP_DEVICE_PROPERTY_F_NUMBER** 0x5007U
- #define **MTP_DEVICE_PROPERTY_FOCAL_LENGTH** 0x5008U
- #define **MTP_DEVICE_PROPERTY_FOCUS_DISTANCE** 0x5009U
- #define **MTP_DEVICE_PROPERTY_FOCUS_MODE** 0x500AU
- #define **MTP_DEVICE_PROPERTY_EXPOSURE_METERING_MODE** 0x500BU
- #define **MTP_DEVICE_PROPERTY_FLASH_MODE** 0x500CU

- #define **MTP_DEVICE_PROPERTY_EXPOSURE_TIME** 0x500DU
- #define **MTP_DEVICE_PROPERTY_EXPOSURE_PROGRAM_MODE** 0x500EU
- #define **MTP_DEVICE_PROPERTY_EXPOSURE_INDEX** 0x500FU
- #define **MTP_DEVICE_PROPERTY_EXPOSURE_BIAS_COMPENSATION** 0x5010U
- #define **MTP_DEVICE_PROPERTY_DATETIME** 0x5011U
- #define **MTP_DEVICE_PROPERTY_CAPTURE_DELAY** 0x5012U
- #define **MTP_DEVICE_PROPERTY_STILL_CAPTURE_MODE** 0x5013U
- #define **MTP_DEVICE_PROPERTY_CONTRAST** 0x5014U
- #define **MTP_DEVICE_PROPERTY_SHARPNESS** 0x5015U
- #define **MTP_DEVICE_PROPERTY_DIGITAL_ZOOM** 0x5016U
- #define **MTP_DEVICE_PROPERTY_EFFECT_MODE** 0x5017U
- #define **MTP_DEVICE_PROPERTY_BURST_NUMBER** 0x5018U
- #define **MTP_DEVICE_PROPERTY_BURST_INTERVAL** 0x5019U
- #define **MTP_DEVICE_PROPERTY_TIMELAPSE_NUMBER** 0x501AU
- #define **MTP_DEVICE_PROPERTY_TIMELAPSE_INTERVAL** 0x501BU
- #define **MTP_DEVICE_PROPERTY_FOCUS_METERING_MODE** 0x501CU
- #define **MTP_DEVICE_PROPERTY_UPLOAD_URL** 0x501DU
- #define **MTP_DEVICE_PROPERTY_ARTIST** 0x501EU
- #define **MTP_DEVICE_PROPERTY_COPYRIGHT_INFO** 0x501FU
- #define **MTP_DEVICE_PROPERTY_SYNCHRONIZATION_PARTNER** 0xD401U
- #define **MTP_DEVICE_PROPERTY_DEVICE_FRIENDLY_NAME** 0xD402U
- #define **MTP_DEVICE_PROPERTY_VOLUME** 0xD403U
- #define **MTP_DEVICE_PROPERTY_SUPPORTED_FORMATS_ORDERED** 0xD404U
- #define **MTP_DEVICE_PROPERTY_DEVICE_ICON** 0xD405U
- #define **MTP_DEVICE_PROPERTY_PLAYBACK_RATE** 0xD410U
- #define **MTP_DEVICE_PROPERTY_PLAYBACK_OBJECT** 0xD411U
- #define **MTP_DEVICE_PROPERTY_PLAYBACK_CONTAINER_INDEX** 0xD412U
- #define **MTP_DEVICE_PROPERTY_SESSION_INITIATOR_VERSION_INFO** 0xD406U
- #define **MTP_DEVICE_PROPERTY_PERCEIVED_DEVICE_TYPE** 0xD407U

USB MTP operation code

- #define **MTP_OPERATION_GET_DEVICE_INFO** 0x1001U
- #define **MTP_OPERATION_OPEN_SESSION** 0x1002U
- #define **MTP_OPERATION_CLOSE_SESSION** 0x1003U
- #define **MTP_OPERATION_GET_STORAGE_IDS** 0x1004U
- #define **MTP_OPERATION_GET_STORAGE_INFO** 0x1005U
- #define **MTP_OPERATION_GET_NUM_OBJECTS** 0x1006U
- #define **MTP_OPERATION_GET_OBJECT_HANDLES** 0x1007U
- #define **MTP_OPERATION_GET_OBJECT_INFO** 0x1008U
- #define **MTP_OPERATION_GET_OBJECT** 0x1009U
- #define **MTP_OPERATION_GET_THUMB** 0x100AU
- #define **MTP_OPERATION_DELETE_OBJECT** 0x100BU
- #define **MTP_OPERATION_SEND_OBJECT_INFO** 0x100CU
- #define **MTP_OPERATION_SEND_OBJECT** 0x100DU
- #define **MTP_OPERATION_INITIATE_CAPTURE** 0x100EU
- #define **MTP_OPERATION_FORMAT_STORE** 0x100FU
- #define **MTP_OPERATION_RESET_DEVICE** 0x1010U
- #define **MTP_OPERATION_SELF_TEST** 0x1011U
- #define **MTP_OPERATION_SET_OBJECT_PROTECTION** 0x1012U
- #define **MTP_OPERATION_POWER_DOWN** 0x1013U
- #define **MTP_OPERATION_GET_DEVICE_PROP_DESC** 0x1014U
- #define **MTP_OPERATION_GET_DEVICE_PROP_VALUE** 0x1015U
- #define **MTP_OPERATION_SET_DEVICE_PROP_VALUE** 0x1016U

- #define **MTP_OPERATION_RESET_DEVICE_PROP_VALUE** 0x1017U
- #define **MTP_OPERATION_TERMINATE_OPEN_CAPTURE** 0x1018U
- #define **MTP_OPERATION_MOVE_OBJECT** 0x1019U
- #define **MTP_OPERATION_COPY_OBJECT** 0x101AU
- #define **MTP_OPERATION_GET_PARTIAL_OBJECT** 0x101BU
- #define **MTP_OPERATION_INITIATE_OPEN_CAPTURE** 0x101CU
- #define **MTP_OPERATION_GET_OBJECT_PROPS_SUPPORTED** 0x9801U
- #define **MTP_OPERATION_GET_OBJECT_PROP_DESC** 0x9802U
- #define **MTP_OPERATION_GET_OBJECT_PROP_VALUE** 0x9803U
- #define **MTP_OPERATION_SET_OBJECT_PROP_VALUE** 0x9804U
- #define **MTP_OPERATION_GET_OBJECT_PROP_LIST** 0x9805U
- #define **MTP_OPERATION_SET_OBJECT_PROP_LIST** 0x9806U
- #define **MTP_OPERATION_GET_INTERDEPENDENT_PROP_DESC** 0x9807U
- #define **MTP_OPERATION_SEND_OBJECT_PROP_LIST** 0x9808U
- #define **MTP_OPERATION_GET_OBJECT_REFERENCES** 0x9810U
- #define **MTP_OPERATION_SET_OBJECT_REFERENCES** 0x9811U
- #define **MTP_OPERATION_SKIP** 0x9820U

USB MTP response code

- #define **MTP_RESPONSE_UNDEFINED** 0x2000U
- #define **MTP_RESPONSE_OK** 0x2001U
- #define **MTP_RESPONSE_GENERAL_ERROR** 0x2002U
- #define **MTP_RESPONSE_SESSION_NOT_OPEN** 0x2003U
- #define **MTP_RESPONSE_INVALID_TRANSACTION_ID** 0x2004U
- #define **MTP_RESPONSE_OPERATION_NOT_SUPPORTED** 0x2005U
- #define **MTP_RESPONSE_PARAMETER_NOT_SUPPORTED** 0x2006U
- #define **MTP_RESPONSE_INCOMPLETE_TRANSFER** 0x2007U
- #define **MTP_RESPONSE_INVALID_STORAGE_ID** 0x2008U
- #define **MTP_RESPONSE_INVALID_OBJECT_HANDLE** 0x2009U
- #define **MTP_RESPONSE_DEVICE_PROP_NOT_SUPPORTED** 0x200AU
- #define **MTP_RESPONSE_INVALID_OBJECT_FORMAT_CODE** 0x200BU
- #define **MTP_RESPONSE_STORAGE_FULL** 0x200CU
- #define **MTP_RESPONSE_OBJECT_WRITE_PROTECTED** 0x200DU
- #define **MTP_RESPONSE_STORE_READ_ONLY** 0x200EU
- #define **MTP_RESPONSE_ACCESS_DENIED** 0x200FU
- #define **MTP_RESPONSE_NO_THUMBNAIL_PRESENT** 0x2010U
- #define **MTP_RESPONSE_SELF_TEST_FAILED** 0x2011U
- #define **MTP_RESPONSE_PARTIAL_DELETION** 0x2012U
- #define **MTP_RESPONSE_STORE_NOT_AVAILABLE** 0x2013U
- #define **MTP_RESPONSE_SPECIFICATION_BY_FORMAT_UNSUPPORTED** 0x2014U
- #define **MTP_RESPONSE_NO_VALID_OBJECT_INFO** 0x2015U
- #define **MTP_RESPONSE_INVALID_CODE_FORMAT** 0x2016U
- #define **MTP_RESPONSE_UNKNOWN_VENDOR_CODE** 0x2017U
- #define **MTP_RESPONSE_CAPTURE_ALREADY_TERMINATED** 0x2018U
- #define **MTP_RESPONSE_DEVICE_BUSY** 0x2019U
- #define **MTP_RESPONSE_INVALID_PARENT_OBJECT** 0x201AU
- #define **MTP_RESPONSE_INVALID_DEVICE_PROP_FORMAT** 0x201BU
- #define **MTP_RESPONSE_INVALID_DEVICE_PROP_VALUE** 0x201CU
- #define **MTP_RESPONSE_INVALID_PARAMETER** 0x201DU
- #define **MTP_RESPONSE_SESSION_ALREADY_OPEN** 0x201EU
- #define **MTP_RESPONSE_TRANSACTION_CANCELLED** 0x201FU
- #define **MTP_RESPONSE_SPECIFICATION_OF_DESTINATION_UNSUPPORTED** 0x2020-U

- #define **MTP_RESPONSE_INVALID_OBJECT_PROP_CODE** 0xA801U
- #define **MTP_RESPONSE_INVALID_OBJECT_PROP_FORMAT** 0xA802U
- #define **MTP_RESPONSE_INVALID_OBJECT_PROP_VALUE** 0xA803U
- #define **MTP_RESPONSE_INVALID_OBJECT_REFERENCE** 0xA804U
- #define **MTP_RESPONSE_GROUP_NOT_SUPPORTED** 0xA805U
- #define **MTP_RESPONSE_INVALID_DATASET** 0xA806U
- #define **MTP_RESPONSE_SPECIFICATION_BY_GROUP_UNSUPPORTED** 0xA807U
- #define **MTP_RESPONSE_SPECIFICATION_BY_DEPTH_UNSUPPORTED** 0xA808U
- #define **MTP_RESPONSE_OBJECT_TOO_LARGE** 0xA809U
- #define **MTP_RESPONSE_OBJECT_PROP_NOT_SUPPORTED** 0xA80AU

USB MTP event code

- #define **MTP_EVENT_UNDEFINED** 0x4000U
- #define **MTP_EVENT_CANCEL_TRANSACTION** 0x4001U
- #define **MTP_EVENT_OBJECT_ADDED** 0x4002U
- #define **MTP_EVENT_OBJECT_REMOVED** 0x4003U
- #define **MTP_EVENT_STORE_ADDED** 0x4004U
- #define **MTP_EVENT_STORE_REMOVED** 0x4005U
- #define **MTP_EVENT_DEVICE_PROP_CHANGED** 0x4006U
- #define **MTP_EVENT_OBJECT_INFO_CHANGED** 0x4007U
- #define **MTP_EVENT_DEVICE_INFO_CHANGED** 0x4008U
- #define **MTP_EVENT_REQUEST_OBJECT_TRANSFER** 0x4009U
- #define **MTP_EVENT_STORE_FULL** 0x400AU
- #define **MTP_EVENT_DEVICE_RESET** 0x400BU
- #define **MTP_EVENT_STORAGE_INFO_CHANGED** 0x400CU
- #define **MTP_EVENT_CAPTURE_COMPLETE** 0x400DU
- #define **MTP_EVENT_UNREPORTED_STATUS** 0x400EU
- #define **MTP_EVENT_OBJECT_PROP_CHANGED** 0xC801U
- #define **MTP_EVENT_OBJECT_PROP_DESC_CHANGED** 0xC802U
- #define **MTP_EVENT_OBJECT_REFERENCES_CHANGED** 0xC803U

USB MTP property form flag

- #define **MTP_FORM_FLAG_NONE** 0x00U
- #define **MTP_FORM_FLAG_RANGE** 0x01U
- #define **MTP_FORM_FLAG_ENUMERATION** 0x02U
- #define **MTP_FORM_FLAG_DATA_TIME** 0x03U
- #define **MTP_FORM_FLAG_FIXED_LENGTH_ARRAY** 0x04U
- #define **MTP_FORM_FLAG_REGULAR_EXPRESSION** 0x05U
- #define **MTP_FORM_FLAG_BYTE_ARRAY** 0x06U
- #define **MTP_FORM_FLAG_LONG_STRING** 0xFFU

USB MTP storage type

- #define **MTP_STORAGE_FIXED_ROM** 0x0001U
- #define **MTP_STORAGE_REMOVABLE_ROM** 0x0002U
- #define **MTP_STORAGE_FIXED_RAM** 0x0003U
- #define **MTP_STORAGE_REMOVABLE_RAM** 0x0004U

USB MTP file system

- #define **MTP_STORAGE_UNDEFINED** 0x0000U
- #define **MTP_STORAGE_FILESYSTEM_GENERIC_FLAT** 0x0001U
- #define **MTP_STORAGE_FILESYSTEM_GENERIC_HIERARCHICAL** 0x0002U
- #define **MTP_STORAGE_FILESYSTEM_DCF** 0x0003U

USB MTP access capability

- #define **MTP_STORAGE_READ_WRITE** 0x0000U
- #define **MTP_STORAGE_READ_ONLY_WITHOUT_DELETE** 0x0001U
- #define **MTP_STORAGE_READ_ONLY_WITH_DELETE** 0x0002U

3.9.2   Data Structure Documentation

3.9.2.1   struct usb_device_mtp_container_t

The structure is used as a header to transfer data in the bulk pipe, and only used by the class driver.

3.9.2.2   struct usb_device_mtp_event_container_t

The structure is used by the class driver to notify the host of occurrence of certain events.

3.9.2.3   struct usb_device_mtp_device_status_t

The structure is used by the class driver to transfer the status and protocol state of device to the host.

3.9.2.4   struct _usb_device_mtp_cancel_request

The structure is used by the class driver to receive the cancel request data from the host.

3.9.2.5   struct usb_device_mtp_extended_event_data_t

The structure is used by the class driver to transfer the extended information regarding an asynchronous event or vendor condition to the host.

3.9.2.6   struct usb_device_mtp_cmd_data_struct_t

Data Fields

- uint8_t ∗ buffer
  [IN] The memory address to hold the data need to be transferred.

- uint32_t curSize

  [IN] In the command or data phase, used to save currently how many bytes need to be transferred.
- uint64_t totalSize

  [IN] In total how many bytes need to be sent.
- uint64_t curPos

  [OUT] The number of bytes has been transferred.
- uint32_t param [5]

  [OUT] In the command phase, used to save command parameter.
- uint16_t code

  [IN] response code
- uint16_t curPhase

  [OUT] In the command phase, equals to USB_DEVICE_MTP_PHASE_COMMAND.

3.9.2.6.0.2   Field Documentation

3.9.2.6.0.2.1   uint8_t∗ usb_device_mtp_cmd_data_struct_t::buffer

3.9.2.6.0.2.2   uint32_t usb_device_mtp_cmd_data_struct_t::curSize

[IN] In the response phase, used to save the number of response parameter

3.9.2.6.0.2.3   uint64_t usb_device_mtp_cmd_data_struct_t::totalSize

[OUT] In total how many bytes need to be received.

3.9.2.6.0.2.4   uint64_t usb_device_mtp_cmd_data_struct_t::curPos

3.9.2.6.0.2.5   uint32_t usb_device_mtp_cmd_data_struct_t::param[5]

[IN] In the repsonse phase, used to save response parameter.

3.9.2.6.0.2.6   uint16_t usb_device_mtp_cmd_data_struct_t::curPhase

[OUT] In the data phase, equals to USB_DEVICE_MTP_PHASE_DATA. [OUT] In the response phase, equals to USB_DEVICE_MTP_PHASE_RESPONSE. [OUT] When host or device cancels the current transaction, equals to USB_DEVICE_MTP_PHASE_CANCELLATION.

3.9.2.7   struct usb_device_mtp_response_struct_t

Data Fields

- uint16_t code

  MTP response code, such as MTP_RESPONSE_OK, MTP_RESPONSE_SESSION_NOT_OPEN, etc.
- uint16_t paramNumber

  The number of parameter.
- uint32_t param1

  This field contains the 1st parameter associated with the event if needed.
- uint32_t param2

  This field contains the 2nd parameter associated with the event if needed.
- uint32_t param3

This field contains the 3rd parameter associated with the event if needed.
- uint32_t param4
    This field contains the 4th parameter associated with the event if needed.
- uint32_t param5
    This field contains the 5th parameter associated with the event if needed.

3.9.2.7.0.3   Field Documentation

3.9.2.7.0.3.1   uint16_t usb_device_mtp_response_struct_t::code

For more response codes, please refer to Media Transfer Protocol Rev 1.1, Appendix F - Responses.

3.9.2.7.0.3.2   uint16_t usb_device_mtp_response_struct_t::paramNumber

3.9.2.7.0.3.3   uint32_t usb_device_mtp_response_struct_t::param1

3.9.2.7.0.3.4   uint32_t usb_device_mtp_response_struct_t::param2

3.9.2.7.0.3.5   uint32_t usb_device_mtp_response_struct_t::param3

3.9.2.7.0.3.6   uint32_t usb_device_mtp_response_struct_t::param4

3.9.2.7.0.3.7   uint32_t usb_device_mtp_response_struct_t::param5

3.9.2.8   struct usb_device_mtp_event_struct_t

Data Fields

- uint16_t code
    MTP event code, such as MTP_EVENT_OBJECT_ADDED, MTP_EVENT_OBJECT_REMOVED, etc.
- uint16_t paramNumber
    The number of parameter.
- uint32_t param1
    This field contains the 1st parameter associated with the event if needed.
- uint32_t param2
    This field contains the 2nd parameter associated with the event if needed.
- uint32_t param3
    This field contains the 3rd parameter associated with the event if needed.

3.9.2.8.0.4   Field Documentation

3.9.2.8.0.4.1   uint16_t usb_device_mtp_event_struct_t::code

For more event codes, please refer to Media Transfer Protocol Rev 1.1, Appendix G - Events.

3.9.2.8.0.4.2   uint16_t usb_device_mtp_event_struct_t::paramNumber

3.9.2.8.0.4.3   uint32_t usb_device_mtp_event_struct_t::param1

3.9.2.8.0.4.4   uint32_t usb_device_mtp_event_struct_t::param2

3.9.2.8.0.4.5   uint32_t usb_device_mtp_event_struct_t::param3

3.9.2.9   struct usb_device_mtp_extended_event_struct_t

Data Fields

- uint8_t ∗ buffer
  - *The memory address to hold the data need to be sent.*
- uint32_t length
  - *The data length need to be sent.*

3.9.2.9.0.5   Field Documentation

3.9.2.9.0.5.1   uint8_t∗ usb_device_mtp_extended_event_struct_t::buffer

User needs to organize the buffer according to USB Still Image Capture Device Definition Rev 1.0, Table 5.2-4.

3.9.2.9.0.5.2   uint32_t usb_device_mtp_extended_event_struct_t::length

3.9.2.10   struct usb_device_mtp_struct_t

Data Fields

- usb_device_handle handle
  - *The device handle.*
- usb_device_class_config_struct_t ∗ configurationStruct
  - *The configuration of the class.*
- usb_device_interface_struct_t ∗ interfaceHandle
  - *Current interface handle.*
- uint32_t sessionID
  - *MTP session ID.*
- uint32_t transactionID
  - *MTP transaction ID.*
- uint8_t ∗ transferBuffer
  - *Data buffer.*
- uint64_t transferTotal
  - *The total length of data to be transferred.*
- uint64_t transferDone
  - *The length of data transferred.*
- uint32_t transferOffset
  - *Transfer backward offset.*
- uint32_t transferLength
  - *Transfer forward offset.*
- usb_device_mtp_container_t ∗ mtpContainer

Command or Response structure.
- usb_device_mtp_event_container_t ∗ eventContainer
    Event structure.
- usb_device_mtp_device_status_t ∗ deviceStatus
    Device status request.
- usb_device_mtp_cancel_request_t ∗ cancelRequest
    Cancel request.
- uint16_t bulkInMaxPacketSize
    Max packet size in bulk in endpoint.
- uint16_t bulkOutMaxPacketSize
    Max packet size in bulk out endpoint.
- uint8_t mtpState
    Internal referenced MTP state.
- uint8_t bulkInStallFlag
    Bulk IN endpoint stall flag.
- uint8_t bulkOutStallFlag
    Bulk OUT endpoint stall flag.
- uint8_t interruptInStallFlag
    Interrupt IN endpoint stall flag.
- uint8_t interruptInBusy
    Interrupt IN endpoint busy flag.
- uint8_t isHostCancel
    Host cancels current transaction.
- uint8_t bulkInEndpoint
    Bulk IN endpoint number.
- uint8_t bulkOutEndpoint
    Bulk OUT endpoint number.
- uint8_t interruptInEndpoint
    Interrupt IN endpoint number.
- uint8_t alternate
    Current alternate setting of the interface.
- uint8_t configuration
    Current configuration.
- uint8_t interfaceNumber
    The interface number of the class.

3.9.3   Enumeration Type Documentation

3.9.3.1   enum usb_device_mtp_callback_event_t

Enumerator

> ***kUSB_DeviceMtpEventInvalid***   Invalid value.
> ***kUSB_DeviceMtpEventOpenSession***   OpenSession command.
> ***kUSB_DeviceMtpEventCloseSession***   CloseSession command.
> ***kUSB_DeviceMtpEventGetDeviceInfo***   GetDeviceInfo command.
> ***kUSB_DeviceMtpEventGetDevicePropDesc***   GetDevicePropDesc command.
> ***kUSB_DeviceMtpEventGetObjPropsSupported***   GetObjectPropsSupported command.
> ***kUSB_DeviceMtpEventGetStorageIDs***   GetStorageIDs command.

kUSB_DeviceMtpEventGetStorageInfo   GetStorageInfo command.
kUSB_DeviceMtpEventGetObjHandles   GetObjectHandles command.
kUSB_DeviceMtpEventGetObjPropDesc   GetObjectPropDesc command.
kUSB_DeviceMtpEventGetObjPropList   GetObjectPropList command.
kUSB_DeviceMtpEventGetObjInfo   GetObjectInfo command.
kUSB_DeviceMtpEventGetObj   GetObject command.
kUSB_DeviceMtpEventSendObjInfo   SendObjectInfo command.
kUSB_DeviceMtpEventSendObj   SendObject command.
kUSB_DeviceMtpEventDeleteObj   DeleteObject command.
kUSB_DeviceMtpEventGetDevicePropVal   GetDevicePropVal command.
kUSB_DeviceMtpEventSetDevicePropVal   SetDevicePropVal command.
kUSB_DeviceMtpEventGetObjPropVal   GetObjectPropVal command.
kUSB_DeviceMtpEventSetObjPropVal   SetObjectPropVal command.
kUSB_DeviceMtpEventGetObjReferences   GetObjectReferences command.
kUSB_DeviceMtpEventMoveObj   MoveObject command.
kUSB_DeviceMtpEventCopyObj   CopyObject command.
kUSB_DeviceMtpEventSendResponseError   The result of asynchronous event notification.
kUSB_DeviceMtpEventSendResponseSuccess   The result of asynchronous event notification.
kUSB_DeviceMtpEventDeviceResetRequest   Class specific request callback.
kUSB_DeviceMtpEventGetExtendedEventData   Class specific request callback.

3.9.4   Function Documentation

3.9.4.1   usb_status_t USB_DeviceMtpInit (uint8_t *controllerId,* usb_device_class_config_- struct_t ∗ *config,* class_handle_t ∗ *handle*)

This function is used to initialize the MTP class.

Parameters

controllerId	The controller ID of the USB IP. See the enumeration usb_controller_index_t.
config	The class configuration information.
handle	A parameter used to return pointer of the MTP class handle to the caller.

Returns

   A USB error code or kStatus_USB_Success.

3.9.4.2   usb_status_t USB_DeviceMtpDeinit (class_handle_t *handle*)

The function deinitializes the device MTP class.

Parameters

handle	The MTP class handle received from usb_device_class_config_struct_t::classHandle.

Returns

A USB error code or kStatus_USB_Success.

3.9.4.3   usb_status_t USB_DeviceMtpEvent (void * *handle,* uint32_t *event,* void * *param*)

This function handles the event passed to the MTP class. This function only can be called by USB_-DeviceClassEvent.

Parameters

in	*handle*	The MTP class handle received from the usb_device_class_config_-struct_t::classHandle.
in	*event*	The event codes. See the enumeration usb_device_class_event_t.
in,out	*param*	The parameter type is determined by the event code.

Returns

A USB error code or kStatus_USB_Success.

Return values

kStatus_USB_Success	Free device handle successfully.
kStatus_USB_Invalid-Parameter	The device handle not be found.
kStatus_USB_Invalid-Request	The request is invalid, and the control pipe is stalled by the caller.

3.9.4.4   usb_status_t USB_DeviceMtpEventSend (class_handle_t *handle,* usb_device_mtp_event_struct_t * *event*)

The function is used to send event through interrupt in endpoint. The function calls USB_DeviceSend-Request internally.

Parameters

handle	The MTP class handle got from usb_device_class_config_struct_t::classHandle.
event	Please refer to the structure usb_device_mtp_event_struct_t.

Returns

A USB error code or kStatus_USB_Success.

Note

The return value just means if the sending request is successful or not; the transfer done is notified by USB_DeviceMtpInterruptIn. Currently, only one transfer request can be supported for one specific endpoint. If there is a specific requirement to support multiple transfer requests for one specific endpoint, the application should implement a queue in the application level. The subsequent transfer could begin only when the previous transfer is done (get notification through the endpoint callback).

3.9.4.5   usb_status_t USB_DeviceMtpResponseSend (class_handle_t *handle,* usb_device_mtp_response_struct_t ∗ *response*)

The function is used to send response through bulk in endpoint. The function calls USB_DeviceSend-Request internally.

Parameters

handle	The MTP class handle got from usb_device_class_config_struct_t::classHandle.
response	Please refer to the structure usb_device_mtp_response_struct_t.

Returns

A USB error code or kStatus_USB_Success.

Note

The function is used to asynchronously send response to the host. Some operations may consume a lot of time to handle current transaction, such as CopyObject or DeleteObject, which causes the subsequent USB event cannot be responded in time. In this case, a separated task is needed to handle these operations. When the process is complete, a response needs to be sent to the host by calling this function.

3.9.4.6   usb_status_t USB_DeviceMtpCancelCurrentTransaction (class_handle_t *handle*)

The function is used to cancel current transaction in the bulk in, bulk out and interrupt in endpoints. The function calls USB_DeviceCancel internally.

Parameters

handle	The MTP class handle got from usb_device_class_config_struct_t::classHandle.

Returns

A USB error code or kStatus_USB_Success.

3.10   USB CCID Class driver

3.10.1   Overview

Data Structures

- struct usb_device_ccid_common_command_t

  Common command structure of the command message in the bulk-out pipe. More...
- struct usb_device_ccid_power_on_command_t

  ICC power on command structure of the command message in the bulk-out pipe. More...
- struct usb_device_ccid_power_off_command_t

  ICC power off command structure of the command message in the bulk-out pipe. More...
- struct usb_device_ccid_get_slot_status_command_t

  Gets the slot status command structure of the command message in the bulk-out pipe. More...
- struct usb_device_ccid_transfer_block_command_t

  Transfer data block command structure of the command message in the bulk-out pipe. More...
- struct usb_device_ccid_get_parameters_command_t

  Gets the ICC parameter command structure of the command message in the bulk-out pipe. More...
- struct usb_device_ccid_reset_parameters_command_t

  Resets the ICC parameter command structure of the command message in the bulk-out pipe. More...
- struct usb_device_ccid_set_parameters_command_t

  Sets the ICC parameter command structure of the command message in the bulk-out pipe. More...
- struct usb_device_ccid_set_parameters_t0_command_t

  Sets the ICC(T=0) parameter command structure of the command message in the bulk-out pipe. More...
- struct usb_device_ccid_set_parameters_t1_command_t

  Sets the ICC(T=1) parameter command structure of the command message in the bulk-out pipe. More...
- union usb_device_ccid_set_parameters_command_common_t

  Sets the ICC parameter command union of the command message in the bulk-out pipe. More...
- struct usb_device_ccid_escape_command_t

  Escape command structure of the command message in the bulk-out pipe. More...
- struct usb_device_ccid_clock_command_t

  Controls the ICC clock command structure of the command message in the bulk-out pipe. More...
- struct usb_device_ccid_t0_apdu_command_t

  Controls the ICC clock command structure of the command message in the bulk-out pipe. More...
- struct usb_device_ccid_secure_command_t

  Secures the command structure of the command message in the bulk-out pipe. More...
- struct usb_device_ccid_secure_pin_operation_command_t

  Secures the PIN operation command structure of the command message in the bulk-out pipe. More...
- struct usb_device_ccid_seucre_pin_verification_command_t

  Secures the PIN verification operation command structure of the command message in the bulk-out pipe. More...
- struct usb_device_ccid_secure_pin_modification_command_t

  Secures the PIN modification operation command structure of the command message in the bulk-out pipe. More...
- struct usb_device_ccid_mechanical_command_t

  Manages the motorized type CCID functionality command structure of the command message in the bulk-out pipe. More...
- struct usb_device_ccid_abort_command_t

  Aborts the command structure of the command message in the bulk-out pipe. More...
- struct usb_device_ccid_set_data_rate_and_clock_frequency_command_t

  Sets data rate and clock frequency command structure of the command message in the bulk-out pipe.

More...

- struct usb_device_ccid_common_response_t

    Common response structure to respond a command message in the bulk-in pipe. More...
- struct usb_device_ccid_data_block_response_t

    Data block response structure to respond a command message in the bulk-in pipe. More...
- struct usb_device_ccid_slot_status_response_t

    Sends a slot status response structure to respond a command message in the bulk-in pipe. More...
- struct usb_device_ccid_parameters_response_t

    ICC parameter response structure to respond a command message in the bulk-in pipe. More...
- struct usb_device_ccid_parameters_T0_response_t

    ICC T0 parameter response structure to respond a command message in the bulk-in pipe. More...
- struct usb_device_ccid_parameters_T1_response_t

    ICC T1 parameter response structure to response a command message in the bulk-in pipe. More...
- union usb_device_ccid_parameters_response_common_t

    ICC parameter response union to response a command message in the bulk-in pipe. More...
- struct usb_device_ccid_escape_response_t

    Response structure to respond the "PC_to_RDR_Escape" command message in the bulk-in pipe. More...
- struct usb_device_ccid_data_rate_and_clock_frequency_response_t

    Response structure to respond the "PC_to_RDR_SetDataRateAndClockFrequency" command message in the bulk-in pipe. More...
- struct usb_device_ccid_notify_slot_chnage_notification_t

    Notification structure to notify Host the CCID device slot changed. More...
- struct usb_device_ccid_hardware_error_notification_t

    Notification structure to notify Host a hardware error happened in the CCID device. More...
- struct usb_device_ccid_transfer_struct_t

    USB device CCID transfer structure. More...
- struct usb_device_ccid_control_request_struct_t

    The structure is used to get data rates or clock frequencies if the event is kUSB_DeviceCcidEventGet-ClockFrequencies or kUSB_DeviceCcidEventGetDataRate. More...
- struct usb_device_ccid_notification_struct_t

    The structure is used to keep the transferred buffer and transferred length if the event is kUSB_Device-CcidEventSlotChangeSent or kUSB_DeviceCcidEventHardwareErrorSent. More...
- struct usb_device_ccid_command_struct_t

    The structure is used to keep the command data and length and get response data and length if the event is kUSB_DeviceCcidEventCommandReceived. More...
- struct usb_device_ccid_slot_status_struct_t

    The structure is used to get the slot status if the event is kUSB_DeviceCcidEventGetSlotStatus. More...
- struct usb_device_ccid_struct_t

    The CCID device class status structure. More...

Macros

- #define USB_DEVICE_CCID_CLASS_CODE (0x0BU)

    CCID device class code.
- #define USB_DEVICE_CCID_SUBCLASS_CODE (0x00U)

    CCID device subclass code.
- #define USB_DEVICE_CCID_PROTOCOL_CODE (0x00U)

    CCID device protocol code.
- #define USB_DEVICE_CCID_ABORT (0x01U)

    CCID device class-specific control pipe requests.

- #define USB_DEVICE_CCID_PC_TO_RDR_ICCPOWERON (0x62U)
  The message type of CCID device class-specific bulk-out pipe (Command pipe)
- #define USB_DEVICE_CCID_RDR_TO_PC_DATABLOCK (0x80U)
  The message type of CCID device class-specific bulk-in pipe (Response pipe)
- #define USB_DEVICE_CCID_RDR_TO_PC_NOTIFYSLOTCHANGE (0x50U)
  The message type of CCID device class-specific interrupt-in pipe.
- #define USB_DEVICE_CCID_SLOT_ERROR_COMMAND_NOT_SUPPORTED (0x00U)
  Reporting slot error and slot status registers in bulk-in messages.
- #define USB_DEVICE_CCID_COMMAND_HEADER_LENGTH (0x0AU)
  The command header length of the bulk-out pipe message.
- #define USB_DEVICE_CCID_RESPONSE_HEADER_LENGTH (0x0AU)
  The response header length of the bulk-in pipe message.
- #define USB_DEVICE_CCID_BUFFER_4BYTE_ALIGN(n) (((n - 1U) & 0xFFFFFFFCU) + 0x00000004U)
  The definition to make the length aligned to 4-bytes.

Enumerations

- enum usb_device_ccid_event_t {
  kUSB_DeviceCcidEventCommandReceived = 0x01U,
  kUSB_DeviceCcidEventResponseSent,
  kUSB_DeviceCcidEventGetSlotCount,
  kUSB_DeviceCcidEventGetSlotStatus,
  kUSB_DeviceCcidEventCommandAbort,
  kUSB_DeviceCcidEventGetClockFrequencies,
  kUSB_DeviceCcidEventGetDataRate,
  kUSB_DeviceCcidEventSlotChangeSent,
  kUSB_DeviceCcidEventHardwareErrorSent }
  Available common EVENT types in CCID class callback.
- enum usb_device_ccid_slot_state_t {
  kUSB_DeviceCcidSlotStateNoPresent = 0x00U,
  kUSB_DeviceCcidSlotStatePresent = 0x01U }
  Slot status, present or not.
- enum usb_device_ccid_hardware_error_t { kUSB_DeviceCcidHardwareErrorOverCurrent = 0x01-U }
  Hardware error status.

Functions

- usb_status_t USB_DeviceCcidInit (uint8_t controllerId, usb_device_class_config_struct_t ∗config, class_handle_t ∗handle)
  Initialize the CCID class.
- usb_status_t USB_DeviceCcidDeinit (class_handle_t handle)
  Deinitializes the device CCID class.
- usb_status_t USB_DeviceCcidEvent (void ∗handle, uint32_t event, void ∗param)
  Handles the event passed to the CCID class.

USB CCID device class configuration

- #define USB_DEVICE_CONFIG_CCID_SLOT_MAX (1U)
  MAX slot number of the CCID device.
- #define USB_DEVICE_CONFIG_CCID_TRANSFER_COUNT (4U)
  MAX transfer entity number of the CCID device.
- #define USB_DEVICE_CONFIG_CCID_MAX_MESSAGE_LENGTH (271U)
  MAX maximum message length of the CCID device.

USB CCID device class descriptor

- #define **USB_DEVICE_CCID_DESCRIPTOR_LENGTH** (0x36U)
- #define **USB_DEVICE_CCID_DESCRIPTOR_TYPE** (0x21U)
- #define **USB_DEVICE_CCID_DESCRIPTOR_VOLTAGE_SUPPORT_BM_5V** (0x01U)
- #define **USB_DEVICE_CCID_DESCRIPTOR_VOLTAGE_SUPPORT_BM_3V** (0x02U)
- #define **USB_DEVICE_CCID_DESCRIPTOR_VOLTAGE_SUPPORT_BM_1V8** (0x04U)
- #define **USB_DEVICE_CCID_DESCRIPTOR_PROTOCOLS_BM_T0** (0x00000001U)
- #define **USB_DEVICE_CCID_DESCRIPTOR_PROTOCOLS_BM_T1** (0x00000002U)
- #define **USB_DEVICE_CCID_DESCRIPTOR_MECHANICAL_BM_NO** (0x00000000U)
- #define **USB_DEVICE_CCID_DESCRIPTOR_MECHANICAL_BM_ACCEPT** (0x00000001-U)
- #define **USB_DEVICE_CCID_DESCRIPTOR_MECHANICAL_BM_EJECTION** (0x00000002-U)
- #define **USB_DEVICE_CCID_DESCRIPTOR_MECHANICAL_BM_CAPTURE** (0x00000004-U)
- #define **USB_DEVICE_CCID_DESCRIPTOR_MECHANICAL_BM_LOCK_UNLCO-K** (0x00000008U)
- #define **USB_DEVICE_CCID_DESCRIPTOR_FEATURES_BM_NO** (0x00000000U)
- #define **USB_DEVICE_CCID_DESCRIPTOR_FEATURES_BM_AUTO_CONFIG_BASED-_ON_ATR** (0x00000002U)
- #define **USB_DEVICE_CCID_DESCRIPTOR_FEATURES_BM_AUTO_ACTIVE_ON_IN-SERTING** (0x00000004U)
- #define **USB_DEVICE_CCID_DESCRIPTOR_FEATURES_BM_AUTO_VOLTAGE_SEL-ECTION** (0x00000008U)
- #define **USB_DEVICE_CCID_DESCRIPTOR_FEATURES_BM_AUTO_FREQUENCY_C-HANGE** (0x00000010U)
- #define **USB_DEVICE_CCID_DESCRIPTOR_FEATURES_BM_AUTO_BAUD_RATE_C-HANGE** (0x00000020U)
- #define **USB_DEVICE_CCID_DESCRIPTOR_FEATURES_BM_AUTO_NEGOTIATIO-N** (0x00000040U)
- #define **USB_DEVICE_CCID_DESCRIPTOR_FEATURES_BM_AUTO_PPS** (0x00000080-U)
- #define **USB_DEVICE_CCID_DESCRIPTOR_FEATURES_BM_CAN_SET_IN_STOP_M-ODE** (0x00000100U)
- #define **USB_DEVICE_CCID_DESCRIPTOR_FEATURES_BM_NAD_VLAUE** (0x00000200-U)
- #define **USB_DEVICE_CCID_DESCRIPTOR_FEATURES_BM_AUTO_IFSD_EXCHANG-E_AS_FIRST** (0x00000400U)
- #define **USB_DEVICE_CCID_DESCRIPTOR_FEATURES_BM_TPDU_LEVEL_EXCHA-**

NGES (0x00010000U)
- #define **USB_DEVICE_CCID_DESCRIPTOR_FEATURES_BM_SHORT_APDU_LEVEL_-EXCHANGES** (0x00020000U)
- #define **USB_DEVICE_CCID_DESCRIPTOR_FEATURES_BM_SHORT_EXTENDED_A-PDU_LEVEL_EXCHANGES** (0x00040000U)
- #define **USB_DEVICE_CCID_DESCRIPTOR_FEATURES_BM_SUPPORT_SUPPEN-D** (0x00100000U)
- #define **USB_DEVICE_CCID_DESCRIPTOR_PIN_SUPPORT_BM_NO** (0x00U)
- #define **USB_DEVICE_CCID_DESCRIPTOR_PIN_SUPPORT_BM_VERIFICATION_SU-PPORTED** (0x01U)
- #define **USB_DEVICE_CCID_DESCRIPTOR_PIN_SUPPORT_BM_MODIFICATION_SU-PPORTED** (0x02U)

USB device CCID class APIs

- usb_status_t USB_DeviceCcidNotifySlotChange (class_handle_t handle, uint8_t slot, usb_device_-ccid_slot_state_t state)
  Notifies the slot status changed.
- usb_status_t USB_DeviceCcidNotifyHardwareError (class_handle_t handle, uint8_t slot, usb_-device_ccid_hardware_error_t errorCode)
  Notifies the slot status changed.

3.10.2 Data Structure Documentation

3.10.2.1 struct _usb_device_ccid_common_command

Data Fields

- uint8_t bMessageType
  The message type.
- uint32_t dwLength
  Message-specific data length.
- uint8_t bSlot
  Identifies the slot number for this command.
- uint8_t bSeq
  Sequence number for command.
- uint8_t bParameter1
  Parameter1 of the message, message-specific.
- uint8_t bParameter2
  Parameter2 of the message, message-specific.
- uint8_t bParameter3
  Parameter3 of the message, message-specific.

3.10.2.2 struct _usb_device_ccid_power_on_command

A PC_to_RDR_IccPowerOn message to an inactive slot returns an Answer-To-Reset (ATR) data.

The response to this command message is the RDR_to_PC_DataBlock response message and the data returned is the Answer To Reset (ATR) data.

Data Fields

- uint8_t bMessageType
  The message type.
- uint32_t dwLength
  Message-specific data length.
- uint8_t bSlot
  Identifies the slot number for this command.
- uint8_t bSeq
  Sequence number for command.
- uint8_t bPowerSelect
  Voltage that is applied to the ICC.
- uint8_t bRFU [2]
  Reserved for Future Use.

3.10.2.3 struct _usb_device_ccid_power_off_command

The response to this command message is the RDR_to_PC_SlotStatus response message.

Data Fields

- uint8_t bMessageType
  The message type.
- uint32_t dwLength
  Message-specific data length.
- uint8_t bSlot
  Identifies the slot number for this command.
- uint8_t bSeq
  Sequence number for command.
- uint8_t bRFU [3]
  Reserved for Future Use.

3.10.2.4 struct _usb_device_ccid_get_slot_status_command

The response to this command message is the RDR_to_PC_SlotStatus response message.

Data Fields

- uint8_t bMessageType
  The message type.
- uint32_t dwLength
  Message-specific data length.
- uint8_t bSlot

Identifies the slot number for this command.
- uint8_t bSeq
    Sequence number for command.
- uint8_t bRFU [3]
    Reserved for Future Use.

3.10.2.5 struct _usb_device_ccid_transfer_block_command

The block should never exceed the dwMaxCCIDMessageLength-10 in the Class Descriptor. Parameter bBWI is only used by CCIDs which use the character level and TPDU level of exchange (as reported in the dwFeatures parameter in the CCID Functional Descriptor) and only for protocol T=1 transfers.

The response to this command message is the RDR_to_PC_DataBlock response message.

Note

For reference, the absolute maximum block size for a TPDU T=0 block is 260U bytes (5U bytes command; 255U bytes data), or for a TPDU T=1 block is 259U bytes, or for a short APDU T=1 block is 261U bytes, or for an extended APDU T=1 block is 65544U bytes.

Data Fields

- uint8_t bMessageType
    The message type.
- uint32_t dwLength
    Size of abData field of this message.
- uint8_t bSlot
    Identifies the slot number for this command.
- uint8_t bSeq
    Sequence number for command.
- uint8_t bBWI
    Used to extend the CCIDs Block Waiting Timeout for this current transfer.
- uint16_t wLevelParameter
    Use changes depending on the exchange level reported by the class descriptor in dwFeatures field.
- uint8_t abData [1]
    Data block sent to the CCID.

3.10.2.6 struct _usb_device_ccid_get_parameters_command

The response to this command message is the RDR_to_PC_Parameters response message.

Data Fields

- uint8_t bMessageType
    The message type.
- uint32_t dwLength
    Message-specific data length.

- uint8_t bSlot
    Identifies the slot number for this command.
- uint8_t bSeq
    Sequence number for command.
- uint8_t bRFU [3]
    Reserved for Future use.

3.10.2.7 struct _usb_device_ccid_reset_parameters_command

This command resets the slot parameters to their default values.

The response to this command message is the RDR_to_PC_Parameters response message.

Data Fields

- uint8_t bMessageType
    The message type.
- uint32_t dwLength
    Message-specific data length.
- uint8_t bSlot
    Identifies the slot number for this command.
- uint8_t bSeq
    Sequence number for command.
- uint8_t bRFU [3]
    Reserved for Future Use.

3.10.2.8 struct _usb_device_ccid_set_parameters_command

This command is used to change the parameters for a given slot. A CCID which has no automatic features (dwFeatures=0, 100h, 200h, or 300h) depends on the driver to send this command to set the protocol and other parameters to the right values necessary to correctly talk to the ICC located in the selected slot. A CCID which has automatic features automatically sets the protocol and certain parameters based on data received from the ICC (ATR, PPS, IFSD, or proprietary algorithms). The level of automatism and design requirements determines which parameters the CCID allow the driver to change. If this command tries to change a parameter which is not changeable, then the CCID does not change any parameters and the RDR_to_PC_GetParameters response returns a Command Failed status and the bError field contains the offset of the "offending" parameter.

The response to this command message is the RDR_to_PC_Parameters response message.

Data Fields

- uint8_t bMessageType
    The message type.
- uint32_t dwLength
    Size of abProtocolDataStructure field of this message.
- uint8_t bSlot

Identifies the slot number for this command.
- uint8_t bSeq
  Sequence number for command.
- uint8_t bProtocolNum
  Specifies what protocol data structure follows.
- uint8_t bRFU [2]
  Reserved for Future Use.
- uint8_t abProtocolDataStructure [1]
  Protocol Data Structure.

3.10.2.8.0.6   Field Documentation

3.10.2.8.0.6.1   uint8_t usb_device_ccid_set_parameters_command_t::bProtocolNum

00h = Structure for protocol T=0, 01h = Structure for protocol T=1

3.10.2.8.0.6.2   uint8_t usb_device_ccid_set_parameters_command_t::abProtocolDataStructure[1]

For T = 0U, see usb_device_ccid_set_parameters_t0_command_t, for T = 1U, see usb_device_ccid_set_-parameters_t1_command_t.

3.10.2.9   struct _usb_device_ccid_set_parameters_t0_command

Protocol Data Structure for Protocol T=0 (bProtocolNum=0) (dwLength=00000005h).

The response to this command message is the RDR_to_PC_Parameters response message.

Data Fields

- uint8_t bMessageType
  The message type.
- uint32_t dwLength
  (dwLength = 0x05U)
- uint8_t bSlot
  Identifies the slot number for this command.
- uint8_t bSeq
  Sequence number for command.
- uint8_t bProtocolNum
  Structure for protocol T=0.
- uint8_t bRFU [2]
  Reserved for Future Use.
- uint8_t bmFindexDindex
  Bit7~4 - Fi, Bit3~0 - Di.
- uint8_t bmTCCKST0
  Bit1 - Convention used(0U for direct, 1U for inverse), other bits is 0.
- uint8_t bGuardTimeT0
  Extra guard time between two characters.
- uint8_t bWaitingIntegerT0
  WI for T= 0U used to define WWT.

- uint8_t bClockStop

  ICC Clock Stop Support.

3.10.2.9.0.7 Field Documentation

3.10.2.9.0.7.1 uint8_t usb_device_ccid_set_parameters_t0_command_t::bmFindexDindex

3.10.2.9.0.7.2 uint8_t usb_device_ccid_set_parameters_t0_command_t::bGuardTimeT0

3.10.2.10 struct _usb_device_ccid_set_parameters_t1_command

Protocol Data Structure for Protocol T=1 (bProtocolNum=1) (dwLength=00000007h)

The response to this command message is the RDR_to_PC_Parameters response message.

Data Fields

- uint8_t bMessageType

  The message type.
- uint32_t dwLength

  (dwLength = 0x07U)
- uint8_t bSlot

  Identifies the slot number for this command.
- uint8_t bSeq

  Sequence number for command.
- uint8_t bProtocolNum

  Structure for protocol T=1.
- uint8_t bRFU [2]

  Reserved for Future Use.
- uint8_t bmFindexDindex

  Bit7∼4 - Fi, Bit3∼0 - Di.
- uint8_t bmTCCKST1

  Bit0 - Checksum type(0U for LRC, 1U for CRC).
- uint8_t bGuardTimeT1

  Extra guard time.
- uint8_t bmWaitingIntegersT1

  Bit7∼4 - BWI(0∼9 valid), Bit3∼0 - CWI(0∼0xF valid)
- uint8_t bClockStop

  ICC Clock Stop Support.
- uint8_t bIFSC

  Size of negotiated IFSC.
- uint8_t bNadValue

  Value = 0x00U if CCID doesn't support a value other then the default value.

3.10.2.10.0.8 Field Documentation

3.10.2.10.0.8.1 uint8_t usb_device_ccid_set_parameters_t1_command_t::bmFindexDindex

3.10.2.10.0.8.2 uint8_t usb_device_ccid_set_parameters_t1_command_t::bmTCCKST1

Bit1 - Convention used(0U for direct, 1U for inverse), Bit7~2 - 0b000100

3.10.2.10.0.8.3 uint8_t usb_device_ccid_set_parameters_t1_command_t::bGuardTimeT1

3.10.2.10.0.8.4 uint8_t usb_device_ccid_set_parameters_t1_command_t::bNadValue

Else value respects ISO/IEC 7816-3, 9.4.2.1

3.10.2.11 union usb_device_ccid_set_parameters_command_common_t

Data Fields

- usb_device_ccid_set_parameters_command_t common
    Set ICC parameter common structure.
- usb_device_ccid_set_parameters_t0_command_t t0
    Set ICC parameter structure for T0.
- usb_device_ccid_set_parameters_t1_command_t t1
    Set ICC parameter structure for T1.

3.10.2.12 struct _usb_device_ccid_escape_command

This command allows the CCID manufacturer to define and access extended features. Information sent via this command is processed by the CCID control logic.

The response to this command message is the RDR_to_PC_Escape response message.

Data Fields

- uint8_t bMessageType
    The message type.
- uint32_t dwLength
    Message-specific data length.
- uint8_t bSlot
    Identifies the slot number for this command.
- uint8_t bSeq
    Sequence number for command.
- uint8_t bRFU [3]
    Reserved for future use.
- uint8_t abData [1]
    Size of abData field of this message.

3.10.2.13   struct _usb_device_ccid_clock_command

This command stops or restarts the clock.

The response to this command message is the RDR_to_PC_SlotStatus response message.

Data Fields

- uint8_t bMessageType
    The message type.
- uint32_t dwLength
    Message-specific data length.
- uint8_t bSlot
    Identifies the slot number for this command.
- uint8_t bSeq
    Sequence number for command.
- uint8_t bClockCommand
    0x00U - Restart clock, 0x01U - Stop clock in the state shown in the bClockStop field of the PC_to_RDR_-SetParameters command and RDR_to_PC_Parameters message.
- uint8_t bRFU [2]
    Reserved for future use.

3.10.2.13.0.9   Field Documentation

3.10.2.13.0.9.1   uint8_t usb_device_ccid_clock_command_t::bClockCommand

3.10.2.14   struct _usb_device_ccid_t0_apdu_command

This command changes the parameters used to perform the transportation of APDU messages by the T=0 protocol. It effects the CLA (class) byte used when issuing a Get Response command or a Envelope command to the ICC.

This command is slot-specific. It only effects the slot specified in the bSlot field. Slots, when not powered, do not change back to using the default behaviour defined in the CCID class descriptor. Any newly inserted ICC has the default behaviour until this command is issued for its slot.

The response to this command message is the RDR_to_PC_SlotStatus response message.

Data Fields

- uint8_t bMessageType
    The message type.
- uint32_t dwLength
    Message-specific data length.
- uint8_t bSlot
    Identifies the slot number for this command.
- uint8_t bSeq
    Sequence number for command.
- uint8_t bmChanges
    The value is bitwise OR operation.

- uint8_t bClassGetResponse

    Value to force the class byte of the header in a get response command.
- uint8_t bClassEnvelope

    Value to force the class byte of the header in a envelope command.

3.10.2.14.0.10   Field Documentation

3.10.2.14.0.10.1   uint8_t usb_device_ccid_t0_apdu_command_t::bmChanges

Bit 0U is associated with field bClassGetResponse Bit 1U is associated with field bClassEnvelope Other bits are RFU.

3.10.2.15   struct _usb_device_ccid_secure_command

This is a command message to allow entering the PIN for verification or modification.

The response to this command message is the RDR_to_PC_DataBlock response message.

Data Fields

- uint8_t bMessageType

    The message type.
- uint32_t dwLength

    Size of abData field of this message.
- uint8_t bSlot

    Identifies the slot number for this command.
- uint8_t bSeq

    Sequence number for command.
- uint8_t bBWI

    Used to extend the CCIDs Block Waiting Timeout for this current transfer.
- uint16_t wLevelParameter

    Use changes depending on the exchange level reported by CCID in the functional descriptor.
- uint8_t abData [1]

    The value depends of wLevelParameters.

3.10.2.15.0.11   Field Documentation

3.10.2.15.0.11.1   uint8_t usb_device_ccid_secure_command_t::abData[1]

When wLevelParameters is 0000h or 0001h abData = abPINOperationDataStructure. For other values of wLevelParameters this field is the continuation of the previously sent PC_to_RDR_Secure.

3.10.2.16   struct _usb_device_ccid_secure_pin_operation_command

This is a command message to allow entering the PIN for verification or modification.

The response to this command message is the RDR_to_PC_DataBlock response message.

Data Fields

- uint8_t bMessageType

  The message type.
- uint32_t dwLength

  1U + Size of abPINDataStructure field of this message
- uint8_t bSlot

  Identifies the slot number for this command.
- uint8_t bSeq

  Sequence number for command.
- uint8_t bBWI

  Used to extend the CCIDs Block Waiting Timeout for this current transfer.
- uint16_t wLevelParameter

  Use changes depending on the exchange level reported by CCID in the functional descriptor.
- uint8_t bPINOperation

  Used to indicate the PIN operation: 00h: PIN Verification 01h: PIN Modification 02h: Transfer PIN from secure CCID buffer 03h: Wait ICC response 04h: Cancel PIN function 05h: Re-send last I-Block, valid only if T = 1.

3.10.2.16.0.12 Field Documentation

3.10.2.16.0.12.1 uint8_t usb_device_ccid_secure_pin_operation_command_t::bPINOperation

06h: Send next part of APDU, valid only T = 1.

3.10.2.17 struct _usb_device_ccid_seucre_pin_verification_command

This is a command message to allow entering the PIN for verification.

The response to this command message is the RDR_to_PC_DataBlock response message.

Data Fields

- uint8_t bMessageType

  The message type.
- uint32_t dwLength

  12U + Size of abPINApdu field of this message
- uint8_t bSlot

  Identifies the slot number for this command.
- uint8_t bSeq

  Sequence number for command.
- uint8_t bBWI

  Used to extend the CCIDs Block Waiting Timeout for this current transfer.
- uint16_t wLevelParameter

  Use changes depending on the exchange level reported by CCID in the functional descriptor.
- uint8_t bPINOperation

  Used to indicate the PIN operation: 00h: PIN Verification 01h: PIN Modification 02h: Transfer PIN from secure CCID buffer 03h: Wait ICC response 04h: Cancel PIN function 05h: Re-send last I-Block, valid only if T = 1.

- uint8_t bTimeOut

    Number of seconds.
- uint8_t bmFormatString

    Several parameters for the PIN format options.
- uint8_t bmPINBlockString

    Defines the length in bytes of the PIN block to present in the APDU command.
- uint8_t bmPINLengthFormat

    Allows the insertion of the PIN length in the APDU command.
- uint16_t wPINMaxExtraDigit

    Bit15∼8 - Minimum PIN size in digit, Bit7∼0 - Maximum PIN size in digit.
- uint8_t bEntryValidationCondition

    The value is a bit wise OR operation.
- uint8_t bNumberMessage

    Number of messages to display for the PIN Verification management.
- uint16_t wLangId

    Language used to display the messages.
- uint8_t bMsgIndex

    Message index in the Reader CCID message table (should be 00h).
- uint8_t bTeoPrologue

    T=1 I-block prologue field to use.
- uint8_t abPINApdu [1]

    APDU to send to the ICC.

3.10.2.17.0.13 Field Documentation

3.10.2.17.0.13.1 uint8_t usb_device_ccid_seucre_pin_verification_command_t::bPINOperation

06h: Send next part of APDU, valid only T = 1.

3.10.2.17.0.13.2 uint8_t usb_device_ccid_seucre_pin_verification_command_t::bEntryValidation-Condition

01h - Maximum size reached, 02h - Validation key pressed, 04h - Timeout occurred

3.10.2.17.0.13.3 uint8_t usb_device_ccid_seucre_pin_verification_command_t::bNumber-Message

3.10.2.17.0.13.4 uint16_t usb_device_ccid_seucre_pin_verification_command_t::wLangId

3.10.2.17.0.13.5 uint8_t usb_device_ccid_seucre_pin_verification_command_t::bMsgIndex

3.10.2.17.0.13.6 uint8_t usb_device_ccid_seucre_pin_verification_command_t::bTeoPrologue

3.10.2.18 struct _usb_device_ccid_secure_pin_modification_command

This is a command message to allow entering the PIN for modification.

The response to this command message is the RDR_to_PC_DataBlock response message.

Data Fields

- uint8_t bMessageType

  The message type.
- uint32_t dwLength

  20U + Size of abPINApdu field of this message
- uint8_t bSlot

  Identifies the slot number for this command.
- uint8_t bSeq

  Sequence number for command.
- uint8_t bBWI

  Used to extend the CCIDs Block Waiting Timeout for this current transfer.
- uint16_t wLevelParameter

  Use changes depending on the exchange level reported by CCID in the functional descriptor.
- uint8_t bPINOperation

  Used to indicate the PIN operation: 00h: PIN Verification 01h: PIN Modification 02h: Transfer PIN from secure CCID buffer 03h: Wait ICC response 04h: Cancel PIN function 05h: Re-send last I-Block, valid only if T = 1.
- uint8_t bTimeOut

  Number of seconds.
- uint8_t bmFormatString

  Several parameters for the PIN format options.
- uint8_t bmPINBlockString

  Define the length of the PIN to present in the APDU command.
- uint8_t bmPINLengthFormat

  Allows the length PIN insertion in the APDU command.
- uint8_t bInsertionOffsetOld

  Insertion position offset in byte for the current PIN.
- uint8_t bInsertionOffsetNew

  Insertion position offset in byte for the new PIN.
- uint16_t wPINMaxExtraDigit

  Bit15∼8 - Minimum PIN size in digit, Bit7∼0 - Maximum PIN size in digit.
- uint8_t bConfirmPIN

  Indicates if a confirmation is requested before acceptance of a new PIN.
- uint8_t bEntryValidationCondition

  The value is a bit wise OR operation.
- uint8_t bNumberMessage

  Number of messages to display for the PIN Verification management.
- uint16_t wLangId

  Language used to display the messages.
- uint8_t bMsgIndex1

  Message index in the Reader message table(should be 00h or 01h).
- uint8_t bMsgIndex2

  Message index in the Reader message table(should be 01h or 02h).
- uint8_t bMsgIndex3

  Message index in the Reader message table(should be 02h).
- uint8_t bTeoPrologue [3]

  T=1 I-block prologue field to use.
- uint8_t abPINApdu [1]

  APDU to send to the ICC.

3.10.2.18.0.14 Field Documentation

3.10.2.18.0.14.1 uint8_t usb_device_ccid_secure_pin_modification_command_t::bPINOperation

06h: Send next part of APDU, valid only T = 1.

3.10.2.18.0.14.2 uint8_t usb_device_ccid_secure_pin_modification_command_t::bEntry-ValidationCondition

01h - Maximum size reached, 02h - Validation key pressed, 04h - Timeout occurred

3.10.2.18.0.14.3 uint8_t usb_device_ccid_secure_pin_modification_command_t::bNumber-Message

3.10.2.18.0.14.4 uint16_t usb_device_ccid_secure_pin_modification_command_t::wLangId

3.10.2.18.0.14.5 uint8_t usb_device_ccid_secure_pin_modification_command_t::bMsgIndex1

3.10.2.18.0.14.6 uint8_t usb_device_ccid_secure_pin_modification_command_t::bMsgIndex2

3.10.2.18.0.14.7 uint8_t usb_device_ccid_secure_pin_modification_command_t::bMsgIndex3

3.10.2.18.0.14.8 uint8_t usb_device_ccid_secure_pin_modification_command_t::bTeoPrologue[3]

3.10.2.19 struct _usb_device_ccid_mechanical_command

This command is used to manage motorized type CCID functionality.

The response to this command message is the RDR_to_PC_SlotStatus response message.

Data Fields

- uint8_t bMessageType
    - *The message type.*
- uint32_t dwLength
    - *Message-specific data length.*
- uint8_t bSlot
    - *Identifies the slot number for this command.*
- uint8_t bSeq
    - *Sequence number for command.*
- uint8_t bFunction
    - *This value corresponds to the mechanical function being requested.*
- uint8_t bRFU [2]
    - *Reserved for Future Use.*

3.10.2.20 struct _usb_device_ccid_abort_command

This command is used with the control pipe abort request to tell the CCID to stop any current transfer at the specified slot and return to a state where the slot is ready to accept a new command pipe Bulk-OUT

message.

The response to this command message is the RDR_to_PC_SlotStatus response message.

Data Fields

- uint8_t bMessageType

  The message type.
- uint32_t dwLength

  Message-specific data length.
- uint8_t bSlot

  Identifies the slot number for this command.
- uint8_t bSeq

  Sequence number for command.
- uint8_t bRFU [3]

  Reserved for future use.

3.10.2.21   struct _usb_device_ccid_set_data_rate_and_clock_frequency_command

This command is used to manually set the data rate and clock frequency of a specific slot.

The response to this command message is the RDR_to_PC_SlotStatus response message.

Data Fields

- uint8_t bMessageType

  The message type.
- uint32_t dwLength

  Message-specific data length(8U bytes)
- uint8_t bSlot

  Identifies the slot number for this command.
- uint8_t bSeq

  Sequence number for command.
- uint8_t bRFU [3]

  Reserved for Future Use.
- uint32_t dwClockFrequency

  ICC clock frequency in kHz.
- uint32_t dwDataRate

  ICC data rate in BPD.

3.10.2.21.0.15   Field Documentation

3.10.2.21.0.15.1   uint32_t usb_device_ccid_set_data_rate_and_clock_frequency_command_t::dw-ClockFrequency

This is an integer value

3.10.2.22   struct _usb_device_ccid_common_response

Data Fields

- uint8_t bMessageType
    The message type.
- uint32_t dwLength
    Message-specific data length.
- uint8_t bSlot
    Identifies the slot number for this command.
- uint8_t bSeq
    Sequence number for the corresponding command.
- uint8_t bStatus
    Slot status register.
- uint8_t bError
    Slot error register.
- uint8_t bParameter1
    Parameter1 of the message, message-specific.

3.10.2.23   struct _usb_device_ccid_data_block_response

The device in response to the following command messages: "PC_to_RDR_IccPowerOn", "PC_to_RDR-_Secure" and "PC_to_RDR_XfrBlock" sends this response message. For "PC_to_RDR_IccPowerOn" this response message is the answer to reset (ATR) data associated with the ICC power on. In other use cases, the response message has the following format: the response data contains the optional data returned by the ICC, followed by the 2U byte-size status words SW1-SW2.

Data Fields

- uint8_t bMessageType
    The message type.
- uint32_t dwLength
    Message-specific data length.
- uint8_t bSlot
    Identifies the slot number for this command.
- uint8_t bSeq
    Sequence number for the corresponding command.
- uint8_t bStatus
    Slot status register.
- uint8_t bError
    Slot error register.
- uint8_t bChainParameter
    Use changes depending on the exchange level reported by the class descriptor in dwFeatures field.
- uint8_t abData [1]
    This field contains the data returned by the CCID.

3.10.2.23.0.16   Field Documentation

3.10.2.23.0.16.1   uint8_t usb_device_ccid_data_block_response_t::abData[1]

3.10.2.24   struct _usb_device_ccid_slot_status_response

The device in response to the following command messages: "PC_to_RDR_IccPowerOff", "PC_to_R-
DR_GetSlotStatus", "PC_to_RDR_IccClock", "PC_to_RDR_T0APDU" and, "PC_to_RDR_Mechanical"
sends this response message. Also, the device sends this response message when it has completed aborting
a slot after receiving both the Class Specific ABORT request and PC_to_RDR_Abort command message.

Data Fields

- uint8_t bMessageType
    The message type.
- uint32_t dwLength
    Message-specific data length.
- uint8_t bSlot
    Identifies the slot number for this command.
- uint8_t bSeq
    Sequence number for the corresponding command.
- uint8_t bStatus
    Slot status register.
- uint8_t bError
    Slot error register.
- uint8_t bClockStatus
    0x00U - Clock running, 0x01U - Clock stopped in L, 0x02U - clock stopped in H, and 0x03U

3.10.2.24.0.17   Field Documentation

3.10.2.24.0.17.1   uint8_t usb_device_ccid_slot_status_response_t::bClockStatus

- clock stopped in an unknown state.

3.10.2.25   struct _usb_device_ccid_parameters_response

The device in response to the following command messages: "PC_to_RDR_GetParameters", "PC_to_R-
DR_ResetParameters", and, "PC_to_RDR_SetParameters" sends this response message.

Data Fields

- uint8_t bMessageType
    The message type.
- uint32_t dwLength
    Size of abProtocolDataStructure field of this message.
- uint8_t bSlot
    Identifies the slot number for this command.

- uint8_t bSeq

    Sequence number for the corresponding command.
- uint8_t bStatus

    Slot status register.
- uint8_t bError

    Slot error register.
- uint8_t bProtocolNum

    0x00U = Structure for protocol T=0, 0x01U = Structure for protocol T=1
- uint8_t abProtocolDataStructure [1]

    Protocol Data Structure.

3.10.2.26 struct _usb_device_ccid_parameters_T0_response

The device in response to the following command messages: "PC_to_RDR_GetParameters", "PC_to_R-DR_ResetParameters", and, "PC_to_RDR_SetParameters" sends this response message.

Data Fields

- uint8_t bMessageType

    The message type.
- uint32_t dwLength

    The value is 0x05U.
- uint8_t bSlot

    Identifies the slot number for this command.
- uint8_t bSeq

    Sequence number for the corresponding command.
- uint8_t bStatus

    Slot status register.
- uint8_t bError

    Slot error register.
- uint8_t bProtocolNum

    0x00U = Structure for protocol T=0
- uint8_t bmFindexDindex

    Bit7∼4 - Fi, Bit3∼0 - Di.
- uint8_t bmTCCKST0

    Bit1 - Convention used(0U for direct, 1U for inverse), other bits is 0.
- uint8_t bGuardTimeT0

    Extra guard time between two characters.
- uint8_t bWaitingIntegerT0

    WI for T= 0U used to define WWT.
- uint8_t bClockStop

    ICC Clock Stop Support.

3.10.2.26.0.18 Field Documentation

3.10.2.26.0.18.1 uint8_t usb_device_ccid_parameters_T0_response_t::bmFindexDindex

3.10.2.26.0.18.2 uint8_t usb_device_ccid_parameters_T0_response_t::bGuardTimeT0

3.10.2.27 struct _usb_device_ccid_parameters_T1_response

The device in response to the following command messages: "PC_to_RDR_GetParameters", "PC_to_R-DR_ResetParameters", and, "PC_to_RDR_SetParameters" sends this response message.

Data Fields

- uint8_t bMessageType
    The message type.
- uint32_t dwLength
    The value is 0x07U.
- uint8_t bSlot
    Identifies the slot number for this command.
- uint8_t bSeq
    Sequence number for the corresponding command.
- uint8_t bStatus
    Slot status register.
- uint8_t bError
    Slot error register.
- uint8_t bProtocolNum
    0x00U = Structure for protocol T=1
- uint8_t bmFindexDindex
    Bit7∼4 - Fi, Bit3∼0 - Di.
- uint8_t bmTCCKST1
    Bit0 - Checksum type(0U for LRC, 1U for CRC).
- uint8_t bGuardTimeT1
    Extra guard time.
- uint8_t bmWaitingIntegersT1
    Bit7∼4 - BWI(0∼9 valid), Bit3∼0 - CWI(0∼0xF valid)
- uint8_t bClockStop
    ICC Clock Stop Support.
- uint8_t bIFSC
    Size of negotiated IFSC.
- uint8_t bNadValue
    Value = 0x00U if CCID doesn't support a value other then the default value.

3.10.2.27.0.19 Field Documentation

3.10.2.27.0.19.1 uint8_t usb_device_ccid_parameters_T1_response_t::bmFindexDindex

3.10.2.27.0.19.2 uint8_t usb_device_ccid_parameters_T1_response_t::bmTCCKST1

Bit1 - Convention used(0U for direct, 1U for inverse), Bit7∼2 - 0b000100

3.10.2.27.0.19.3   uint8_t usb_device_ccid_parameters_T1_response_t::bGuardTimeT1

3.10.2.27.0.19.4   uint8_t usb_device_ccid_parameters_T1_response_t::bNadValue

Else value respects ISO/IEC 7816-3, 9.4.2.1

3.10.2.28   union usb_device_ccid_parameters_response_common_t

Data Fields

- usb_device_ccid_parameters_response_t common
  Response ICC parameter common structure.
- usb_device_ccid_parameters_T0_response_t t0
  Response ICC parameter structure for T0.
- usb_device_ccid_parameters_T1_response_t t1
  Response ICC parameter structure for T1.

3.10.2.29   struct _usb_device_ccid_escape_response

The device in response to the following command messages: "PC_to_RDR_Escape" sends this response message.

Data Fields

- uint8_t bMessageType
  The message type.
- uint32_t dwLength
  Size of abData field of this message.
- uint8_t bSlot
  Identifies the slot number for this command.
- uint8_t bSeq
  Sequence number for the corresponding command.
- uint8_t bStatus
  Slot status register.
- uint8_t bError
  Slot error register.
- uint8_t bRFU
  Reserved for Future Use.
- uint8_t abData [1]
  Data sent from CCID.

3.10.2.30   struct _usb_device_ccid_data_rate_and_clock_frequency_response

The device in response to the following command messages: "PC_to_RDR_SetDataRateAndClock-Frequency" sends this response message.

Data Fields

- uint8_t bMessageType

  The message type.
- uint32_t dwLength

  Message-specific data length.
- uint8_t bSlot

  Identifies the slot number for this command.
- uint8_t bSeq

  Sequence number for the corresponding command.
- uint8_t bStatus

  Slot status register.
- uint8_t bError

  Slot error register.
- uint8_t bRFU

  Reserved for Future Use.
- uint32_t dwClockFrequency

  Current setting of the ICC clock frequency in KHz.
- uint32_t dwDataRate

  Current setting of the ICC data rate in bps.

3.10.2.30.0.20 Field Documentation

3.10.2.30.0.20.1 uint32_t usb_device_ccid_data_rate_and_clock_frequency_response_t::dw-ClockFrequency

This is an integer value

3.10.2.30.0.20.2 uint32_t usb_device_ccid_data_rate_and_clock_frequency_response_t::dwData-Rate

This is an integer value

3.10.2.31 struct _usb_device_ccid_notify_slot_chnage_notification

Data Fields

- uint8_t bMessageType

  The message type.
- uint8_t bmSlotICCState [1]

  This field is reported on byte granularity.

3.10.2.31.0.21 Field Documentation

3.10.2.31.0.21.1 uint8_t usb_device_ccid_notify_slot_chnage_notification_t::bmSlotICCState[1]

3.10.2.32 struct _usb_device_ccid_hardware_error_notification

Data Fields

- uint8_t bMessageType
  The message type.
- uint8_t bSlot
  Identifies the slot number for this command.
- uint8_t bSeq
  Sequence number of bulk out command when the hardware error occurred.
- uint8_t bHardwareErrorCode
  0x01U - Over current.

3.10.2.32.0.22 Field Documentation

3.10.2.32.0.22.1 uint8_t usb_device_ccid_hardware_error_notification_t::bHardwareErrorCode

3.10.2.33 struct usb_device_ccid_transfer_struct_t

Data Fields

- struct
  _usb_device_ccid_transfer_struct ∗ next
  Next transfer pointer.
- uint8_t ∗ buffer
  The transfer buffer address need to be sent.
- uint32_t length
  The transfer length.
- usb_device_ccid_slot_status_response_t response
  Response buffer is used when dwLength = 0.

3.10.2.33.0.23 Field Documentation

**3.10.2.33.0.23.1 usb_device_ccid_slot_status_response_t usb_device_ccid_transfer_struct_t-
::response**

3.10.2.34 struct usb_device_ccid_control_request_struct_t

Data Fields

- uint8_t ∗ buffer
  The buffer address.
- uint32_t length
  The data length.

3.10.2.35 struct usb_device_ccid_notification_struct_t

Data Fields

- uint8_t ∗ buffer
    The transferred buffer address.
- uint32_t length
    The transferred data length.

3.10.2.36 struct usb_device_ccid_command_struct_t

Data Fields

- uint8_t ∗ commandBuffer
    The buffer address kept the command from host.
- uint32_t commandLength
    The command length from host.
- uint8_t ∗ responseBuffer
    The response data need to be sent to host.
- uint32_t responseLength
    The response data length.

3.10.2.37 struct usb_device_ccid_slot_status_struct_t

Data Fields

- uint8_t slot
    The slot number need to get.
- uint8_t present
    Is present or not.
- uint8_t clockStatus
    The clock status.

3.10.2.38 struct usb_device_ccid_struct_t

Data Fields

- usb_device_handle handle
    The device handle.
- usb_device_class_config_struct_t ∗ configStruct
    The configuration of the class.
- usb_device_interface_struct_t ∗ interfaceHandle
    Current interface handle.
- usb_device_ccid_transfer_struct_t ∗ transferHead
    Transfer queue for busy.
- usb_device_ccid_transfer_struct_t ∗ transferFree
    Transfer queue for idle.

- uint8_t commandBuffer [USB_DEVICE_CCID_BUFFER_4BYTE_ALIGN(USB_DEVICE_CO-NFIG_CCID_MAX_MESSAGE_LENGTH)]

  Command buffer for getting command data from host.
- usb_device_ccid_transfer_struct_t transfers [USB_DEVICE_CONFIG_CCID_TRANSFER_COU-NT]

  Transfer entity.
- uint8_t slotsChangeBuffer [(USB_DEVICE_CONFIG_CCID_SLOT_MAX *2-1U)/8+1U+1U]

  The buffer for saving slot status.
- uint8_t slotsSendingChangeBuffer [(USB_DEVICE_CONFIG_CCID_SLOT_MAX *2-1U)/8+1-U+1U]

  The buffer is used to notify host the slot status changed.
- uint8_t slotsSequenceNumber [USB_DEVICE_CONFIG_CCID_SLOT_MAX]

  Save each slot sequence number.
- usb_device_ccid_hardware_error_notification_t hardwareError

  The buffer is used to notify host the hardware error happened.
- uint8_t configuration

  Current configuration.
- uint8_t interfaceNumber

  The interface number of the class.
- uint8_t alternate

  Current alternate setting of the interface.
- uint8_t endpointInterruptIn

  The endpoint number of the interrupt IN pipe.
- uint8_t endpointBulkIn

  The endpoint number of the bulk IN pipe.
- uint8_t endpointBulkOut

  The endpoint number of the bulk OUT pipe.
- uint8_t slots

  The slot number of the application.
- uint8_t bulkInBusy

  The bulk IN pipe is busy or not.
- uint8_t interruptInBusy

  The interrupt IN pipe is busy or not.
- uint8_t slotsChanged

  The slot status changed.

3.10.2.38.0.24   Field Documentation

3.10.2.38.0.24.1   usb_device_class_config_struct_t∗ usb_device_ccid_struct_t::configStruct

3.10.2.38.0.24.2   uint8_t usb_device_ccid_struct_t::bulkInBusy

3.10.2.38.0.24.3   uint8_t usb_device_ccid_struct_t::interruptInBusy

3.10.3   Macro Definition Documentation

3.10.3.1   #define USB_DEVICE_CONFIG_CCID_SLOT_MAX (1U)

3.10.3.2   #define USB_DEVICE_CONFIG_CCID_TRANSFER_COUNT (4U)

3.10.3.3   #define USB_DEVICE_CONFIG_CCID_MAX_MESSAGE_LENGTH (271U)

3.10.3.4   #define USB_DEVICE_CCID_COMMAND_HEADER_LENGTH (0x0AU)

3.10.3.5   #define USB_DEVICE_CCID_RESPONSE_HEADER_LENGTH (0x0AU)

3.10.4   Enumeration Type Documentation

3.10.4.1   enum usb_device_ccid_event_t

Enumerator

> *kUSB_DeviceCcidEventCommandReceived* Command received or cancelled in BULK OUT pipe.
> *kUSB_DeviceCcidEventResponseSent* Response sent in BULK IN pipe.
> *kUSB_DeviceCcidEventGetSlotCount* Get the slot count.
> *kUSB_DeviceCcidEventGetSlotStatus* Get the slot status, including clock status, ICC present.
> *kUSB_DeviceCcidEventCommandAbort* Command abort request received from control pipe.
> *kUSB_DeviceCcidEventGetClockFrequencies* Get the clock frequencies.
> *kUSB_DeviceCcidEventGetDataRate* Get the data rate.
> *kUSB_DeviceCcidEventSlotChangeSent* Slot changed notification send completed.
> *kUSB_DeviceCcidEventHardwareErrorSent* Hardware error notification send completed.

3.10.4.2   enum usb_device_ccid_slot_state_t

Enumerator

> *kUSB_DeviceCcidSlotStateNoPresent* Not present.
> *kUSB_DeviceCcidSlotStatePresent* Present.

3.10.4.3 enum usb_device_ccid_hardware_error_t

Enumerator

kUSB_DeviceCcidHardwareErrorOverCurrent Over current.

3.10.5 Function Documentation

3.10.5.1 usb_status_t USB_DeviceCcidInit (uint8_t *controllerId,* usb_-device_class_config_struct_t ∗ *config,* class_handle_t ∗ *handle*)

This function is used to initialize the CCID class. This function only can be called by USB_DeviceClass-Init.

Parameters

in	controllerId	The controller ID of the USB IP. See the enumeration usb_controller_-index_t.
in	config	The class configuration information.
out	handle	An out parameter used to return pointer of the video class handle to the caller.

Returns

A USB error code or kStatus_USB_Success.

3.10.5.2 usb_status_t USB_DeviceCcidDeinit (class_handle_t *handle*)

The function deinitializes the device CCID class. This function can only be called by USB_DeviceClass-Deinit.

Parameters

in	handle	The CCID class handle received from usb_device_class_config_struct-_t::classHandle.

Returns

A USB error code or kStatus_USB_Success.

3.10.5.3 usb_status_t USB_DeviceCcidEvent (void ∗ *handle,* uint32_t *event,* void ∗ *param*)

This function handles the event passed to the CCID class. This function can only be called by USB_-
DeviceClassEvent.

Parameters

in	*handle*	The CCID class handle, received from the usb_device_class_config_-struct_t::classHandle.
in	*event*	The event codes. See the enumeration usb_device_class_event_t.
in,out	*param*	The parameter type is determined by the event code.

Returns

A USB error code or kStatus_USB_Success.

Return values

kStatus_USB_Success	Free device handle successfully.
kStatus_USB_Invalid-Parameter	The device handle not be found.
kStatus_USB_Invalid-Request	The request is invalid and the control pipe is stalled by the caller.

3.10.5.4 usb_status_t USB_DeviceCcidNotifySlotChange (class_handle_t *handle,* uint8_t *slot,* usb_device_ccid_slot_state_t *state*)

The function is used to notify that the slot status changed. This is a non-blocking function. The event kUSB_DeviceCcidEventSlotChangeSent is asserted when the transfer completed.

The slot status may not be sent to the host if the interrupt IN pipe is busy. The status is saved internally and sent to the host when the interrupt IN pipe callback called. So, the event kUSB_DeviceCcidEvent-SlotChangeSent happened times does not equal to the function call times of this function.

Parameters

in	*handle*	The CCID class handle received from usb_device_class_config_struct-_t::classHandle.
in	*slot*	The changed slot number.
in	*state*	The changed slot status.

Returns

A USB error code or kStatus_USB_Success.

3.10.5.5   usb_status_t USB_DeviceCcidNotifyHardwareError (class_handle_t *handle,* uint8_t *slot,* usb_device_ccid_hardware_error_t *errorCode*)

The function is used to notify the hardware error. This is a non-blocking function. The event kUSB_-DeviceCcidEventHardwareErrorSent is asserted when the transfer completed.

If the interrupt IN pipe is busy, the function returns an error kStatus_USB_Error.

Parameters

in	*handle*	The CCID class handle received from usb_device_class_config_struct-_t::classHandle.
in	*slot*	The changed slot number.
in	*errorCode*	The hardware error code.

Returns

A USB error code or kStatus_USB_Success.

3.11 USB HID Class driver

3.11.1 Overview

Data Structures

- struct usb_device_hid_report_struct_t
    The device HID GET/SET report structure. More...
- struct usb_device_hid_struct_t
    The HID device class status structure. More...

Macros

- #define USB_DEVICE_CONFIG_HID_CLASS_CODE (0x03U)
    The class code of the HID class.
- #define USB_DEVICE_HID_REQUEST_GET_REPORT (0x01U)
    Request code to get report of HID class.
- #define USB_DEVICE_HID_REQUEST_GET_IDLE (0x02U)
    Request code to get idle of HID class.
- #define USB_DEVICE_HID_REQUEST_GET_PROTOCOL (0x03U)
    Request code to get protocol of HID class.
- #define USB_DEVICE_HID_REQUEST_SET_REPORT (0x09U)
    Request code to set report of HID class.
- #define USB_DEVICE_HID_REQUEST_SET_IDLE (0x0AU)
    Request code to set idle of HID class.
- #define USB_DEVICE_HID_REQUEST_SET_PROTOCOL (0x0BU)
    Request code to set protocol of HID class.

Enumerations

- enum usb_device_hid_event_t {
    kUSB_DeviceHidEventSendResponse = 0x01U,
    kUSB_DeviceHidEventRecvResponse,
    kUSB_DeviceHidEventGetReport,
    kUSB_DeviceHidEventGetIdle,
    kUSB_DeviceHidEventGetProtocol,
    kUSB_DeviceHidEventSetReport,
    kUSB_DeviceHidEventSetIdle,
    kUSB_DeviceHidEventSetProtocol,
    kUSB_DeviceHidEventRequestReportBuffer }
    Available common EVENT types in HID class callback.

Functions

- usb_status_t USB_DeviceHidInit (uint8_t controllerId, usb_device_class_config_struct_t *config, class_handle_t *handle)

  Initializes the HID class.

- usb_status_t USB_DeviceHidDeinit (class_handle_t handle)

  Deinitializes the device HID class.

- usb_status_t USB_DeviceHidEvent (void *handle, uint32_t event, void *param)

  Handles the event passed to the HID class.

USB device HID class APIs

- usb_status_t USB_DeviceHidSend (class_handle_t handle, uint8_t ep, uint8_t *buffer, uint32_t length)

  Sends data through a specified endpoint.

- usb_status_t USB_DeviceHidRecv (class_handle_t handle, uint8_t ep, uint8_t *buffer, uint32_t length)

  Receives data through a specified endpoint.

3.11.2 Data Structure Documentation

3.11.2.1 struct usb_device_hid_report_struct_t

This structure is used to pass data when the event type is kUSB_DeviceHidEventGetReport, kUSB_-DeviceHidEventSetReport, and kUSB_DeviceHidEventRequestReportBuffer.

1. kUSB_DeviceHidEventGetReport The structure is used to save the report buffer and report length got from the application. The reportBuffer is the report data buffer address filled by the application. The reportLength is the report length. The reportType is the requested report type. The reportId is the requested report ID.
2. kUSB_DeviceHidEventSetReport The structure is used to pass the report data received from the host to the application. The reportBuffer is buffer address of the report data received from the host. The reportLength is the report data length. The reportType is the requested report type. The reportId is the requested report ID.
3. kUSB_DeviceHidEventRequestReportBuffer The structure is used to get the buffer to save the report data sent by the host. The reportBuffer is buffer address to receive to report data. It is filled by the application. The reportLength is the requested report data buffer length. The reportType is the requested report type. The reportId is the requested report ID.

Data Fields

- uint8_t * reportBuffer

  The report buffer address.

- uint32_t reportLength

  The report data length.

- uint8_t reportType

    The report type.
- uint8_t reportId

    The report ID.

3.11.2.2 struct usb_device_hid_struct_t

Data Fields

- usb_device_handle handle

    The device handle.
- usb_device_class_config_struct_t ∗ configStruct

    The configuration of the class.
- usb_device_interface_struct_t ∗ interfaceHandle

    Current interface handle.
- uint8_t ∗ interruptInPipeDataBuffer

    IN pipe data buffer backup when stall.
- uint32_t interruptInPipeDataLen

    IN pipe data length backup when stall.
- uint8_t ∗ interruptOutPipeDataBuffer

    OUT pipe data buffer backup when stall.
- uint32_t interruptOutPipeDataLen

    OUT pipe data length backup when stall.
- uint8_t configuration

    Current configuration.
- uint8_t interfaceNumber

    The interface number of the class.
- uint8_t alternate

    Current alternate setting of the interface.
- uint8_t idleRate

    The idle rate of the HID device.
- uint8_t protocol

    Current protocol.
- uint8_t interruptInPipeBusy

    Interrupt IN pipe busy flag.
- uint8_t interruptOutPipeBusy

    Interrupt OUT pipe busy flag.
- uint8_t interruptInPipeStall

    Interrupt IN pipe stall flag.
- uint8_t interruptOutPipeStall

    Interrupt OUT pipe stall flag.

3.11.2.2.0.25   Field Documentation

3.11.2.2.0.25.1   usb_device_class_config_struct_t∗ usb_device_hid_struct_t::configStruct

3.11.3   Macro Definition Documentation

3.11.3.1   #define USB_DEVICE_HID_REQUEST_GET_REPORT (0x01U)

3.11.3.2   #define USB_DEVICE_HID_REQUEST_GET_IDLE (0x02U)

3.11.3.3   #define USB_DEVICE_HID_REQUEST_GET_PROTOCOL (0x03U)

3.11.3.4   #define USB_DEVICE_HID_REQUEST_SET_REPORT (0x09U)

3.11.3.5   #define USB_DEVICE_HID_REQUEST_SET_IDLE (0x0AU)

3.11.3.6   #define USB_DEVICE_HID_REQUEST_SET_PROTOCOL (0x0BU)

3.11.4   Enumeration Type Documentation

3.11.4.1   enum usb_device_hid_event_t

Enumerator

kUSB_DeviceHidEventSendResponse   Send data completed or cancelled etc.
kUSB_DeviceHidEventRecvResponse   Data received or cancelled etc.
kUSB_DeviceHidEventGetReport   Get report request.
kUSB_DeviceHidEventGetIdle   Get idle request.
kUSB_DeviceHidEventGetProtocol   Get protocol request.
kUSB_DeviceHidEventSetReport   Set report request.
kUSB_DeviceHidEventSetIdle   Set idle request.
kUSB_DeviceHidEventSetProtocol   Set protocol request.
kUSB_DeviceHidEventRequestReportBuffer   Get buffer to save the data of the set report request.

3.11.5   Function Documentation

**3.11.5.1   usb_status_t USB_DeviceHidInit (uint8_t *controllerId,*   usb_-
device_class_config_struct_t ∗ *config,*   class_handle_t ∗ *handle*
)**

This function is used to initialize the HID class. This function only can be called by USB_DeviceClassInit.

Parameters

in	*controllerId*	The controller ID of the USB IP. See the enumeration usb_controller_-index_t.
in	*config*	The class configuration information.
out	*handle*	An parameter used to return pointer of the HID class handle to the caller.

Returns

A USB error code or kStatus_USB_Success.

3.11.5.2 usb_status_t USB_DeviceHidDeinit (class_handle_t *handle*)

The function deinitializes the device HID class. This function only can be called by USB_DeviceClass-Deinit.

Parameters

in	*handle*	The HID class handle got from usb_device_class_config_struct_t::class-Handle.

Returns

A USB error code or kStatus_USB_Success.

3.11.5.3 usb_status_t USB_DeviceHidEvent (void ∗ *handle,* uint32_t *event,* void ∗ *param*)

This function handles the event passed to the HID class. This function only can be called by USB_Device-ClassEvent.

Parameters

in	*handle*	The HID class handle received from the usb_device_class_config_-struct_t::classHandle.

in	*event*	The event codes. See the enumeration usb_device_class_event_t.
in,out	*param*	The parameter type is determined by the event code.

Returns

A USB error code or kStatus_USB_Success.

Return values

kStatus_USB_Success	Free device handle successfully.
kStatus_USB_Invalid-Parameter	The device handle not be found.
kStatus_USB_Invalid-Request	The request is invalid, and the control pipe is stalled by the caller.

3.11.5.4   usb_status_t USB_DeviceHidSend (class_handle_t *handle,* uint8_t *ep,* uint8_t ∗ *buffer,* uint32_t *length*)

The function is used to send data through a specified endpoint. The function calls USB_DeviceSend-Request internally.

Parameters

in	*handle*	The HID class handle received from usb_device_class_config_struct_t-::classHandle.
in	*ep*	Endpoint index.
in	*buffer*	The memory address to hold the data need to be sent.
in	*length*	The data length to be sent.

Returns

A USB error code or kStatus_USB_Success.

Note

The function can only be called in the same context.
The return value indicates whether the sending request is successful or not. The transfer done is notified by usb_device_hid_interrupt_in. Currently, only one transfer request can be supported for one specific endpoint. If there is a specific requirement to support multiple transfer requests for a specific endpoint, the application should implement a queue in the application level. The subsequent transfer can begin only when the previous transfer is done (a notification is received through the endpoint callback).

3.11.5.5 usb_status_t USB_DeviceHidRecv (class_handle_t *handle,* uint8_t *ep,* uint8_t ∗ *buffer,* uint32_t *length*)

The function is used to receive data through a specified endpoint. The function calls USB_DeviceRecv-Request internally.

Parameters

in	*handle*	The HID class handle received from the usb_device_class_config_struct_t::classHandle.
in	*ep*	Endpoint index.
in	*buffer*	The memory address to save the received data.
in	*length*	The data length to be received.

Returns

A USB error code or kStatus_USB_Success.

Note

The function can only be called in the same context.

The return value indicates whether the receiving request is successful or not. The transfer done is notified by usb_device_hid_interrupt_out. Currently, only one transfer request can be supported for a specific endpoint. If there is a specific requirement to support multiple transfer requests for a specific endpoint, the application should implement a queue in the application level. The subsequent transfer can begin only when the previous transfer is done (a notification is received through the endpoint callback).

3.12   USB PHDC Class driver

3.12.1   Overview

Data Structures

- struct usb_device_phdc_pipe_t
  Definition of pipe structure. More...
- struct usb_device_phdc_struct_t
  The PHDC device class status structure. More...

Macros

- #define USB_DEVICE_CONFIG_PHDC_CLASS_CODE (0x0FU)
  The class code of the PHDC class.
- #define USB_DEVICE_PHDC_REQUEST_SET_FEATURE (0x03U)
  The PHDC class set Meta-data message preamble feature request.
- #define USB_DEVICE_PHDC_REQUEST_CLEAR_FEATURE (0x01U)
  The PHDC class clear Meta-data message preamble feature request.
- #define USB_DEVICE_PHDC_REQUEST_GET_STATUS (0x00U)
  The PHDC class get data status request.

Enumerations

- enum usb_device_phdc_event_t {
  kUSB_DevicePhdcEventInterruptInSendComplete = 0x01,
  kUSB_DevicePhdcEventBulkInSendComplete,
  kUSB_DevicePhdcEventDataReceived,
  kUSB_DevicePhdcEventSetFeature,
  kUSB_DevicePhdcEventClearFeature,
  kUSB_DevicePhdcEventGetStatus }
  Available common EVENT types in PHDC class callback.

Functions

- usb_status_t USB_DevicePhdcInit (uint8_t controllerId, usb_device_class_config_struct_t ∗config,
  class_handle_t ∗handle)
  Initializes the PHDC class.
- usb_status_t USB_DevicePhdcDeinit (class_handle_t handle)
  Deinitializes the device PHDC class.
- usb_status_t USB_DevicePhdcEvent (void ∗handle, uint32_t event, void ∗param)
  Handles the event passed to the PHDC class.

USB device PHDC class APIs

- usb_status_t USB_DevicePhdcSend (class_handle_t handle, uint8_t ep, uint8_t *buffer, uint32_t length)

  Sends data through a specified endpoint.
- usb_status_t USB_DevicePhdcRecv (class_handle_t handle, uint8_t ep, uint8_t *buffer, uint32_t length)

  Receives data through a specified endpoint.

3.12.2 Data Structure Documentation

3.12.2.1 struct usb_device_phdc_pipe_t

Data Fields

- uint8_t * pipeDataBuffer

  pipe data buffer backup when stall
- uint32_t pipeDataLen

  pipe data length backup when stall
- uint8_t pipeStall

  pipe is stall
- uint8_t ep

  The endpoint number of the pipe.
- uint8_t isBusy

  1: The pipe is transferring packet, 0: The pipe is idle.

3.12.2.1.0.26 Field Documentation

3.12.2.1.0.26.1 uint8_t usb_device_phdc_pipe_t::ep

3.12.2.1.0.26.2 uint8_t usb_device_phdc_pipe_t::isBusy

3.12.2.2 struct usb_device_phdc_struct_t

Data Fields

- usb_device_handle handle

  The device handle.
- usb_device_class_config_struct_t * configStruct

  The configuration of the class.
- usb_device_interface_struct_t * interfaceHandle

  Current interface handle.
- usb_device_phdc_pipe_t bulkIn

  The bulk in pipe for sending data.
- usb_device_phdc_pipe_t bulkOut

  The bulk out pipe for receiving data.
- usb_device_phdc_pipe_t interruptIn

  The interrupt in pipe for sending data.
- uint8_t configuration

Current configuration.
- uint8_t interfaceNumber
    The interface number of the class.
- uint8_t alternate
    Current alternate setting of the interface.

3.12.2.2.0.27   Field Documentation

3.12.2.2.0.27.1   usb_device_class_config_struct_t∗ usb_device_phdc_struct_t::configStruct

3.12.3   Enumeration Type Documentation

3.12.3.1   enum usb_device_phdc_event_t

Enumerator

kUSB_DevicePhdcEventInterruptInSendComplete   Send data completed or cancelled etc.
kUSB_DevicePhdcEventBulkInSendComplete   Send data completed or cancelled etc.
kUSB_DevicePhdcEventDataReceived   Data received or cancelled etc.
kUSB_DevicePhdcEventSetFeature   Set feature request.
kUSB_DevicePhdcEventClearFeature   Clear feature request.
kUSB_DevicePhdcEventGetStatus   Get status request.

3.12.4   Function Documentation

3.12.4.1   usb_status_t USB_DevicePhdcInit (uint8_t *controllerId,* usb_-device_class_config_struct_t ∗ *config,* class_handle_t ∗ *handle*)

This function is used to initialize the PHDC class.

Parameters

controllerId	The controller ID of the USB IP. See the enumeration usb_controller_index_t.
config	The class configuration information.
handle	An output parameter used to return pointer of the PHDC class handle to the caller.

Return values

kStatus_USB_Success	The PHDC class is initialized successfully.

kStatus_USB_Busy	No PHDC device handle available for allocation.
kStatus_USB_Invalid-Handle	The PHDC device handle allocation failure.
kStatus_USB_Invalid-Parameter	The USB device handle allocation failure.

3.12.4.2 usb_status_t USB_DevicePhdcDeinit (class_handle_t *handle*)

The function deinitializes the device PHDC class.

Parameters

handle	The PHDC class handle received from usb_device_class_config_struct_t::classHandle.

Return values

kStatus_USB_Invalid-Handle	The device handle is not found.
kStatus_USB_Success	The PHDC class is de-initialized successful.

3.12.4.3 usb_status_t USB_DevicePhdcEvent (void ∗ *handle,* uint32_t *event,* void ∗ *param*)

This function handles the event passed to the PHDC class.

Parameters

in	*handle*	The PHDC class handle received from the usb_device_class_config_-struct_t::classHandle.
in	*event*	The event codes. See the enumeration usb_device_class_event_t.
in,out	*param*	The parameter type is determined by the event code.

Return values

kStatus_USB_Success	Free device handle successfully.

kStatus_USB_Invalid-Parameter	The device handle is not found.
kStatus_USB_Invalid-Request	The request is invalid and the control pipe is stalled by the caller.

3.12.4.4 usb_status_t USB_DevicePhdcSend (class_handle_t *handle,* uint8_t *ep,* uint8_t ∗ *buffer,* uint32_t *length*)

The function is used to send data through a specified endpoint. The function calls USB_DeviceSend-Request internally.

Parameters

in	*handle*	The PHDC class handle received from the usb_device_class_config_-struct_t::classHandle.
in	*ep*	Endpoint index.
in	*buffer*	The memory address to hold the data to be sent.
in	*length*	The data length to be sent.

Return values

kStatus_USB_Invalid-Handle	The device handle is not found.
kStatus_USB_Busy	The previous transfer is pending.
kStatus_USB_Success	The sending is successful.

Note

The function can only be called in the same context.

3.12.4.5 usb_status_t USB_DevicePhdcRecv (class_handle_t *handle,* uint8_t *ep,* uint8_t ∗ *buffer,* uint32_t *length*)

The function is used to receive data through a specified endpoint. The function calls the USB_Device-RecvRequest internally.

Parameters

in	*handle*	The PHDC class handle received from usb_device_class_config_struct-_t::classHandle.
in	*ep*	Endpoint index.
in	*buffer*	The memory address to save the received data.
in	*length*	The data length want to be received.

Return values

kStatus_USB_Invalid-Handle	The device handle is not found.
kStatus_USB_Busy	The previous transfer is pending.
kStatus_USB_Success	The receiving is successful.

Note

The function can only be called in the same context.

3.13   USB PRINTER Class driver

3.13.1   Overview

Data Structures

- struct usb_device_printer_struct_t

  The printer device class instance structure. More...

Macros

- #define USB_DEVICE_CONFIG_PRINTER_CLASS_CODE (0x07U)

  The class code of the printer class.
- #define USB_DEVICE_PRINTER_GET_DEVICE_ID (0x00U)

  class-specific request GET_DEVICE_ID
- #define USB_DEVICE_PRINTER_GET_PORT_STATUS (0x01U)

  class-specific request GET_PORT_STATUS
- #define USB_DEVICE_PRINTER_SOFT_RESET (0x02U)

  class-specific request SOFT_RESET
- #define USB_DEVICE_PRINTER_PORT_STATUS_PAPER_EMPTRY_MASK (0x20U)

  Paper empty bit mask for GET_PORT_STATUS.
- #define USB_DEVICE_PRINTER_PORT_STATUS_SELECT_MASK (0x10U)

  Select bit mask for GET_PORT_STATUS.
- #define USB_DEVICE_PRINTER_PORT_STATUS_NOT_ERROR_MASK (0x08U)

  Error bit mask for GET_PORT_STATUS.

Enumerations

- enum usb_device_printer_event_t {
  kUSB_DevicePrinterEventRecvResponse = 0x01U,
  kUSB_DevicePrinterEventSendResponse,
  kUSB_DevicePrinterEventGetDeviceId,
  kUSB_DevicePrinterEventGetPortStatus,
  kUSB_DevicePrinterEventSoftReset }

  Available common EVENT types in printer class callback.

Functions

- usb_status_t USB_DevicePrinterInit (uint8_t   controllerId,   usb_device_class_config_struct_-
  t ∗config, class_handle_t ∗handle)

  Initializes the printer class.
- usb_status_t USB_DevicePrinterDeinit (class_handle_t handle)

  De-initializes the device printer class.
- usb_status_t USB_DevicePrinterEvent (void ∗handle, uint32_t event, void ∗param)

  Handles the event passed to the printer class.

USB device printer class APIs

- usb_status_t USB_DevicePrinterSend (class_handle_t handle, uint8_t ep, uint8_t *buffer, uint32_t length)

  Sends data through a specified endpoint.
- usb_status_t USB_DevicePrinterRecv (class_handle_t handle, uint8_t ep, uint8_t *buffer, uint32_t length)

  Receives data through a specified endpoint.

3.13.2   Data Structure Documentation

3.13.2.1   struct usb_device_printer_struct_t

Data Fields

- usb_device_handle deviceHandle

  The device handle.
- usb_device_class_config_struct_t ∗ classConfig

  The configuration of the class.
- usb_device_interface_struct_t ∗ interfaceHandle

  Current interface handle.
- uint8_t ∗ bulkInPipeDataBuffer

  IN pipe data buffer backup when stall.
- uint32_t bulkInPipeDataLen

  IN pipe data length backup when stall.
- uint8_t ∗ bulkOutPipeDataBuffer

  OUT pipe data buffer backup when stall.
- uint32_t bulkOutPipeDataLen

  OUT pipe data length backup when stall.
- uint8_t configuration

  Current configuration.
- uint8_t interfaceNumber

  Interface number in the device descriptor.
- uint8_t alternate

  Interface alternate value.
- uint8_t bulkInBusy

  BULK IN pipe busy flag.
- uint8_t bulkOutBusy

  BULK OUT pipe busy flag.
- uint8_t bulkInPipeStall

  bulk IN pipe stall flag
- uint8_t bulkOutPipeStall

  bulk OUT pipe stall flag

3.13.2.1.0.28   Field Documentation

3.13.2.1.0.28.1   usb_device_class_config_struct_t∗ **usb_device_printer_struct_t::classConfig**

3.13.3   Enumeration Type Documentation

3.13.3.1   enum usb_device_printer_event_t

Enumerator

> *kUSB_DevicePrinterEventRecvResponse*   Data received or cancelled etc.
> *kUSB_DevicePrinterEventSendResponse*   Data send done or cancelled etc.
> *kUSB_DevicePrinterEventGetDeviceId*   Get device ID request.
> *kUSB_DevicePrinterEventGetPortStatus*   Get port status request.
> *kUSB_DevicePrinterEventSoftReset*   Soft reset request.

3.13.4   Function Documentation

3.13.4.1   usb_status_t USB_DevicePrinterInit (uint8_t *controllerId,* usb-_device_class_config_struct_t ∗ *config,* class_handle_t ∗ *handle*)

This function is used to initialize the printer class. This function only can be called by USB_DeviceClass-Init.

Parameters

in	*controllerId*	The controller ID of the USB IP. See the enumeration usb_controller_-index_t.
in	*config*	The class configuration information.
out	*handle*	A parameter used to return a pointer of the printer class handle to the caller.

Returns

> A USB error code or kStatus_USB_Success.

3.13.4.2   usb_status_t USB_DevicePrinterDeinit (class_handle_t *handle*)

The function de-initializes the device printer class. This function only can be called by USB_DeviceClass-Deinit.

Parameters

in	handle	The printer class handle got from usb_device_class_config_struct_t-::classHandle.

Returns

A USB error code or kStatus_USB_Success.

3.13.4.3 usb_status_t USB_DevicePrinterEvent (void ∗ *handle,* uint32_t *event,* void ∗ *param*)

This function handles the event passed to the printer class. This function only can be called by USB_-DeviceClassEvent.

Parameters

in	handle	The printer class handle received from the usb_device_class_config_-struct_t::classHandle.
in	event	The event codes. See the enumeration usb_device_class_event_t.
in,out	param	The parameter type is determined by the event code.

Returns

A USB error code or kStatus_USB_Success.

Return values

kStatus_USB_Success	Process event successfully.
kStatus_USB_Invalid-Handle	The device handle or parameter is invalid.
kStatus_USB_Invalid-Request	The request is invalid, and the control pipe is stalled by the caller.

3.13.4.4 usb_status_t USB_DevicePrinterSend (class_handle_t *handle,* uint8_t *ep,* uint8_t ∗ *buffer,* uint32_t *length*)

The function is used to send data through a specified endpoint. The function calls USB_DeviceSend-Request internally.

Parameters

in	handle	The printer class handle received from usb_device_class_config_struct-_t::classHandle.
in	ep	Endpoint index.
in	buffer	The memory address to hold the data need to be sent.
in	length	The data length to be sent.

Returns

A USB error code or kStatus_USB_Success.

Note

The function can only be called in the same context.

The return value indicates whether the sending request is successful or not. Currently, only one transfer request can be supported for one specific endpoint. If there is a specific requirement to support multiple transfer requests for a specific endpoint, the application should implement a queue in the application level. The subsequent transfer can begin only when the previous transfer is done (a notification is received through the callback).

3.13.4.5 usb_status_t USB_DevicePrinterRecv (class_handle_t *handle,* uint8_t *ep,* uint8_t ∗ *buffer,* uint32_t *length*)

The function is used to receive data through a specified endpoint. The function calls USB_DeviceSend-Request internally.

Parameters

in	handle	The printer class handle received from usb_device_class_config_struct-_t::classHandle.
in	ep	Endpoint index.
in	buffer	The memory address to hold the data need to be sent.
in	length	The data length to be sent.

Returns

A USB error code or kStatus_USB_Success.

Note

The function can only be called in the same context.

The return value indicates whether the sending request is successful or not. Currently, only one transfer request can be supported for one specific endpoint. If there is a specific requirement to support multiple transfer requests for a specific endpoint, the application should implement a queue in the application level. The subsequent transfer can begin only when the previous transfer is done (a notification is received through the callback).

3.14 USB VIDEO Class driver

3.14.1 Overview

Data Structures

- struct usb_device_video_mjpeg_payload_header_struct_t
  The payload header structure for MJPEG payload format. More...
- struct usb_device_video_probe_and_commit_controls_struct_t
  The Video probe and commit controls structure. More...
- struct usb_device_video_still_probe_and_commit_controls_struct_t
  The Video still probe and still commit controls structure. More...
- struct usb_device_video_entity_struct_t
  The video device class-specific information. More...
- struct usb_device_video_entities_struct_t
  The video device class-specific information list. More...
- struct usb_device_video_struct_t
  The video device class status structure. More...

Macros

- #define USB_DEVICE_VIDEO_STILL_IMAGE_TRIGGER_NORMAL_OPERATION (0x00U)
  Video device still image trigger control.

Enumerations

- enum usb_device_video_event_t {
  kUSB_DeviceVideoEventStreamSendResponse = 0x01U,
  kUSB_DeviceVideoEventStreamRecvResponse,
  kUSB_DeviceVideoEventControlSendResponse,
  kUSB_DeviceVideoEventClassRequestBuffer }
  Available common event types in video class callback.

Functions

- usb_status_t   USB_DeviceVideoInit   (uint8_t   controllerId,   usb_device_class_config_struct_-
  t *config, class_handle_t *handle)
  Initializes the video class.
- usb_status_t USB_DeviceVideoDeinit (class_handle_t handle)
  Deinitializes the device video class.
- usb_status_t USB_DeviceVideoEvent (void *handle, uint32_t event, void *param)
  Handles the event passed to the video class.

USB Video class codes

- #define USB_DEVICE_VIDEO_CC_VIDEO (0x0EU)
  Video device class code.
- #define USB_DEVICE_VIDEO_SC_UNDEFINED (0x00U)
  Video device subclass code.
- #define **USB_DEVICE_VIDEO_SC_VIDEOCONTROL** (0x01U)
- #define **USB_DEVICE_VIDEO_SC_VIDEOSTREAMING** (0x02U)
- #define **USB_DEVICE_VIDEO_SC_VIDEO_INTERFACE_COLLECTION** (0x03U)
- #define USB_DEVICE_VIDEO_PC_PROTOCOL_UNDEFINED (0x00U)
  Video device protocol code.
- #define **USB_DEVICE_VIDEO_PC_PROTOCOL_15** (0x01U)
- #define USB_DESCRIPTOR_TYPE_VIDEO_CS_UNDEFINED (0x20U)
  Video device class-specific descriptor type.
- #define **USB_DESCRIPTOR_TYPE_VIDEO_CS_DEVICE** (0x21U)
- #define **USB_DESCRIPTOR_TYPE_VIDEO_CS_CONFIGURATION** (0x22U)
- #define **USB_DESCRIPTOR_TYPE_VIDEO_CS_STRING** (0x23U)
- #define **USB_DESCRIPTOR_TYPE_VIDEO_CS_INTERFACE** (0x24U)
- #define **USB_DESCRIPTOR_TYPE_VIDEO_CS_ENDPOINT** (0x25U)
- #define USB_DESCRIPTOR_SUBTYPE_VIDEO_VC_DESCRIPTOR_UNDEFINED (0x00U)
  Video device class-specific VC interface descriptor subtype.
- #define **USB_DESCRIPTOR_SUBTYPE_VIDEO_VC_HEADER** (0x01U)
- #define **USB_DESCRIPTOR_SUBTYPE_VIDEO_VC_INPUT_TERMINAL** (0x02U)
- #define **USB_DESCRIPTOR_SUBTYPE_VIDEO_VC_OUTPUT_TERMINAL** (0x03U)
- #define **USB_DESCRIPTOR_SUBTYPE_VIDEO_VC_SELECTOR_UNIT** (0x04U)
- #define **USB_DESCRIPTOR_SUBTYPE_VIDEO_VC_PROCESSING_UNIT** (0x05U)
- #define **USB_DESCRIPTOR_SUBTYPE_VIDEO_VC_EXTENSION_UNIT** (0x06U)
- #define **USB_DESCRIPTOR_SUBTYPE_VIDEO_VC_ENCODING_UNIT** (0x07U)
- #define USB_DESCRIPTOR_SUBTYPE_VIDEO_VS_UNDEFINED (0x00U)
  Video device class-specific VS interface descriptor subtype.
- #define **USB_DESCRIPTOR_SUBTYPE_VIDEO_VS_INPUT_HEADER** (0x01U)
- #define **USB_DESCRIPTOR_SUBTYPE_VIDEO_VS_OUTPUT_HEADER** (0x02U)
- #define **USB_DESCRIPTOR_SUBTYPE_VIDEO_VS_STILL_IMAGE_FRAME** (0x03U)
- #define **USB_DESCRIPTOR_SUBTYPE_VIDEO_VS_FORMAT_UNCOMPRESSED** (0x04-U)
- #define **USB_DESCRIPTOR_SUBTYPE_VIDEO_VS_FRAME_UNCOMPRESSED** (0x05U)
- #define **USB_DESCRIPTOR_SUBTYPE_VIDEO_VS_FORMAT_MJPEG** (0x06U)
- #define **USB_DESCRIPTOR_SUBTYPE_VIDEO_VS_FRAME_MJPEG** (0x07U)
- #define **USB_DESCRIPTOR_SUBTYPE_VIDEO_VS_FORMAT_MPEG2TS** (0x0AU)
- #define **USB_DESCRIPTOR_SUBTYPE_VIDEO_VS_FORMAT_DV** (0x0CU)
- #define **USB_DESCRIPTOR_SUBTYPE_VIDEO_VS_COLORFORMAT** (0x0DU)
- #define **USB_DESCRIPTOR_SUBTYPE_VIDEO_VS_FORMAT_FRAME_BASED** (0x10U)
- #define **USB_DESCRIPTOR_SUBTYPE_VIDEO_VS_FRAME_FRAME_BASED** (0x11U)
- #define **USB_DESCRIPTOR_SUBTYPE_VIDEO_VS_FORMAT_STREAM_BASED** (0x12-U)
- #define **USB_DESCRIPTOR_SUBTYPE_VIDEO_VS_FORMAT_H264** (0x13U)
- #define **USB_DESCRIPTOR_SUBTYPE_VIDEO_VS_FRAME_H264** (0x14U)
- #define **USB_DESCRIPTOR_SUBTYPE_VIDEO_VS_FORMAT_H264_SIMULCAST** (0x15-U)
- #define **USB_DESCRIPTOR_SUBTYPE_VIDEO_VS_FORMAT_VP8** (0x16U)
- #define **USB_DESCRIPTOR_SUBTYPE_VIDEO_VS_FRAME_VP8** (0x17U)
- #define **USB_DESCRIPTOR_SUBTYPE_VIDEO_VS_FORMAT_VP8_SIMULCAST** (0x18-U)
- #define USB_DESCRIPTOR_SUBTYPE_VIDEO_EP_UNDEFINED (0x00U)

Video device class-specific VC endpoint descriptor subtype.
- #define **USB_DESCRIPTOR_SUBTYPE_VIDEO_EP_GENERAL** (0x01U)
- #define **USB_DESCRIPTOR_SUBTYPE_VIDEO_EP_ENDPOINT** (0x02U)
- #define **USB_DESCRIPTOR_SUBTYPE_VIDEO_EP_INTERRUPT** (0x03U)
- #define USB_DEVICE_VIDEO_REQUEST_CODE_UNDEFINED (0x00U)

Video device class-specific request code.
- #define **USB_DEVICE_VIDEO_REQUEST_CODE_SET_CUR** (0x01U)
- #define **USB_DEVICE_VIDEO_REQUEST_CODE_SET_CUR_ALL** (0x11U)
- #define **USB_DEVICE_VIDEO_REQUEST_CODE_GET_CUR** (0x81U)
- #define **USB_DEVICE_VIDEO_REQUEST_CODE_GET_MIN** (0x82U)
- #define **USB_DEVICE_VIDEO_REQUEST_CODE_GET_MAX** (0x83U)
- #define **USB_DEVICE_VIDEO_REQUEST_CODE_GET_RES** (0x84U)
- #define **USB_DEVICE_VIDEO_REQUEST_CODE_GET_LEN** (0x85U)
- #define **USB_DEVICE_VIDEO_REQUEST_CODE_GET_INFO** (0x86U)
- #define **USB_DEVICE_VIDEO_REQUEST_CODE_GET_DEF** (0x87U)
- #define **USB_DEVICE_VIDEO_REQUEST_CODE_GET_CUR_ALL** (0x91U)
- #define **USB_DEVICE_VIDEO_REQUEST_CODE_GET_MIN_ALL** (0x92U)
- #define **USB_DEVICE_VIDEO_REQUEST_CODE_GET_MAX_ALL** (0x93U)
- #define **USB_DEVICE_VIDEO_REQUEST_CODE_GET_RES_ALL** (0x94U)
- #define **USB_DEVICE_VIDEO_REQUEST_CODE_GET_DEF_ALL** (0x97U)
- #define USB_DEVICE_VIDEO_VC_CONTROL_UNDEFINED (0x00U)

Video device class-specific VideoControl interface control selector.
- #define **USB_DEVICE_VIDEO_VC_VIDEO_POWER_MODE_CONTROL** (0x01U)
- #define **USB_DEVICE_VIDEO_VC_REQUEST_ERROR_CODE_CONTROL** (0x02U)
- #define USB_DEVICE_VIDEO_TE_CONTROL_UNDEFINED (0x00U)

Video device class-specific Terminal control selector.
- #define USB_DEVICE_VIDEO_SU_CONTROL_UNDEFINED (0x00U)

Video device class-specific Selector Unit control selector.
- #define **USB_DEVICE_VIDEO_SU_INPUT_SELECT_CONTROL** (0x01U)
- #define USB_DEVICE_VIDEO_CT_CONTROL_UNDEFINED (0x00U)

Video device class-specific Camera Terminal control selector.
- #define **USB_DEVICE_VIDEO_CT_SCANNING_MODE_CONTROL** (0x01U)
- #define **USB_DEVICE_VIDEO_CT_AE_MODE_CONTROL** (0x02U)
- #define **USB_DEVICE_VIDEO_CT_AE_PRIORITY_CONTROL** (0x03U)
- #define **USB_DEVICE_VIDEO_CT_EXPOSURE_TIME_ABSOLUTE_CONTROL** (0x04U)
- #define **USB_DEVICE_VIDEO_CT_EXPOSURE_TIME_RELATIVE_CONTROL** (0x05U)
- #define **USB_DEVICE_VIDEO_CT_FOCUS_ABSOLUTE_CONTROL** (0x06U)
- #define **USB_DEVICE_VIDEO_CT_FOCUS_RELATIVE_CONTROL** (0x07U)
- #define **USB_DEVICE_VIDEO_CT_FOCUS_AUTO_CONTROL** (0x08U)
- #define **USB_DEVICE_VIDEO_CT_IRIS_ABSOLUTE_CONTROL** (0x09U)
- #define **USB_DEVICE_VIDEO_CT_IRIS_RELATIVE_CONTROL** (0x0AU)
- #define **USB_DEVICE_VIDEO_CT_ZOOM_ABSOLUTE_CONTROL** (0x0BU)
- #define **USB_DEVICE_VIDEO_CT_ZOOM_RELATIVE_CONTROL** (0x0CU)
- #define **USB_DEVICE_VIDEO_CT_PANTILT_ABSOLUTE_CONTROL** (0x0DU)
- #define **USB_DEVICE_VIDEO_CT_PANTILT_RELATIVE_CONTROL** (0x0EU)
- #define **USB_DEVICE_VIDEO_CT_ROLL_ABSOLUTE_CONTROL** (0x0FU)
- #define **USB_DEVICE_VIDEO_CT_ROLL_RELATIVE_CONTROL** (0x10U)
- #define **USB_DEVICE_VIDEO_CT_PRIVACY_CONTROL** (0x11U)
- #define **USB_DEVICE_VIDEO_CT_FOCUS_SIMPLE_CONTROL** (0x12U)
- #define **USB_DEVICE_VIDEO_CT_WINDOW_CONTROL** (0x13U)
- #define **USB_DEVICE_VIDEO_CT_REGION_OF_INTEREST_CONTROL** (0x14U)
- #define USB_DEVICE_VIDEO_PU_CONTROL_UNDEFINED (0x00U)

Video device class-specific Processing Unit control selector.
- #define **USB_DEVICE_VIDEO_PU_BACKLIGHT_COMPENSATION_CONTROL** (0x01U)
- #define **USB_DEVICE_VIDEO_PU_BRIGHTNESS_CONTROL** (0x02U)

- #define **USB_DEVICE_VIDEO_PU_CONTRAST_CONTROL** (0x03U)
- #define **USB_DEVICE_VIDEO_PU_GAIN_CONTROL** (0x04U)
- #define **USB_DEVICE_VIDEO_PU_POWER_LINE_FREQUENCY_CONTROL** (0x05U)
- #define **USB_DEVICE_VIDEO_PU_HUE_CONTROL** (0x06U)
- #define **USB_DEVICE_VIDEO_PU_SATURATION_CONTROL** (0x07U)
- #define **USB_DEVICE_VIDEO_PU_SHARPNESS_CONTROL** (0x08U)
- #define **USB_DEVICE_VIDEO_PU_GAMMA_CONTROL** (0x09U)
- #define **USB_DEVICE_VIDEO_PU_WHITE_BALANCE_TEMPERATURE_CONTRO-L** (0x0AU)
- #define **USB_DEVICE_VIDEO_PU_WHITE_BALANCE_TEMPERATURE_AUTO_CON-TROL** (0x0BU)
- #define **USB_DEVICE_VIDEO_PU_WHITE_BALANCE_COMPONENT_CONTROL** (0x0-CU)
- #define **USB_DEVICE_VIDEO_PU_WHITE_BALANCE_COMPONENT_AUTO_CONTR-OL** (0x0DU)
- #define **USB_DEVICE_VIDEO_PU_DIGITAL_MULTIPLIER_CONTROL** (0x0EU)
- #define **USB_DEVICE_VIDEO_PU_DIGITAL_MULTIPLIER_LIMIT_CONTROL** (0x0FU)
- #define **USB_DEVICE_VIDEO_PU_HUE_AUTO_CONTROL** (0x10U)
- #define **USB_DEVICE_VIDEO_PU_ANALOG_VIDEO_STANDARD_CONTROL** (0x11U)
- #define **USB_DEVICE_VIDEO_PU_ANALOG_LOCK_STATUS_CONTROL** (0x12U)
- #define **USB_DEVICE_VIDEO_PU_CONTRAST_AUTO_CONTROL** (0x13U)
- #define USB_DEVICE_VIDEO_EU_CONTROL_UNDEFINED (0x00U)
  Video device class-specific Encoding Unit control selector.
- #define **USB_DEVICE_VIDEO_EU_SELECT_LAYER_CONTROL** (0x01U)
- #define **USB_DEVICE_VIDEO_EU_PROFILE_TOOLSET_CONTROL** (0x02U)
- #define **USB_DEVICE_VIDEO_EU_VIDEO_RESOLUTION_CONTROL** (0x03U)
- #define **USB_DEVICE_VIDEO_EU_MIN_FRAME_INTERVAL_CONTROL** (0x04U)
- #define **USB_DEVICE_VIDEO_EU_SLICE_MODE_CONTROL** (0x05U)
- #define **USB_DEVICE_VIDEO_EU_RATE_CONTROL_MODE_CONTROL** (0x06U)
- #define **USB_DEVICE_VIDEO_EU_AVERAGE_BITRATE_CONTROL** (0x07U)
- #define **USB_DEVICE_VIDEO_EU_CPB_SIZE_CONTROL** (0x08U)
- #define **USB_DEVICE_VIDEO_EU_PEAK_BIT_RATE_CONTROL** (0x09U)
- #define **USB_DEVICE_VIDEO_EU_QUANTIZATION_PARAMS_CONTROL** (0x0AU)
- #define **USB_DEVICE_VIDEO_EU_SYNC_REF_FRAME_CONTROL** (0x0BU)
- #define **USB_DEVICE_VIDEO_EU_LTR_BUFFER_ CONTROL**(0x0CU)
- #define **USB_DEVICE_VIDEO_EU_LTR_PICTURE_CONTROL** (0x0DU)
- #define **USB_DEVICE_VIDEO_EU_LTR_VALIDATION_CONTROL** (0x0EU)
- #define **USB_DEVICE_VIDEO_EU_LEVEL_IDC_LIMIT_CONTROL** (0x0FU)
- #define **USB_DEVICE_VIDEO_EU_SEI_PAYLOADTYPE_CONTROL** (0x10U)
- #define **USB_DEVICE_VIDEO_EU_QP_RANGE_CONTROL** (0x11U)
- #define **USB_DEVICE_VIDEO_EU_PRIORITY_CONTROL** (0x12U)
- #define **USB_DEVICE_VIDEO_EU_START_OR_STOP_LAYER_CONTROL** (0x13U)
- #define **USB_DEVICE_VIDEO_EU_ERROR_RESILIENCY_CONTROL** (0x14U)
- #define USB_DEVICE_VIDEO_XU_CONTROL_UNDEFINED (0x00U)
  Video device class-specific Extension Unit control selector.
- #define USB_DEVICE_VIDEO_VS_CONTROL_UNDEFINED (0x00U)
  Video device class-specific VideoStreaming Interface control selector.
- #define **USB_DEVICE_VIDEO_VS_PROBE_CONTROL** (0x01U)
- #define **USB_DEVICE_VIDEO_VS_COMMIT_CONTROL** (0x02U)
- #define **USB_DEVICE_VIDEO_VS_STILL_PROBE_CONTROL** (0x03U)
- #define **USB_DEVICE_VIDEO_VS_STILL_COMMIT_CONTROL** (0x04U)
- #define **USB_DEVICE_VIDEO_VS_STILL_IMAGE_TRIGGER_CONTROL** (0x05U)
- #define **USB_DEVICE_VIDEO_VS_STREAM_ERROR_CODE_CONTROL** (0x06U)
- #define **USB_DEVICE_VIDEO_VS_GENERATE_KEY_FRAME_CONTROL** (0x07U)

- #define **USB_DEVICE_VIDEO_VS_UPDATE_FRAME_SEGMENT_CONTROL** (0x08U)
- #define **USB_DEVICE_VIDEO_VS_SYNCH_DELAY_CONTROL** (0x09U)

USB Video class terminal types

- #define USB_DEVICE_VIDEO_TT_VENDOR_SPECIFIC (0x0100U)
  Video device USB terminal type.
- #define **USB_DEVICE_VIDEO_TT_STREAMING** (0x0101U)
- #define USB_DEVICE_VIDEO_ITT_VENDOR_SPECIFIC (0x0200U)
  Video device input terminal type.
- #define **USB_DEVICE_VIDEO_ITT_CAMERA** (0x0201U)
- #define **USB_DEVICE_VIDEO_ITT_MEDIA_TRANSPORT_INPUT** (0x0202U)
- #define USB_DEVICE_VIDEO_OTT_VENDOR_SPECIFIC (0x0300U)
  Video device output terminal type.
- #define **USB_DEVICE_VIDEO_OTT_DISPLAY** (0x0301U)
- #define **USB_DEVICE_VIDEO_OTT_MEDIA_TRANSPORT_OUTPUT** (0x0302U)
- #define USB_DEVICE_VIDEO_ET_VENDOR_SPECIFIC (0x0400U)
  Video device external terminal type.
- #define **USB_DEVICE_VIDEO_ET_COMPOSITE_CONNECTOR** (0x0401U)
- #define **USB_DEVICE_VIDEO_ET_SVIDEO_CONNECTOR** (0x0402U)
- #define **USB_DEVICE_VIDEO_ET_COMPONENT_CONNECTOR** (0x0403U)

USB Video class setup request types

- #define USB_DEVICE_VIDEO_SET_REQUEST_INTERFACE (0x21U)
  Video device class setup request set type.
- #define **USB_DEVICE_VIDEO_SET_REQUEST_ENDPOINT** (0x22U)
- #define USB_DEVICE_VIDEO_GET_REQUEST_INTERFACE (0xA1U)
  Video device class setup request get type.
- #define **USB_DEVICE_VIDEO_GET_REQUEST_ENDPOINT** (0xA2U)

USB Video device class-specific request commands

- #define USB_DEVICE_VIDEO_GET_CUR_VC_POWER_MODE_CONTROL (0x8101U)
  Video device class-specific request GET CUR COMMAND.
- #define **USB_DEVICE_VIDEO_GET_CUR_VC_ERROR_CODE_CONTROL** (0x8102U)
- #define **USB_DEVICE_VIDEO_GET_CUR_PU_BACKLIGHT_COMPENSATION_CONT-ROL** (0x8121U)
- #define **USB_DEVICE_VIDEO_GET_CUR_PU_BRIGHTNESS_CONTROL** (0x8122U)
- #define **USB_DEVICE_VIDEO_GET_CUR_PU_CONTRACT_CONTROL** (0x8123U)
- #define **USB_DEVICE_VIDEO_GET_CUR_PU_GAIN_CONTROL** (0x8124U)
- #define **USB_DEVICE_VIDEO_GET_CUR_PU_POWER_LINE_FREQUENCY_CONTRO-L** (0x8125U)
- #define **USB_DEVICE_VIDEO_GET_CUR_PU_HUE_CONTROL** (0x8126U)
- #define **USB_DEVICE_VIDEO_GET_CUR_PU_SATURATION_CONTROL** (0x8127U)
- #define **USB_DEVICE_VIDEO_GET_CUR_PU_SHARRNESS_CONTROL** (0x8128U)
- #define **USB_DEVICE_VIDEO_GET_CUR_PU_GAMMA_CONTROL** (0x8129U)
- #define **USB_DEVICE_VIDEO_GET_CUR_PU_WHITE_BALANCE_TEMPERATURE_C-ONTROL** (0x812AU)

- #define **USB_DEVICE_VIDEO_GET_CUR_PU_WHITE_BALANCE_TEMPERATURE_A-UTO_CONTROL** (0x812BU)
- #define **USB_DEVICE_VIDEO_GET_CUR_PU_WHITE_BALANCE_COMPONENT_CO-NTROL** (0x812CU)
- #define **USB_DEVICE_VIDEO_GET_CUR_PU_WHITE_BALANCE_COMPONENT_AU-TO_CONTROL** (0x812DU)
- #define **USB_DEVICE_VIDEO_GET_CUR_PU_DIGITAL_MULTIPLIER_CONTRO-L** (0x812EU)
- #define **USB_DEVICE_VIDEO_GET_CUR_PU_DIGITAL_MULTIPLIER_LIMIT_CONT-ROL** (0x812FU)
- #define **USB_DEVICE_VIDEO_GET_CUR_PU_HUE_AUTO_CONTROL** (0x8130U)
- #define **USB_DEVICE_VIDEO_GET_CUR_PU_ANALOG_VIDEO_STANDARD_CONTR-OL** (0x8131U)
- #define **USB_DEVICE_VIDEO_GET_CUR_PU_ANALOG_LOCK_STATUS_CONTRO-L** (0x8132U)
- #define **USB_DEVICE_VIDEO_GET_CUR_CT_SCANNING_MODE_CONTROL** (0x8141-U)
- #define **USB_DEVICE_VIDEO_GET_CUR_CT_AE_MODE_CONTROL** (0x8142U)
- #define **USB_DEVICE_VIDEO_GET_CUR_CT_AE_PRIORITY_CONTROL** (0x8143U)
- #define **USB_DEVICE_VIDEO_GET_CUR_CT_EXPOSURE_TIME_ABSOLUTE_CONT-ROL** (0x8144U)
- #define **USB_DEVICE_VIDEO_GET_CUR_CT_EXPOSURE_TIME_RELATIVE_CONTR-OL** (0x8145U)
- #define **USB_DEVICE_VIDEO_GET_CUR_CT_FOCUS_ABSOLUTE_CONTROL** (0x8146-U)
- #define **USB_DEVICE_VIDEO_GET_CUR_CT_FOCUS_RELATIVE_CONTROL** (0x8147-U)
- #define **USB_DEVICE_VIDEO_GET_CUR_CT_FOCUS_AUTO_CONTROL** (0x8148U)
- #define **USB_DEVICE_VIDEO_GET_CUR_CT_IRIS_ABSOLUTE_CONTROL** (0x8149U)
- #define **USB_DEVICE_VIDEO_GET_CUR_CT_IRIS_RELATIVE_CONTROL** (0x814AU)
- #define **USB_DEVICE_VIDEO_GET_CUR_CT_ZOOM_ABSOLUTE_CONTROL** (0x814B-U)
- #define **USB_DEVICE_VIDEO_GET_CUR_CT_ZOOM_RELATIVE_CONTROL** (0x814C-U)
- #define **USB_DEVICE_VIDEO_GET_CUR_CT_PANTILT_ABSOLUTE_CONTROL** (0x814-DU)
- #define **USB_DEVICE_VIDEO_GET_CUR_CT_PANTILT_RELATIVE_CONTROL** (0x814-EU)
- #define **USB_DEVICE_VIDEO_GET_CUR_CT_ROLL_ABSOLUTE_CONTROL** (0x814F-U)
- #define **USB_DEVICE_VIDEO_GET_CUR_CT_ROLL_RELATIVE_CONTROL** (0x8150U)
- #define **USB_DEVICE_VIDEO_GET_CUR_CT_PRIVACY_CONTROL** (0x8151U)
- #define **USB_DEVICE_VIDEO_GET_CUR_VS_PROBE_CONTROL** (0x8161U)
- #define **USB_DEVICE_VIDEO_GET_CUR_VS_COMMIT_CONTROL** (0x8162U)
- #define **USB_DEVICE_VIDEO_GET_CUR_VS_STILL_PROBE_CONTROL** (0x8163U)
- #define **USB_DEVICE_VIDEO_GET_CUR_VS_STILL_COMMIT_CONTROL** (0x8164U)
- #define **USB_DEVICE_VIDEO_GET_CUR_VS_STILL_IMAGE_TRIGGER_CONTRO-L** (0x8165U)
- #define **USB_DEVICE_VIDEO_GET_CUR_VS_STREAM_ERROR_CODE_CONTRO-L** (0x8166U)
- #define **USB_DEVICE_VIDEO_GET_CUR_VS_GENERATE_KEY_FRAME_CONTRO-**

L (0x8167U)
- #define **USB_DEVICE_VIDEO_GET_CUR_VS_UPDATE_FRAME_SEGMENT_CONTR-OL** (0x8168U)
- #define **USB_DEVICE_VIDEO_GET_CUR_VS_SYNCH_DELAY_CONTROL** (0x8169U)
- #define USB_DEVICE_VIDEO_GET_MIN_PU_BACKLIGHT_COMPENSATION_CONTRO-L (0x8221U)

    Video device class-specific request GET MIN COMMAND.
- #define **USB_DEVICE_VIDEO_GET_MIN_PU_BRIGHTNESS_CONTROL** (0x8222U)
- #define **USB_DEVICE_VIDEO_GET_MIN_PU_CONTRACT_CONTROL** (0x8223U)
- #define **USB_DEVICE_VIDEO_GET_MIN_PU_GAIN_CONTROL** (0x8224U)
- #define **USB_DEVICE_VIDEO_GET_MIN_PU_HUE_CONTROL** (0x8226U)
- #define **USB_DEVICE_VIDEO_GET_MIN_PU_SATURATION_CONTROL** (0x8227U)
- #define **USB_DEVICE_VIDEO_GET_MIN_PU_SHARRNESS_CONTROL** (0x8228U)
- #define **USB_DEVICE_VIDEO_GET_MIN_PU_GAMMA_CONTROL** (0x8229U)
- #define **USB_DEVICE_VIDEO_GET_MIN_PU_WHITE_BALANCE_TEMPERATURE_C-ONTROL** (0x822AU)
- #define **USB_DEVICE_VIDEO_GET_MIN_PU_WHITE_BALANCE_COMPONENT_CO-NTROL** (0x822CU)
- #define **USB_DEVICE_VIDEO_GET_MIN_PU_DIGITAL_MULTIPLIER_CONTRO-L** (0x822EU)
- #define **USB_DEVICE_VIDEO_GET_MIN_PU_DIGITAL_MULTIPLIER_LIMIT_CONT-ROL** (0x822FU)
- #define **USB_DEVICE_VIDEO_GET_MIN_CT_EXPOSURE_TIME_ABSOLUTE_CONT-ROL** (0x8244U)
- #define **USB_DEVICE_VIDEO_GET_MIN_CT_FOCUS_ABSOLUTE_CONTROL** (0x8246-U)
- #define **USB_DEVICE_VIDEO_GET_MIN_CT_FOCUS_RELATIVE_CONTROL** (0x8247-U)
- #define **USB_DEVICE_VIDEO_GET_MIN_CT_IRIS_ABSOLUTE_CONTROL** (0x8249U)
- #define **USB_DEVICE_VIDEO_GET_MIN_CT_ZOOM_ABSOLUTE_CONTROL** (0x824B-U)
- #define **USB_DEVICE_VIDEO_GET_MIN_CT_ZOOM_RELATIVE_CONTROL** (0x824C-U)
- #define **USB_DEVICE_VIDEO_GET_MIN_CT_PANTILT_ABSOLUTE_CONTROL** (0x824-DU)
- #define **USB_DEVICE_VIDEO_GET_MIN_CT_PANTILT_RELATIVE_CONTROL** (0x824-EU)
- #define **USB_DEVICE_VIDEO_GET_MIN_CT_ROLL_ABSOLUTE_CONTROL** (0x824F-U)
- #define **USB_DEVICE_VIDEO_GET_MIN_CT_ROLL_RELATIVE_CONTROL** (0x8250U)
- #define **USB_DEVICE_VIDEO_GET_MIN_VS_PROBE_CONTROL** (0x8261U)
- #define **USB_DEVICE_VIDEO_GET_MIN_VS_STILL_PROBE_CONTROL** (0x8263U)
- #define **USB_DEVICE_VIDEO_GET_MIN_VS_UPDATE_FRAME_SEGMENT_CONTRO-L** (0x8268U)
- #define **USB_DEVICE_VIDEO_GET_MIN_VS_SYNCH_DELAY_CONTROL** (0x8269U)
- #define USB_DEVICE_VIDEO_GET_MAX_PU_BACKLIGHT_COMPENSATION_CONTRO-L (0x8321U)

    Video device class-specific request GET MAX COMMAND.
- #define **USB_DEVICE_VIDEO_GET_MAX_PU_BRIGHTNESS_CONTROL** (0x8322U)
- #define **USB_DEVICE_VIDEO_GET_MAX_PU_CONTRACT_CONTROL** (0x8323U)
- #define **USB_DEVICE_VIDEO_GET_MAX_PU_GAIN_CONTROL** (0x8324U)

- #define **USB_DEVICE_VIDEO_GET_MAX_PU_HUE_CONTROL** (0x8326U)
- #define **USB_DEVICE_VIDEO_GET_MAX_PU_SATURATION_CONTROL** (0x8327U)
- #define **USB_DEVICE_VIDEO_GET_MAX_PU_SHARRNESS_CONTROL** (0x8328U)
- #define **USB_DEVICE_VIDEO_GET_MAX_PU_GAMMA_CONTROL** (0x8329U)
- #define **USB_DEVICE_VIDEO_GET_MAX_PU_WHITE_BALANCE_TEMPERATURE_-CONTROL** (0x832AU)
- #define **USB_DEVICE_VIDEO_GET_MAX_PU_WHITE_BALANCE_COMPONENT_CO-NTROL** (0x832CU)
- #define **USB_DEVICE_VIDEO_GET_MAX_PU_DIGITAL_MULTIPLIER_CONTRO-L** (0x832EU)
- #define **USB_DEVICE_VIDEO_GET_MAX_PU_DIGITAL_MULTIPLIER_LIMIT_CONT-ROL** (0x832FU)
- #define **USB_DEVICE_VIDEO_GET_MAX_CT_EXPOSURE_TIME_ABSOLUTE_CONT-ROL** (0x8344U)
- #define **USB_DEVICE_VIDEO_GET_MAX_CT_FOCUS_ABSOLUTE_CONTROL** (0x8346-U)
- #define **USB_DEVICE_VIDEO_GET_MAX_CT_FOCUS_RELATIVE_CONTROL** (0x8347-U)
- #define **USB_DEVICE_VIDEO_GET_MAX_CT_IRIS_ABSOLUTE_CONTROL** (0x8349U)
- #define **USB_DEVICE_VIDEO_GET_MAX_CT_ZOOM_ABSOLUTE_CONTROL** (0x834-BU)
- #define **USB_DEVICE_VIDEO_GET_MAX_CT_ZOOM_RELATIVE_CONTROL** (0x834C-U)
- #define **USB_DEVICE_VIDEO_GET_MAX_CT_PANTILT_ABSOLUTE_CONTROL** (0x834-DU)
- #define **USB_DEVICE_VIDEO_GET_MAX_CT_PANTILT_RELATIVE_CONTROL** (0x834-EU)
- #define **USB_DEVICE_VIDEO_GET_MAX_CT_ROLL_ABSOLUTE_CONTROL** (0x834F-U)
- #define **USB_DEVICE_VIDEO_GET_MAX_CT_ROLL_RELATIVE_CONTROL** (0x8350-U)
- #define **USB_DEVICE_VIDEO_GET_MAX_VS_PROBE_CONTROL** (0x8361U)
- #define **USB_DEVICE_VIDEO_GET_MAX_VS_STILL_PROBE_CONTROL** (0x8363U)
- #define **USB_DEVICE_VIDEO_GET_MAX_VS_UPDATE_FRAME_SEGMENT_CONTR-OL** (0x8368U)
- #define **USB_DEVICE_VIDEO_GET_MAX_VS_SYNCH_DELAY_CONTROL** (0x8369U)
- #define USB_DEVICE_VIDEO_GET_RES_PU_BACKLIGHT_COMPENSATION_CONTRO-L (0x8421U)

  Video device class-specific request GET RES COMMAND.
- #define **USB_DEVICE_VIDEO_GET_RES_PU_BRIGHTNESS_CONTROL** (0x8422U)
- #define **USB_DEVICE_VIDEO_GET_RES_PU_CONTRACT_CONTROL** (0x8423U)
- #define **USB_DEVICE_VIDEO_GET_RES_PU_GAIN_CONTROL** (0x8424U)
- #define **USB_DEVICE_VIDEO_GET_RES_PU_HUE_CONTROL** (0x8426U)
- #define **USB_DEVICE_VIDEO_GET_RES_PU_SATURATION_CONTROL** (0x8427U)
- #define **USB_DEVICE_VIDEO_GET_RES_PU_SHARRNESS_CONTROL** (0x8428U)
- #define **USB_DEVICE_VIDEO_GET_RES_PU_GAMMA_CONTROL** (0x8429U)
- #define **USB_DEVICE_VIDEO_GET_RES_PU_WHITE_BALANCE_TEMPERATURE_C-ONTROL** (0x842AU)
- #define **USB_DEVICE_VIDEO_GET_RES_PU_WHITE_BALANCE_COMPONENT_CON-TROL** (0x842CU)
- #define **USB_DEVICE_VIDEO_GET_RES_PU_DIGITAL_MULTIPLIER_CONTRO-**

L (0x842EU)

- #define **USB_DEVICE_VIDEO_GET_RES_PU_DIGITAL_MULTIPLIER_LIMIT_CONT-ROL** (0x842FU)
- #define **USB_DEVICE_VIDEO_GET_RES_CT_AE_MODE_CONTROL** (0x8442U)
- #define **USB_DEVICE_VIDEO_GET_RES_CT_EXPOSURE_TIME_ABSOLUTE_CONTR-OL** (0x8444U)
- #define **USB_DEVICE_VIDEO_GET_RES_CT_FOCUS_ABSOLUTE_CONTROL** (0x8446-U)
- #define **USB_DEVICE_VIDEO_GET_RES_CT_FOCUS_RELATIVE_CONTROL** (0x8447-U)
- #define **USB_DEVICE_VIDEO_GET_RES_CT_IRIS_ABSOLUTE_CONTROL** (0x8449U)
- #define **USB_DEVICE_VIDEO_GET_RES_CT_ZOOM_ABSOLUTE_CONTROL** (0x844B-U)
- #define **USB_DEVICE_VIDEO_GET_RES_CT_ZOOM_RELATIVE_CONTROL** (0x844C-U)
- #define **USB_DEVICE_VIDEO_GET_RES_CT_PANTILT_ABSOLUTE_CONTROL** (0x844-DU)
- #define **USB_DEVICE_VIDEO_GET_RES_CT_PANTILT_RELATIVE_CONTROL** (0x844-EU)
- #define **USB_DEVICE_VIDEO_GET_RES_CT_ROLL_ABSOLUTE_CONTROL** (0x844FU)
- #define **USB_DEVICE_VIDEO_GET_RES_CT_ROLL_RELATIVE_CONTROL** (0x8450U)
- #define **USB_DEVICE_VIDEO_GET_RES_VS_PROBE_CONTROL** (0x8461U)
- #define **USB_DEVICE_VIDEO_GET_RES_VS_STILL_PROBE_CONTROL** (0x8463U)
- #define **USB_DEVICE_VIDEO_GET_RES_VS_UPDATE_FRAME_SEGMENT_CONTRO-L** (0x8468U)
- #define **USB_DEVICE_VIDEO_GET_RES_VS_SYNCH_DELAY_CONTROL** (0x8469U)
- #define USB_DEVICE_VIDEO_GET_LEN_VS_PROBE_CONTROL (0x8561U)
  Video device class-specific request GET LEN COMMAND.
- #define **USB_DEVICE_VIDEO_GET_LEN_VS_COMMIT_CONTROL** (0x8562U)
- #define **USB_DEVICE_VIDEO_GET_LEN_VS_STILL_PROBE_CONTROL** (0x8563U)
- #define **USB_DEVICE_VIDEO_GET_LEN_VS_STILL_COMMIT_CONTROL** (0x8564U)
- #define USB_DEVICE_VIDEO_GET_INFO_VC_POWER_MODE_CONTROL (0x8601U)
  Video device class-specific request GET INFO COMMAND.
- #define **USB_DEVICE_VIDEO_GET_INFO_VC_ERROR_CODE_CONTROL** (0x8602U)
- #define **USB_DEVICE_VIDEO_GET_INFO_PU_BACKLIGHT_COMPENSATION_CON-TROL** (0x8621U)
- #define **USB_DEVICE_VIDEO_GET_INFO_PU_BRIGHTNESS_CONTROL** (0x8622U)
- #define **USB_DEVICE_VIDEO_GET_INFO_PU_CONTRACT_CONTROL** (0x8623U)
- #define **USB_DEVICE_VIDEO_GET_INFO_PU_GAIN_CONTROL** (0x8624U)
- #define **USB_DEVICE_VIDEO_GET_INFO_PU_POWER_LINE_FREQUENCY_CONTR-OL** (0x8625U)
- #define **USB_DEVICE_VIDEO_GET_INFO_PU_HUE_CONTROL** (0x8626U)
- #define **USB_DEVICE_VIDEO_GET_INFO_PU_SATURATION_CONTROL** (0x8627U)
- #define **USB_DEVICE_VIDEO_GET_INFO_PU_SHARRNESS_CONTROL** (0x8628U)
- #define **USB_DEVICE_VIDEO_GET_INFO_PU_GAMMA_CONTROL** (0x8629U)
- #define **USB_DEVICE_VIDEO_GET_INFO_PU_WHITE_BALANCE_TEMPERATURE_-CONTROL** (0x862AU)
- #define **USB_DEVICE_VIDEO_GET_INFO_PU_WHITE_BALANCE_TEMPERATURE_-AUTO_CONTROL** (0x862BU)
- #define **USB_DEVICE_VIDEO_GET_INFO_PU_WHITE_BALANCE_COMPONENT_CO-NTROL** (0x862CU)
- #define **USB_DEVICE_VIDEO_GET_INFO_PU_WHITE_BALANCE_COMPONENT_AU-**

TO_CONTROL (0x862DU)
- #define   USB_DEVICE_VIDEO_GET_INFO_PU_DIGITAL_MULTIPLIER_CONTRO-**L** (0x862EU)
- #define   **USB_DEVICE_VIDEO_GET_INFO_PU_DIGITAL_MULTIPLIER_LIMIT_CON-TROL** (0x862FU)
- #define **USB_DEVICE_VIDEO_GET_INFO_PU_HUE_AUTO_CONTROL** (0x8630U)
- #define   **USB_DEVICE_VIDEO_GET_INFO_PU_ANALOG_VIDEO_STANDARD_CONT-ROL** (0x8631U)
- #define   **USB_DEVICE_VIDEO_GET_INFO_PU_ANALOG_LOCK_STATUS_CONTRO-L** (0x8632U)
- #define **USB_DEVICE_VIDEO_GET_INFO_CT_SCANNING_MODE_CONTROL** (0x8641-U)
- #define **USB_DEVICE_VIDEO_GET_INFO_CT_AE_MODE_CONTROL** (0x8642U)
- #define **USB_DEVICE_VIDEO_GET_INFO_CT_AE_PRIORITY_CONTROL** (0x8643U)
- #define **USB_DEVICE_VIDEO_GET_INFO_CT_EXPOSURE_TIME_ABSOLUTE_CONT-ROL** (0x8644U)
- #define   **USB_DEVICE_VIDEO_GET_INFO_CT_EXPOSURE_TIME_RELATIVE_CONT-ROL** (0x8645U)
- #define **USB_DEVICE_VIDEO_GET_INFO_CT_FOCUS_ABSOLUTE_CONTROL** (0x8646-U)
- #define **USB_DEVICE_VIDEO_GET_INFO_CT_FOCUS_RELATIVE_CONTROL** (0x8647-U)
- #define **USB_DEVICE_VIDEO_GET_INFO_CT_FOCUS_AUTO_CONTROL** (0x8648U)
- #define **USB_DEVICE_VIDEO_GET_INFO_CT_IRIS_ABSOLUTE_CONTROL** (0x8649U)
- #define **USB_DEVICE_VIDEO_GET_INFO_CT_IRIS_RELATIVE_CONTROL** (0x864AU)
- #define **USB_DEVICE_VIDEO_GET_INFO_CT_ZOOM_ABSOLUTE_CONTROL** (0x864-BU)
- #define **USB_DEVICE_VIDEO_GET_INFO_CT_ZOOM_RELATIVE_CONTROL** (0x864-CU)
- #define **USB_DEVICE_VIDEO_GET_INFO_CT_PANTILT_ABSOLUTE_CONTROL** (0x864-DU)
- #define **USB_DEVICE_VIDEO_GET_INFO_CT_PANTILT_RELATIVE_CONTROL** (0x864-EU)
- #define **USB_DEVICE_VIDEO_GET_INFO_CT_ROLL_ABSOLUTE_CONTROL** (0x864F-U)
- #define **USB_DEVICE_VIDEO_GET_INFO_CT_ROLL_RELATIVE_CONTROL** (0x8650-U)
- #define **USB_DEVICE_VIDEO_GET_INFO_CT_PRIVACY_CONTROL** (0x8651U)
- #define **USB_DEVICE_VIDEO_GET_INFO_VS_PROBE_CONTROL** (0x8661U)
- #define **USB_DEVICE_VIDEO_GET_INFO_VS_COMMIT_CONTROL** (0x8662U)
- #define **USB_DEVICE_VIDEO_GET_INFO_VS_STILL_PROBE_CONTROL** (0x8663U)
- #define **USB_DEVICE_VIDEO_GET_INFO_VS_STILL_COMMIT_CONTROL** (0x8664U)
- #define   **USB_DEVICE_VIDEO_GET_INFO_VS_STILL_IMAGE_TRIGGER_CONTRO-L** (0x8665U)
- #define   **USB_DEVICE_VIDEO_GET_INFO_VS_STREAM_ERROR_CODE_CONTRO-L** (0x8666U)
- #define   **USB_DEVICE_VIDEO_GET_INFO_VS_GENERATE_KEY_FRAME_CONTRO-L** (0x8667U)
- #define **USB_DEVICE_VIDEO_GET_INFO_VS_UPDATE_FRAME_SEGMENT_CONTR-OL** (0x8668U)
- #define **USB_DEVICE_VIDEO_GET_INFO_VS_SYNCH_DELAY_CONTROL** (0x8669U)

- #define USB_DEVICE_VIDEO_GET_DEF_PU_BACKLIGHT_COMPENSATION_CONTRO-L (0x8721U)

    Video device class-specific request GET DEF COMMAND.
- #define **USB_DEVICE_VIDEO_GET_DEF_PU_BRIGHTNESS_CONTROL** (0x8722U)
- #define **USB_DEVICE_VIDEO_GET_DEF_PU_CONTRACT_CONTROL** (0x8723U)
- #define **USB_DEVICE_VIDEO_GET_DEF_PU_GAIN_CONTROL** (0x8724U)
- #define **USB_DEVICE_VIDEO_GET_DEF_PU_POWER_LINE_FREQUENCY_CONTRO-L** (0x8725U)
- #define **USB_DEVICE_VIDEO_GET_DEF_PU_HUE_CONTROL** (0x8726U)
- #define **USB_DEVICE_VIDEO_GET_DEF_PU_SATURATION_CONTROL** (0x8727U)
- #define **USB_DEVICE_VIDEO_GET_DEF_PU_SHARRNESS_CONTROL** (0x8728U)
- #define **USB_DEVICE_VIDEO_GET_DEF_PU_GAMMA_CONTROL** (0x8729U)
- #define **USB_DEVICE_VIDEO_GET_DEF_PU_WHITE_BALANCE_TEMPERATURE_C-ONTROL** (0x872AU)
- #define **USB_DEVICE_VIDEO_GET_DEF_PU_WHITE_BALANCE_TEMPERATURE_A-UTO_CONTROL** (0x872BU)
- #define **USB_DEVICE_VIDEO_GET_DEF_PU_WHITE_BALANCE_COMPONENT_CO-NTROL** (0x872CU)
- #define **USB_DEVICE_VIDEO_GET_DEF_PU_WHITE_BALANCE_COMPONENT_AUT-O_CONTROL** (0x872DU)
- #define **USB_DEVICE_VIDEO_GET_DEF_PU_DIGITAL_MULTIPLIER_CONTRO-L** (0x872EU)
- #define **USB_DEVICE_VIDEO_GET_DEF_PU_DIGITAL_MULTIPLIER_LIMIT_CONT-ROL** (0x872FU)
- #define **USB_DEVICE_VIDEO_GET_DEF_PU_HUE_AUTO_CONTROL** (0x8730U)
- #define **USB_DEVICE_VIDEO_GET_DEF_CT_AE_MODE_CONTROL** (0x8742U)
- #define **USB_DEVICE_VIDEO_GET_DEF_CT_EXPOSURE_TIME_ABSOLUTE_CONT-ROL** (0x8744U)
- #define **USB_DEVICE_VIDEO_GET_DEF_CT_FOCUS_ABSOLUTE_CONTROL** (0x8746-U)
- #define **USB_DEVICE_VIDEO_GET_DEF_CT_FOCUS_RELATIVE_CONTROL** (0x8747-U)
- #define **USB_DEVICE_VIDEO_GET_DEF_CT_FOCUS_AUTO_CONTROL** (0x8748U)
- #define **USB_DEVICE_VIDEO_GET_DEF_CT_IRIS_ABSOLUTE_CONTROL** (0x8749U)
- #define **USB_DEVICE_VIDEO_GET_DEF_CT_ZOOM_ABSOLUTE_CONTROL** (0x874B-U)
- #define **USB_DEVICE_VIDEO_GET_DEF_CT_ZOOM_RELATIVE_CONTROL** (0x874C-U)
- #define **USB_DEVICE_VIDEO_GET_DEF_CT_PANTILT_ABSOLUTE_CONTROL** (0x874-DU)
- #define **USB_DEVICE_VIDEO_GET_DEF_CT_PANTILT_RELATIVE_CONTROL** (0x874-EU)
- #define **USB_DEVICE_VIDEO_GET_DEF_CT_ROLL_ABSOLUTE_CONTROL** (0x874F-U)
- #define **USB_DEVICE_VIDEO_GET_DEF_CT_ROLL_RELATIVE_CONTROL** (0x8750U)
- #define **USB_DEVICE_VIDEO_GET_DEF_VS_PROBE_CONTROL** (0x8761U)
- #define **USB_DEVICE_VIDEO_GET_DEF_VS_STILL_PROBE_CONTROL** (0x8763U)
- #define **USB_DEVICE_VIDEO_GET_DEF_VS_UPDATE_FRAME_SEGMENT_CONTRO-L** (0x8768U)
- #define **USB_DEVICE_VIDEO_GET_DEF_VS_SYNCH_DELAY_CONTROL** (0x8769U)
- #define USB_DEVICE_VIDEO_SET_CUR_VC_POWER_MODE_CONTROL (0x0101U)

Video device class-specific request SET CUR COMMAND.

- #define **USB_DEVICE_VIDEO_SET_CUR_PU_BACKLIGHT_COMPENSATION_CONT-ROL** (0x0121U)
- #define **USB_DEVICE_VIDEO_SET_CUR_PU_BRIGHTNESS_CONTROL** (0x0122U)
- #define **USB_DEVICE_VIDEO_SET_CUR_PU_CONTRACT_CONTROL** (0x0123U)
- #define **USB_DEVICE_VIDEO_SET_CUR_PU_GAIN_CONTROL** (0x0124U)
- #define **USB_DEVICE_VIDEO_SET_CUR_PU_POWER_LINE_FREQUENCY_CONTRO-L** (0x0125U)
- #define **USB_DEVICE_VIDEO_SET_CUR_PU_HUE_CONTROL** (0x0126U)
- #define **USB_DEVICE_VIDEO_SET_CUR_PU_SATURATION_CONTROL** (0x0127U)
- #define **USB_DEVICE_VIDEO_SET_CUR_PU_SHARRNESS_CONTROL** (0x0128U)
- #define **USB_DEVICE_VIDEO_SET_CUR_PU_GAMMA_CONTROL** (0x0129U)
- #define **USB_DEVICE_VIDEO_SET_CUR_PU_WHITE_BALANCE_TEMPERATURE_C-ONTROL** (0x012AU)
- #define **USB_DEVICE_VIDEO_SET_CUR_PU_WHITE_BALANCE_TEMPERATURE_A-UTO_CONTROL** (0x012BU)
- #define **USB_DEVICE_VIDEO_SET_CUR_PU_WHITE_BALANCE_COMPONENT_CON-TROL** (0x012CU)
- #define **USB_DEVICE_VIDEO_SET_CUR_PU_WHITE_BALANCE_COMPONENT_AUT-O_CONTROL** (0x012DU)
- #define **USB_DEVICE_VIDEO_SET_CUR_PU_DIGITAL_MULTIPLIER_CONTRO-L** (0x012EU)
- #define **USB_DEVICE_VIDEO_SET_CUR_PU_DIGITAL_MULTIPLIER_LIMIT_CONT-ROL** (0x012FU)
- #define **USB_DEVICE_VIDEO_SET_CUR_PU_HUE_AUTO_CONTROL** (0x0130U)
- #define **USB_DEVICE_VIDEO_SET_CUR_CT_SCANNING_MODE_CONTROL** (0x0141-U)
- #define **USB_DEVICE_VIDEO_SET_CUR_CT_AE_MODE_CONTROL** (0x0142U)
- #define **USB_DEVICE_VIDEO_SET_CUR_CT_AE_PRIORITY_CONTROL** (0x0143U)
- #define **USB_DEVICE_VIDEO_SET_CUR_CT_EXPOSURE_TIME_ABSOLUTE_CONTR-OL** (0x0144U)
- #define **USB_DEVICE_VIDEO_SET_CUR_CT_EXPOSURE_TIME_RELATIVE_CONTR-OL** (0x0145U)
- #define **USB_DEVICE_VIDEO_SET_CUR_CT_FOCUS_ABSOLUTE_CONTROL** (0x0146-U)
- #define **USB_DEVICE_VIDEO_SET_CUR_CT_FOCUS_RELATIVE_CONTROL** (0x0147-U)
- #define **USB_DEVICE_VIDEO_SET_CUR_CT_FOCUS_AUTO_CONTROL** (0x0148U)
- #define **USB_DEVICE_VIDEO_SET_CUR_CT_IRIS_ABSOLUTE_CONTROL** (0x0149U)
- #define **USB_DEVICE_VIDEO_SET_CUR_CT_IRIS_RELATIVE_CONTROL** (0x014AU)
- #define **USB_DEVICE_VIDEO_SET_CUR_CT_ZOOM_ABSOLUTE_CONTROL** (0x014B-U)
- #define **USB_DEVICE_VIDEO_SET_CUR_CT_ZOOM_RELATIVE_CONTROL** (0x014C-U)
- #define **USB_DEVICE_VIDEO_SET_CUR_CT_PANTILT_ABSOLUTE_CONTROL** (0x014-DU)
- #define **USB_DEVICE_VIDEO_SET_CUR_CT_PANTILT_RELATIVE_CONTROL** (0x014-EU)
- #define **USB_DEVICE_VIDEO_SET_CUR_CT_ROLL_ABSOLUTE_CONTROL** (0x014FU)
- #define **USB_DEVICE_VIDEO_SET_CUR_CT_ROLL_RELATIVE_CONTROL** (0x0150U)
- #define **USB_DEVICE_VIDEO_SET_CUR_CT_PRIVACY_CONTROL** (0x0151U)
- #define **USB_DEVICE_VIDEO_SET_CUR_VS_PROBE_CONTROL** (0x0161U)

- #define **USB_DEVICE_VIDEO_SET_CUR_VS_COMMIT_CONTROL** (0x0162U)
- #define **USB_DEVICE_VIDEO_SET_CUR_VS_STILL_PROBE_CONTROL** (0x0163U)
- #define **USB_DEVICE_VIDEO_SET_CUR_VS_STILL_COMMIT_CONTROL** (0x0164U)
- #define   **USB_DEVICE_VIDEO_SET_CUR_VS_STILL_IMAGE_TRIGGER_CONTRO-L** (0x0165U)
- #define   **USB_DEVICE_VIDEO_SET_CUR_VS_STREAM_ERROR_CODE_CONTRO-L** (0x0166U)
- #define   **USB_DEVICE_VIDEO_SET_CUR_VS_GENERATE_KEY_FRAME_CONTRO-L** (0x0167U)
- #define **USB_DEVICE_VIDEO_SET_CUR_VS_UPDATE_FRAME_SEGMENT_CONTRO-L** (0x0168U)
- #define **USB_DEVICE_VIDEO_SET_CUR_VS_SYNCH_DELAY_CONTROL** (0x0169U)

USB device video class APIs

- usb_status_t USB_DeviceVideoSend (class_handle_t handle, uint8_t ep, uint8_t ∗buffer, uint32_t length)
    Sends data through a specified endpoint.
- usb_status_t USB_DeviceVideoRecv (class_handle_t handle, uint8_t ep, uint8_t ∗buffer, uint32_t length)
    Receives data through a specified endpoint.

3.14.2   Data Structure Documentation

3.14.2.1   struct _usb_device_video_mjpeg_payload_header_struct

Data Fields

- uint8_t bHeaderLength
    The payload header length.
- uint32_t dwPresentationTime
    Presentation time stamp (PTS) field.
- uint8_t bSourceClockReference [6]
    Source clock reference (SCR) field.
- uint8_t bmheaderInfo
    The payload header bitmap field.
- uint8_t frameIdentifier: 1U
    Frame Identifier.
- uint8_t endOfFrame: 1U
    End of Frame.
- uint8_t presentationTimeStamp: 1U
    Presentation Time Stamp.
- uint8_t sourceClockReference: 1U
    Source Clock Reference.
- uint8_t reserved: 1U
    Reserved.
- uint8_t stillImage: 1U
    Still Image.

- uint8_t errorBit: 1U
    Error Bit.
- uint8_t endOfHeader: 1U
    End of Header.
- uint8_t FID: 1U
    Frame Identifier.
- uint8_t EOI: 1U
    End of Frame.
- uint8_t PTS: 1U
    Presentation Time Stamp.
- uint8_t SCR: 1U
    Source Clock Reference.
- uint8_t RES: 1U
    Reserved.
- uint8_t STI: 1U
    Still Image.
- uint8_t ERR: 1U
    Error Bit.
- uint8_t EOH: 1U
    End of Header.

3.14.2.1.0.29 Field Documentation

3.14.2.1.0.29.1 uint8_t usb_device_video_mjpeg_payload_header_struct_t::bHeaderLength

3.14.2.1.0.29.2 uint8_t usb_device_video_mjpeg_payload_header_struct_t::bmheaderInfo

3.14.2.1.0.29.3 uint8_t usb_device_video_mjpeg_payload_header_struct_t::frameIdentifier

This bit toggles at each frame start boundary and stays constant for the rest of the frame.

3.14.2.1.0.29.4 uint8_t usb_device_video_mjpeg_payload_header_struct_t::endOfFrame

This bit indicates the end of a video frame and is set in the last video sample that belongs to a frame.

3.14.2.1.0.29.5 uint8_t usb_device_video_mjpeg_payload_header_struct_t::presentationTime-Stamp

This bit, when set, indicates the presence of a PTS field.

3.14.2.1.0.29.6 uint8_t usb_device_video_mjpeg_payload_header_struct_t::sourceClock-Reference

This bit, when set, indicates the presence of a SCR field.

3.14.2.1.0.29.7 uint8_t usb_device_video_mjpeg_payload_header_struct_t::reserved

Set to 0.

3.14.2.1.0.29.8　uint8_t usb_device_video_mjpeg_payload_header_struct_t::stillImage

This bit, when set, identifies a video sample that belongs to a still image.

3.14.2.1.0.29.9　uint8_t usb_device_video_mjpeg_payload_header_struct_t::errorBit

This bit, when set, indicates an error in the device streaming.

3.14.2.1.0.29.10　uint8_t usb_device_video_mjpeg_payload_header_struct_t::endOfHeader

This bit, when set, indicates the end of the BFH fields.

3.14.2.1.0.29.11　uint8_t usb_device_video_mjpeg_payload_header_struct_t::FID

This bit toggles at each frame start boundary and stays constant for the rest of the frame.

3.14.2.1.0.29.12　uint8_t usb_device_video_mjpeg_payload_header_struct_t::EOI

This bit indicates the end of a video frame and is set in the last video sample that belongs to a frame.

3.14.2.1.0.29.13　uint8_t usb_device_video_mjpeg_payload_header_struct_t::PTS

This bit, when set, indicates the presence of a PTS field.

3.14.2.1.0.29.14　uint8_t usb_device_video_mjpeg_payload_header_struct_t::SCR

This bit, when set, indicates the presence of a SCR field.

3.14.2.1.0.29.15　uint8_t usb_device_video_mjpeg_payload_header_struct_t::RES

Set to 0.

3.14.2.1.0.29.16　uint8_t usb_device_video_mjpeg_payload_header_struct_t::STI

This bit, when set, identifies a video sample that belongs to a still image.

3.14.2.1.0.29.17　uint8_t usb_device_video_mjpeg_payload_header_struct_t::ERR

This bit, when set, indicates an error in the device streaming.

3.14.2.1.0.29.18　uint8_t usb_device_video_mjpeg_payload_header_struct_t::EOH

This bit, when set, indicates the end of the BFH fields.

3.14.2.1.0.29.19 uint32_t usb_device_video_mjpeg_payload_header_struct_t::dwPresentation-Time

3.14.2.1.0.29.20 uint8_t usb_device_video_mjpeg_payload_header_struct_t::bSourceClock-Reference[6]

3.14.2.2 struct _usb_device_video_probe_and_commit_controls_struct

Data Fields

- uint8_t bFormatIndex

  Video format index from a format descriptor.
- uint8_t bFrameIndex

  Video frame index from a frame descriptor.
- uint32_t dwFrameInterval

  Frame interval in 100ns units.
- uint16_t wKeyFrameRate

  Key frame rate in key-frame per video-frame units.
- uint16_t wPFrameRate

  PFrame rate in PFrame/key frame units.
- uint16_t wCompQuality

  Compression quality control in abstract units 0U (lowest) to 10000U (highest).
- uint16_t wCompWindowSize

  Window size for average bit rate control.
- uint16_t wDelay

  Internal video streaming interface latency in ms from video data capture to presentation on the USB.
- uint32_t dwMaxVideoFrameSize

  Maximum video frame or codec-specific segment size in bytes.
- uint32_t dwMaxPayloadTransferSize

  Specifies the maximum number of bytes that the device can transmit or receive in a single payload transfer.
- uint32_t dwClockFrequency

  The device clock frequency in Hz for the specified format.
- uint8_t bmFramingInfo

  Bit-field control supporting the following values: D0 Frame ID, D1 EOF.
- uint8_t bPreferedVersion

  The preferred payload format version supported by the host or device for the specified bFormatIndex value.
- uint8_t bMinVersion

  The minimum payload format version supported by the device for the specified bFormatIndex value.
- uint8_t bMaxVersion

  The maximum payload format version supported by the device for the specified bFormatIndex value.
- uint8_t bmHint

  Bit-field control indicating to the function what fields shall be kept fixed.
- uint8_t dwFrameInterval: 1U

  dwFrameInterval field.
- uint8_t wKeyFrameRate: 1U

  wKeyFrameRate field.
- uint8_t wPFrameRate: 1U

  wPFrameRate field.
- uint8_t wCompQuality: 1U

  wCompQuality field.
- uint8_t wCompWindowSize: 1U

wCompWindowSize field.
- uint8_t reserved: 3U
   Reserved field.

3.14.2.2.0.30   Field Documentation

3.14.2.2.0.30.1   uint8_t usb_device_video_probe_and_commit_controls_struct_t::bmHint

3.14.2.2.0.30.2   uint8_t usb_device_video_probe_and_commit_controls_struct_t::dwFrameInterval

3.14.2.2.0.30.3   uint8_t usb_device_video_probe_and_commit_controls_struct_t::wKeyFrameRate

3.14.2.2.0.30.4   uint8_t usb_device_video_probe_and_commit_controls_struct_t::wPFrameRate

3.14.2.2.0.30.5   uint8_t usb_device_video_probe_and_commit_controls_struct_t::wCompQuality

3.14.2.2.0.30.6   uint8_t usb_device_video_probe_and_commit_controls_struct_t::wCompWindow-Size

3.14.2.2.0.30.7   uint8_t usb_device_video_probe_and_commit_controls_struct_t::reserved

3.14.2.2.0.30.8   uint8_t usb_device_video_probe_and_commit_controls_struct_t::bFormatIndex

3.14.2.2.0.30.9   uint8_t usb_device_video_probe_and_commit_controls_struct_t::bFrameIndex

3.14.2.2.0.30.10   uint32_t usb_device_video_probe_and_commit_controls_struct_t::dwFrame-Interval

3.14.2.2.0.30.11   uint16_t usb_device_video_probe_and_commit_controls_struct_t::wKeyFrame-Rate

3.14.2.2.0.30.12   uint16_t usb_device_video_probe_and_commit_controls_struct_t::wPFrameRate

3.14.2.2.0.30.13   uint16_t usb_device_video_probe_and_commit_controls_struct_t::wComp-Quality

3.14.2.2.0.30.14   uint16_t usb_device_video_probe_and_commit_controls_struct_t::wComp-WindowSize

3.14.2.2.0.30.15   uint16_t usb_device_video_probe_and_commit_controls_struct_t::wDelay

3.14.2.2.0.30.16   uint32_t usb_device_video_probe_and_commit_controls_struct_t::dwMaxVideo-FrameSize

3.14.2.2.0.30.17   uint32_t usb_device_video_probe_and_commit_controls_struct_t::dwMax-PayloadTransferSize

3.14.2.2.0.30.18   uint32_t usb_device_video_probe_and_commit_controls_struct_t::dwClock-Frequency

This specifies the units used for the time information fields in the Video Payload Headers in the data stream.

3.14.2.2.0.30.19 **uint8_t usb_device_video_probe_and_commit_controls_struct_t::bmFramingInfo**

3.14.2.2.0.30.20 **uint8_t usb_device_video_probe_and_commit_controls_struct_t::bPrefered-Version**

3.14.2.2.0.30.21 **uint8_t usb_device_video_probe_and_commit_controls_struct_t::bMinVersion**

3.14.2.2.0.30.22 **uint8_t usb_device_video_probe_and_commit_controls_struct_t::bMaxVersion**

3.14.2.3 struct _usb_device_video_still_probe_and_commit_controls_struct

Data Fields

- uint8_t bFormatIndex
  Video format index from a format descriptor.
- uint8_t bFrameIndex
  Video frame index from a frame descriptor.
- uint8_t bCompressionIndex
  Compression index from a frame descriptor.
- uint32_t dwMaxVideoFrameSize
  Maximum still image size in bytes.
- uint32_t dwMaxPayloadTransferSize
  Specifies the maximum number of bytes that the device can transmit or receive in a single payload transfer.

3.14.2.3.0.31 **Field Documentation**

3.14.2.3.0.31.1 **uint8_t usb_device_video_still_probe_and_commit_controls_struct_t::bFormat-Index**

3.14.2.3.0.31.2 **uint8_t usb_device_video_still_probe_and_commit_controls_struct_t::bFrame-Index**

3.14.2.3.0.31.3 **uint8_t usb_device_video_still_probe_and_commit_controls_struct_t::b-CompressionIndex**

3.14.2.3.0.31.4 **uint32_t usb_device_video_still_probe_and_commit_controls_struct_t::dwMax-VideoFrameSize**

3.14.2.3.0.31.5 **uint32_t usb_device_video_still_probe_and_commit_controls_struct_t::dwMax-PayloadTransferSize**

3.14.2.4 struct usb_device_video_entity_struct_t

The structure is used to pass the video entity information filled by application. Such as entity id (unit or terminal ID), entity type (unit or terminal type), and terminal type if the entity is a terminal.

3.14.2.5   struct usb_device_video_entities_struct_t

The structure is used to pass the video entity informations filled by the application. The type of each entity is the usb_device_video_entity_struct_t. The structure pointer is kept in the usb_device_interface_struct-_t::classSpecific, such as, if there are three entities(out terminal, camera terminal, and processing unit), the value of the count field is 3U and the entity field saves the every entity information.

3.14.2.6   struct usb_device_video_struct_t

Data Fields

- usb_device_handle handle
  The device handle.
- usb_device_class_config_struct_t ∗ configStruct
  The configuration of the class.
- usb_device_interface_struct_t ∗ controlInterfaceHandle
  Current control interface handle.
- usb_device_interface_struct_t ∗ streamInterfaceHandle
  Current stream interface handle.
- uint8_t configuration
  Current configuration.
- uint8_t controlInterfaceNumber
  The control interface number of the class.
- uint8_t controlAlternate
  Current alternate setting of the control interface.
- uint8_t streamInterfaceNumber
  The stream interface number of the class.
- uint8_t streamAlternate
  Current alternate setting of the stream interface.
- uint8_t streamInPipeBusy
  Stream IN pipe busy flag.
- uint8_t streamOutPipeBusy
  Stream OUT pipe busy flag.

3.14.2.6.0.32   Field Documentation

3.14.2.6.0.32.1   usb_device_class_config_struct_t∗ usb_device_video_struct_t::configStruct

3.14.3   Enumeration Type Documentation

3.14.3.1   enum usb_device_video_event_t

Enumerator

kUSB_DeviceVideoEventStreamSendResponse	Send data completed or cancelled in stream pipe.
kUSB_DeviceVideoEventStreamRecvResponse	Data received or cancelled in stream pipe.
kUSB_DeviceVideoEventControlSendResponse	Send data completed or cancelled etc in video control pipe.

kUSB_DeviceVideoEventClassRequestBuffer   Get buffer to save the data of the video class-specific request.

3.14.4   Function Documentation

3.14.4.1   usb_status_t USB_DeviceVideoInit (uint8_t *controllerId,* usb_-_device_class_config_struct_t ∗ *config,* class_handle_t ∗ *handle*)

This function is used to initialize the video class. This function can only be called by the USB_Device-ClassInit.

Parameters

in	*controllerId*	The controller ID of the USB IP. See the enumeration usb_controller_-index_t.
in	*config*	The class configuration information.
in	*handle*	An parameter used to return pointer of the video class handle to the caller.

Returns

A USB error code or kStatus_USB_Success.

3.14.4.2   usb_status_t USB_DeviceVideoDeinit (class_handle_t *handle*)

The function deinitializes the device video class. This function can only be called by the USB_Device-ClassDeinit.

Parameters

in	*handle*	The video class handle received from usb_device_class_config_struct_-t::classHandle.

Returns

A USB error code or kStatus_USB_Success.

3.14.4.3   usb_status_t USB_DeviceVideoEvent (void ∗ *handle,* uint32_t *event,* void ∗ *param*)

This function handles the event passed to the video class. This function can only be called by the USB_-DeviceClassEvent.

Parameters

in	*handle*	The video class handle received from the usb_device_class_config_-struct_t::classHandle.
in	*event*	The event codes. See the enumeration usb_device_class_event_t.
in,out	*param*	The parameter type is determined by the event code.

Returns

A USB error code or kStatus_USB_Success.

Return values

kStatus_USB_Success	Free device handle successfully.
kStatus_USB_Invalid-Parameter	The device handle is not found.
kStatus_USB_Invalid-Request	The request is invalid and the control pipe is stalled by the caller.

3.14.4.4   usb_status_t USB_DeviceVideoSend (class_handle_t *handle,* uint8_t *ep,* uint8_t ∗ *buffer,* uint32_t *length*)

The function is used to send data through a specified endpoint. The function calls USB_DeviceSend-Request internally.

Parameters

in	*handle*	The video class handle received from usb_device_class_config_struct_-t::classHandle.
in	*ep*	Endpoint index.
in	*buffer*	The memory address to hold the data need to be sent.
in	*length*	The data length to be sent.

Returns

A USB error code or kStatus_USB_Success.

Note

The function can only be called in the same context.

The return value indicates whether the sending request is successful or not. The transfer done is notified by USB_DeviceVideoStreamIn or USB_DeviceVideoControlIn. Currently, only one transfer request can be supported for a specific endpoint. If there is a specific requirement to support multiple transfer requests for a specific endpoint, the application should implement a queue in the application level. The subsequent transfer can begin only when the previous transfer is done (a notification is received through the endpoint callback).

3.14.4.5 usb_status_t USB_DeviceVideoRecv (class_handle_t *handle,* uint8_t *ep,* uint8_t ∗ *buffer,* uint32_t *length*)

The function is used to receive data through a specified endpoint. The function calls the USB_Device-RecvRequest internally.

Parameters

in	handle	The video class handle got from usb_device_class_config_struct_t-::classHandle.
in	ep	Endpoint index.
in	buffer	The memory address to save the received data.
in	length	The data length want to be received.

Returns

A USB error code or kStatus_USB_Success.

Note

The function can only be called in the same context.

The return value indicates whether the receiving request is successful or not. The transfer done is notified by USB_DeviceVideoStreamOut. Currently, only one transfer request can be supported for a specific endpoint. If there is a specific requirement to support multiple transfer requests for a specific endpoint. The application should implement a queue in the application level. The subsequent transfer can begin only when the previous transfer is done (a notification is received through the endpoint callback).

Chapter 4
USB Device driver

4.1   Overview

The USB device provides the device APIs to support the class driver and lite/non-lite application. It includes the USB controller driver only which consist of the common controller driver and xHCI driver.

Modules

- USB Device Configuration
- USB Device Controller driver
- USB Device Spec Chapter 9 driver

Data Structures

- struct usb_device_endpoint_callback_message_struct_t
    Endpoint callback message structure. More...
- struct usb_device_endpoint_callback_struct_t
    Endpoint callback structure. More...
- struct usb_device_endpoint_init_struct_t
    Endpoint initialization structure. More...
- struct usb_device_endpoint_status_struct_t
    Endpoint status structure. More...

Macros

- #define USB_CONTROL_ENDPOINT (0U)
    Control endpoint index.
- #define USB_CONTROL_MAX_PACKET_SIZE (64U)
    Control endpoint maxPacketSize.
- #define USB_SETUP_PACKET_SIZE (8U)
    The setup packet size of USB control transfer.
- #define USB_ENDPOINT_NUMBER_MASK (0x0FU)
    USB endpoint mask.
- #define USB_UNINITIALIZED_VAL_32 (0xFFFFFFFFU)
    uninitialized value
- #define USB_CANCELLED_TRANSFER_LENGTH (0xFFFFFFFFU)
    the endpoint callback length of cancelled transfer
- #define USB_INVALID_TRANSFER_BUFFER (0xFFFFFFFEU)
    invalid tranfer buffer addresss

Typedefs

- typedef usb_status_t(∗ usb_device_endpoint_callback_t)(usb_device_handle handle, usb_device_-
  endpoint_callback_message_struct_t ∗message, void ∗callbackParam)
    Endpoint callback function typedef.

- typedef usb_status_t(∗ usb_device_callback_t)(usb_device_handle handle, uint32_t callbackEvent, void ∗eventParam)

    Device callback function typedef.

Enumerations

- enum usb_device_status_t {
  kUSB_DeviceStatusTestMode = 1U,
  kUSB_DeviceStatusSpeed,
  kUSB_DeviceStatusOtg,
  kUSB_DeviceStatusDevice,
  kUSB_DeviceStatusEndpoint,
  kUSB_DeviceStatusDeviceState,
  kUSB_DeviceStatusAddress,
  kUSB_DeviceStatusSynchFrame,
  kUSB_DeviceStatusBus,
  kUSB_DeviceStatusBusSuspend,
  kUSB_DeviceStatusBusSleep,
  kUSB_DeviceStatusBusResume,
  kUSB_DeviceStatusRemoteWakeup,
  kUSB_DeviceStatusBusSleepResume }

    Defines Get/Set status Types.
- enum usb_device_state_t {
  kUSB_DeviceStateConfigured = 0U,
  kUSB_DeviceStateAddress,
  kUSB_DeviceStateDefault,
  kUSB_DeviceStateAddressing,
  kUSB_DeviceStateTestMode }

    Defines USB 2.0 device state.
- enum usb_device_endpoint_status_t {
  kUSB_DeviceEndpointStateIdle = 0U,
  kUSB_DeviceEndpointStateStalled }

    Defines endpoint state.
- enum usb_device_event_t {

kUSB_DeviceEventBusReset = 1U,

kUSB_DeviceEventSuspend,

kUSB_DeviceEventResume,

kUSB_DeviceEventSleeped,

kUSB_DeviceEventLPMResume,

kUSB_DeviceEventError,

kUSB_DeviceEventDetach,

kUSB_DeviceEventAttach,

kUSB_DeviceEventSetConfiguration,

kUSB_DeviceEventSetInterface,

kUSB_DeviceEventGetDeviceDescriptor,

kUSB_DeviceEventGetConfigurationDescriptor,

kUSB_DeviceEventGetStringDescriptor,

kUSB_DeviceEventGetHidDescriptor,

kUSB_DeviceEventGetHidReportDescriptor,

kUSB_DeviceEventGetHidPhysicalDescriptor,

kUSB_DeviceEventGetBOSDescriptor,

kUSB_DeviceEventGetDeviceQualifierDescriptor,

kUSB_DeviceEventVendorRequest,

kUSB_DeviceEventSetRemoteWakeup,

kUSB_DeviceEventGetConfiguration,

kUSB_DeviceEventGetInterface }

Available common EVENT types in device callback.

USB device APIs

- usb_status_t USB_DeviceInit (uint8_t controllerId, usb_device_callback_t deviceCallback, usb_-device_handle *handle)

  Initializes the USB device stack.
- usb_status_t USB_DeviceRun (usb_device_handle handle)

  Enables the device functionality.
- usb_status_t USB_DeviceStop (usb_device_handle handle)

  Disables the device functionality.
- usb_status_t USB_DeviceDeinit (usb_device_handle handle)

  De-initializes the device controller.
- usb_status_t USB_DeviceSendRequest (usb_device_handle handle, uint8_t endpointAddress, uint8_t *buffer, uint32_t length)

  Sends data through a specified endpoint.
- usb_status_t USB_DeviceRecvRequest (usb_device_handle handle, uint8_t endpointAddress, uint8_t *buffer, uint32_t length)

  Receives data through a specified endpoint.
- usb_status_t USB_DeviceCancel (usb_device_handle handle, uint8_t endpointAddress)

  Cancels the pending transfer in a specified endpoint.
- usb_status_t USB_DeviceInitEndpoint (usb_device_handle handle, usb_device_endpoint_init_-struct_t *epInit, usb_device_endpoint_callback_struct_t *epCallback)

  Initializes a specified endpoint.
- usb_status_t USB_DeviceDeinitEndpoint (usb_device_handle handle, uint8_t endpointAddress)

Deinitializes a specified endpoint.

- usb_status_t USB_DeviceStallEndpoint (usb_device_handle handle, uint8_t endpointAddress)
    Stalls a specified endpoint.
- usb_status_t USB_DeviceUnstallEndpoint (usb_device_handle handle, uint8_t endpointAddress)
    Un-stall a specified endpoint.
- usb_status_t USB_DeviceGetStatus (usb_device_handle handle, usb_device_status_t type, void ∗param)
    Gets the status of the selected item.
- usb_status_t USB_DeviceSetStatus (usb_device_handle handle, usb_device_status_t type, void ∗param)
    Sets the status of the selected item.
- void USB_DeviceKhciIsrFunction (void ∗deviceHandle)
    Device KHCI ISR function.
- void USB_DeviceEhciIsrFunction (void ∗deviceHandle)
    Device EHCI ISR function.
- void USB_DeviceLpcIp3511IsrFunction (void ∗deviceHandle)
    Device LPC USB ISR function.
- void USB_DeviceGetVersion (uint32_t ∗version)
    Gets the device stack version function.
- usb_status_t USB_DeviceUpdateHwTick (usb_device_handle handle, uint64_t tick)
    Update the hardware tick.

4.2 Data Structure Documentation

4.2.1 struct usb_device_endpoint_callback_message_struct_t

Data Fields

- uint8_t ∗ buffer
    Transferred buffer.
- uint32_t length
    Transferred data length.
- uint8_t isSetup
    Is in a setup phase.

4.2.2 struct usb_device_endpoint_callback_struct_t

Data Fields

- usb_device_endpoint_callback_t callbackFn
    Endpoint callback function.
- void ∗ callbackParam
    Parameter for callback function.

4.2.3 struct usb_device_endpoint_init_struct_t

Data Fields

- uint16_t maxPacketSize
    Endpoint maximum packet size.
- uint8_t endpointAddress
    Endpoint address.
- uint8_t transferType
    Endpoint transfer type.
- uint8_t zlt
    ZLT flag.
- uint8_t interval
    Endpoint interval.

4.2.4 struct usb_device_endpoint_status_struct_t

Data Fields

- uint8_t endpointAddress
    Endpoint address.
- uint16_t endpointStatus
    Endpoint status : idle or stalled.

4.3 Macro Definition Documentation

4.3.1 #define USB_SETUP_PACKET_SIZE (8U)

4.4 Typedef Documentation

4.4.1 typedef usb_status_t(∗ usb_device_endpoint_callback_t)(usb_device_handle handle, usb_device_endpoint_callback_message_struct_t ∗message, void ∗callbackParam)

This callback function is used to notify the upper layer what the transfer result is. This callback pointer is passed when a specified endpoint is initialized by calling API USB_DeviceInitEndpoint.

Parameters

handle	The device handle. It equals to the value returned from USB_DeviceInit.

message	The result of a transfer, which includes transfer buffer, transfer length, and whether is in a setup phase. phase for control pipe.
callbackParam	The parameter for this callback. It is same with usb_device_endpoint_callback_-struct_t::callbackParam.

Returns

A USB error code or kStatus_USB_Success.

4.4.2   typedef usb_status_t(∗ usb_device_callback_t)(usb_device_handle handle, uint32_t callbackEvent, void ∗eventParam)

This callback function is used to notify the upper layer that the device status has changed. This callback pointer is passed by calling API USB_DeviceInit.

Parameters

handle	The device handle. It equals the value returned from USB_DeviceInit.
callbackEvent	The callback event type. See enumeration usb_device_event_t.
eventParam	The event parameter for this callback. The parameter type is determined by the callback event.

Returns

A USB error code or kStatus_USB_Success.

4.5   Enumeration Type Documentation

4.5.1   enum usb_device_status_t

Enumerator

kUSB_DeviceStatusTestMode Test mode.
kUSB_DeviceStatusSpeed Current speed.
kUSB_DeviceStatusOtg OTG status.
kUSB_DeviceStatusDevice Device status.
kUSB_DeviceStatusEndpoint Endpoint state usb_device_endpoint_status_t.
kUSB_DeviceStatusDeviceState Device state.
kUSB_DeviceStatusAddress Device address.
kUSB_DeviceStatusSynchFrame Current frame.
kUSB_DeviceStatusBus Bus status.
kUSB_DeviceStatusBusSuspend Bus suspend.
kUSB_DeviceStatusBusSleep Bus suspend.

kUSB_DeviceStatusBusResume   Bus resume.
kUSB_DeviceStatusRemoteWakeup   Remote wakeup state.
kUSB_DeviceStatusBusSleepResume   Bus resume.

4.5.2   enum usb_device_state_t

Enumerator

kUSB_DeviceStateConfigured   Device state, Configured.
kUSB_DeviceStateAddress   Device state, Address.
kUSB_DeviceStateDefault   Device state, Default.
kUSB_DeviceStateAddressing   Device state, Address setting.
kUSB_DeviceStateTestMode   Device state, Test mode.

4.5.3   enum usb_device_endpoint_status_t

Enumerator

kUSB_DeviceEndpointStateIdle   Endpoint state, idle.
kUSB_DeviceEndpointStateStalled   Endpoint state, stalled.

4.5.4   enum usb_device_event_t

Enumerator

kUSB_DeviceEventBusReset   USB bus reset signal detected.
kUSB_DeviceEventSuspend   USB bus suspend signal detected.
kUSB_DeviceEventResume   USB bus resume signal detected. The resume signal is driven by itself or a host
kUSB_DeviceEventSleeped   USB bus LPM suspend signal detected.
kUSB_DeviceEventLPMResume   USB bus LPM resume signal detected. The resume signal is driven by itself or a host
kUSB_DeviceEventError   An error is happened in the bus.
kUSB_DeviceEventDetach   USB device is disconnected from a host.
kUSB_DeviceEventAttach   USB device is connected to a host.
kUSB_DeviceEventSetConfiguration   Set configuration.
kUSB_DeviceEventSetInterface   Set interface.
kUSB_DeviceEventGetDeviceDescriptor   Get device descriptor.
kUSB_DeviceEventGetConfigurationDescriptor   Get configuration descriptor.
kUSB_DeviceEventGetStringDescriptor   Get string descriptor.
kUSB_DeviceEventGetHidDescriptor   Get HID descriptor.

MCUXpresso SDK USB Stack Device Reference Manual

kUSB_DeviceEventGetHidReportDescriptor   Get HID report descriptor.
kUSB_DeviceEventGetHidPhysicalDescriptor   Get HID physical descriptor.
kUSB_DeviceEventGetBOSDescriptor   Get configuration descriptor.
kUSB_DeviceEventGetDeviceQualifierDescriptor   Get device qualifier descriptor.
kUSB_DeviceEventVendorRequest   Vendor request.
kUSB_DeviceEventSetRemoteWakeup   Enable or disable remote wakeup function.
kUSB_DeviceEventGetConfiguration   Get current configuration index.
kUSB_DeviceEventGetInterface   Get current interface alternate setting value.

4.6   Function Documentation

4.6.1   usb_status_t USB_DeviceInit (uint8_t *controllerId,* usb_device_callback_t *deviceCallback,* usb_device_handle ∗ *handle*)

This function initializes the USB device module specified by the controllerId.

Parameters

in	*controllerId*	The controller ID of the USB IP. See the enumeration usb_controller_-index_t.
in	*deviceCallback*	Function pointer of the device callback.
out	*handle*	It is an out parameter used to return the pointer of the device handle to the caller.

Return values

kStatus_USB_Success	The device is initialized successfully.
kStatus_USB_Invalid-Handle	The handle is a NULL pointer.
kStatus_USB_Busy	Cannot allocate a device handle.
kStatus_USB_Controller-NotFound	Cannot find the controller according to the controller id.
kStatus_USB_Invalid-ControllerInterface	The controller driver interfaces is invalid. There is an empty interface entity.
kStatus_USB_Error	The macro USB_DEVICE_CONFIG_ENDPOINTS is more than the IP's endpoint number. Or, the device has been initialized. Or, the mutex or message queue is created failed.

4.6.2   usb_status_t USB_DeviceRun (usb_device_handle *handle*)

The function enables the device functionality, so that the device can be recognized by the host when the device detects that it has been connected to a host.

Parameters

in	*handle*	The device handle got from USB_DeviceInit.

Return values

kStatus_USB_Success	The device is run successfully.
kStatus_USB_Controller-NotFound	Cannot find the controller.
kStatus_USB_Invalid-Handle	The device handle is a NULL pointer. Or the controller handle is invalid.

4.6.3   usb_status_t USB_DeviceStop (usb_device_handle *handle*)

The function disables the device functionality. After this function called, even if the device is detached to the host, it can't work.

Parameters

in	*handle*	The device handle received from USB_DeviceInit.

Return values

kStatus_USB_Success	The device is stopped successfully.
kStatus_USB_Controller-NotFound	Cannot find the controller.
kStatus_USB_Invalid-Handle	The device handle is a NULL pointer or the controller handle is invalid.

4.6.4   usb_status_t USB_DeviceDeinit (usb_device_handle *handle*)

The function de-initializes the device controller specified by the handle.

Parameters

in	*handle*	The device handle got from USB_DeviceInit.

Function Documentation

Return values

kStatus_USB_Success	The device is stopped successfully.
kStatus_USB_Invalid-Handle	The device handle is a NULL pointer or the controller handle is invalid.

4.6.5 usb_status_t USB_DeviceSendRequest (usb_device_handle *handle,* uint8_t *endpointAddress,* uint8_t ∗ *buffer,* uint32_t *length*)

The function is used to send data through a specified endpoint.

Parameters

in	*handle*	The device handle got from USB_DeviceInit.
in	*endpoint-Address*	Endpoint index.
in	*buffer*	The memory address to hold the data need to be sent. The function is not reentrant.
in	*length*	The data length need to be sent.

Return values

kStatus_USB_Success	The send request is sent successfully.
kStatus_USB_Invalid-Handle	The handle is a NULL pointer. Or the controller handle is invalid.
kStatus_USB_Busy	Cannot allocate DTDS for current transfer in EHCI driver.
kStatus_USB_Controller-NotFound	Cannot find the controller.
kStatus_USB_Error	The device is doing reset.

Note

The return value indicates whether the sending request is successful or not. The transfer done is notified by the corresponding callback function. Currently, only one transfer request can be supported for one specific endpoint. If there is a specific requirement to support multiple transfer requests for one specific endpoint, the application should implement a queue on the application level. The subsequent transfer can begin only when the previous transfer is done (get notification through the endpoint callback).

4.6.6 usb_status_t USB_DeviceRecvRequest (usb_device_handle *handle,* uint8_t *endpointAddress,* uint8_t ∗ *buffer,* uint32_t *length*)

The function is used to receive data through a specified endpoint. The function is not reentrant.

Function Documentation

Parameters

in	*handle*	The device handle got from USB_DeviceInit.
in	*endpoint-Address*	Endpoint index.
in	*buffer*	The memory address to save the received data.
in	*length*	The data length want to be received.

Return values

kStatus_USB_Success	The receive request is sent successfully.
kStatus_USB_Invalid-Handle	The handle is a NULL pointer. Or the controller handle is invalid.
kStatus_USB_Busy	Cannot allocate DTDS for current transfer in EHCI driver.
kStatus_USB_Controller-NotFound	Cannot find the controller.
kStatus_USB_Error	The device is doing reset.

Note

The return value indicates whether the receiving request is successful or not. The transfer done is notified by the corresponding callback function. Currently, only one transfer request can be supported for one specific endpoint. If there is a specific requirement to support multiple transfer requests for one specific endpoint, the application should implement a queue on the application level. The subsequent transfer can begin only when the previous transfer is done (get notification through the endpoint callback).

4.6.7 usb_status_t USB_DeviceCancel (usb_device_handle *handle,* uint8_t *endpointAddress*)

The function is used to cancel the pending transfer in a specified endpoint.

Parameters

in	*handle*	The device handle got from USB_DeviceInit.

in	endpoint-Address	Endpoint address, bit7 is the direction of endpoint, 1U - IN, and 0U - OUT.

Return values

kStatus_USB_Success	The transfer is cancelled.
kStatus_USB_Invalid-Handle	The handle is a NULL pointer or the controller handle is invalid.
kStatus_USB_Controller-NotFound	Cannot find the controller.

4.6.8 usb_status_t USB_DeviceInitEndpoint (usb_device_handle *handle,* usb_device_endpoint_init_struct_t ∗ *epInit,* usb_device_endpoint_callback_-struct_t ∗ *epCallback*)

The function is used to initialize a specified endpoint. The corresponding endpoint callback is also initialized.

Parameters

in	handle	The device handle received from USB_DeviceInit.
in	epInit	Endpoint initialization structure. See the structure usb_device_-endpoint_init_struct_t.
in	epCallback	Endpoint callback structure. See the structure usb_device_endpoint_-callback_struct_t.

Return values

kStatus_USB_Success	The endpoint is initialized successfully.
kStatus_USB_Invalid-Handle	The handle is a NULL pointer. Or the controller handle is invalid.
kStatus_USB_Invalid-Parameter	The epInit or epCallback is NULL pointer. Or the endpoint number is more than USB_DEVICE_CONFIG_ENDPOINTS.
kStatus_USB_Busy	The endpoint is busy in EHCI driver.
kStatus_USB_Controller-NotFound	Cannot find the controller.

4.6.9 usb_status_t USB_DeviceDeinitEndpoint (usb_device_handle *handle,* uint8_t *endpointAddress*)

The function is used to deinitializes a specified endpoint.

Parameters

in	*handle*	The device handle got from USB_DeviceInit.
in	*endpoint-Address*	Endpoint address, bit7 is the direction of endpoint, 1U - IN, and 0U - OUT.

Return values

kStatus_USB_Success	The endpoint is de-initialized successfully.
kStatus_USB_Invalid-Handle	The handle is a NULL pointer. Or the controller handle is invalid.
kStatus_USB_Invalid-Parameter	The endpoint number is more than USB_DEVICE_CONFIG_ENDPOIN-TS.
kStatus_USB_Busy	The endpoint is busy in EHCI driver.
kStatus_USB_Controller-NotFound	Cannot find the controller.

4.6.10 usb_status_t USB_DeviceStallEndpoint (usb_device_handle *handle,* uint8_t *endpointAddress*)

The function is used to stall a specified endpoint.

Parameters

in	*handle*	The device handle received from USB_DeviceInit.
in	*endpoint-Address*	Endpoint address, bit7 is the direction of endpoint, 1U - IN, and 0U - OUT.

Return values

kStatus_USB_Success	The endpoint is stalled successfully.
kStatus_USB_Invalid-Handle	The handle is a NULL pointer. Or the controller handle is invalid.
kStatus_USB_Invalid-Parameter	The endpoint number is more than USB_DEVICE_CONFIG_ENDPOIN-TS.

kStatus_USB_Controller- NotFound	Cannot find the controller.

4.6.11 usb_status_t USB_DeviceUnstallEndpoint (usb_device_handle *handle,* uint8_t *endpointAddress*)

The function is used to unstall a specified endpoint.

Parameters

in	*handle*	The device handle received from USB_DeviceInit.
in	*endpoint- Address*	Endpoint address, bit7 is the direction of endpoint, 1U - IN, and 0U - OUT.

Return values

kStatus_USB_Success	The endpoint is un-stalled successfully.
kStatus_USB_Invalid- Handle	The handle is a NULL pointer. Or the controller handle is invalid.
kStatus_USB_Invalid- Parameter	The endpoint number is more than USB_DEVICE_CONFIG_ENDPOIN- TS.
kStatus_USB_Controller- NotFound	Cannot find the controller.

4.6.12 usb_status_t USB_DeviceGetStatus (usb_device_handle *handle,* usb_device_status_t *type,* void ∗ *param*)

The function is used to get the status of the selected item.

Parameters

in	*handle*	The device handle got from USB_DeviceInit.
in	*type*	The selected item. See the structure usb_device_status_t.
out	*param*	The parameter type is determined by the selected item.

Return values

kStatus_USB_Success	Get status successfully.
kStatus_USB_Invalid-Handle	The handle is a NULL pointer. Or the controller handle is invalid.
kStatus_USB_Invalid-Parameter	The parameter is NULL pointer.
kStatus_USB_Controller-NotFound	Cannot find the controller.
kStatus_USB_Error	Unsupported type.

4.6.13 usb_status_t USB_DeviceSetStatus (usb_device_handle *handle,* usb_device_status_t *type,* void ∗ *param*)

The function is used to set the status of the selected item.

Parameters

in	*handle*	The device handle got from USB_DeviceInit.
in	*type*	The selected item. See the structure usb_device_status_t.
in	*param*	The parameter type is determined by the selected item.

Return values

kStatus_USB_Success	Set status successfully.
kStatus_USB_Invalid-Handle	The handle is a NULL pointer. Or the controller handle is invalid.
kStatus_USB_Controller-NotFound	Cannot find the controller.
kStatus_USB_Error	Unsupported type or the parameter is NULL pointer.

4.6.14 void USB_DeviceKhcilsrFunction (void ∗ *deviceHandle*)

The function is the KHCI interrupt service routine.

Function Documentation

Parameters

in	*deviceHandle*	The device handle got from USB_DeviceInit.

4.6.15 void USB_DeviceEhciIsrFunction (void ∗ *deviceHandle*)

The function is the EHCI interrupt service routine.

Parameters

in	*deviceHandle*	The device handle got from USB_DeviceInit.

4.6.16 void USB_DeviceLpcIp3511IsrFunction (void ∗ *deviceHandle*)

The function is the LPC USB interrupt service routine.

Parameters

in	*deviceHandle*	The device handle got from USB_DeviceInit.

4.6.17 void USB_DeviceGetVersion (uint32_t ∗ *version*)

The function is used to get the device stack version.

Parameters

out	*version*	The version structure pointer to keep the device stack version.

4.6.18 usb_status_t USB_DeviceUpdateHwTick (usb_device_handle *handle,* uint64_t *tick*)

The function is used to update the hardware tick.

Parameters

in	*handle*	The device handle got from USB_DeviceInit.
in	*tick*	Current hardware tick(uint is ms).

4.7 USB Device Controller driver

4.7.1 Overview

The interface between KHCI/EHCI etc controller Driver and Common Controller driver.

Modules

- USB Device Controller EHCI driver
- USB Device Controller KHCI driver
- USB Device Controller LPC IP3511 driver

Data Structures

- struct usb_device_callback_message_struct_t

  Device notification message structure. More...
- struct usb_device_controller_interface_struct_t

  USB device controller interface structure. More...
- struct usb_device_struct_t

  USB device status structure. More...

Macros

- #define usb_device_controller_handle usb_device_handle

  Macro to define controller handle.

Typedefs

- typedef usb_status_t(∗ usb_device_controller_init_t)(uint8_t controllerId, usb_device_handle handle, usb_device_controller_handle ∗controllerHandle)

  USB device controller initialization function typedef.
- typedef usb_status_t(∗ usb_device_controller_deinit_t)(usb_device_controller_handle controllerHandle)

  USB device controller de-initialization function typedef.
- typedef usb_status_t(∗ usb_device_controller_send_t)(usb_device_controller_handle controllerHandle, uint8_t endpointAddress, uint8_t ∗buffer, uint32_t length)

  USB device controller send data function typedef.
- typedef usb_status_t(∗ usb_device_controller_recv_t)(usb_device_controller_handle controllerHandle, uint8_t endpointAddress, uint8_t ∗buffer, uint32_t length)

  USB device controller receive data function typedef.
- typedef usb_status_t(∗ usb_device_controller_cancel_t)(usb_device_controller_handle controllerHandle, uint8_t endpointAddress)

  USB device controller cancel transfer function in a specified endpoint typedef.
- typedef usb_status_t(∗ usb_device_controller_control_t)(usb_device_controller_handle controllerHandle, usb_device_control_type_t command, void ∗param)

USB device controller control function typedef.

Enumerations

- enum usb_device_notification_t {
  kUSB_DeviceNotifyBusReset = 0x10U,
  kUSB_DeviceNotifySuspend,
  kUSB_DeviceNotifyResume,
  kUSB_DeviceNotifyLPMSleep,
  kUSB_DeviceNotifyLPMResume,
  kUSB_DeviceNotifyError,
  kUSB_DeviceNotifyDetach,
  kUSB_DeviceNotifyAttach }
    Available notify types for device notification.
- enum usb_device_control_type_t {
  kUSB_DeviceControlRun = 0U,
  kUSB_DeviceControlStop,
  kUSB_DeviceControlEndpointInit,
  kUSB_DeviceControlEndpointDeinit,
  kUSB_DeviceControlEndpointStall,
  kUSB_DeviceControlEndpointUnstall,
  kUSB_DeviceControlGetDeviceStatus,
  kUSB_DeviceControlGetEndpointStatus,
  kUSB_DeviceControlSetDeviceAddress,
  kUSB_DeviceControlGetSynchFrame,
  kUSB_DeviceControlResume,
  kUSB_DeviceControlSleepResume,
  kUSB_DeviceControlSuspend,
  kUSB_DeviceControlSleep,
  kUSB_DeviceControlSetDefaultStatus,
  kUSB_DeviceControlGetSpeed,
  kUSB_DeviceControlGetOtgStatus,
  kUSB_DeviceControlSetOtgStatus,
  kUSB_DeviceControlSetTestMode,
  kUSB_DeviceControlGetRemoteWakeUp,
  kUSB_DeviceControlPreSetDeviceAddress,
  kUSB_DeviceControlUpdateHwTick }
    Control type for controller.

Functions

- usb_status_t USB_DeviceNotificationTrigger (void ∗handle, void ∗msg)
    Notify the device that the controller status changed.

4.7.2   Data Structure Documentation

4.7.2.1   struct usb_device_callback_message_struct_t

Data Fields

- uint8_t ∗ buffer
  Transferred buffer.
- uint32_t length
  Transferred data length.
- uint8_t code
  Notification code.
- uint8_t isSetup
  Is in a setup phase.

4.7.2.2   struct usb_device_controller_interface_struct_t

Data Fields

- usb_device_controller_init_t deviceInit
  Controller initialization.
- usb_device_controller_deinit_t deviceDeinit
  Controller de-initialization.
- usb_device_controller_send_t deviceSend
  Controller send data.
- usb_device_controller_recv_t deviceRecv
  Controller receive data.
- usb_device_controller_cancel_t deviceCancel
  Controller cancel transfer.
- usb_device_controller_control_t deviceControl
  Controller control.

4.7.2.3   struct usb_device_struct_t

Data Fields

- volatile uint64_t hwTick
  Current hw tick(ms)
- usb_device_controller_handle controllerHandle
  Controller handle.
- const
  usb_device_controller_interface_struct_t ∗ controllerInterface
  Controller interface handle.
- usb_device_callback_t deviceCallback
  Device callback function pointer.
- usb_device_endpoint_callback_struct_t epCallback [USB_DEVICE_CONFIG_ENDPOINTS$<<$
  1U]
  Endpoint callback function structure.

- uint8_t deviceAddress
    Current device address.
- uint8_t controllerId
    Controller ID.
- uint8_t state
    Current device state.
- uint8_t remotewakeup
    Remote wakeup is enabled or not.
- uint8_t isResetting
    Is doing device reset or not.

4.7.3   Enumeration Type Documentation

4.7.3.1   enum usb_device_notification_t

Enumerator

    kUSB_DeviceNotifyBusReset   Reset signal detected.
    kUSB_DeviceNotifySuspend   Suspend signal detected.
    kUSB_DeviceNotifyResume   Resume signal detected.
    kUSB_DeviceNotifyLPMSleep   LPM signal detected.
    kUSB_DeviceNotifyLPMResume   Resume signal detected.
    kUSB_DeviceNotifyError   Errors happened in bus.
    kUSB_DeviceNotifyDetach   Device disconnected from a host.
    kUSB_DeviceNotifyAttach   Device connected to a host.

4.7.3.2   enum usb_device_control_type_t

Enumerator

    kUSB_DeviceControlRun   Enable the device functionality.
    kUSB_DeviceControlStop   Disable the device functionality.
    kUSB_DeviceControlEndpointInit   Initialize a specified endpoint.
    kUSB_DeviceControlEndpointDeinit   De-initialize a specified endpoint.
    kUSB_DeviceControlEndpointStall   Stall a specified endpoint.
    kUSB_DeviceControlEndpointUnstall   Un-stall a specified endpoint.
    kUSB_DeviceControlGetDeviceStatus   Get device status.
    kUSB_DeviceControlGetEndpointStatus   Get endpoint status.
    kUSB_DeviceControlSetDeviceAddress   Set device address.
    kUSB_DeviceControlGetSynchFrame   Get current frame.
    kUSB_DeviceControlResume   Drive controller to generate a resume signal in USB bus.
    kUSB_DeviceControlSleepResume   Drive controller to generate a LPM resume signal in USB bus.
    kUSB_DeviceControlSuspend   Drive controller to enter into suspend mode.
    kUSB_DeviceControlSleep   Drive controller to enter into sleep mode.
    kUSB_DeviceControlSetDefaultStatus   Set controller to default status.

kUSB_DeviceControlGetSpeed   Get current speed.
kUSB_DeviceControlGetOtgStatus   Get OTG status.
kUSB_DeviceControlSetOtgStatus   Set OTG status.
kUSB_DeviceControlSetTestMode   Drive xCHI into test mode.
kUSB_DeviceControlGetRemoteWakeUp   Get flag of LPM Remote Wake-up Enabled by USB host.

kUSB_DeviceControlPreSetDeviceAddress   Pre set device address.
kUSB_DeviceControlUpdateHwTick   update hardware tick

4.7.4 Function Documentation

4.7.4.1 usb_status_t USB_DeviceNotificationTrigger (void ∗ *handle,* void ∗ *msg*)

This function is used to notify the device that the controller status changed.

Parameters

handle	The device handle. It equals the value returned from USB_DeviceInit.
message	The device callback message handle.

Returns

   A USB error code or kStatus_USB_Success.

4.7.5   USB Device Controller KHCI driver

4.7.5.1   Overview

Data Structures

- struct usb_device_khci_endpoint_state_struct_t
    Endpoint state structure. More...
- struct usb_device_khci_state_struct_t
    KHCI state structure. More...

Macros

- #define USB_DEVICE_MAX_FS_ISO_MAX_PACKET_SIZE (1023U)
    The maximum value of ISO maximum packet size for FS in USB specification 2.0.
- #define USB_DEVICE_MAX_FS_NONE_ISO_MAX_PACKET_SIZE (64U)
    The maximum value of non-ISO maximum packet size for FS in USB specification 2.0.
- #define USB_KHCI_BDT_SET_ADDRESS(bdt_base, ep, direction, odd, address)
    Set BDT buffer address.
- #define USB_KHCI_BDT_SET_CONTROL(bdt_base, ep, direction, odd, control)
    Set BDT control fields.
- #define USB_KHCI_BDT_GET_ADDRESS(bdt_base, ep, direction, odd)
    Get BDT buffer address.
- #define USB_KHCI_BDT_GET_CONTROL(bdt_base, ep, direction, odd)
    Get BDT control fields.

USB device KHCI functions

- usb_status_t USB_DeviceKhciInit (uint8_t controllerId, usb_device_handle handle, usb_device_-
  controller_handle ∗khciHandle)
    Initializes the USB device KHCI instance.
- usb_status_t USB_DeviceKhciDeinit (usb_device_controller_handle khciHandle)
    Deinitializes the USB device KHCI instance.
- usb_status_t USB_DeviceKhciSend (usb_device_controller_handle khciHandle, uint8_t endpoint-
  Address, uint8_t ∗buffer, uint32_t length)
    Sends data through a specified endpoint.
- usb_status_t USB_DeviceKhciRecv (usb_device_controller_handle khciHandle, uint8_t endpoint-
  Address, uint8_t ∗buffer, uint32_t length)
    Receives data through a specified endpoint.
- usb_status_t USB_DeviceKhciCancel (usb_device_controller_handle khciHandle, uint8_t ep)
    Cancels the pending transfer in a specified endpoint.
- usb_status_t USB_DeviceKhciControl (usb_device_controller_handle khciHandle, usb_device_-
  control_type_t type, void ∗param)
    Controls the status of the selected item.

4.7.5.2 Data Structure Documentation

4.7.5.2.1 struct usb_device_khci_endpoint_state_struct_t

Data Fields

- uint8_t * transferBuffer
  Address of buffer containing the data to be transmitted.
- uint32_t transferLength
  Length of data to transmit.
- uint32_t transferDone
  The data length has been transferred.
- uint32_t state
  The state of the endpoint.
- uint32_t maxPacketSize: 10U
  The maximum packet size of the endpoint.
- uint32_t stalled: 1U
  The endpoint is stalled or not.
- uint32_t data0: 1U
  The data toggle of the transaction.
- uint32_t bdtOdd: 1U
  The BDT toggle of the endpoint.
- uint32_t dmaAlign: 1U
  Whether the transferBuffer is DMA aligned or not.
- uint32_t transferring: 1U
  The endpoint is transferring.
- uint32_t zlt: 1U
  zlt flag

4.7.5.2.1.1 Field Documentation

4.7.5.2.1.1.1 uint32_t usb_device_khci_endpoint_state_struct_t::transferLength

4.7.5.2.2 struct usb_device_khci_state_struct_t

Data Fields

- usb_device_struct_t * deviceHandle
  Device handle used to identify the device object belongs to.
- uint32_t * bdt
  BDT buffer address.
- USB_Type * registerBase
  The base address of the register.
- uint8_t setupPacketBuffer [USB_SETUP_PACKET_SIZE *2]
  The setup request buffer.
- uint8_t * dmaAlignBuffer
  This buffer is used to fix the transferBuffer or transferLength does not align to 4-bytes when the function USB_DeviceKhciRecv is called.
- usb_device_khci_endpoint_state_struct_t endpointState [USB_DEVICE_CONFIG_ENDPOINTS *2]
  Endpoint state structures.

- uint8_t isDmaAlignBufferInusing

  The dmaAlignBuffer is used or not.
- uint8_t isResetting

  Is doing device reset or not.
- uint8_t controllerId

  Controller ID.
- uint8_t setupBufferIndex

  A valid setup buffer flag.

4.7.5.2.2.1 Field Documentation

4.7.5.2.2.1.1 uint8_t∗ usb_device_khci_state_struct_t::dmaAlignBuffer

The macro USB_DEVICE_CONFIG_KHCI_DMA_ALIGN is used to enable or disable this feature. If the feature is enabled, when the transferBuffer or transferLength does not align to 4-bytes, the transfer-Length is not more than USB_DEVICE_CONFIG_KHCI_DMA_ALIGN_BUFFER_LENGTH, and the flag isDmaAlignBufferInusing is zero, the dmaAlignBuffer is used to receive data and the flag isDma-AlignBufferInusing is set to 1. When the transfer is done, the received data, kept in dmaAlignBuffer, is copied to the transferBuffer, and the flag isDmaAlignBufferInusing is cleared.

4.7.5.3 Function Documentation

4.7.5.3.1 usb_status_t USB_DeviceKhciInit (uint8_t *controllerId,* usb_device_handle *handle,* usb_device_controller_handle ∗ *khciHandle*)

This function initializes the USB device KHCI module specified by the controllerId.

Parameters

in	*controllerId*	The controller ID of the USB IP. See the enumeration type usb_-controller_index_t.
in	*handle*	Pointer of the device handle used to identify the device object belongs to.
out	*khciHandle*	An out parameter used to return the pointer of the device KHCI handle to the caller.

Returns

A USB error code or kStatus_USB_Success.

4.7.5.3.2 usb_status_t USB_DeviceKhciDeinit (usb_device_controller_handle *khciHandle*)

This function deinitializes the USB device KHCI module.

Parameters

in	*khciHandle*	Pointer of the device KHCI handle.

Returns

A USB error code or kStatus_USB_Success.

4.7.5.3.3   usb_status_t USB_DeviceKhciSend (usb_device_controller_handle *khciHandle,* uint8_t *endpointAddress,* uint8_t ∗ *buffer,* uint32_t *length*)

This function sends data through a specified endpoint.

Parameters

in	*khciHandle*	Pointer of the device KHCI handle.
in	*endpoint-Address*	Endpoint index.
in	*buffer*	The memory address to hold the data need to be sent.
in	*length*	The data length need to be sent.

Returns

A USB error code or kStatus_USB_Success.

Note

The return value indicates whether the sending request is successful or not. The transfer completion is notified by the corresponding callback function. Currently, only one transfer request can be supported for a specific endpoint. If there is a specific requirement to support multiple transfer requests for a specific endpoint, the application should implement a queue in the application level. The subsequent transfer can begin only when the previous transfer is done (a notification is obtained through the endpoint callback).

4.7.5.3.4   usb_status_t USB_DeviceKhciRecv (usb_device_controller_handle *khciHandle,* uint8_t *endpointAddress,* uint8_t ∗ *buffer,* uint32_t *length*)

This function receives data through a specified endpoint.

Parameters

in	khciHandle	Pointer of the device KHCI handle.
in	endpoint-Address	Endpoint index.
in	buffer	The memory address to save the received data.
in	length	The data length to be received.

Returns

A USB error code or kStatus_USB_Success.

Note

The return value indicates whether the receiving request is successful or not. The transfer completion is notified by the corresponding callback function. Currently, only one transfer request can be supported for a specific endpoint. If there is a specific requirement to support multiple transfer requests for a specific endpoint, the application should implement a queue in the application level. The subsequent transfer can begin only when the previous transfer is done (a notification is obtained through the endpoint callback).

4.7.5.3.5 usb_status_t USB_DeviceKhciCancel (usb_device_controller_handle *khciHandle,* uint8_t *ep*)

The function is used to cancel the pending transfer in a specified endpoint.

Parameters

in	khciHandle	Pointer of the device KHCI handle.
in	ep	Endpoint address, bit7 is the direction of endpoint, 1U - IN, abd 0U - OUT.

Returns

A USB error code or kStatus_USB_Success.

4.7.5.3.6 usb_status_t USB_DeviceKhciControl (usb_device_controller_handle *khciHandle,* usb_device_control_type_t *type,* void ∗ *param*)

The function is used to control the status of the selected item.

Parameters

in	khciHandle	Pointer of the device KHCI handle.
in	type	The selected item. See enumeration type usb_device_control_type_t.
in,out	param	The parameter type is determined by the selected item.

Returns

A USB error code or kStatus_USB_Success.

4.7.6   USB Device Controller EHCI driver

4.7.6.1   Overview

Data Structures

- struct usb_device_ehci_state_struct_t
  EHCI state structure. More...

Macros

- #define USB_DEVICE_MAX_HS_ISO_MAX_PACKET_SIZE (1024U)
  The maximum value of ISO type maximum packet size for HS in USB specification 2.0.
- #define USB_DEVICE_MAX_HS_INTERUPT_MAX_PACKET_SIZE (1024U)
  The maximum value of interrupt type maximum packet size for HS in USB specification 2.0.
- #define USB_DEVICE_MAX_HS_BULK_MAX_PACKET_SIZE (512U)
  The maximum value of bulk type maximum packet size for HS in USB specification 2.0.
- #define USB_DEVICE_MAX_HS_CONTROL_MAX_PACKET_SIZE (64U)
  The maximum value of control type maximum packet size for HS in USB specification 2.0.

USB device EHCI functions

- usb_status_t USB_DeviceEhciInit (uint8_t controllerId, usb_device_handle handle, usb_device_-controller_handle ∗ehciHandle)
  Initializes the USB device EHCI instance.
- usb_status_t USB_DeviceEhciDeinit (usb_device_controller_handle ehciHandle)
  Deinitializes the USB device EHCI instance.
- usb_status_t USB_DeviceEhciSend (usb_device_controller_handle ehciHandle, uint8_t endpoint-Address, uint8_t ∗buffer, uint32_t length)
  Sends data through a specified endpoint.
- usb_status_t USB_DeviceEhciRecv (usb_device_controller_handle ehciHandle, uint8_t endpoint-Address, uint8_t ∗buffer, uint32_t length)
  Receive data through a specified endpoint.
- usb_status_t USB_DeviceEhciCancel (usb_device_controller_handle ehciHandle, uint8_t ep)
  Cancels the pending transfer in a specified endpoint.
- usb_status_t USB_DeviceEhciControl (usb_device_controller_handle ehciHandle, usb_device_-control_type_t type, void ∗param)
  Controls the status of the selected item.

4.7.6.2   Data Structure Documentation

4.7.6.2.1   struct usb_device_ehci_state_struct_t

Data Fields

- usb_device_struct_t ∗ deviceHandle
  Device handle used to identify the device object is belonged to.

- USBHS_Type ∗ registerBase
  The base address of the register.
- USBPHY_Type ∗ registerPhyBase
  The base address of the PHY register.
- usb_device_ehci_qh_struct_t ∗ qh
  The QH structure base address.
- usb_device_ehci_dtd_struct_t ∗ dtd
  The DTD structure base address.
- usb_device_ehci_dtd_struct_t ∗ dtdFree
  The idle DTD list head.
- usb_device_ehci_dtd_struct_t ∗ dtdHard [USB_DEVICE_CONFIG_ENDPOINTS ∗2]
  The transferring DTD list head for each endpoint.
- usb_device_ehci_dtd_struct_t ∗ dtdTail [USB_DEVICE_CONFIG_ENDPOINTS ∗2]
  The transferring DTD list tail for each endpoint.
- uint8_t dtdCount
  The idle DTD node count.
- uint8_t endpointCount
  The endpoint number of EHCI.
- uint8_t isResetting
  Whether a PORT reset is occurring or not.
- uint8_t controllerId
  Controller ID.
- uint8_t speed
  Current speed of EHCI.
- uint8_t isSuspending
  Is suspending of the PORT.

4.7.6.3 Function Documentation

4.7.6.3.1 usb_status_t USB_DeviceEhciInit (uint8_t *controllerId,* usb_device_handle *handle,* usb_device_controller_handle ∗ *ehciHandle*)

This function initializes the USB device EHCI module specified by the controllerId.

Parameters

in	*controllerId*	The controller ID of the USB IP. See the enumeration type usb_-controller_index_t.
in	*handle*	Pointer of the device handle used to identify the device object is belonged to.
out	*ehciHandle*	An out parameter used to return the pointer of the device EHCI handle to the caller.

Returns

A USB error code or kStatus_USB_Success.

4.7.6.3.2   usb_status_t USB_DeviceEhciDeinit (usb_device_controller_handle *ehciHandle*)

This function deinitializes the USB device EHCI module.

Parameters

in	*ehciHandle*	Pointer of the device EHCI handle.

Returns

A USB error code or kStatus_USB_Success.

4.7.6.3.3 usb_status_t USB_DeviceEhciSend (usb_device_controller_handle *ehciHandle,* uint8_t *endpointAddress,* uint8_t ∗ *buffer,* uint32_t *length*)

This function sends data through a specified endpoint.

Parameters

in	*ehciHandle*	Pointer of the device EHCI handle.
in	*endpoint-Address*	Endpoint index.
in	*buffer*	The memory address to hold the data need to be sent.
in	*length*	The data length to be sent.

Returns

A USB error code or kStatus_USB_Success.

Note

The return value means whether the sending request is successful or not. The transfer completion is indicated by the corresponding callback function. Currently, only one transfer request can be supported for a specific endpoint. If there is a specific requirement to support multiple transfer requests for a specific endpoint, the application should implement a queue in the application level. The subsequent transfer can begin only when the previous transfer is done (a notification is received through the endpoint callback).

4.7.6.3.4 usb_status_t USB_DeviceEhciRecv (usb_device_controller_handle *ehciHandle,* uint8_t *endpointAddress,* uint8_t ∗ *buffer,* uint32_t *length*)

This function Receives data through a specified endpoint.

Parameters

in	*ehciHandle*	Pointer of the device EHCI handle.
in	*endpoint-Address*	Endpoint index.
in	*buffer*	The memory address to save the received data.
in	*length*	The data length want to be received.

Returns

A USB error code or kStatus_USB_Success.

Note

The return value just means if the receiving request is successful or not; the transfer done is notified by the corresponding callback function. Currently, only one transfer request can be supported for one specific endpoint. If there is a specific requirement to support multiple transfer requests for one specific endpoint, the application should implement a queue in the application level. The subsequent transfer could begin only when the previous transfer is done (get notification through the endpoint callback).

4.7.6.3.5 usb_status_t USB_DeviceEhciCancel (usb_device_controller_handle *ehciHandle,* uint8_t *ep*)

The function is used to cancel the pending transfer in a specified endpoint.

Parameters

in	*ehciHandle*	Pointer of the device EHCI handle.
in	*ep*	Endpoint address, bit7 is the direction of endpoint, 1U - IN, 0U - OUT.

Returns

A USB error code or kStatus_USB_Success.

4.7.6.3.6 usb_status_t USB_DeviceEhciControl (usb_device_controller_handle *ehciHandle,* usb_device_control_type_t *type,* void ∗ *param*)

The function is used to control the status of the selected item.

Parameters

in	*ehciHandle*	Pointer of the device EHCI handle.
in	*type*	The selected item. See enumeration type usb_device_control_type_t.
in,out	*param*	The parameter type is determined by the selected item.

Returns

A USB error code or kStatus_USB_Success.

4.7.7 USB Device Controller LPC IP3511 driver

4.7.7.1 Overview

Data Structures

- struct usb_device_lpc3511ip_endpoint_state_struct_t
  Endpoint state structure. More...
- struct usb_device_lpc3511ip_state_struct_t
  LPC USB controller (IP3511) state structure. More...

Macros

- #define USB_DEVICE_IP3511_ENDPOINT_RESERVED_BUFFER_SIZE (5U ∗ 1024U)
  The reserved buffer size, the buffer is for the memory copy if the application transfer buffer is ((not 64 bytes alignment) || (not in the same 64K ram) || (HS && OUT && not multiple of 4))
- #define USB_DEVICE_IP3511_BITS_FOR_RESERVED_BUFFER ((USB_DEVICE_IP3511_E-NDPOINT_RESERVED_BUFFER_SIZE + 63U) / 64U)
  Use one bit to represent one reserved 64 bytes to allocate the buffer by uint of 64 bytes.
- #define USB_DEVICE_IP3511_RESERVED_BUFFER_FOR_COPY (USB_DEVICE_CONFIG-_LPCIP3511FS + USB_DEVICE_CONFIG_LPCIP3511HS)
  How many IPs support the reserved buffer.
- #define USB_DEVICE_IP3511_DOUBLE_BUFFER_ENABLE (1U)
  Prime all the double endpoint buffer at the same time, if the transfer length is larger than max packet size.

USB device controller (IP3511) functions

- usb_status_t USB_DeviceLpc3511IpInit (uint8_t controllerId, usb_device_handle handle, usb_-device_controller_handle ∗controllerHandle)
  Initializes the USB device controller instance.
- usb_status_t USB_DeviceLpc3511IpDeinit (usb_device_controller_handle controllerHandle)
  Deinitializes the USB device controller instance.
- usb_status_t USB_DeviceLpc3511IpSend (usb_device_controller_handle controllerHandle, uint8_t endpointAddress, uint8_t ∗buffer, uint32_t length)
  Sends data through a specified endpoint.
- usb_status_t USB_DeviceLpc3511IpRecv (usb_device_controller_handle controllerHandle, uint8_t endpointAddress, uint8_t ∗buffer, uint32_t length)
  Receives data through a specified endpoint.
- usb_status_t USB_DeviceLpc3511IpCancel (usb_device_controller_handle controllerHandle, uint8_t ep)
  Cancels the pending transfer in a specified endpoint.
- usb_status_t USB_DeviceLpc3511IpControl (usb_device_controller_handle controllerHandle, usb-_device_control_type_t type, void ∗param)
  Controls the status of the selected item.

4.7.7.2 Data Structure Documentation

4.7.7.2.1 struct usb_device_lpc3511ip_endpoint_state_struct_t

Data Fields

- uint8_t ∗ transferBuffer
  Address of buffer containing the data to be transmitted.
- uint32_t transferLength
  Length of data to transmit.
- uint32_t transferDone
  The data length has been transferred.
- uint32_t transferPrimedLength
  it may larger than transferLength, because the primed length may larger than the transaction length.
- uint8_t ∗ epPacketBuffer
  The max packet buffer for copying.
- uint32_t state
  The state of the endpoint.
- uint32_t maxPacketSize: 11U
  The maximum packet size of the endpoint.
- uint32_t stalled: 1U
  The endpoint is stalled or not.
- uint32_t transferring: 1U
  The endpoint is transferring.
- uint32_t zlt: 1U
  zlt flag
- uint32_t epPacketCopied: 1U
  whether use the copy buffer
- uint32_t epControlDefault: 5u
  The EP command/status 26∼30 bits.
- uint32_t doubleBufferBusy: 2U
  How many buffers are primed, for control endpoint it is not used.
- uint32_t producerOdd: 1U
  When priming one transaction, prime to this endpoint buffer.
- uint32_t consumerOdd: 1U
  When transaction is done, read result from this endpoint buffer.

4.7.7.2.1.1 Field Documentation

4.7.7.2.1.1.1 uint32_t usb_device_lpc3511ip_endpoint_state_struct_t::transferLength

4.7.7.2.1.1.2 uint32_t usb_device_lpc3511ip_endpoint_state_struct_t::transferPrimedLength

4.7.7.2.2 struct usb_device_lpc3511ip_state_struct_t

Data Fields

- uint8_t ∗ controlData
  < control data buffer, must align with 64
- uint8_t ∗ setupData
  4 bytes for zero length transaction, must align with 64

- usb_device_handle deviceHandle
    (4 bytes) Device handle used to identify the device object belongs to
- USB_LPC3511IP_Type ∗ registerBase
    (4 bytes) ip base address
- uint8_t controllerId
    Controller ID.
- uint8_t isResetting
    Is doing device reset or not.
- uint8_t deviceSpeed
    some controller support the HS

4.7.7.2.2.1   Field Documentation

4.7.7.2.2.1.1   uint8_t∗ usb_device_lpc3511ip_state_struct_t::controlData

8 bytes' setup data, must align with 64

4.7.7.3   Macro Definition Documentation

4.7.7.3.1   #define USB_DEVICE_IP3511_BITS_FOR_RESERVED_BUFFER ((USB_-DEVICE_IP3511_ENDPOINT_RESERVED_BUFFER_SIZE + 63U) / 64U)

4.7.7.4   Function Documentation

4.7.7.4.1   usb_status_t USB_DeviceLpc3511IpInit (uint8_t *controllerId,* usb_device_handle *handle,* usb_device_controller_handle ∗ *controllerHandle*)

This function initializes the USB device controller module specified by the controllerId.

Parameters

in	controllerId	The controller ID of the USB IP. See the enumeration type usb_-controller_index_t.
in	handle	Pointer of the device handle used to identify the device object belongs to.
out	controller-Handle	An out parameter used to return the pointer of the device controller handle to the caller.

Returns

A USB error code or kStatus_USB_Success.

4.7.7.4.2 usb_status_t USB_DeviceLpc3511IpDeinit (usb_device_controller_handle *controllerHandle*)

This function deinitializes the USB device controller module.

Parameters

in	*controller-Handle*	Pointer of the device controller handle.

Returns

A USB error code or kStatus_USB_Success.

4.7.7.4.3   usb_status_t USB_DeviceLpc3511IpSend (usb_device_controller_handle *controllerHandle,* uint8_t *endpointAddress,* uint8_t ∗ *buffer,* uint32_t *length*)

This function sends data through a specified endpoint.

Parameters

in	*controller-Handle*	Pointer of the device controller handle.
in	*endpoint-Address*	Endpoint index.
in	*buffer*	The memory address to hold the data need to be sent.
in	*length*	The data length need to be sent.

Returns

A USB error code or kStatus_USB_Success.

Note

The return value indicates whether the sending request is successful or not. The transfer completion is notified by the corresponding callback function. Currently, only one transfer request can be supported for a specific endpoint. If there is a specific requirement to support multiple transfer requests for a specific endpoint, the application should implement a queue in the application level. The subsequent transfer can begin only when the previous transfer is done (a notification is obtained through the endpoint callback).

4.7.7.4.4   usb_status_t USB_DeviceLpc3511IpRecv (usb_device_controller_handle *controllerHandle,* uint8_t *endpointAddress,* uint8_t ∗ *buffer,* uint32_t *length*)

This function receives data through a specified endpoint.

Parameters

in	controller-Handle	Pointer of the device controller handle.
in	endpoint-Address	Endpoint index.
in	buffer	The memory address to save the received data.
in	length	The data length to be received.

Returns

A USB error code or kStatus_USB_Success.

Note

The return value indicates whether the receiving request is successful or not. The transfer completion is notified by the corresponding callback function. Currently, only one transfer request can be supported for a specific endpoint. If there is a specific requirement to support multiple transfer requests for a specific endpoint, the application should implement a queue in the application level. The subsequent transfer can begin only when the previous transfer is done (a notification is obtained through the endpoint callback).

4.7.7.4.5 usb_status_t USB_DeviceLpc3511IpCancel (usb_device_controller_handle *controllerHandle,* uint8_t *ep*)

The function is used to cancel the pending transfer in a specified endpoint.

Parameters

in	controller-Handle	ointer of the device controller handle.
in	ep	Endpoint address, bit7 is the direction of endpoint, 1U - IN, abd 0U - OUT.

Returns

A USB error code or kStatus_USB_Success.

4.7.7.4.6 usb_status_t USB_DeviceLpc3511IpControl (usb_device_controller_handle *controllerHandle,* usb_device_control_type_t *type,* void ∗ *param*)

The function is used to control the status of the selected item.

Parameters

in	controller-Handle	Pointer of the device controller handle.
in	type	The selected item. Please refer to enumeration type usb_device_control-_type_t.
in,out	param	The parameter type is determined by the selected item.

Returns

A USB error code or kStatus_USB_Success.

4.8 USB Device Spec Chapter 9 driver

4.8.1 Overview

Macros

- #define USB_DEVICE_STATUS_SIZE (0x02U)
  Defines USB device status size when the host request to get device status.
- #define USB_INTERFACE_STATUS_SIZE (0x02U)
  Defines USB device interface status size when the host request to get interface status.
- #define USB_ENDPOINT_STATUS_SIZE (0x02U)
  Defines USB device endpoint status size when the host request to get endpoint status.
- #define USB_CONFIGURE_SIZE (0X01U)
  Defines USB device configuration size when the host request to get current configuration.
- #define USB_INTERFACE_SIZE (0X01U)
  Defines USB device interface alternate setting size when the host request to get interface alternate setting.
- #define USB_GET_STATUS_DEVICE_MASK (0x03U)
  Defines USB device status mask.
- #define USB_GET_STATUS_INTERFACE_MASK (0x03U)
  Defines USB device interface status mask.
- #define USB_GET_STATUS_ENDPOINT_MASK (0x03U)
  Defines USB device endpoint status mask.

Enumerations

- enum usb_device_control_read_write_sequence_t {
  kUSB_DeviceControlPipeSetupStage = 0U,
  kUSB_DeviceControlPipeDataStage,
  kUSB_DeviceControlPipeStatusStage }
  Control read and write sequence.

Functions

- usb_status_t USB_DeviceControlPipeInit (usb_device_handle handle, void ∗param)
  Initializes the control pipes.

4.8.2 Enumeration Type Documentation

4.8.2.1 enum usb_device_control_read_write_sequence_t

Enumerator

kUSB_DeviceControlPipeSetupStage Setup stage.
kUSB_DeviceControlPipeDataStage Data stage.
kUSB_DeviceControlPipeStatusStage status stage

4.8.3 Function Documentation

4.8.3.1 usb_status_t USB_DeviceControlPipeInit (usb_device_handle *handle,* void ∗ *param*)

The function is used to initialize the control pipes. This function should be called when event kUSB_-DeviceEventBusReset is received.

Parameters

in	*handle*	The device handle.
in	*param*	The event parameter.

Returns

A USB error code or kStatus_USB_Success.

4.9   USB Device Configuration

4.9.1   Overview

Macros

- #define USB_DEVICE_CONFIG_SELF_POWER (1U)

  Whether device is self power.
- #define USB_DEVICE_CONFIG_ENDPOINTS (4U)

  How many endpoints are supported in the stack.
- #define USB_DEVICE_CONFIG_USE_TASK (0U)

  Whether the device task is enabled.
- #define USB_DEVICE_CONFIG_MAX_MESSAGES (8U)

  How many the notification message are supported when the device task is enabled.
- #define USB_DEVICE_CONFIG_USB20_TEST_MODE (0U)

  Whether test mode enabled.
- #define USB_DEVICE_CONFIG_CV_TEST (0U)

  Whether device CV test is enabled.
- #define USB_DEVICE_CONFIG_COMPLIANCE_TEST (0U)

  Whether device compliance test is enabled.
- #define USB_DEVICE_CONFIG_KHCI_DMA_ALIGN_BUFFER_LENGTH (64U)

  The MAX buffer length for the KHCI DMA workaround.
- #define USB_DEVICE_CONFIG_EHCI_MAX_DTD (16U)

  How many the DTD are supported.
- #define USB_DEVICE_CONFIG_EHCI_ID_PIN_DETECT (0U)

  Whether the EHCI ID pin detect feature enabled.
- #define USB_DEVICE_CONFIG_KEEP_ALIVE_MODE (0U)

  Whether the keep alive feature enabled.
- #define USB_DEVICE_CONFIG_BUFFER_PROPERTY_CACHEABLE (0U)

  Whether the transfer buffer is cache-enabled or not.
- #define USB_DEVICE_CONFIG_LOW_POWER_MODE (0U)

  Whether the low power mode is enabled or not.
- #define USB_DEVICE_CONFIG_REMOTE_WAKEUP (0U)

  Whether device remote wakeup supported.
- #define USB_DEVICE_CONFIG_LPM_L1 (0U)

  Whether LPM is supported.
- #define USB_DEVICE_CONFIG_DETACH_ENABLE (0U)

  Whether the device detached feature is enabled or not.
- #define USB_DEVICE_CONFIG_ERROR_HANDLING (0U)

  Whether handle the USB bus error.
- #define USB_DEVICE_CONFIG_SELF_POWER (1U)

  Whether device is self power.
- #define USB_DEVICE_CONFIG_ENDPOINTS (4U)

  How many endpoints are supported in the stack.
- #define USB_DEVICE_CONFIG_USE_TASK (0U)

  Whether the device task is enabled.
- #define USB_DEVICE_CONFIG_MAX_MESSAGES (8U)

  How many the notification message are supported when the device task is enabled.
- #define USB_DEVICE_CONFIG_USB20_TEST_MODE (0U)

  Whether test mode enabled.
- #define USB_DEVICE_CONFIG_CV_TEST (0U)

Whether device CV test is enabled.
- #define USB_DEVICE_CONFIG_COMPLIANCE_TEST (0U)

  Whether device compliance test is enabled.
- #define USB_DEVICE_CONFIG_KHCI_DMA_ALIGN_BUFFER_LENGTH (64U)

  The MAX buffer length for the KHCI DMA workaround.
- #define USB_DEVICE_CONFIG_EHCI_MAX_DTD (16U)

  How many the DTD are supported.
- #define USB_DEVICE_CONFIG_EHCI_ID_PIN_DETECT (0U)

  Whether the EHCI ID pin detect feature enabled.
- #define USB_DEVICE_CONFIG_KEEP_ALIVE_MODE (0U)

  Whether the keep alive feature enabled.
- #define USB_DEVICE_CONFIG_BUFFER_PROPERTY_CACHEABLE (0U)

  Whether the transfer buffer is cache-enabled or not.
- #define USB_DEVICE_CONFIG_LOW_POWER_MODE (0U)

  Whether the low power mode is enabled or not.
- #define USB_DEVICE_CONFIG_REMOTE_WAKEUP (0U)

  Whether device remote wakeup supported.
- #define USB_DEVICE_CONFIG_LPM_L1 (0U)

  Whether LPM is supported.
- #define USB_DEVICE_CONFIG_DETACH_ENABLE (0U)

  Whether the device detached feature is enabled or not.
- #define USB_DEVICE_CONFIG_ERROR_HANDLING (0U)

  Whether handle the USB bus error.
- #define USB_DEVICE_CONFIG_SELF_POWER (1U)

  Whether device is self power.
- #define USB_DEVICE_CONFIG_ENDPOINTS (4U)

  How many endpoints are supported in the stack.
- #define USB_DEVICE_CONFIG_USE_TASK (0U)

  Whether the device task is enabled.
- #define USB_DEVICE_CONFIG_MAX_MESSAGES (8U)

  How many the notification message are supported when the device task is enabled.
- #define USB_DEVICE_CONFIG_USB20_TEST_MODE (0U)

  Whether test mode enabled.
- #define USB_DEVICE_CONFIG_CV_TEST (0U)

  Whether device CV test is enabled.
- #define USB_DEVICE_CONFIG_COMPLIANCE_TEST (0U)

  Whether device compliance test is enabled.
- #define USB_DEVICE_CONFIG_KHCI_DMA_ALIGN_BUFFER_LENGTH (64U)

  The MAX buffer length for the KHCI DMA workaround.
- #define USB_DEVICE_CONFIG_EHCI_MAX_DTD (16U)

  How many the DTD are supported.
- #define USB_DEVICE_CONFIG_EHCI_ID_PIN_DETECT (0U)

  Whether the EHCI ID pin detect feature enabled.
- #define USB_DEVICE_CONFIG_KEEP_ALIVE_MODE (0U)

  Whether the keep alive feature enabled.
- #define USB_DEVICE_CONFIG_BUFFER_PROPERTY_CACHEABLE (0U)

  Whether the transfer buffer is cache-enabled or not.
- #define USB_DEVICE_CONFIG_LOW_POWER_MODE (0U)

  Whether the low power mode is enabled or not.
- #define USB_DEVICE_CONFIG_REMOTE_WAKEUP (0U)

  Whether device remote wakeup supported.

- #define USB_DEVICE_CONFIG_LPM_L1 (0U)

    Whether LPM is supported.
- #define USB_DEVICE_CONFIG_DETACH_ENABLE (0U)

    Whether the device detached feature is enabled or not.
- #define USB_DEVICE_CONFIG_ERROR_HANDLING (0U)

    Whether handle the USB bus error.
- #define USB_DEVICE_CONFIG_SELF_POWER (1U)

    Whether device is self power.
- #define USB_DEVICE_CONFIG_ENDPOINTS (4U)

    How many endpoints are supported in the stack.
- #define USB_DEVICE_CONFIG_USE_TASK (0U)

    Whether the device task is enabled.
- #define USB_DEVICE_CONFIG_MAX_MESSAGES (8U)

    How many the notification message are supported when the device task is enabled.
- #define USB_DEVICE_CONFIG_USB20_TEST_MODE (0U)

    Whether test mode enabled.
- #define USB_DEVICE_CONFIG_CV_TEST (0U)

    Whether device CV test is enabled.
- #define USB_DEVICE_CONFIG_COMPLIANCE_TEST (0U)

    Whether device compliance test is enabled.
- #define USB_DEVICE_CONFIG_KHCI_DMA_ALIGN_BUFFER_LENGTH (64U)

    The MAX buffer length for the KHCI DMA workaround.
- #define USB_DEVICE_CONFIG_EHCI_MAX_DTD (16U)

    How many the DTD are supported.
- #define USB_DEVICE_CONFIG_EHCI_ID_PIN_DETECT (0U)

    Whether the EHCI ID pin detect feature enabled.
- #define USB_DEVICE_CONFIG_KEEP_ALIVE_MODE (0U)

    Whether the keep alive feature enabled.
- #define USB_DEVICE_CONFIG_BUFFER_PROPERTY_CACHEABLE (0U)

    Whether the transfer buffer is cache-enabled or not.
- #define USB_DEVICE_CONFIG_LOW_POWER_MODE (0U)

    Whether the low power mode is enabled or not.
- #define USB_DEVICE_CONFIG_REMOTE_WAKEUP (0U)

    Whether device remote wakeup supported.
- #define USB_DEVICE_CONFIG_LPM_L1 (0U)

    Whether LPM is supported.
- #define USB_DEVICE_CONFIG_DETACH_ENABLE (0U)

    Whether the device detached feature is enabled or not.
- #define USB_DEVICE_CONFIG_ERROR_HANDLING (0U)

    Whether handle the USB bus error.

Hardware instance define

- #define USB_DEVICE_CONFIG_KHCI (0U)

    KHCI instance count.
- #define USB_DEVICE_CONFIG_EHCI (1U)

    EHCI instance count.
- #define USB_DEVICE_CONFIG_LPCIP3511FS (0U)

    LPC USB IP3511 FS instance count.
- #define USB_DEVICE_CONFIG_LPCIP3511HS (0U)

LPC USB IP3511 HS instance count.
- #define USB_DEVICE_CONFIG_NUM (USB_DEVICE_CONFIG_KHCI + USB_DEVICE_CO-NFIG_EHCI + USB_DEVICE_CONFIG_LPCIP3511FS + USB_DEVICE_CONFIG_LPCIP3511-HS)

  Device instance count, the sum of KHCI and EHCI instance counts.

class instance define

- #define USB_DEVICE_CONFIG_HID (0U)

  HID instance count.
- #define USB_DEVICE_CONFIG_CDC_ACM (0U)

  CDC ACM instance count.
- #define **USB_DEVICE_CONFIG_CDC_RNDIS** (0U)
- #define USB_DEVICE_CONFIG_MSC (0U)

  MSC instance count.
- #define USB_DEVICE_CONFIG_AUDIO (0U)

  Audio instance count.
- #define USB_DEVICE_CONFIG_PHDC (0U)

  PHDC instance count.
- #define USB_DEVICE_CONFIG_VIDEO (0U)

  Video instance count.
- #define USB_DEVICE_CONFIG_CCID (0U)

  CCID instance count.
- #define USB_DEVICE_CONFIG_PRINTER (0U)

  Printer instance count.
- #define USB_DEVICE_CONFIG_DFU (0U)

  DFU instance count.

Hardware instance define

- #define USB_DEVICE_CONFIG_KHCI (0U)

  KHCI instance count.
- #define USB_DEVICE_CONFIG_EHCI (0U)

  EHCI instance count.
- #define USB_DEVICE_CONFIG_LPCIP3511FS (1U)

  LPC USB IP3511 FS instance count.
- #define USB_DEVICE_CONFIG_LPCIP3511HS (0U)

  LPC USB IP3511 HS instance count.
- #define USB_DEVICE_CONFIG_NUM (USB_DEVICE_CONFIG_KHCI + USB_DEVICE_CO-NFIG_EHCI + USB_DEVICE_CONFIG_LPCIP3511FS + USB_DEVICE_CONFIG_LPCIP3511-HS)

  Device instance count, the sum of KHCI and EHCI instance counts.

class instance define

- #define USB_DEVICE_CONFIG_HID (0U)

  HID instance count.

USB Device Configuration

- #define USB_DEVICE_CONFIG_CDC_ACM (0U)

  CDC ACM instance count.
- #define **USB_DEVICE_CONFIG_CDC_RNDIS** (0U)
- #define USB_DEVICE_CONFIG_MSC (0U)

  MSC instance count.
- #define USB_DEVICE_CONFIG_AUDIO (0U)

  Audio instance count.
- #define USB_DEVICE_CONFIG_PHDC (0U)

  PHDC instance count.
- #define USB_DEVICE_CONFIG_VIDEO (0U)

  Video instance count.
- #define USB_DEVICE_CONFIG_CCID (0U)

  CCID instance count.
- #define USB_DEVICE_CONFIG_PRINTER (0U)

  Printer instance count.
- #define USB_DEVICE_CONFIG_DFU (0U)

  DFU instance count.

Hardware instance define

- #define USB_DEVICE_CONFIG_KHCI (0U)

  KHCI instance count.
- #define USB_DEVICE_CONFIG_EHCI (0U)

  EHCI instance count.
- #define USB_DEVICE_CONFIG_LPCIP3511FS (0U)

  LPC USB IP3511 FS instance count.
- #define USB_DEVICE_CONFIG_LPCIP3511HS (1U)

  LPC USB IP3511 HS instance count.
- #define USB_DEVICE_CONFIG_NUM (USB_DEVICE_CONFIG_KHCI + USB_DEVICE_CO-NFIG_EHCI + USB_DEVICE_CONFIG_LPCIP3511FS + USB_DEVICE_CONFIG_LPCIP3511-HS)

  Device instance count, the sum of KHCI and EHCI instance counts.

class instance define

- #define USB_DEVICE_CONFIG_HID (0U)

  HID instance count.
- #define USB_DEVICE_CONFIG_CDC_ACM (0U)

  CDC ACM instance count.
- #define **USB_DEVICE_CONFIG_CDC_RNDIS** (0U)
- #define USB_DEVICE_CONFIG_MSC (0U)

  MSC instance count.
- #define USB_DEVICE_CONFIG_AUDIO (0U)

  Audio instance count.
- #define USB_DEVICE_CONFIG_PHDC (0U)

  PHDC instance count.
- #define USB_DEVICE_CONFIG_VIDEO (0U)

  Video instance count.

- #define USB_DEVICE_CONFIG_CCID (0U)
    CCID instance count.
- #define USB_DEVICE_CONFIG_PRINTER (0U)
    Printer instance count.
- #define USB_DEVICE_CONFIG_DFU (0U)
    DFU instance count.

Hardware instance define

- #define USB_DEVICE_CONFIG_KHCI (1U)
    KHCI instance count.
- #define USB_DEVICE_CONFIG_EHCI (0U)
    EHCI instance count.
- #define USB_DEVICE_CONFIG_LPCIP3511FS (0U)
    LPC USB IP3511 FS instance count.
- #define USB_DEVICE_CONFIG_LPCIP3511HS (0U)
    LPC USB IP3511 HS instance count.
- #define USB_DEVICE_CONFIG_NUM (USB_DEVICE_CONFIG_KHCI + USB_DEVICE_CO-
    NFIG_EHCI + USB_DEVICE_CONFIG_LPCIP3511FS + USB_DEVICE_CONFIG_LPCIP3511-
    HS)
    Device instance count, the sum of KHCI and EHCI instance counts.

class instance define

- #define USB_DEVICE_CONFIG_HID (0U)
    HID instance count.
- #define USB_DEVICE_CONFIG_CDC_ACM (0U)
    CDC ACM instance count.
- #define **USB_DEVICE_CONFIG_CDC_RNDIS** (0U)
- #define USB_DEVICE_CONFIG_MSC (0U)
    MSC instance count.
- #define USB_DEVICE_CONFIG_AUDIO (0U)
    Audio instance count.
- #define USB_DEVICE_CONFIG_PHDC (0U)
    PHDC instance count.
- #define USB_DEVICE_CONFIG_VIDEO (0U)
    Video instance count.
- #define USB_DEVICE_CONFIG_CCID (0U)
    CCID instance count.
- #define USB_DEVICE_CONFIG_PRINTER (0U)
    Printer instance count.
- #define USB_DEVICE_CONFIG_DFU (0U)
    DFU instance count.

4.9.2   Macro Definition Documentation

4.9.2.1   #define USB_DEVICE_CONFIG_SELF_POWER (1U)

1U supported, 0U not supported

4.9.2.2   #define USB_DEVICE_CONFIG_ENDPOINTS (4U)

4.9.2.3   #define USB_DEVICE_CONFIG_USE_TASK (0U)

4.9.2.4   #define USB_DEVICE_CONFIG_MAX_MESSAGES (8U)

4.9.2.5   #define USB_DEVICE_CONFIG_USB20_TEST_MODE (0U)

4.9.2.6   #define USB_DEVICE_CONFIG_CV_TEST (0U)

4.9.2.7   #define USB_DEVICE_CONFIG_COMPLIANCE_TEST (0U)

If the macro is enabled, the test mode and CV test macroes will be set.

4.9.2.8   #define USB_DEVICE_CONFIG_KHCI_DMA_ALIGN_BUFFER_LENGTH (64U)

4.9.2.9   #define USB_DEVICE_CONFIG_EHCI_MAX_DTD (16U)

4.9.2.10   #define USB_DEVICE_CONFIG_EHCI_ID_PIN_DETECT (0U)

4.9.2.11   #define USB_DEVICE_CONFIG_KEEP_ALIVE_MODE (0U)

4.9.2.12   #define USB_DEVICE_CONFIG_BUFFER_PROPERTY_CACHEABLE (0U)

4.9.2.13   #define USB_DEVICE_CONFIG_LOW_POWER_MODE (0U)

4.9.2.14   #define USB_DEVICE_CONFIG_REMOTE_WAKEUP (0U)

1U supported, 0U not supported

4.9.2.15   #define USB_DEVICE_CONFIG_LPM_L1 (0U)

1U supported, 0U not supported

4.9.2.16   #define USB_DEVICE_CONFIG_DETACH_ENABLE (0U)

4.9.2.17   #define USB_DEVICE_CONFIG_ERROR_HANDLING (0U)

4.9.2.18   #define USB_DEVICE_CONFIG_SELF_POWER (1U)

1U supported, 0U not supported

4.9.2.19   #define USB_DEVICE_CONFIG_ENDPOINTS (4U)

4.9.2.20   #define USB_DEVICE_CONFIG_USE_TASK (0U)

4.9.2.21   #define USB_DEVICE_CONFIG_MAX_MESSAGES (8U)

4.9.2.22   #define USB_DEVICE_CONFIG_USB20_TEST_MODE (0U)

4.9.2.23   #define USB_DEVICE_CONFIG_CV_TEST (0U)

4.9.2.24   #define USB_DEVICE_CONFIG_COMPLIANCE_TEST (0U)

If the macro is enabled, the test mode and CV test macroes will be set.

4.9.2.25   #define USB_DEVICE_CONFIG_KHCI_DMA_ALIGN_BUFFER_LENGTH (64U)

4.9.2.26   #define USB_DEVICE_CONFIG_EHCI_MAX_DTD (16U)

4.9.2.27   #define USB_DEVICE_CONFIG_EHCI_ID_PIN_DETECT (0U)

4.9.2.28   #define USB_DEVICE_CONFIG_KEEP_ALIVE_MODE (0U)

4.9.2.29   #define USB_DEVICE_CONFIG_BUFFER_PROPERTY_CACHEABLE (0U)

4.9.2.30   #define USB_DEVICE_CONFIG_LOW_POWER_MODE (0U)

4.9.2.31   #define USB_DEVICE_CONFIG_REMOTE_WAKEUP (0U)

1U supported, 0U not supported

4.9.2.32   #define USB_DEVICE_CONFIG_LPM_L1 (0U)

1U supported, 0U not supported

4.9.2.33   #define USB_DEVICE_CONFIG_DETACH_ENABLE (0U)

4.9.2.34   #define USB_DEVICE_CONFIG_ERROR_HANDLING (0U)

4.9.2.35   #define USB_DEVICE_CONFIG_SELF_POWER (1U)

1U supported, 0U not supported

4.9.2.36   #define USB_DEVICE_CONFIG_ENDPOINTS (4U)

4.9.2.37   #define USB_DEVICE_CONFIG_USE_TASK (0U)

4.9.2.38   #define USB_DEVICE_CONFIG_MAX_MESSAGES (8U)

4.9.2.39   #define USB_DEVICE_CONFIG_USB20_TEST_MODE (0U)

4.9.2.40   #define USB_DEVICE_CONFIG_CV_TEST (0U)

4.9.2.41   #define USB_DEVICE_CONFIG_COMPLIANCE_TEST (0U)

If the macro is enabled, the test mode and CV test macroes will be set.

4.9.2.42   #define USB_DEVICE_CONFIG_KHCI_DMA_ALIGN_BUFFER_LENGTH (64U)

4.9.2.43   #define USB_DEVICE_CONFIG_EHCI_MAX_DTD (16U)

4.9.2.44   #define USB_DEVICE_CONFIG_EHCI_ID_PIN_DETECT (0U)

4.9.2.45   #define USB_DEVICE_CONFIG_KEEP_ALIVE_MODE (0U)

4.9.2.46   #define USB_DEVICE_CONFIG_BUFFER_PROPERTY_CACHEABLE (0U)

4.9.2.47   #define USB_DEVICE_CONFIG_LOW_POWER_MODE (0U)

4.9.2.48   #define USB_DEVICE_CONFIG_REMOTE_WAKEUP (0U)

1U supported, 0U not supported

4.9.2.49   #define USB_DEVICE_CONFIG_LPM_L1 (0U)

1U supported, 0U not supported

4.9.2.50 #define USB_DEVICE_CONFIG_DETACH_ENABLE (0U)

4.9.2.51 #define USB_DEVICE_CONFIG_ERROR_HANDLING (0U)

4.9.2.52 #define USB_DEVICE_CONFIG_SELF_POWER (1U)

1U supported, 0U not supported

4.9.2.53 #define USB_DEVICE_CONFIG_ENDPOINTS (4U)

4.9.2.54 #define USB_DEVICE_CONFIG_USE_TASK (0U)

4.9.2.55 #define USB_DEVICE_CONFIG_MAX_MESSAGES (8U)

4.9.2.56 #define USB_DEVICE_CONFIG_USB20_TEST_MODE (0U)

4.9.2.57 #define USB_DEVICE_CONFIG_CV_TEST (0U)

4.9.2.58 #define USB_DEVICE_CONFIG_COMPLIANCE_TEST (0U)

If the macro is enabled, the test mode and CV test macroes will be set.

4.9.2.59 #define USB_DEVICE_CONFIG_KHCI_DMA_ALIGN_BUFFER_LENGTH (64U)

4.9.2.60 #define USB_DEVICE_CONFIG_EHCI_MAX_DTD (16U)

4.9.2.61 #define USB_DEVICE_CONFIG_EHCI_ID_PIN_DETECT (0U)

4.9.2.62 #define USB_DEVICE_CONFIG_KEEP_ALIVE_MODE (0U)

4.9.2.63 #define USB_DEVICE_CONFIG_BUFFER_PROPERTY_CACHEABLE (0U)

4.9.2.64 #define USB_DEVICE_CONFIG_LOW_POWER_MODE (0U)

4.9.2.65 #define USB_DEVICE_CONFIG_REMOTE_WAKEUP (0U)

1U supported, 0U not supported

4.9.2.66 #define USB_DEVICE_CONFIG_LPM_L1 (0U)

1U supported, 0U not supported

4.9.2.67 #define USB_DEVICE_CONFIG_DETACH_ENABLE (0U)

4.9.2.68 #define USB_DEVICE_CONFIG_ERROR_HANDLING (0U)

Chapter 5
USB OS Adapter

Please reference to MCUXpresso SDK API Reference Manual.