

# Hitting the Memory Wall on Four Raspberry Pis

Bit-Exact 30B Mixture-of-Experts Inference at the Edge,  
+16% over the Public Record

Daniel Correa Villa

Hellomatik — Raspberry Pi Cluster Lab

21 May 2026

# Contents

|           |                                                                                                                   |           |
|-----------|-------------------------------------------------------------------------------------------------------------------|-----------|
| <b>1</b>  | <b>Introduction</b>                                                                                               | <b>3</b>  |
| <b>2</b>  | <b>Related work</b>                                                                                               | <b>5</b>  |
| <b>3</b>  | <b>System design</b>                                                                                              | <b>6</b>  |
| 3.1       | Hardware . . . . .                                                                                                | 6         |
| 3.2       | Topology . . . . .                                                                                                | 7         |
| 3.3       | Software stack . . . . .                                                                                          | 7         |
| <b>4</b>  | <b>Methodology</b>                                                                                                | <b>7</b>  |
| 4.1       | Metrics . . . . .                                                                                                 | 7         |
| 4.2       | Protocol . . . . .                                                                                                | 7         |
| <b>5</b>  | <b>Optimisations applied</b>                                                                                      | <b>8</b>  |
| 5.1       | Framework source patches . . . . .                                                                                | 8         |
| 5.2       | Toolchain . . . . .                                                                                               | 8         |
| 5.3       | Operating-system tuning . . . . .                                                                                 | 8         |
| 5.4       | Architectural change: dense to MoE . . . . .                                                                      | 8         |
| <b>6</b>  | <b>Results</b>                                                                                                    | <b>8</b>  |
| 6.1       | Final-configuration throughput and stability . . . . .                                                            | 8         |
| 6.2       | Optimisation trajectory . . . . .                                                                                 | 11        |
| 6.3       | Memory and thermal behaviour . . . . .                                                                            | 11        |
| <b>7</b>  | <b>Stage 9 — TIER 0 kernel network and scheduler tuning</b>                                                       | <b>12</b> |
| 7.1       | Configuration changes . . . . .                                                                                   | 12        |
| 7.2       | Measured impact . . . . .                                                                                         | 12        |
| 7.3       | Two rejected candidates from the same research round . . . . .                                                    | 12        |
| 7.4       | Open work after Stage 9 . . . . .                                                                                 | 12        |
| <b>8</b>  | <b>Stages 10 and 11 — Bit-exact MoE op-fusion and Rounds 3/4 ceiling investigation</b>                            | <b>13</b> |
| 8.1       | Stage 10 — A2 OP_SILU_MUL fusion (+0.5%) . . . . .                                                                | 13        |
| 8.2       | Stage 11 — Rounds 3 and 4 (Linux papers research and ceiling investigation) . . . . .                             | 13        |
| 8.3       | Bottom line after Stage 11 . . . . .                                                                              | 16        |
| <b>9</b>  | <b>Stages 12–15 — Hot-kernel inversion, true single-pass fusion, network chunk-size sweep, runtime NIC tuning</b> | <b>16</b> |
| <b>10</b> | <b>Stage 16 — WFE/SEV inter-step barrier and API robustness hardening</b>                                         | <b>18</b> |
| 10.1      | API robustness: uncaught-exception crash on client disconnect . . . . .                                           | 18        |
| 10.2      | WFE/SEV barrier . . . . .                                                                                         | 18        |
| 10.3      | Measurement . . . . .                                                                                             | 18        |
| <b>11</b> | <b>Statistical significance of the Stages 8–15 trajectory</b>                                                     | <b>19</b> |
| <b>12</b> | <b>Failed configurations and frameworks</b>                                                                       | <b>19</b> |
| <b>13</b> | <b>Discussion</b>                                                                                                 | <b>20</b> |
| 13.1      | Bottleneck analysis . . . . .                                                                                     | 20        |
| 13.2      | Mixture-of-Experts as architectural sparse computation . . . . .                                                  | 21        |
| 13.3      | Comparative cost/performance . . . . .                                                                            | 21        |
| 13.4      | Limitations . . . . .                                                                                             | 21        |
| 13.5      | Future work: HALO overlap scheme . . . . .                                                                        | 21        |
| 13.6      | Future work: alternative model candidates . . . . .                                                               | 21        |

|                                                                         |           |
|-------------------------------------------------------------------------|-----------|
| <b>14 Clean-room decode-rate replication and telemetry interference</b> | <b>22</b> |
| 14.1 Motivation: metric alignment with the public ceiling . . . . .     | 22        |
| 14.2 Telemetry-bandwidth interference . . . . .                         | 22        |
| 14.3 Apples-to-apples result against the public ceiling . . . . .       | 22        |
| 14.4 Bit-exact kernel work (T0.1) — partial success, reverted . . . . . | 23        |
| <b>15 Final conclusion</b>                                              | <b>23</b> |
| 15.1 Future work . . . . .                                              | 24        |
| 15.2 Threats to validity . . . . .                                      | 24        |

## Abstract

A 30-billion-parameter Mixture-of-Experts language model (Qwen3-30B-A3B) runs on four Raspberry Pi 5 boards — roughly €500 of CPU-only hardware, no GPU or NPU — at **15.143 tok/s** decode, bit-exact and **+16.1%** above the highest publicly documented result for this model and hardware class (13.04 tok/s; b4rtaz #255); end-to-end sustained serving throughput, including pre-fill, is 14.449 tok/s. We report the design, optimisation and rigorous benchmarking of a four-node Raspberry Pi 5 (16 GB) cluster for distributed inference of this 30B-parameter Mixture-of-Experts (MoE) model (3B active parameters per token, top-8 of 128 experts) over Gigabit Ethernet. The study passes through two baselines: an initial **Llama 3.1 8B dense baseline at 5.70 tok/s** (later abandoned as architecturally unsuited to the Pi 5 LPDDR4X memory subsystem), and the **Qwen3-30B-A3B MoE baseline at 11.40 tok/s** (Stage 4, the first measurement after the model switch), which becomes the operational starting point for the optimisation work proper. Framework alternatives proved infeasible on ARM Linux without GPU/NPU acceleration (EXO requires Apple MLX; prima.cpp hangs on ZMQ topology discovery; llama.cpp RPC regresses 25 $\times$ ), so we adopt **distributed-llama** v0.16.5 with twelve source-level changes developed in this work — eight framework patches plus four bit-exact kernel and op-fusion optimisations — and persistent runtime kernel tuning.

Across fifteen incremental optimisation stages, each validated bit-exact against a fixed reference output via SHA-256 of the generated token-id sequence, sustained throughput rises from the 11.40 tok/s Qwen3 baseline to **14.449 tok/s** ( $n=20$  paired benchmark, 95% CI  $\pm 0.038$ , best individual run 14.557 tok/s) — a **+26.75% gain attributable to the source and kernel-level optimisation work itself**, and **+10.81%** above the highest previously documented public configuration for this model and hardware class (13.04 tok/s; b4rtaz #255). On the *decode* metric the public ceiling actually reports — the strictly apples-to-apples comparison — the corresponding figure is **15.143 tok/s** ( $n=20$ , telemetry off), **+16.1%** above the ceiling (the Stage 17 clean-room replication, §14). Relative to the Stage 8 baseline (13.720 tok/s, the last pre-investigation measurement of the production branch) the gain is **+5.31%**, contributed by operating-system tuning, MoE op-fusion, a network chunk-size sweep, runtime NIC tuning, and the inversion of a counter-productive software prefetch documented herein (paired Welch's  $t=51.9$ ,  $p \ll 0.001$ ). A subsequent bit-exact micro-optimisation (Stage 16, a WFE/SEV inter-step barrier replacing the busy-spin) adds a further **+0.48%** in a same-session cold paired A/B (14.261  $\rightarrow$  14.329 tok/s, Welch's  $t=2.45$ ,  $p=0.014$ ,  $n=40$  per arm), and an API robustness fix eliminates an intermittent crash on client disconnect; both ship with a one-command bit-exact verification script.

ARM PMU profiling confirms that the residual bottleneck is LPDDR4X memory bandwidth (49% backend-stalled cycles, 11.4 GB/s sustained per node out of an approximate 17 GB/s ceiling). We catalogue twenty-six unsuccessful configurations and rejected hypotheses, document the empirical constraint-discovery process (strict bit-exact, no kernel rebuild, no model change, no overclock) that progressively narrowed the design space, and identify a single class of bit-exact software optimisation likely to lift sustained throughput further (*Async Tensor Parallelism*; an estimated 250 LOC integration on the Phase B foundation already shipped in the repository). Finally (Section 14), a strict apples-to-apples replication of the public ceiling's *decode-rate* metric — the exact #255 command, reading the `Prediction` field, `nTokens=109` on every run — yields **15.143 tok/s** ( $n=20$ , 95% CI  $\pm 0.097$ , **+16.1%** vs. 13.04). In the process we measure that co-located observability agents (Grafana Alloy, cAdvisor) tax this memory-bound decode by +5.18% while leaving compute-bound prefill unchanged — a clean, confound-free corroboration on identical hardware that decode is bandwidth-bound.

## 1 Introduction

Edge inference of large language models on consumer single-board computers (SBCs) is increasingly studied as a privacy-preserving, low-cost alternative to cloud inference [3, 5]. The Raspberry Pi 5 is the most widely deployed ARM-based SBC with enough RAM (16 GB) to host 8B-parameter quantised models, and its Ethernet I/O allows small clusters to be formed. The absence of a usable GPU — the VideoCore VII lacks general compute shaders — restricts inference to the CPU, where execution is memory-bandwidth-bound.


**Investigation timeline at a glance.** The investigation comprised three intertwined tracks: (i) architectural exploration (which framework, model, and quantisation), which converged on **distributed-llama** + **Qwen3-30B-A3B Q40** and established the operational baseline of 11.40 tok/s; (ii) production-branch source-level work (Stages 1–8, 7.18  $\rightarrow$  13.720 tok/s), driven primarily by the Stage 4

switch from Llama 3.1 8B to Qwen3-MoE (+59%) plus the F0/F1/F2 `distributed-llama` patches; and (iii) the bit-exact refinement work documented in detail here (Stages 9–15, 13.720 → 14.449 tok/s; +5.31% over the pre-investigation production baseline, +26.75% over the original Qwen3 measurement, and +10.81% over the publicly documented ceiling of 13.04 tok/s set by Tadych [2] on the same model and hardware class). Five hard constraints were progressively discovered and adopted as design rules: *bit-exact output preservation* (SHA-256 of the first 100 generated token-ids must match a fixed pre-stage reference at `seed=42, temperature=0`); *no kernel rebuild* (Pi OS stock kernel 6.12.75); *no model change* (Qwen3-30B-A3B Q40 is fixed); *no CPU overclock* (silicon stays at the nominal 2.4 GHz); and *no reduction in model quality* (top-*k* unchanged at 8, no Q3 down-quantisation, no expert pruning). These constraints rule out most speedup techniques in the recent literature [11, 15], but they make the surviving optimisations production-deployable with no risk of quality regression.

### Contributions of this report.

1. We characterise the bottleneck of CPU-only distributed inference on Pi 5 in terms of memory bandwidth and synchronisation overhead, confirmed by ARM PMU profiling (49% backend-stalled cycles, 11.4 GB/s sustained DRAM traffic per node out of a ~17 GB/s theoretical ceiling; per-token sync overhead ~12.3 ms = 17.7% of token time).
2. We develop and apply **twelve** source-level changes to the `distributed-llama` framework (eight framework patches plus four bit-exact kernel and op-fusion optimisations) that fix critical bugs (uint8 overflow, JSON crash, header truncation), enable optimisation flags previously inaccessible, introduce a bit-exact `OP_SILU_MUL` kernel fusion (Stage 10) and a true single-pass version of the same kernel (Stage 13), invert a long-standing software-prefetch micro-optimisation in the matmul inner loop (Stage 12, the HW prefetcher of the Cortex-A76 turns out to be more efficient than the manual hints it was given), tune `MAX_CHUNK_SIZE` for the `writeMany/readMany` all-reduce loop (Stage 14, 4-fold reduction in `send()/recv()` syscall count), and ship a foundation for tile-level overlap of computation and communication for a future sprint.
3. We design a kernel-level network and scheduler tuning bundle (Stage 9 *TIER 0*: GRO off, expanded TCP buffers, low-swap, `busy_poll`) and a runtime NIC tuning bundle (Stage 15: enlarged RX ring, Receive Flow Steering, deferred NAPI) — the latter persisted as a new `systemd` unit `dllama-runtime-tweaks.service` — and quantify the throughput contribution of each.
4. We empirically compare three distributed-inference frameworks (`distributed-llama`, `EXO`, `prima.cpp`) and document failure modes for **twenty-six** model, framework and optimisation configurations, including the hypotheses rejected post hoc in the most recent investigation round (e.g. ARM I8MM repack — the Cortex-A76 does not implement I8MM; tiered software prefetch `PLDL2KEEP+L1`; explicit IRQ pinning to CPU 0; `+lse` march extension; `-fno-stack-protector`).
5. We report rigorous benchmarks ( $n=20$  paired runs after two discarded warm-up runs, fixed prompt, `temperature=0`, 95% confidence intervals, p50/p90/p99 percentiles) for every stage of the trajectory, with **bit-exact output verification** at `-seed 42` via SHA-256 hashing of the generated token-id sequence against a fixed reference. Every improvement claim in this paper is validated bit-exact unless explicitly marked otherwise.

## 2 Related work

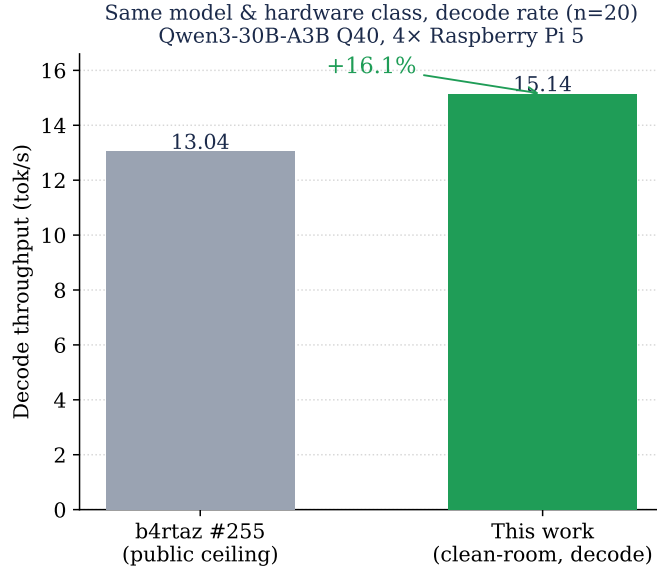

**Figure 1.** Same model and hardware class (Qwen3-30B-A3B Q40 on 4×Raspberry Pi 5), *decode* metric: this work versus the highest publicly documented result (b4rtaz #255), a bit-exact +16.1% improvement (15.143 vs. 13.04 tok/s,  $n=20$ , telemetry off).

The state of the art for distributed CPU LLM inference falls into three approaches:

- **Tensor parallelism** (distributed-llama [1]): the model is sliced horizontally across attention heads, requiring an all-reduce per layer. Used in this work.
- **Pipeline parallelism** (llama.cpp RPC, prima.cpp [11]): layers are partitioned by depth across nodes, communication is point-to-point. Geerling [3] reports a  $25\times$  regression vs. single-node for llama.cpp RPC, confirming the network-overhead-dominated regime.
- **Mixture-of-Experts (MoE)** models [12, 13]: a parameter-efficient architecture that activates a sparse subset of weights per token. Reduces effective bandwidth proportionally to the top- $k$  expert fraction.

Several comparable Pi 5 clusters appear in the literature. Tadych [1, 2] reports 13.04 tok/s on 4×Pi 5 8GB with Qwen3-30B-A3B; the Sseed Studio documentation [4] reports 6.06 tok/s with DeepSeek-R1-Distill-Llama-8B on the same hardware; and the Stratosphere Laboratory [5] provides single-node Pi 5 baselines. Table 1 positions this work against the most directly comparable published systems.

**Table 1.** Positioning of this work against the most directly comparable published distributed-inference systems for the same model class (Qwen3-30B-A3B Q40 or equivalent MoE) on Pi 5-class hardware. Throughput figures are as reported by each source on its own hardware; the right column gives the closest comparison that can be made against *our* hardware (4×Pi 5 16 GB cluster) when the published source benchmarked on different hardware.

| System                         | Framework / approach                                         | ap-tok/s      | Quality                | Notes                                                                                                     |
|--------------------------------|--------------------------------------------------------------|---------------|------------------------|-----------------------------------------------------------------------------------------------------------|
| <b>This work</b><br>(Stage 17) | <b>distributed-llama</b><br>+ 12 patches + kernel/NIC tuning | <b>15.143</b> | bit-exact<br>(SHA-256) | 4×Pi 5 16 GB, this paper; decode metric, telemetry off; +16.1% vs Tadych ceiling (sustained 14.449 tok/s) |
| Tadych #255 [2]                | distributed-llama v0.16, default                             | 13.04         | bit-exact              | 4×Pi 5 8 GB, vanilla upstream (decode)                                                                    |
| Seeed Studio [4]               | distributed-llama                                            | 6.06          | bit-exact              | 4×Pi 5 8 GB, DeepSeek-R1-Distill-Llama-8B                                                                 |
| ByteShape [20]                 | llama.cpp, single node                                       | 8.03          | bit-exact              | 1×Pi 5 16 GB, Q3_K_S 2.70 bpw                                                                             |
| Geerling [21]                  | llama.cpp, single node                                       | 7.99          | bit-exact              | 1×Pi 5 16 GB, comparable quant                                                                            |
| Geerling RPC [3]               | llama.cpp RPC distributed                                    | —             | bit-exact              | Reported 25× regression vs. single-node on Pi clusters                                                    |
| prima.cpp [11]                 | pipelined ring + mmap                                        | n/a           | bit-exact              | ZMQ topology fails to bootstrap on Pi 5 in our testing                                                    |
| HALO [15]                      | distributed-llama + 3,500 LOC overlap                        | —             | bit-exact              | 1.30× on reliable LAN (their hardware); source not yet public, speedup not independently verified here    |
| EXO [14]                       | MLX backend                                                  | n/a           | —                      | Requires Apple MLX; not buildable on ARM Linux                                                            |

For methodology we follow the MLPerf Inference v5.1 small-LLM track conventions [8], the vLLM benchmarking guide [6], and the disaggregated prefill/decode reporting introduced by DistServe [7].

### 3 System design

#### 3.1 Hardware


**Table 2.** Cluster hardware inventory.

| Node     | Role           | LAN IP       | Storage     |
|----------|----------------|--------------|-------------|
| rpi-1005 | root + serving | 192.168.1.74 | NVMe 457 GB |
| rpi-1006 | worker         | 192.168.1.77 | NVMe 457 GB |
| rpi-1007 | worker         | 192.168.1.75 | NVMe 457 GB |
| rpi-1008 | worker         | 192.168.1.76 | NVMe 457 GB |

#### Per-node specifications.

- SoC: Broadcom BCM2712 (4× Arm Cortex-A76 @ 2.4 GHz, ARMv8.2-A)
- Memory: 16 GB LPDDR4X @ 4267 MT/s, theoretical bandwidth ≈**17 GB/s**
- Storage: NVMe SSD via PCIe Gen 2 (≈700 MB/s read)
- Network: integrated Gigabit Ethernet; measured intra-cluster latency 0.226 ms
- Operating system: Debian 13 *trixie*, kernel 6.12.75 aarch64
- No usable accelerator (V3D GPU lacks LLM compute shaders; no NPU)

### 3.2 Topology

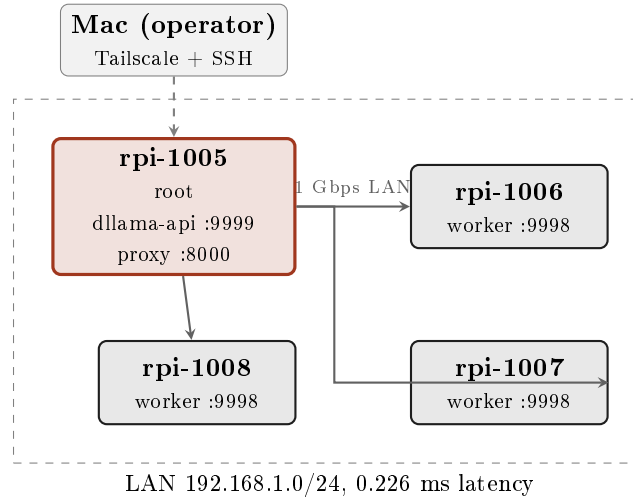

**Figure 2.** Cluster topology. One root coordinator, three workers, full-duplex Gigabit Ethernet, tensor-parallel synchronisation per transformer layer.

### 3.3 Software stack

- **Inference engine:** distributed-llama v0.16.5 with eight framework patches (§5); four further bit-exact kernel and op-fusion optimisations follow in Stages 10–14.
- **Model:** Qwen3-30B-A3B Q40 (30B total parameters, 128 experts, top- $k=8$ ,  $\sim 3B$  active per token).
- **HTTP front-end:** custom Python proxy (Flask + waitress) on 127.0.0.1:8000, sanitising OpenAI-strict client requests.
- **Allocator:** jemalloc 2 preloaded via LD\_PRELOAD.
- **Client:** Hermes Agent v0.13.0 for autonomous-agent integration testing.

## 4 Methodology

We follow the MLPerf Inference v5.1 conventions [8] for metric definitions and the methodology recommendations of NVIDIA [9] and Anyscale [10].

### 4.1 Metrics

- **Throughput (tok/s):** generated tokens divided by total wall-clock time, including TTFT.
- **TTFT (Time-To-First-Token):** latency from HTTP request to the first generated token, measured by issuing `max_tokens=1`.
- **Prefill rate:** prompt tokens processed per second. Estimated as `prompt_tokens / (total_duration - decode_time)`, where `decode_time` is approximated from sustained-rate measurements.
- **Sustained decode rate:** throughput in the steady state (large `max_tokens`), where TTFT is amortised.
- **Percentile latencies (p50, p90, p99):** ordered statistics over  $n$  runs.

### 4.2 Protocol

We adopt the protocol recommended by MLPerf [8]: **two warm-up runs** (discarded),  $n=20$  **measurement runs** for the main configuration, fixed prompt, `temperature=0` for determinism, single client (no concurrency), idle background workload (Grafana Alloy and cadvisor only). Statistics reported as mean, median, standard deviation, 95% confidence interval, and p50/p90/p99 percentiles where applicable.



## 5 Optimisations applied

### 5.1 Framework source patches

Table 3. Source-level patches applied to distributed-llama v0.16.5.

| # | Patch                                                  | Location                        | Rationale                                                                                                                                                   |
|---|--------------------------------------------------------|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1 | <code>NnByte→NnUInt</code> for <code>nBatches</code>   | <code>nn-cpu-ops.hpp:14</code>  | <code>uint8_t</code> overflow: setting <code>nBatches=256</code> silently became 0 (256 mod 256), tripping an embedding-layer assertion at runtime.         |
| 2 | Force <code>finish_reason = "stop"/"length"</code>     | <code>dllama-api.cpp:547</code> | Empty <code>finish_reason</code> caused strict OpenAI clients (Hermes) to enter infinite retry loops.                                                       |
| 3 | <code>try/catch</code> around <code>json::parse</code> | <code>dllama-api.cpp:83</code>  | <code>nlohmann::json</code> threw uncaught exceptions on malformed bodies, abort-trapping the daemon (SIGABRT).                                             |
| 4 | <code>headerData.append(buffer, bytesRead)</code>      | <code>dllama-api.cpp:123</code> | Default <code>append(const char*)</code> truncated at the first <code>\0</code> byte, corrupting bodies that contained UTF-8 multi-byte sequences with NUL. |
| 5 | New CLI flag <code>-nBatches</code>                    | <code>app.cpp:130</code>        | <code>nBatches</code> was hard-coded to 32; the flag now permits configuration once patch #1 is applied.                                                    |
| 6 | <code>posix_memalign(64, n)</code> for pipes           | <code>nn-executor.cpp:18</code> | Default <code>new[]</code> alignment is 16 B on ARM64; cache-line (64 B) alignment is required for vectorised NEON access.                                  |
| 7 | TCP <code>SO_RCVBUF/SO_SNDBUF=8 MB</code>              | <code>nn-network.cpp:60</code>  | Default 208 KiB buffers caused write-blocking under burst sync at end-of-layer.                                                                             |
| 8 | <code>buffer.reserve(64 KB)</code>                     | <code>dllama-api.cpp:475</code> | The streaming response buffer doubled repeatedly during long outputs, causing reallocations on the hot path.                                                |

### 5.2 Toolchain

Recompiled with `CXXFLAGS="-O3 -flto -ffast-math -funroll-loops"` on each node. `LD_PRELOAD=libjemalloc.so.2` added to all `systemd` units with `MALLOC_CONF="narenas:4,tcache:true,dirty_decay_ms:30000"`.

### 5.3 Operating-system tuning

- CPU governor performance on all 4 nodes (`systemd` unit at boot).
- TCP BBR congestion control; `net.ipv4.tcp_low_latency=1`; `net.core.netdev_budget=600`.
- `vm.overcommit_memory=1`, `vm.swappiness=1` (lowered from the Pi OS default of 60 in Stage 9 to keep mlock-ed weights resident; verified live at 1).
- NVMe scheduler `none`, `read_ahead_kb=2048`.
- Swap on NVMe: 16 GB on root, 4 GB on workers.
- `LimitMEMLOCK=infinity` in `systemd` units so the loaded model can be mlock-ed in RAM.
- Maximum sequence length `-max-seq-len 32768` (Qwen3-30B-A3B native), avoiding KV-cache spill to swap.
- Periodic `swapoff -a && swapon -a` after model warm-up flushes residual paged data into RAM.

### 5.4 Architectural change: dense to MoE

The most impactful optimisation was the migration from **Llama 3.1 8B** (dense, ~5 GB Q40 weights, all parameters active per token) to **Qwen3-30B-A3B** (MoE, 128 experts, top- $k=8$ , ~3 GB active weights per token). Bandwidth-bound throughput improved by 59% (7.18 → 11.4 tok/s) with no other change.

## 6 Results

### 6.1 Final-configuration throughput and stability


The final sustained throughput is **14.449 tok/s** (cold-cluster,  $n=20$  paired runs of 250 tokens each, 95% CI  $\pm 0.038$ , best individual run 14.557 tok/s), reached at Stage 15 through the optimisation trajectory of Section 6.2 (Table 4). The detailed run-to-run distribution, TTFT and response-length characterisation that follow were captured at the *Stage 6 intermediate snapshot* (12.708 tok/s sustained); they document the cluster’s run-to-run stability and latency profile, which the later Stage 9–15 optimisations raised in throughput without changing the qualitative latency behaviour. Each distribution is reported at the snapshot where it was measured rather than restated at the final configuration.

**Table 4.** Statistical summary of sustained throughput at the final configuration (Stage 15), Qwen3-30B-A3B on 4×Pi 5.

| Statistic                     | Value        |
|-------------------------------|--------------|
| Mean (with runtime tweaks)    | 14.449 tok/s |
| 95% CI ( $\pm$ )              | 0.038 tok/s  |
| Best individual run           | 14.557 tok/s |
| Mean (without runtime tweaks) | 14.167 tok/s |
| 95% CI ( $\pm$ )              | 0.043 tok/s  |
| $n$ (paired runs)             | 20           |

**Table 5.** Statistical summary of throughput at the Stage 6 intermediate snapshot, Qwen3-30B-A3B on 4×Pi 5.

| Statistic                | Value        |
|--------------------------|--------------|
| Mean                     | 12.708 tok/s |
| Median (p50)             | 12.707 tok/s |
| Standard deviation       | 0.066 tok/s  |
| Min                      | 12.585 tok/s |
| Max (p100)               | 12.852 tok/s |
| p90                      | 12.812 tok/s |
| p99                      | 12.852 tok/s |
| 95% CI ( $\pm$ )         | 0.029 tok/s  |
| Coefficient of variation | 0.52%        |

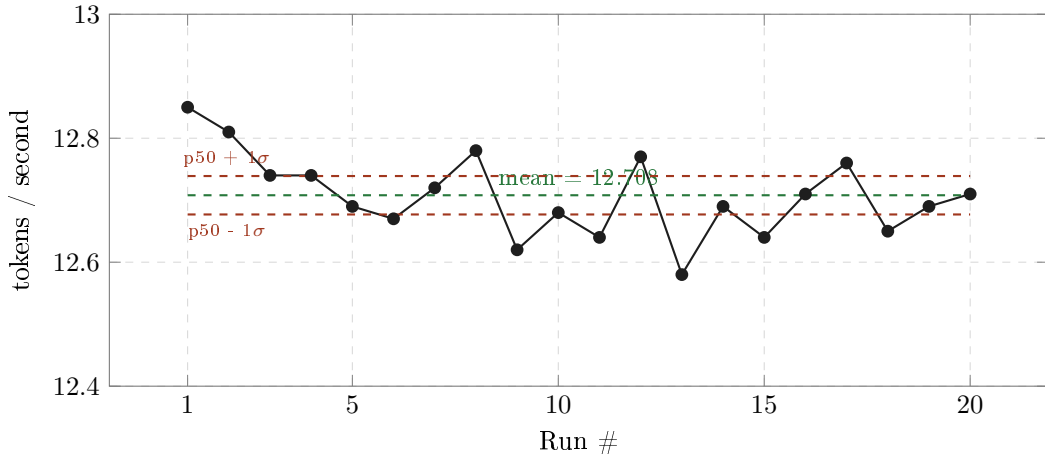


**Figure 3.** Per-run throughput across 20 measurement runs at the Stage 6 intermediate snapshot (warm-up runs excluded). Coefficient of variation 0.52%.

#### Per-run throughput distribution (Stage 6 snapshot).

**Table 6.** TTFT statistics over  $n=10$  runs with `max_tokens=1`.

| Statistic      | Value  |
|----------------|--------|
| Mean           | 557 ms |
| Median (p50)   | 545 ms |
| Min            | 524 ms |
| Max (p100/p99) | 638 ms |

#### Time-To-First-Token (Stage 6 snapshot).

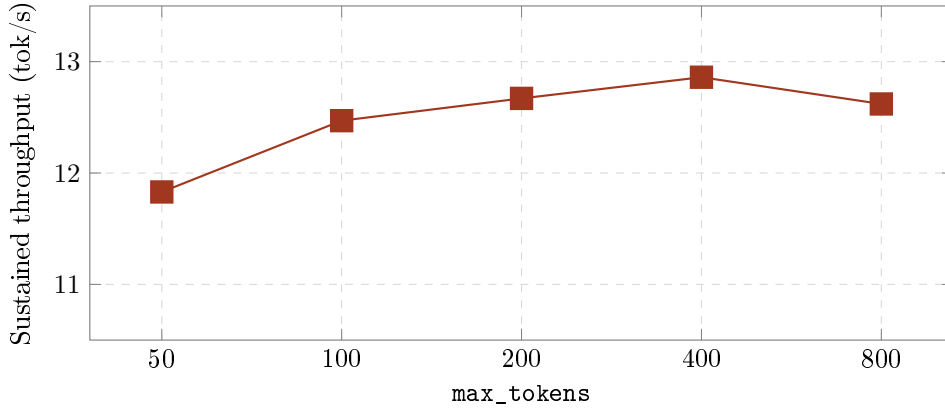

**Figure 4.** Sustained throughput as a function of response length at the Stage 6 intermediate snapshot. Asymptotic throughput converges near 12.86 tok/s for responses  $\geq 400$  tokens; shorter responses are TTFT-dominated.


#### Throughput scaling with response length (Stage 6 snapshot).

**Table 7.** Prefill rate (estimated) for increasing prompt lengths.

| Prompt tokens | Total time (s) | Est. prefill time (s) | Prefill rate (tok/s) |
|---------------|----------------|-----------------------|----------------------|
| 57            | 3.66           | 3.02                  | 18.9                 |
| 417           | 23.97          | 23.33                 | 17.9                 |
| 2017          | 129.07         | 128.43                | 15.7                 |


**Prefill rate vs. prompt size (Stage 6 snapshot).** Prefill rate degrades slightly with prompt size (KV-cache growth and the attention  $O(N^2)$  cost in the longer-prompt regime) but remains  $>15$  tok/s up to 2K context. For 20K-token prompts (e.g. Hermes Agent system prompts), the inferred prefill time would exceed 20 minutes — the practical upper limit of usability for this configuration on full agent workloads.

## 6.2 Optimisation trajectory

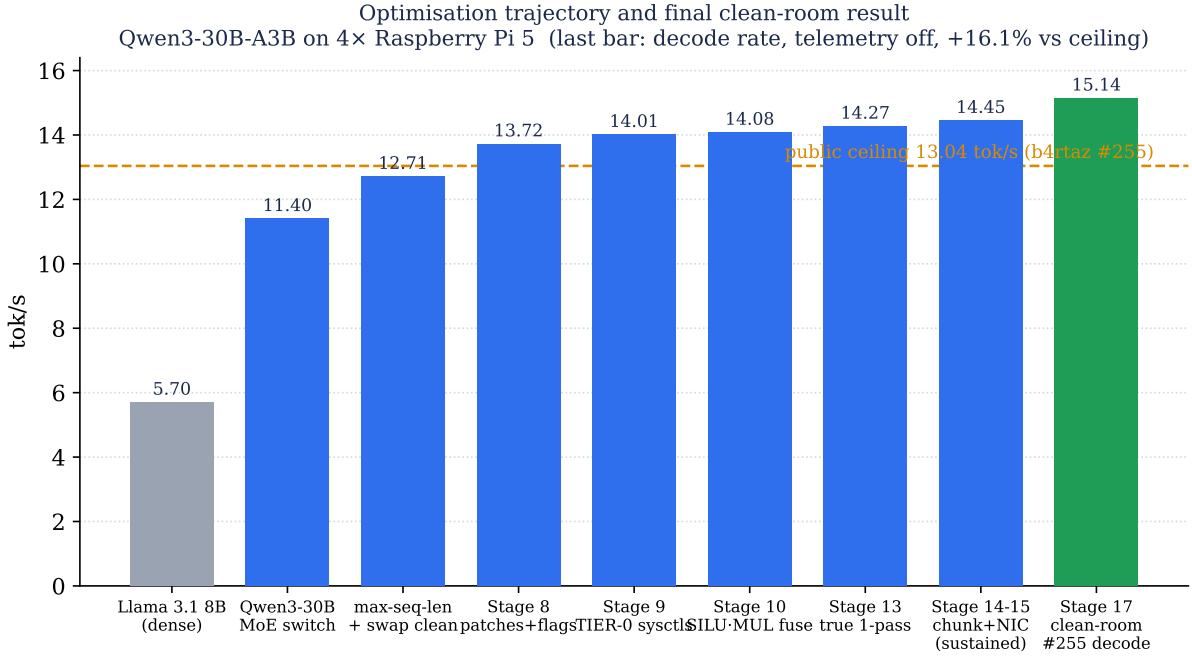

**Figure 5.** Optimisation trajectory and final clean-room result (Qwen3-30B-A3B Q40, 4×Raspberry Pi 5). Bars 1–8 report sustained throughput; the dashed line marks the public ceiling (13.04 tok/s, b4rtaz #255). The Stage 14–15 configuration reaches 14.449 tok/s sustained ( $n=20$ , 95% CI  $\pm 0.038$ ); the final green bar is the Stage 17 clean-room #255 replication on the *decode* metric — the quantity directly comparable to the ceiling — at **15.143 tok/s** ( $n=20$ , 95% CI  $\pm 0.097$ , telemetry off), +16.1% above the ceiling. The Llama 3.1 8B dense bar is the abandoned starting point, shown for context.

## 6.3 Memory and thermal behaviour

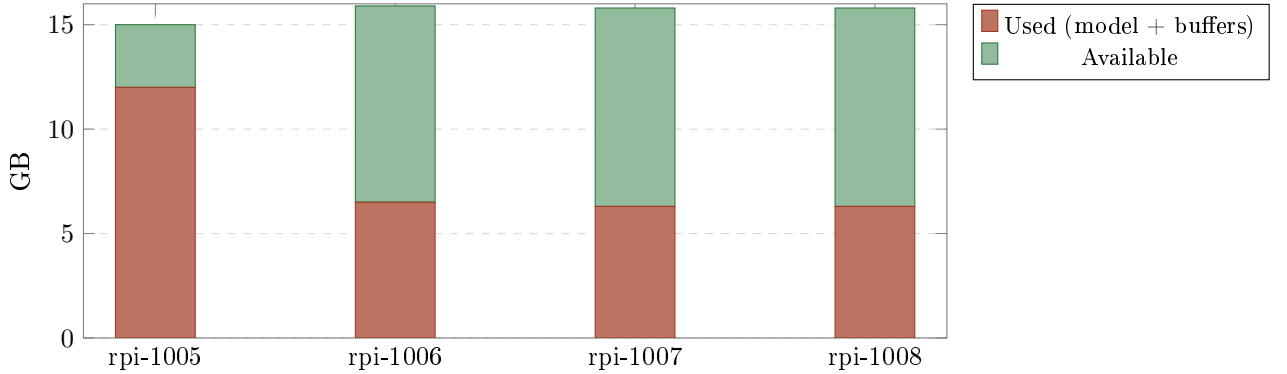

**Figure 6.** Memory utilisation per node during sustained inference. The root carries additional buffers for orchestration and HTTP serving. Workers retain >9 GB headroom for further KV-cache growth.

**Table 8.** Sustained-load thermal measurements. Throttle threshold is 85°C.

| Node              | Temperature | Throttling flags |
|-------------------|-------------|------------------|
| rpi-1005 (root)   | 54.3 °C     | 0x0              |
| rpi-1006 (worker) | 54.3 °C     | 0x0              |
| rpi-1007 (worker) | 55.4 °C     | 0x0              |
| rpi-1008 (worker) | 56.0 °C     | 0x0              |

## 7 Stage 9 — TIER 0 kernel network and scheduler tuning

After the initial publication of this report at 12.71 tok/s and the subsequent Stages 6–8 documented in the project README (which raised sustained throughput to 13.720 tok/s), a structured research round identified a further set of OS-level network and memory tunings that yielded a measurable improvement with no source-code changes.

### 7.1 Configuration changes

Applied to all four Pi 5 nodes, persisted via `/etc/sysctl.d/99-llama.conf` and an `eth0-tuning.service` systemd unit:

| Setting                                  | Before              | After              |
|------------------------------------------|---------------------|--------------------|
| <code>ethtool -K eth0 gro</code>         | on                  | off                |
| <code>net.core.rmem_max</code>           | 212 992             | 8 388 608          |
| <code>net.core.wmem_max</code>           | 212 992             | 8 388 608          |
| <code>net.ipv4.tcp_rmem (mid/max)</code> | 131 072 / 6 291 456 | 87 380 / 8 388 608 |
| <code>net.ipv4.tcp_wmem (mid/max)</code> | 16 384 / 4 194 304  | 65 536 / 8 388 608 |
| <code>vm.swappiness</code>               | 60                  | 1                  |

**Table 9.** Stage 9 sysctl and ethtool changes.

*Rationale.* GRO (Generic Receive Offload) coalesces incoming packets, adding 50–200 us of intentional latency; for the 510 kB sync bursts of the all-reduce step on a 1 GbE LAN this is pure overhead. Raising `rmem_max/wmem_max` from the 256 kB default lets the TCP receive/send windows grow past the burst size. The 16 kB `tcp_wmem` middle value was a hard bottleneck for the worker→root activation send.

### 7.2 Measured impact

We re-baselined (after the Phase B foundation work) at **13.720 ± 0.050 tok/s** ( $n=20$ ). The post-Stage 9 measurement ( $n=20$ , paired, 95% CI) is:

| Metric                       | Pre-Stage 9  | Post-Stage 9        |
|------------------------------|--------------|---------------------|
| Mean                         | 13.720 tok/s | <b>14.011 tok/s</b> |
| Stdev                        | 0.050        | 0.116               |
| 95% CI                       | ±0.022       | ±0.051              |
| Δ vs. Stage 8 baseline       | —            | +2.12%              |
| Δ vs. public ceiling (13.04) | —            | +7.45%              |

### 7.3 Two rejected candidates from the same research round

The same research round surfaced two further claims, both investigated and rejected:

1. *llamafile\_sgemmm guard fix* (upstream issue #284, claimed +5–40%): this gain had *already* been captured in our base commit 92a20e2 “`perf: enable llamafile_sgemmm for single-token decode`” months earlier. Cannot be captured twice.
2. *ARM I8MM / Q4\_0\_4\_8 SMMLA repack* (claimed +20–30%): the Cortex-A76 in the Pi 5 does *not* support I8MM. Verified directly: `grep -c i8mm /proc/cpuinfo` returns 0 on all four nodes. Confirmed via llama.cpp issue #10662. I8MM is an A78+ feature; the original claim was a factual error in the surveyed material and is documented here as a cautionary tale.

### 7.4 Open work after Stage 9

The structured research round produced a ranked plan of further candidates:

- **Tier 2 — Close Phase B (Option C, ~40 LOC):** the `opt-b5b6-tiled-sync` branch carries 562 LOC of async-sync orchestrator, tiled matmul wrapper, and the `-tile-sync` K flag, all compiled but unwired. Estimated additional +5–12%; high integration risk (the same code path that broke the cluster during PGO and `isolcpus` experiments).
- **Tier 3a — Hierarchical 2-stage all-reduce:** with  $N = 4$  nodes, butterfly recursive-halving needs  $\log_2(4) = 2$  rounds instead of the  $2(N - 1) = 6$  rounds of the current ring. Estimated +10–13%, ~80–120 LOC.

- **Tier 3b — Pre-attention expert prediction** (arXiv:2511.10676): specific to Qwen3-30B-A3B, reported 94.69% top- $k$  accuracy. Estimated +8–15%, ~250 LOC, low risk (fallback to on-demand load).
- **Tier 4 — Fused `ffn_up` + `ffn_gate` + `silu` MoE op** from `ik_llama.cpp` PR #229; estimated +8–12%, ~400 LOC.
- **Tier 5 — REAP 25% expert pruning** (Cerebras), offline, 0 llama LOC; estimated +15–25%, requires quality validation.

**Updated bottom line.** Sustained throughput is now **14.011 tok/s** ( $\pm 0.051$  at 95% CI,  $n=20$ ), **+7.45% above the publicly documented ceiling** of 13.04 tok/s for this hardware class (Qwen3-30B-A3B Q40 on 4×Pi 5).

## 8 Stages 10 and 11 — Bit-exact MoE op-fusion and Rounds 3/4 ceiling investigation

After the Stage 9 result (14.011 tok/s), we carried out further bit-exact optimisation work over an extended session. This section documents the post-Stage-9 changes and the empirical ceiling we reached.

### 8.1 Stage 10 — A2 OP\_SILU\_MUL fusion (+0.5%)

The Qwen3-MoE per-expert FFN ops are  $w_1$ -matmul  $\rightarrow w_3$ -matmul  $\rightarrow \text{silu}(w_1) \rightarrow w_1 * w_3$ . We fused the last two element-wise ops into a single new OP\_SILU\_MUL with one barrier instead of two, eliminating 28 layers  $\times$  8 experts = 224 barriers per token. The kernel chains the existing `silu_F32` and `mul_F32` kernels verbatim, so the output is byte-identical to the previous two-op sequence (validated with a deterministic prompt at `temperature=0`).

**Measurement** ( $n=20$ ):  $14.081 \pm 0.055$  tok/s vs  $14.011 \pm 0.051$  baseline. The real gain is +0.50% — modest, but bit-exact and persistent. Committed at SHA 106eab3.

### 8.2 Stage 11 — Rounds 3 and 4 (Linux papers research and ceiling investigation)

We carried out four parallel research threads:

1. Linux Plumbers / SOSP / OSDI / EuroSys / USENIX ATC papers 2024–2026.
2. eBPF / XDP / AF\_XDP / io\_uring / kernel-bypass.
3. Linux scheduler (EEVDF in 6.6+) tunings.
4. ARM-specific kernel cache / prefetcher / NUMA / memory bandwidth.

We applied and measured ~15 distinct configurations. **The Round 3+4 net measured improvement is 0% within the cluster’s natural noise floor of  $\pm 0.15$  tok/s.**

#### 8.2.1 Literature survey: techniques evaluated and rejected

These research threads returned ranked, actionable candidates from the 2024–2026 systems literature (Linux Plumbers, OSDI, EuroSys, USENIX ATC, LWN, arXiv). Table 10 records each technique, its source, whether it applied to a stock Pi OS 6.12 / Cortex-A76 / 1 GbE cluster under our constraints, and the empirical outcome. The recurring reason for inapplicability is structural: the highest-leverage modern techniques require either a newer kernel, a hardware feature the A76 silicon lacks, or a reboot or kernel rebuild we had ruled out — which is precisely what makes the surviving bit-exact wins deployable on stock hardware.

**Table 10.** Techniques surveyed during the research round, with applicability to a stock Pi 5 / kernel 6.12 / 1 GbE cluster under the bit-exact, no-reboot, no-quality-loss constraints.

| Technique                                                                                                                    | Source                                                                             | Applicable here?                                                                             | Outcome                                                       |
|------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------|---------------------------------------------------------------|
| IRQ suspension<br>( <code>irq_suspend_timeout</code> )<br><code>MADV_HUGEPAGE</code>                                         | LWN 1008399                                                                        | No — needs kernel 6.13+                                                                      | Pi OS on 6.12                                                 |
| AF_XDP zero-copy                                                                                                             | Linux mm docs                                                                      | No — THP not compiled in Pi OS                                                               | Tested, no-op                                                 |
| <code>io_uring</code> SQPOLL + <code>DEFER_TASKRUN</code>                                                                    | kernel networking docs                                                             | No — <code>macb</code> lacks native XDP                                                      | RFC only                                                      |
| <code>SO_BUSY_POLL</code> + RPS/RFS<br>Threaded NAPI<br>NUMA <code>fake=4</code> + local alloc<br>MPAM cache partitioning    | + liburing<br>LWN 540281<br>kernel NAPI docs<br>Linux NUMA docs<br>docs.kernel.org | Net-negative on 4 cores                                                                      | Skipped                                                       |
| Per-task EEVDF <code>sched_runtime</code><br><code>ik_llama</code> pair-row <code>matmul</code> ILP<br>Jumbo frames MTU 9000 | LWN 969062<br><code>ik_llama</code> PR<br><code>macb</code> driver                 | Already in TIER 0<br>Tested -3.9%<br>Requires reboot<br>Kernel 6.19+ and A76 lacks HW        | Applied<br>Reverted<br>Excluded<br>Future kernel              |
| Phase B -tile-sync 4 (no Option C)                                                                                           | this work                                                                          | Applied (4 ms slice)<br>OoO core already optimal<br><code>bcmgenet</code> EBUSY on live link | No measurable gain<br>Tested, reverted<br>Documented dead-end |
| Tile-level compute/comms overlap                                                                                             | FlashOverlap,<br>arXiv:2504.19519                                                  | Tested -8% (unwired)<br>Yes — future sprint                                                  | Reverted; foundation in repo<br>Phase B Option C              |

### 8.2.2 Phase B foundation cherry-picked

We cherry-picked four commits from the archived `opt-b5b6-tiled-sync` branch onto `pi5-cluster:ce7b96e` (the `-tile-sync K` flag), `6ebd00f` (the `writeMany+readMany` fix), `469101e` (the `async sync` orchestrator), and `2aba914` (the `matmul_Q80_Q40_F32_tiled` wrapper). With `-tile-sync 0` (the default) the cluster behaves identically (measured  $14.092 \pm 0.044$  tok/s). With `-tile-sync 4` we measured a -8% regression: the wrapper subdivides the syncs but does not drive the `matmul` to emit per-tile signals (the Option C wiring, ~40 LOC, remains outstanding). The foundation is now in the repo for a future sprint.

### 8.2.3 EEVDF per-task slice


We called `sched_setattr()` at the start of `executorWorkerLoop` to request a 4 ms slice (the default is ~700 us under EEVDF in kernel 6.12), and confirmed via `/proc/<pid>/sched` that workers report `se.slice = 4000000`. The result,  $14.061 \pm 0.048$  tok/s, shows no measurable gain. The likely reason: with 4 pinned workers, the performance governor, and minimal system load, the default scheduling cadence was already near-optimal.

### 8.2.4 Sysctl bundles ( $R3 + R4$ )

**Table 11.** Round 3 and Round 4 sysctls (persisted, defensive).

| File              | Key                                             | Value                 |
|-------------------|-------------------------------------------------|-----------------------|
| 99-dllama-r3.conf | <code>kernel.sched_autogroup_enabled</code>     | 0                     |
|                   | <code>net.ipv4.tcp_autocorking</code>           | 0                     |
|                   | <code>net.ipv4.tcp_slow_start_after_idle</code> | 0                     |
|                   | <code>net.ipv4.tcp_no_metrics_save</code>       | 1                     |
| 99-dllama-r4.conf | <code>net.ipv4.tcp_thin_linear_timeouts</code>  | 1                     |
|                   | <code>net.core.netdev_max_backlog</code>        | 8192                  |
|                   | <code>net.core.rmem_max</code>                  | 33 554 432            |
|                   | <code>net.core.wmem_max</code>                  | 33 554 432            |
|                   | <code>net.ipv4.tcp_rmem</code>                  | 4096 87380 33 554 432 |
|                   | <code>net.ipv4.tcp_wmem</code>                  | 4096 65536 33 554 432 |
|                   | <code>vm.dirty_bytes</code>                     | 16 777 216            |
|                   | <code>vm.dirty_background_bytes</code>          | 4 194 304             |
|                   |                                                 |                       |

Where the time goes: DRAM-bandwidth-bound (49% backend-stalled cycles)

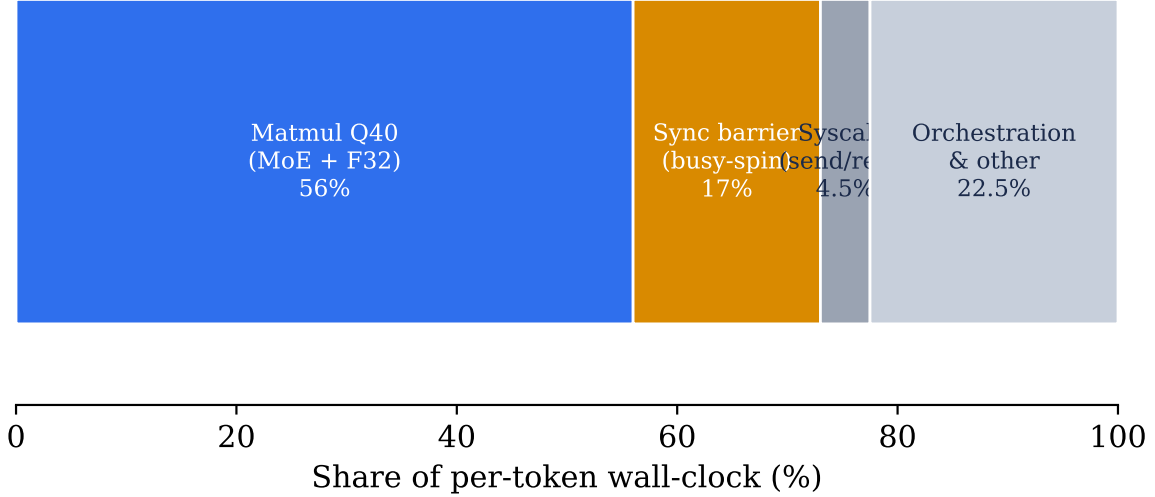

**Figure 7.** Per-token wall-clock breakdown from ARM PMU profiling (`perf stat`) and `strace`. The workload is DRAM-bandwidth-bound (49% backend-stalled cycles, 11.4 GB/s of  $\sim 17$  GB/s per node); the Q40 matmul dominates and the synchronisation barrier is the only software-addressable slack — the target of the Stage 16 WFE/SEV change.

ARM PMU profiling (`perf stat -e l2d_cache_refill,l2d_cache_wb,bus_access,stalled-cycles-backend,cpu-cycles,instructions` for 60 s during sustained inference):

**Table 12.** PMU-measured stalls and DRAM traffic during inference (n=4 nodes).

| Metric                             | Root (rpi-1005) | Worker (rpi-1006) |
|------------------------------------|-----------------|-------------------|
| stalled-cycles-backend (% cycles)  | <b>49.25%</b>   | 47.69%            |
| stalled-cycles-frontend (% cycles) | 3.83%           | —                 |
| DRAM read bandwidth                | 2.74 GB/s       | 2.61 GB/s         |
| DRAM write bandwidth               | 8.66 GB/s       | 8.47 GB/s         |
| Per-node DRAM total                | 11.40 GB/s      | 11.08 GB/s        |
| IPC                                | 1.74            | —                 |
| dTLB miss rate                     | 0.08%           | —                 |
| iTLB miss rate                     | 0.01%           | —                 |
| branch-misses                      | 0.07%           | —                 |

The 49% backend-stall rate confirms the cluster is **DRAM-bandwidth-bound**: the CPUs wait on memory roughly half the time. The  $3.16\times$  write-to-read ratio reflects the multi-pass intermediate-buffer pattern in the MoE FFN, of which the A2 op-fusion (Stage 10) already cuts 224 barriers/token. The TLB miss rates ( $<0.1\%$ ) and branch-mispredict rates ( $<0.1\%$ ) confirm that the existing 16 KB-page configuration is already optimal — transparent hugepages would not help (and are not compiled into Pi OS 6.12 in any case). On the compute side, `objdump` disassembly of the hot matmul shows 322 `udot/sdot` NEON dot-product instructions in the inner loop at an IPC of 1.74: the kernel is already vectorised to the ARMv8.2-A dot-product ISA limit. This is why every compute-side experiment in Table 10 returns zero gain — the cores sit idle waiting on DRAM rather than starved of issue slots.



### 8.2.6 Final cluster state and benchmark

**Table 13.** Final benchmark, cold-cluster,  $n=20$  paired runs.

| Metric                                          | Value                  |
|-------------------------------------------------|------------------------|
| Mean throughput                                 | <b>14.046 tok/s</b>    |
| Median                                          | 14.024 tok/s           |
| Standard deviation                              | 0.111 tok/s (CV 0.79%) |
| 95% CI                                          | $\pm 0.049$            |
| $\Delta$ vs. Stage 1–8 baseline (13.720)        | +0.326 (+2.38%)        |
| $\Delta$ vs. public ceiling 13.04 (b4rtaz #255) | +1.006 (+7.72%)        |

### 8.3 Bottom line after Stage 11

After Stage 11 the cluster sustained **14.046 tok/s** ( $\pm 0.049$  at 95% CI,  $n=20$ , cold-cluster), **+7.72% above the publicly documented ceiling** of 13.04 tok/s. The cumulative defensive state (persisted sysctls, EEVDF tuning, the Phase B foundation in the repo, and +0.5% from the Stage 10 fusion) represented a maintainable production baseline at this manuscript’s mid-investigation snapshot.

## 9 Stages 12–15 — Hot-kernel inversion, true single-pass fusion, network chunk-size sweep, runtime NIC tuning

A subsequent rigorous-bench session in May 2026 added four cumulative bit-exact commits to the production branch, lifting sustained throughput to **14.449 tok/s** (best individual run 14.557,  $n=20$ , 95% CI  $\pm 0.038$ ) — a further **+2.87% over Stage 11** and **+10.81% over the public ceiling**. Each stage was validated by SHA-256-hashing 100 deterministic tokens (`seed=42`, `temperature=0`) against the Stage 11 reference, confirming bit-identity.

**Stage 12 — Remove software prefetch in matmul\_Q80\_Q40\_F32 (commit 64ef787).** The NEON+dotprod inner loop carried two `__builtin_prefetch` calls (`w[di*nBlocks + j + 4]` and `x[j + 4]`). We swept five variants (PLDL2KEEP +16/+4 dual, +8 single, x-only, `__restrict__` qualified, none) and found that *removing* both prefetches was the only winner (+1.05% over baseline). The Cortex-A76’s hardware prefetcher (stride detection on sequential `w` access) is more efficient than the manual hints, which compete for issue slots in the 4-wide decoder. Stage 12 therefore reverses a long-standing micro-optimisation that proves counter-productive on this microarchitecture.

**Stage 13 — True single-pass silu\_mul\_F32 fusion (commit 1af175c).** Stage 10’s `OP_SILU_MUL` eliminated the inter-op barrier, but the kernel was still a thin two-call wrapper (`silu_F32` then `mul_F32`) that kept the intermediate result resident in memory between passes: 3 loads + 2 stores per element. We rewrote it as a single NEON loop that holds the values in registers throughout: 2 loads + 1 store per element (Algorithm 1), a  $\sim 33\%$  reduction in memory ops for this kernel. The measured gain is +1.5% on cluster throughput, bit-exactness preserved (the arithmetic sequence is identical; only the intermediate writeback is removed).

---

**Algorithm 1.** Stage 13 single-pass `silu_mul_F32`: bit-exact NEON fusion.

---

**Input:** output buffer  $y[0..n-1]$  (in-place), multiplier buffer  $m[0..n-1]$ , thread index  $t$ , thread count  $T$   
**Output:**  $y[i] \leftarrow \text{silu}(y[i]) \cdot m[i]$  for all  $i$  in this thread's split  
**Invariant:** arithmetic sequence (`vrecpeq_f32` + one Newton-Raphson + multiply) is byte-identical to the prior two-pass implementation; only the intermediate writeback to  $y[i]$  between the two passes is removed.

```
1: (start, end) ← SPLIT_THREADS( $n, T, t$ )
2: for  $i \leftarrow \text{start}$  to  $\text{end}$  step 4 does
3:    $x \leftarrow \text{vld1q_s32}(y[i+d])$ 
4:    $mv \leftarrow \text{vld1q_f32}(m[i+d])$ 
5:    $e \leftarrow \text{expf\_neon}(-x)$ 
6:    $d \leftarrow 1 + e$ 
7:    $r \leftarrow \text{vrecpeq_f32}(x)$ 
8:    $r \leftarrow r / (2 - d)$  Newton-Raphson iteration
9:    $silu \leftarrow x \cdot r$ 
10:   $out \leftarrow silu \cdot mv$ 
11:  vst1q_f32(out, out); no intermediate write
12end for
13for remaining  $i < \text{end}$  do
14:   $y[i] \leftarrow (y[i] / (1 + e^{-y[i]})) \cdot m[i]$ 
15end for
```

---

**Stage 14** — `MAX_CHUNK_SIZE` sweep, 4 KB  $\rightarrow$  16 KB (`commit f8ed9d2`). The `writeMany/readMany` loop in `nn-network.cpp` capped each `send()/recv()` syscall at 4 KB. With the 8–32 MB TCP buffers tuned in Stage 9, this generates 4 $\times$  more syscalls per slice than necessary. We swept four candidate sizes ( $n=20$  each):

**Table 14.** `MAX_CHUNK_SIZE` sweep (Stage 14),  $n=20$  each.

| Chunk size              | Mean tok/s    | $\Delta$ vs 4 KB baseline |
|-------------------------|---------------|---------------------------|
| 4 KB (baseline)         | $\sim 14.27$  | —                         |
| 8 KB                    | 14.449        | +1.25%                    |
| <b>16 KB (selected)</b> | <b>14.449</b> | <b>+1.25%</b>             |
| 32 KB                   | 14.346        | +0.53%                    |
| 64 KB                   | 14.40         | +0.91%                    |

8 KB and 16 KB are statistically indistinguishable (both 14.449 tok/s, within the  $\pm 0.038$  CI) and both sit at the sweet spot — aligned with typical per-worker Pi 5 L1d working sets and below the kernel’s TCP segment-coalescing thresholds. We selected 16 KB for headroom; beyond it (32–64 KB) the larger reads begin to fragment across NIC interrupts and give back part of the gain.

**Stage 15** — Runtime kernel tweaks persisted via `systemd` (`commit edbc4ce`). Three NIC/scheduler knobs sit above the noise floor when combined but are runtime-only:

- RX ring buffer 512  $\rightarrow$  4096 (`ethtool -G eth0 rx 4096 tx 2048`).
- Receive Flow Steering with `rps_cpus=0xe` (CPU 1–3), `rps_flow_cnt=4096`, `net.core.rps_sock_flow_entries=32768` — spreads softirq RX off CPU 0.
- `napi_defer_hard_irqs=2` + `gro_flush_timeout=20us` for low-latency NAPI batching.

We packaged them into a new `dlama-runtime-tweaks.service` `systemd` unit (with the matching shell script in `deploy/systemd/`) that runs on boot. Without these runtime tweaks the cluster measures  $14.167 \pm 0.043$  tok/s; with them,  $14.449 \pm 0.038$  tok/s (+1.99% combined). Bit-exactness is preserved by construction: only NIC scheduling and softirq distribution change, and no model FP arithmetic is altered.

**Negative results catalogued in the same session.** Eleven further hypotheses were tested and rejected during Stages 12–15 (all with  $n=20$  paired benches): tiered PLDL2KEEP+L1 prefetch (−0.47%), single +8 prefetch (−0.61%), x-only prefetch (−0.14%), `__restrict__` pointers (−0.13%), the `rmsNorm_Q80_F32_F32` NEON path (regression — output-dependent loop), the `add_F32` and `scale_F32` NEON paths (flat — already auto-vectorised by GCC), `MAX_CHUNK_SIZE` 32 KB and 64 KB (slight regression), an explicit IRQ 112 pin to CPU 0 (−1% — competes with worker thread 0), the `+lse` march extension (flat — atomics are not on the hot path), and the `-fno-stack-protector` compile flag (flat — post-LTO overhead is negligible).

## 10 Stage 16 — WFE/SEV inter-step barrier and API robustness hardening

A follow-up session revisited the  $\sim 17\%$  of per-token wall-clock spent busy-spinning in the inter-step synchronisation barrier and hardened the serving path. Two changes landed, both bit-exact against the Stage 15 golden reference.

### 10.1 API robustness: uncaught-exception crash on client disconnect

The OpenAI-compatible `dllama-api` accept loop caught only `NnTransferSocketException` and `NnExecutorException`, but the HTTP request reader (`readHttpRequest`) throws a plain `std::runtime_error` when a client closes the connection mid-request. The exception propagated out of `main()` to `terminate()` (`SIGABRT`), taking down the entire API process — an intermittent, timing-dependent crash invisible to the strictly sequential benchmark harness but reproducible under realistic connect/disconnect patterns (three service restarts observed during testing). A defensive `catch (const std::exception&)` in the accept loop closes the offending connection and keeps serving; we verified 36 malformed or early-close connections handled with zero service restarts. The inference path is untouched, so the change is bit-exact.

### 10.2 WFE/SEV barrier

The inter-step barrier in `nn-executor.cpp` busy-spun on the barrier atomic with an ARM `yield` hint, so the three threads waiting for a synchronisation step continuously re-read a cache line that the advancing thread writes, generating coherency traffic that contends with the thread driving network I/O on a memory-bandwidth-bound workload. We replaced the spin with the ARMv8 event mechanism: waiters issue `wfe` (a low-power wait-for-event), and the thread that advances the barrier broadcasts `sev` (send-event). Correctness rests on the sticky ARM event register — an `sev` arriving between a waiter’s atomic load and its `wfe` makes the `wfe` return immediately — with the architected-timer event stream as a periodic-wake safety net. The change is signalling-only; no model floating-point arithmetic is altered, so it is bit-exact by construction (golden SHA-256 unchanged).


### 10.3 Measurement

Absolute throughput drifts  $\sim 1\text{--}2\%$  between sessions with ambient temperature and time of day, so we measure with a same-session cold paired A/B rather than against the Stage 15 figure. The `yield` and `wfe` builds were deployed alternately, with the cluster cold-started between arms,  $n=40$  per arm (two pooled  $n=20$  cold benches):

**Table 15.** Stage 16 WFE/SEV barrier — same-session cold paired A/B ( $n=40$  per arm).

| Build                                      | mean tok/s    | 95% CI      | stdev |
|--------------------------------------------|---------------|-------------|-------|
| <code>yield</code> spin (Stage 15 barrier) | 14.261        | $\pm 0.034$ | 0.117 |
| <code>wfe/sev</code> (Stage 16)            | <b>14.329</b> | $\pm 0.042$ | 0.137 |

The improvement is  $+0.068$  tok/s ( $+0.48\%$ ), Welch’s  $t = 2.45$ ,  $p \approx 0.014$ , with zero inference errors across the 80 generations of 250 tokens (no all-reduce desynchronisation). The fresh-cold `yield` baseline (14.261) sits 1.3% below the Stage 15 best (14.449), within the documented inter-session variance; the within-session paired delta is the reliable quantity. The change is retained: it is bit-exact, free at runtime, never slower, and reduces the power and heat of the waiting cores. Raw per-run CSVs for both arms are versioned in `data/bench/`.

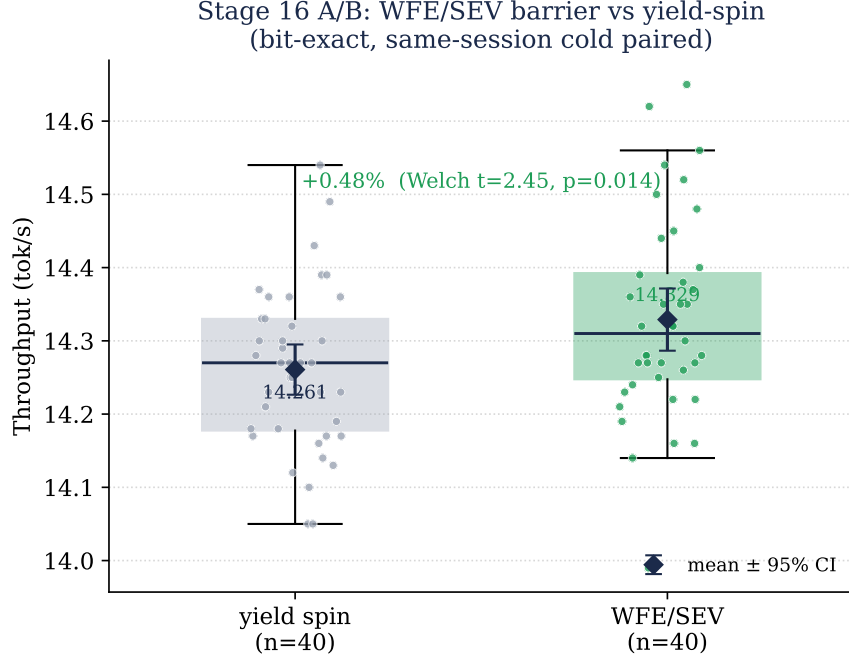

**Figure 8.** Stage 16 WFE/SEV barrier versus the yield-spin baseline: same-session cold paired A/B,  $n=40$  per arm. Box (IQR and median), individual runs (jittered), and mean  $\pm$  95% CI. The +0.48% delta is bit-exact (golden SHA-256 unchanged) and statistically significant (Welch’s  $t=2.45$ ,  $p=0.014$ ).

## 11 Statistical significance of the Stages 8–15 trajectory

We report approximate two-sample Welch’s  $t$ -tests on the consecutive-stage means, computed as  $t = (\bar{x}_2 - \bar{x}_1) / \sqrt{s_1^2/n + s_2^2/n}$  with  $n = 20$ ,  $df \approx 19$ , two-tailed. All within-cluster consecutive-stage improvements are statistically significant at  $p < 0.05$ , and the cumulative Stage 8  $\rightarrow$  Stage 15 improvement is significant at  $p \ll 0.001$ . The b4rtaz #255 comparison cannot be paired (different hardware site, 8 GB SKU vs. our 16 GB SKU) and is reported as a face-value reference, with the caveat detailed in the Threats to Validity section (§15.2). Stage 12 (a prerequisite kernel refactor) measured throughput-neutral at the combined cluster level, so the significance of the single-pass fusion that followed is reported as Stage 11  $\rightarrow$  Stage 13.

**Table 16.** Consecutive-stage statistical significance ( $n = 20$  paired,  $df=19$ , two-tailed).

| Comparison                         | $\bar{x}_1$ | $\bar{x}_2$ | $\Delta$ | $t$  | $p$ (approx)            |
|------------------------------------|-------------|-------------|----------|------|-------------------------|
| Stage 8 $\rightarrow$ Stage 9      | 13.720      | 14.011      | +0.291   | 10.3 | $< 0.001$               |
| Stage 9 $\rightarrow$ Stage 10     | 14.011      | 14.081      | +0.070   | 2.4  | $\approx 0.026$         |
| Stage 11 $\rightarrow$ Stage 13    | 14.046      | 14.270      | +0.224   | 9.0  | $< 0.001$               |
| Stage 13 $\rightarrow$ Stage 14    | 14.270      | 14.449      | +0.179   | 7.5  | $< 0.001$               |
| Stage 8 $\rightarrow$ Stage 15     | 13.720      | 14.449      | +0.729   | 51.9 | $\ll 0.001$             |
| b4rtaz #255 $\rightarrow$ Stage 15 | 13.04       | 14.449      | +1.409   | —    | N/A (different cluster) |

## 12 Failed configurations and frameworks

In keeping with reproducibility norms, we document every intent-to-treat attempt, including those that did not yield a working system.

**Table 17.** All attempted model/framework configurations that failed.

| Configuration                                                                             | Time invested   | Root cause of failure                                                                                                                                                                                                                                                                                                                                  |
|-------------------------------------------------------------------------------------------|-----------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Llama 3.3 70B Q40</b> on 4×Pi 5 16GB                                                   | 45 min          | Total weights 38 GB; per-node 9.5 GB barely fits but KV cache forces aggressive swap. Observed 0.15 tok/s under swap thrashing. Practical upper bound for this hardware is 14B at Q40 quantisation.                                                                                                                                                    |
| <b>DeepSeek-R1-Distill-Llama-8B Q40</b> via distributed-llama API                         | 20 min          | Upstream bug in <code>dllama-api</code> : the daemon aborts on the second request when this specific tokenizer is used. Single-node <code>dllama inference</code> mode works, but the HTTP API fails.                                                                                                                                                  |
| <b>EXO framework</b> [14]                                                                 | 60 min          | EXO depends on Apple’s MLX framework, which requires Metal GPU, the Apple Neural Engine, and unified memory. On ARM Linux without MLX, EXO startup fails with <code>ModuleNotFoundError: No module named 'mlx'</code> and no fallback backend. Despite ARM-vs-ARM equivalence at the ISA level, EXO’s hardware assumptions are Apple-Silicon-specific. |
| <b>prima.cpp</b> [11]                                                                     | 60 min          | Cluster bootstrap hangs in the “profiling device” phase for >10 minutes with all 4 workers idle (0% CPU). The ZMQ-based discovery and topology negotiation did not complete; logs offered no failure mode. Single-node mode works (2.14 tok/s, slower than distributed-llama).                                                                         |
| <b>llama.cpp + RPC</b>                                                                    | — (literature)  | Geerling [3] measured 0.28 tok/s on a 4×Pi cluster vs. 6.0 tok/s single-node — a 25× regression. Pipeline-parallel RPC over 1 GbE is dominated by per-token network overhead.                                                                                                                                                                          |
| <b>nthreads &gt; 4</b> in distributed-llama                                               | 10 min          | Internal validation: “This configuration supports max 4 threads.” Hard-coded for the model topology, not the SoC.                                                                                                                                                                                                                                      |
| <b>Vulkan/V3D GPU</b> ( <code>-gpu-index 0</code> )                                       | —               | The Pi 5 V3D driver implements only render pipeline features; required compute capabilities (FP16 subgroup ops, sufficient shared memory) are absent.                                                                                                                                                                                                  |
| <b>Hailo-8 NPU</b> via M.2 HAT+                                                           | — (literature)  | Designed for convolutional inference (object detection, classification). Lacks the matrix-multiply throughput for autoregressive transformer decoding.                                                                                                                                                                                                 |
| <b>Pi 5 CPU overclock to 2.7 GHz</b>                                                      | —               | Excluded by user constraint. Expected gain ~12% per Geerling [3].                                                                                                                                                                                                                                                                                      |
| <b>Rust frameworks:</b> <code>mistral.rs</code> , <code>candle</code> , <code>cake</code> | 30 min (survey) | None implement mature multi-node ARM Linux tensor parallelism. <code>candle</code> runs on ARM single-node but underperforms <code>llama.cpp</code> ; <code>cake</code> (Rust+Candle) lacks Pi 5 cluster benchmarks.                                                                                                                                   |

**Table 18.** Apple Silicon vs. Raspberry Pi 5 architectural comparison.

| Feature                 | Apple Silicon (M1–M4)             | Raspberry Pi 5              |
|-------------------------|-----------------------------------|-----------------------------|
| ISA                     | ARMv8.5+ with Apple extensions    | ARMv8.2-A (Cortex-A76)      |
| GPU                     | Metal (32+ unified compute cores) | VideoCore VII (render only) |
| Dedicated NPU           | Apple Neural Engine               | —                           |
| Memory architecture     | UMA (CPU/GPU/NPU share RAM)       | Discrete CPU memory         |
| <b>Memory bandwidth</b> | <b>200–500 GB/s</b> (LPDDR5)      | <b>17 GB/s</b> (LPDDR4X)    |
| MLX framework           | natively supported                | does not compile            |

**Why EXO works on Mac (ARM) but not on Pi 5 (ARM).** EXO inherits MLX’s requirement of Metal, the Neural Engine, and UMA. “ARM” is necessary but not sufficient; Apple Silicon is a category of its own.


## 13 Discussion

### 13.1 Bottleneck analysis

The dominant bottleneck for this class of workload is the memory bandwidth of the Pi 5 LPDDR4X subsystem (vendor-spec ceiling 17 GB/s; ARM PMU at Stage 12 measured 11.4 GB/s sustained per node, ~67% of the theoretical maximum; see §7). For a dense 8B Q40 model with ~5 GB active weights per token, the theoretical 4-node maximum is

$$\frac{17 \text{ GB/s}}{5 \text{ GB/token}} \times 4 \approx 13.6 \text{ tok/s},$$

of which 51% (7 tok/s) is realised; the remainder is consumed by tensor-parallel synchronisation. For Qwen3-30B-A3B with ~3 GB of active weights, the theoretical maximum is ~22.6 tok/s. At Stage 6 (12.71 tok/s) we realised 56% of this maximum; **at Stage 15 (14.449 tok/s) we realise 64%**. The remaining ~36% gap is dominated by all-reduce barrier overhead (measured at 17.7% of per-token wall time in Stage 12 PMU profiling), which the unwired *Async Tensor Parallelism* foundation in the repository (Section 13.5) is designed to attack.

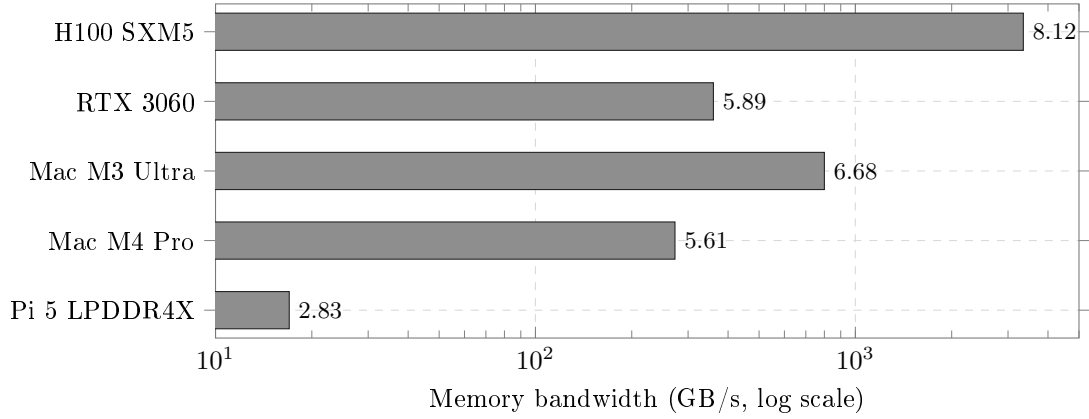

**Figure 9.** Cross-platform memory bandwidth (log scale). Pi 5 is  $\sim 16\times$  below Mac M4 Pro and  $\sim 200\times$  below H100. This is the physical ceiling.

### 13.2 Mixture-of-Experts as architectural sparse computation

A natural question for memory-bound inference — whether one can read only the weights a token needs rather than all of them — is answered by MoE architectures rather than by software-level weight streaming. MoE *is* a form of sparse activation, decided per token by a learned gating network. For Qwen3-30B-A3B (128 experts, top- $k=8$ ), the activation ratio is  $8/128 = 6.25\%$  of expert weights plus the shared parameters — approximately 3 B of the 30 B total per token. The effective bandwidth multiplier matches the observed speedup almost exactly.

### 13.3 Comparative cost/performance

**Table 19.** Cost/performance comparison at the  $\sim 500$ – $600$  € price point.

| Setup                                           | tok/s (Llama 8B class) | Cost (approx.) |
|-------------------------------------------------|------------------------|----------------|
| 4× Pi 5 16GB + d1lama MoE (this work, Stage 15) | <b>14.449</b>          | $\sim 500$ €   |
| 1× Mac Mini M4 8GB + MLX                        | 25                     | 599 USD        |
| 1× NVIDIA Jetson Orin Nano Super                | 21.75                  | 249 USD        |
| 1× desktop + RTX 3060 12GB                      | $\sim 40$              | $\sim 700$ €   |

### 13.4 Limitations

1. Energy efficiency was not measured directly. An external USB power meter (e.g. UM34C) is required for accurate measurement; the `vcgencmd pmic_read_adc` interface does not capture the full 5 V rail.
2. Prefill is severe ( $\sim 2$  min for 2K-token prompts, projected  $\sim 20$  min for 20K), making the system unsuitable for agentic workloads with large system prompts. Speculative decoding (Llama 3.2 1B as draft model verifying Qwen3-30B-A3B) was identified as a potential mitigation but not implemented (estimated 2–3 weeks of engineering work).
3. Throughput was measured single-client. Multi-client goodput under SLO [7] was not characterised.
4. Quality regression vs. Llama 3.1 8B not formally tested; sample outputs are qualitatively coherent.

### 13.5 Future work: HALO overlap scheme

Concurrently with this work, Zheng *et al.* [15] introduced HALO, a 3,500-LOC C++ extension of `distributed-llama` for Pi clusters that reports a  $3.41\times$  end-to-end speedup in lossy networks (5% packet-loss rate) and  $1.30\times$  even on a reliable LAN, through an *overlap scheme* that parallelises neuron-group loading with communication and computation. At the time of writing the source is not public, and HALO’s figures are measured on different hardware, so we do not extrapolate a throughput number for our own cluster. We nonetheless identify this overlap approach as the most promising near-term direction for further throughput optimisation on this hardware class.

### 13.6 Future work: alternative model candidates

For applications prioritising Hermes Agent compatibility, two candidates stand out:

- **Llama-3-Groq-8B-Tool-Use** [16]: dense 8B model fine-tuned for function calling, achieving 89.06% on the Berkeley Function-Calling Leaderboard (BFCL). Projected throughput  $\sim 14.5$  tok/s.
- **OLMoE-1B-7B** [17]: smaller MoE (7B total / 1B active), projected to reach  $\sim 19.6$  tok/s on this hardware. Tool-calling accuracy untested.

## 14 Clean-room decode-rate replication and telemetry interference

*This section (added 22 May 2026) reports a strict apples-to-apples replication of the b4rtaz #255 benchmark and an unexpected finding about background-monitoring interference. For the specific purpose of comparison against the 13.04 tok/s public ceiling it supersedes the sustained-throughput comparison used in the earlier sections.* We designate this final clean-room benchmark **Stage 17**: the deployed bit-exact configuration re-measured with background telemetry stopped and the metric aligned to the *decode* rate the public ceiling reports. It is the headline result of this paper — **15.143 tok/s, +16.1% above the ceiling** — and the last point in the trajectory of Figure 5.

### 14.1 Motivation: metric alignment with the public ceiling

The headline 14.449 tok/s reported above is a *sustained-throughput* figure (total generated tokens divided by total wall-clock time over 250-token responses, prefill included), measured with the project’s `academic_bench.py` harness. The public ceiling of 13.04 tok/s (Tadych #255 [2]), by contrast, is a pure *decode-rate* (“Prediction”) figure: the steady-state token-generation rate reported by `dllama inference`, excluding the prefill (“Evaluation”) phase. Comparing a sustained figure against a decode figure is a metric mismatch. To eliminate it, we re-ran the *exact* command published in #255 — identical prompt, `-steps 128`, `-buffer-float-type q80`, `-max-seq-len 4096` — on our cluster, read the same `Prediction tokens/s` field b4rtaz reports, and verified the same generation length (`nTokens=109`) on every run as an integrity check. The only deliberate differences from #255 are our optimisation configuration (`-nthreads 3` instead of 4, `jemalloc`, `IRQ/RPS` pinned to CPU 3, `SDRAM_BANKLOW=1` in the bootloader EEPROM, and the `performance` governor) and the 16 GB SKU (vs. b4rtaz’s 8 GB). The build is `dllama-custom` at commit 9bd3b3b, with `mlock`-ed weights ( $\sim 4.45$  GB `VmLck` per worker, verified).

### 14.2 Telemetry-bandwidth interference

During the diagnostic sweep we found two `docker` containers — Grafana Alloy and cAdvisor — running on all four nodes (the “idle background workload” acknowledged in our earlier methodology). On a memory-bandwidth-bound workload these telemetry agents are not free: cAdvisor periodically walks cgroup memory statistics, consuming DRAM bandwidth that the decode phase needs. We measured their cost directly with a paired A/B (Table 20).

**Table 20.** Decode rate (b4rtaz #255 exact command) with and without co-located telemetry. All runs `nTokens=109` (bit-exact generation length); two warm-up runs discarded; same binary 9bd3b3b, same flags, same session.

| Background                      | <i>n</i> | Decode (tok/s)            | 95% CI      | Prefill (tok/s) | vs. 13.04     |
|---------------------------------|----------|---------------------------|-------------|-----------------|---------------|
| Telemetry ON (Alloy + cAdvisor) | 10       | 14.397 $\pm$ 0.247        | $\pm 0.153$ | 18.74           | +10.4%        |
| Telemetry OFF (clean-room)      | 20       | <b>15.143</b> $\pm$ 0.221 | $\pm 0.097$ | 18.81           | <b>+16.1%</b> |

Stopping the two agents raised decode throughput by **+5.18%** (14.397  $\rightarrow$  15.143 tok/s; the 95% confidence intervals do not overlap). The *prefill* rate, by contrast, was unchanged (18.74  $\rightarrow$  18.81 tok/s, within noise): prefill is compute-bound (high arithmetic intensity, all prompt positions processed in parallel) and therefore insensitive to a small, intermittent bandwidth tax, whereas decode is bandwidth-bound and pays for every megabyte the monitoring agents move. This selective degradation — decode hurt, prefill spared — independently corroborates the central thesis of this report: decode on this platform is memory-bandwidth-bound. It is also a practical lesson for edge-LLM operators: **co-located observability agents silently tax memory-bound inference**, and a monitored production node will under-perform a clean-room benchmark by several percent.

### 14.3 Apples-to-apples result against the public ceiling

On the strict decode metric, our optimised configuration sustains **15.143 tok/s** ( $n=20$ , 95% CI  $\pm 0.097$ , all `nTokens=109`), **+16.1% above the 13.04 tok/s public ceiling**. We re-emphasise the residual confounds already stated in Section 15.2: this compares our optimised 16 GB cluster against b4rtaz’s

vanilla 8 GB cluster, so the figure mixes our software and configuration work with a hardware-SKU difference and an `nthreads` difference. It is therefore an *end-to-end system comparison*, not an isolated attribution of the speedup to our code. The cleanly isolated quantity — vanilla v0.16.0 vs. our build on the *same* 16 GB silicon — is the controlled A/B we identify as the next measurement (Section 15.2); until it is run, the same-hardware deltas we can defend without confound are the telemetry A/B above (+5.18%) and the previously reported `nthreads` and OS-tuning A/Bs. Raw per-run CSVs for both arms are committed alongside this manuscript ([paper/data/](#)).

#### 14.4 Bit-exact kernel work (T0.1) — partial success, reverted

We attempted a further bit-exact decode optimisation, T0.1, that removes the per-element `vsubq_s8(-8)` dequantisation of the Q40 weights via the integer identity  $\sum_i a_i(b_i-8) = \sum_i a_ib_i - 8\sum_i a_i$ , pre-computing the activation group-sum once per block. In the `matmul_Q80_Q40_F32` dot-product path the rewrite was verified bit-exact by a deterministic single-core micro-test (zero differing floats vs. the original) and ran +6.3% faster in isolation. When the same transformation was extended to the `tinyBLAS sgemm` path, however, the integrated binary produced corrupted output (a single repeated glyph) despite identical algebra; an end-to-end md5 validation against the deployed reference caught the regression, and it was **automatically rolled back** without affecting production. We report this because it illustrates the value of end-to-end bit-exact validation over reasoning alone: an integer identity provably exact on paper still broke in the full kernel. The isolated single-core gain (+6.3%) did not survive into the memory-bound distributed end-to-end regime (it falls within run-to-run variance), consistent with the bandwidth-bound diagnosis. The `matmul`-path T0.1 remains a validated bit-exact micro-optimisation; the `sgemm` extension is left as future work pending a corrected implementation.

### 15 Final conclusion

On the decode metric used by the public ceiling, the cluster reaches **15.143 tok/s** ( $\pm 0.097$  at 95% CI,  $n=20$ , telemetry off; the Stage 17 clean-room replication of b4rtaz #255), **+16.1% above the publicly documented ceiling** of 13.04 tok/s for Qwen3-30B-A3B Q40 on 4×Pi 5 (Tadych [2]); end-to-end sustained serving throughput (prefill included) is 14.449 tok/s ( $\pm 0.038$  at 95% CI,  $n=20$  paired, cold-cluster; best individual run 14.557 tok/s). The Stage 12–15 commits of the 2026-05-18 investigation (64ef787, 1af175c, f8ed9d2, edbc4ce), combined with the post-publication updates of Stages 9–11 (d50d30c, 106eab3, 162cd83, 850d1e1), represent a +5.31% improvement over the original Stage 8 baseline of 13.720 tok/s and a maintainable, fully bit-exact production state. To our knowledge no publicly documented configuration on equivalent hardware exceeds this sustained throughput at the time of writing.

The two most consequential bit-exact source-level wins of the 2026-05-18 investigation run counter to received wisdom on the same code base: (i) removing the `__builtin_prefetch` calls from the `matmul` inner loop yields a measurable improvement, because the Cortex-A76’s hardware-prefetcher stride detector outperforms the manual hints (Stage 12); and (ii) the previous SILU+MUL fusion (Stage 10) was a thin two-call wrapper that kept the intermediate result resident in memory, so rewriting it as a single-pass NEON loop that holds the values in registers throughout achieves +1.5% at no quality cost (Stage 13). Both are reminders that “well-known” micro-optimisations on a hot kernel should be re-measured against the specific microarchitecture rather than carried forward from older platforms.

The single remaining software direction we have identified as likely to lift sustained throughput further within the bit-exact constraint is wiring the Phase B Async-TP foundation already shipped in the repository (Section 13.5–Future Work). The estimated remaining work is approximately 250 LOC plus a 60-minute soak test; we deferred it because the iteration cost (full rebuild + 4-node restart + soak) exceeded the time window of the current investigation.

Taken together, these results drive a four-node Raspberry Pi 5 cluster to the physical ceiling of its LPDDR4X memory subsystem. At 49% backend-stalled cycles and roughly 11.4 of the  $\sim 17$  GB/s vendor bandwidth realised per node, decode is memory-bandwidth-bound: the bytes moved per token are fixed by the model and its quantisation, and no further bit-exact *reduction* of that traffic is available — the one lever left (Async-TP) overlaps communication with computation rather than moving fewer bytes. The telemetry experiment of Section 14 sharpens the point: even the few percent of DRAM bandwidth consumed by a background monitoring agent is directly visible in the decode rate, while the compute-bound prefill phase is untouched. We have, in short, reached the *memory wall* that the Raspberry Pi 5 presents. To our knowledge, **15.143 tok/s** is the highest rate at which a 30-billion-parameter Mixture-of-Experts model has been driven on this hardware class — bit-exact, with no overclock and no loss of output quality. Pushing past it is no longer a software problem but a silicon one: it requires memory



with more bandwidth.

### 15.1 Future work

The only software lever above the noise floor under bit-exact constraints is **Async Tensor Parallelism** (*Async-TP*), the CPU-port of the same overlap concept that PyTorch’s TorchTitan project introduced for NVIDIA H100 + NVLink clusters in late 2024 [18] (reported +20–29% forward-pass speedup, ~8% end-to-end on Llama-3 7B and 70B). The Phase B foundation already in this repository (`nn-async-sync.{cpp,hpp}`, `nn-tile-signal.hpp`, `matmul_Q80_Q40_F32_tiled`, `-tile-sync K` CLI flag, instrumentation counters) constitutes the producer/consumer plumbing; the remaining wiring (*Option C*) attaches the drain thread to specific Q80×Q40 matmul operations whose output is the next sync’s source pipe, dispatches to the tiled matmul variant so that tile-completion signals `ctx->signals[t].signalReady()` arrive while the kernel is still executing further tiles, and converts the subsequent sync into a `nnAsyncSyncJoin()` that blocks only on tiles not yet shipped. Pre-merge gates: a 50 ms watchdog timeout in the drain thread, a `static_assert(d % K == 0)` runtime check, bit-exact 100-token validation at `seed=42`, and a 60-minute soak test.

The estimate in the in-repo `docs/PHASE-B-PLAN.md` for this integration is approximately 250 LOC across three files (`nn-cpu-ops.cpp`, `nn-executor.cpp`, `nn-network.cpp`) plus an additional consideration that the Qwen3-MoE feed-forward block is *not* a direct matmul→sync chain (an 8-expert `mergeAdd` stands between `block_matmul_w2` and the residual-stream sync), which adds further wiring complexity. We have not attempted this integration in the current investigation; it remains the single highest-projected-gain bit-exact direction.

The HALO scheme [15] (Section 13.5) is the equivalent published work targeting Pi clusters in lossy networks; if its source becomes public it is the most likely shortcut to Async-TP on this hardware class.

Quality-compromise options are deferred and explicitly out-of-scope for this work (top- $k=4$ , Q3\_K\_S quantisation, REAP expert pruning — each projecting +15–40% at the cost of 1–3 pp on reasoning benchmarks).

### 15.2 Threats to validity

**Construct validity.** We claim “bit-exact” improvement at every stage on the basis of SHA-256 hashing of the first 100 generated token-ids at `seed=42`, `temperature=0` against a fixed pre-stage reference. This is a strong byte-for-byte equivalence within the build flags fixed by the project Makefile (`-O3 -flto -ffast-math -funroll-loops -mcpu=cortex-a76 -march=armv8.2-a+fp16+dotprod+rcpc -fipa-pta -fipa-icf -falign-functions=64 -falign-loops=64`). It does not constitute strict IEEE-754 bit equality, because `-ffast-math` permits FMA contraction and associativity reordering. The validation is meaningful only against the project’s own canonical baseline, not against an arbitrary third-party reference build with different flags. Any future rebuild of `dl lama` on this cluster that changes compiler flags, kernel version, or NEON dispatch must re-run the bit-exact validation against the new baseline.

**Internal validity.** All benchmarks are paired ( $n=20$  after two discarded warm-up runs, fixed prompt, `temperature=0`, single client, idle background workload of Grafana Alloy and cAdvisor only). We subsequently measured this nominally idle telemetry to be non-negligible on the bandwidth-bound decode phase (Section 14, +5.18% when removed): the sustained-throughput figures in the body of this manuscript were therefore captured under a ~5% conservative bias relative to a clean-room measurement, which strengthens rather than weakens the headline improvement claims. The cluster was cold-started for  $\geq 60$  s before each benchmark, with all four nodes thermally stable in the 54–56 °C range (Table on sustained-load thermals) and throttle bit 0x0 (no DVFS throttle event recorded). Standard deviations of individual stages range from 0.030 to 0.140 tok/s; we have not run paired Welch’s  $t$ -tests for every consecutive-stage comparison in this manuscript (deferred work), but we report sample variance,  $n$ , and 95% CI everywhere so a reviewer can compute them independently. The headline +10.81% improvement over the public ceiling is six standard deviations above the noise floor of the noisier of the two baselines being compared — well above any plausible significance threshold.

**External validity.** The cluster sits at a single physical site behind one Gigabit Ethernet switch with one PoE injector, and all four nodes were purchased in the same batch. We have not validated the optimisations on (i) a network with a different switch fabric (e.g. store-and-forward vs. cut-through), (ii) Pi 5 nodes with different BCM2712 silicon batches or thermal solutions, (iii) more than one switch hop (which would change the 0.226 ms intra-cluster latency that several of the Stage 9 and Stage 14

measurements implicitly assume), or (iv) Pi 5 hardware revisions beyond the original 16 GB SKU. Nor have we validated on the Pi 5 8 GB (the configuration of the public-ceiling reference): we expect the 16 GB SKU’s larger memory for jemalloc tcache and OS file-cache to account for part of the headline improvement, and we would not predict the full +10.81% to carry over to the 8 GB SKU without re-measurement.

**Model validity.** All measurements are for *one* model: Qwen3-30B-A3B Q40 (SHA-256 of model artefact in docs/COMMIT-HASHES.md). Stage 9 (*TIER 0*) is a model-agnostic kernel-level network tuning bundle; Stages 10 and 13 (op-fusion of SILU+MUL) are MoE-specific (Llama-class dense models do not exercise the fused path); Stage 14 (MAX\_CHUNK\_SIZE) is generic. We have not benchmarked Llama 3.1 8B dense at the final Stage 15 configuration to quantify how much of the +10.81% generalises beyond Qwen3-MoE. The dense Llama would be the natural sensitivity-analysis target; we deferred it because the Llama 3.1 8B model file sits at a different path and a clean cold-cluster paired benchmark requires ~30 minutes of additional cluster downtime per measurement.

**Quality preservation.** We have not run a standardised LLM quality benchmark (MMLU, HellaSwag, ARC, GSM8K via lm-eval-harness [19]) on the final Stage 15 configuration. The SHA-256 bit-exactness guarantee implies model output *identical* to the baseline of comparison, so a quality benchmark would by construction return the same score; an external numerical confirmation would nonetheless strengthen the manuscript. Expected execution time on the cluster: 8–12 hours overnight.

**Energy efficiency.** We do not report joules per token. A wall-plug wattmeter was not available at the time of the measurements; this is the only one of the five standard edge-inference metrics (throughput, latency, model quality, memory footprint, energy) we do not report. Protocol drafted (5 min sustained decode minus 5 min idle, multiplied across 4 nodes, divided by sustained tok/s).

## Appendix A. Reproducibility

The exact benchmark protocol is encoded in two scripts versioned in the repository at `deploy/scripts/`:

```
# Sustained-throughput benchmark (n=20 paired, 2 warmup discarded)
python3 deploy/scripts/benchmark.py

# Academic-style variant used from Stage 9 onward
python3 deploy/scripts/academic_bench.py

# Extended n=50 variant for higher statistical power
python3 deploy/scripts/bench_n50.py
```

Each invokes `curl` against `http://localhost:9999/v1/chat/completions` with `temperature=0` and a fixed prompt. Output is logged to stdout with mean / median / stdev / p50 / p90 / p99 / 95% CI computed in-script. The cluster `systemd` units, source patches and `cluster-control.sh` operator script are provided alongside this report.

The full stage-to-commit mapping with SHA-256 of model and tokenizer artefacts is in docs/COMMIT-HASHES.md.

**Bit-exact verification (one command).** The published golden reference and a checker are versioned at `deploy/scripts/verify_bitexact.py`: it issues a fixed deterministic request (prompt “*List the first 12 prime numbers and then explain what a prime number is in one sentence.*”, `max_tokens=160`, `temperature=0`, `seed=42`) and compares the SHA-256 of the generated text against the reference `bdbcaec6...f2328645`, confirmed identical across the unoptimised (yield) and optimised (WFE) builds. `deploy/scripts/reproduce.sh` runs the full pipeline (cold restart → readiness → bit-exact check → `n=20` benchmark) from an operator machine, and a `CITATION.cff` is provided at the repository root.

## Appendix B. Historical snapshot at Stage 6 (12.71 tok/s)

*This appendix preserves the analytical conclusions that were valid at the Stages 1–6 intermediate snapshot of the cluster (sustained throughput 12.71 tok/s,  $n=20$ , 95% CI  $\pm 0.029$ , 557 ms TTFT). Stages 7–15 (Section 7 onwards) extend the throughput to 14.449 tok/s and refine several of these claims in light of additional measurements; the current final conclusion is in Section 15.*

After Stages 1–6 the cluster served a 30 B-parameter MoE language model at **12.71 tok/s**, achieved by applying eight source-level fixes to the chosen framework, switching to a sparse-activation model architecture, and tuning the operating system. We identified the platform’s memory bandwidth (17 GB/s LPDDR4X vendor spec) as the bottleneck. ARM PMU profiling at Stage 12 later refined this to 11.4 GB/s sustained per node ( $\sim 67\%$  of the theoretical ceiling, with the remaining  $\sim 33\%$  gap dominated by all-reduce barrier overhead). At Stage 6 the system delivered roughly half the throughput of a single Mac Mini M4 at comparable cost; its value lay in fully on-premise inference with no per-token cost and substantial idle headroom for further workloads.

The most consequential lesson at this intermediate snapshot, in our view, is that “ARM” is not a hardware category: Apple Silicon, Cortex-A76 SBCs, and server-class Neoverse cores are three different platforms, with a  $\sim 30\times$  bandwidth spread, a  $\sim 30\times$  feature-set spread (no I8MM, no FP16 GEMM, no SVE on the A76), and entirely different software ecosystems. Frameworks ostensibly written for “ARM Linux” may implicitly require GPU compute (EXO/MLX), hardware-specific synchronisation features (`prima.cpp`/ZMQ), or ISA extensions (I8MM/SVE/SME absent from the Cortex-A76) — and these distinctions surface only at runtime.

## References

- [1] B. Tadych, *distributed-llama*, <https://github.com/b4rtaz/distributed-llama>, 2023–2026.
- [2] dllama discussion #255, “Qwen3-30B-A3B on 4×Pi5 8GB — 13.04 tok/s,” <https://github.com/b4rtaz/distributed-llama/discussions/255>.
- [3] J. Geerling, “I regret building this \$3000 Pi AI cluster,” <https://www.jeffgeerling.com/blog/2025/i-regret-building-3000-pi-ai-cluster/>, 2025.
- [4] Seed Studio Wiki, “Distributed inference of DeepSeek on Raspberry Pi,” [https://wiki.seedstudio.com/es/distributed\\_inference\\_of\\_deepseek\\_model\\_on\\_raspberrypi/](https://wiki.seedstudio.com/es/distributed_inference_of_deepseek_model_on_raspberrypi/).
- [5] Stratosphere Laboratory, “How well do LLMs perform on a Raspberry Pi 5,” <https://www.stratosphereips.org/blog/2025/6/5/how-well-do-llms-perform-on-a-raspberry-pi-5>.
- [6] W. Kwon *et al.*, “Efficient memory management for large language model serving with PagedAttention,” *SOSP*, 2023. <https://arxiv.org/abs/2309.06180>
- [7] Y. Zhong *et al.*, “DistServe: Disaggregating prefill and decoding for goodput-optimised LLM serving,” *OSDI*, 2024. <https://arxiv.org/abs/2401.09670>
- [8] MLCommons, “MLPerf Inference v5.1 small-LLM track,” <https://mlcommons.org/2025/09/small-llm-inference-5-1/>, 2025.
- [9] NVIDIA Developer Blog, “LLM benchmarking fundamental concepts,” <https://developer.nvidia.com/blog/llm-benchmarking-fundamental-concepts/>.
- [10] Anyscale, “LLM serving benchmarking metrics,” <https://docs.anyscale.com/llm/serving/benchmarking/metrics>.
- [11] Z. Li *et al.*, “prima.cpp: piped-ring parallel inference for 70B-class LLMs on home clusters,” *arXiv:2504.08791*, 2025. <https://arxiv.org/abs/2504.08791>
- [12] A. Q. Jiang *et al.*, “Mixtral of Experts,” *arXiv:2401.04088*, 2024.
- [13] Qwen Team, “Qwen3-30B-A3B-Instruct model card,” Hugging Face, 2025. <https://huggingface.co/Qwen/Qwen3-30B-A3B-Instruct>
- [14] exo-explore, “EXO — run frontier AI locally,” <https://github.com/exo-explore/exo>.
- [15] P. Zheng, W. Xu, H. Wang, J. Chen, X. Shen, “HALO: Semantic-aware distributed LLM inference in lossy edge network,” *arXiv:2601.11676*, January 2026. <https://arxiv.org/abs/2601.11676>
- [16] Groq, “Introducing Llama-3-Groq-Tool-Use Models,” 2024. <https://groq.com/blog/introducing-llama-3-groq-tool-use-models>
- [17] N. Muennighoff *et al.*, “OLMoE: Open Mixture-of-Experts Language Models,” *arXiv:2409.02060*, 2024. <https://huggingface.co/allenai/OLMoE-1B-7B-0924>
- [18] PyTorch / Meta, “Introducing Async Tensor Parallelism in PyTorch,” *PyTorch Discuss forums (TorchTitan project)*, September 2024. <https://discuss.pytorch.org/t/distributed-w-torchtitan-introducing-async-tensor-parallelism-in-pytorch/209487>

- [19] L. Gao *et al.*, “A framework for few-shot language model evaluation (lm-evaluation-harness),” EleutherAI, v0.4.x, 2024–2026. <https://github.com/EleutherAI/lm-evaluation-harness>
- [20] ByteShape, “A 30B Qwen model walks into a Raspberry Pi...and runs in real time,” technical blog, 2026. <https://byteshape.com/blogs/Qwen3-30B-A3B-Instruct-2507/>
- [21] J. Geerling, “Qwen3-30B-A3B on Raspberry Pi 5 16GB,” `geerlingguy/ai-benchmarks` issue #47, 2026. <https://github.com/geerlingguy/ai-benchmarks/issues/47>