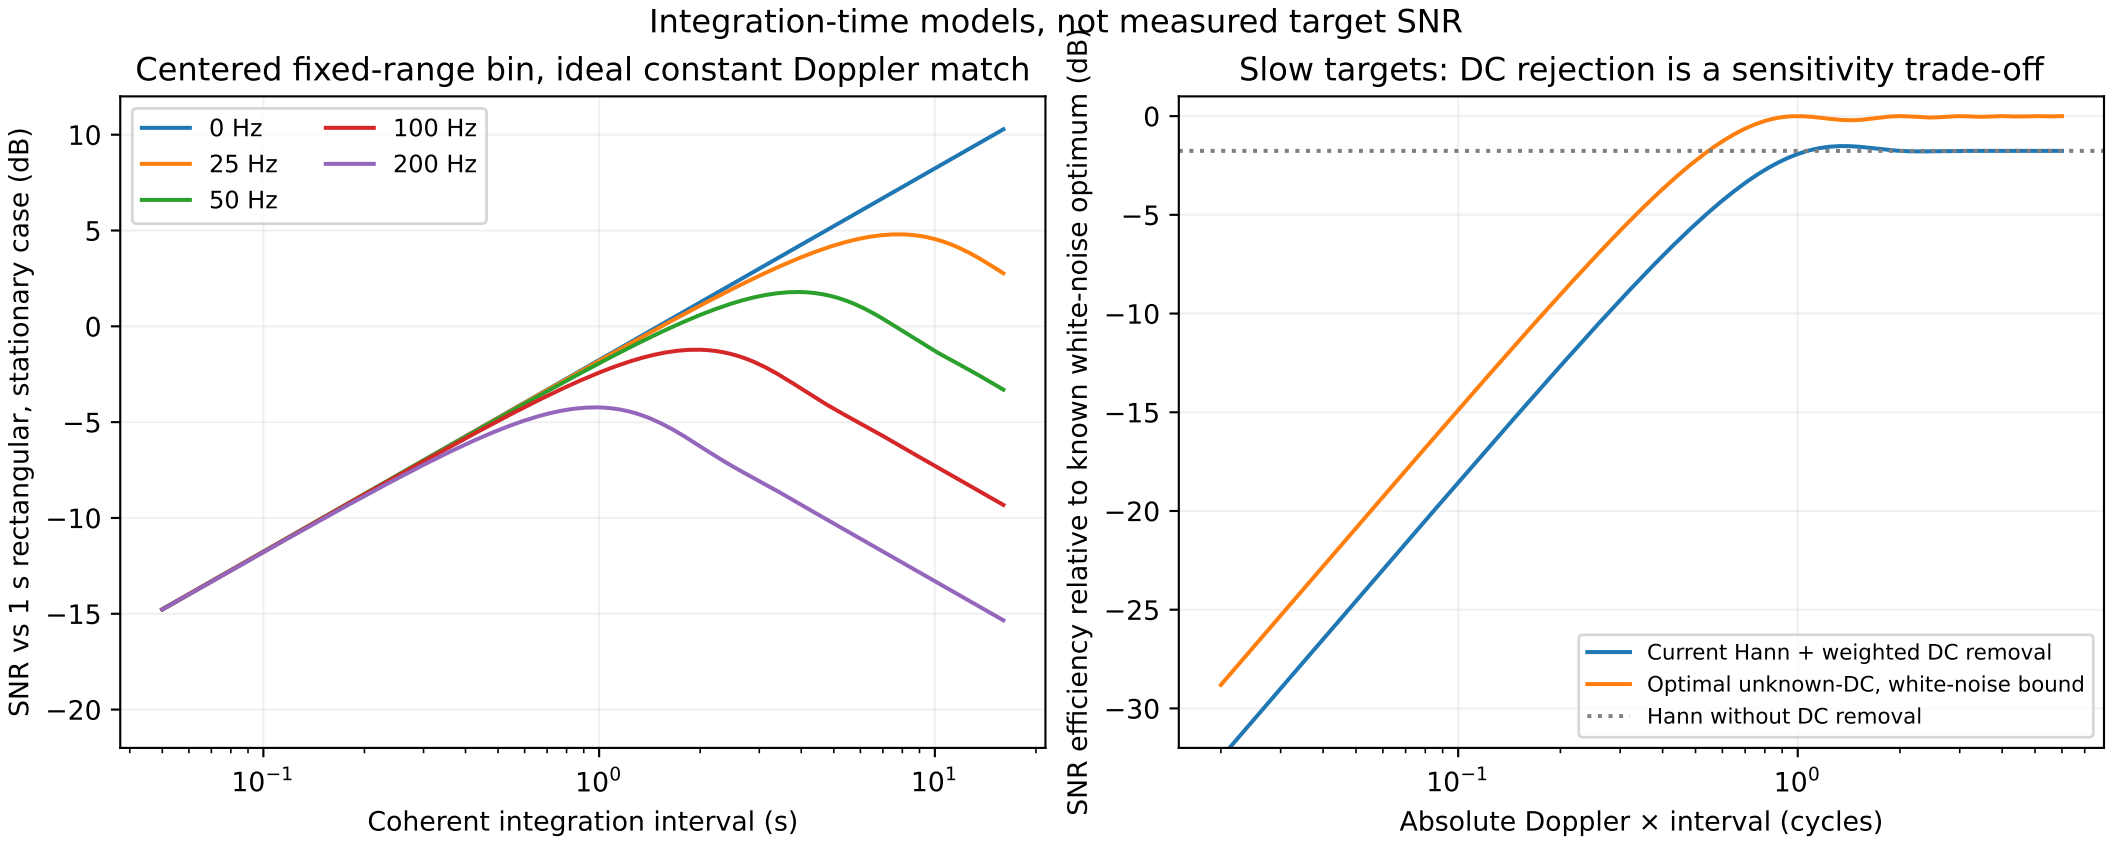
Integration-time models, not measured target SNR
Centered fixed-range bin, ideal constant Doppler match
SNR vs 1 s rectangular, stationary case (dB)
Coherent integration interval (s)
0 Hz
25 Hz
50 Hz
100 Hz
200 Hz
Slow targets: DC rejection is a sensitivity trade-off
SNR efficiency relative to known white-noise optimum (dB)
Absolute Doppler × interval (cycles)
Current Hann + weighted DC removal
Optimal unknown-DC, white-noise bound
Hann without DC removal