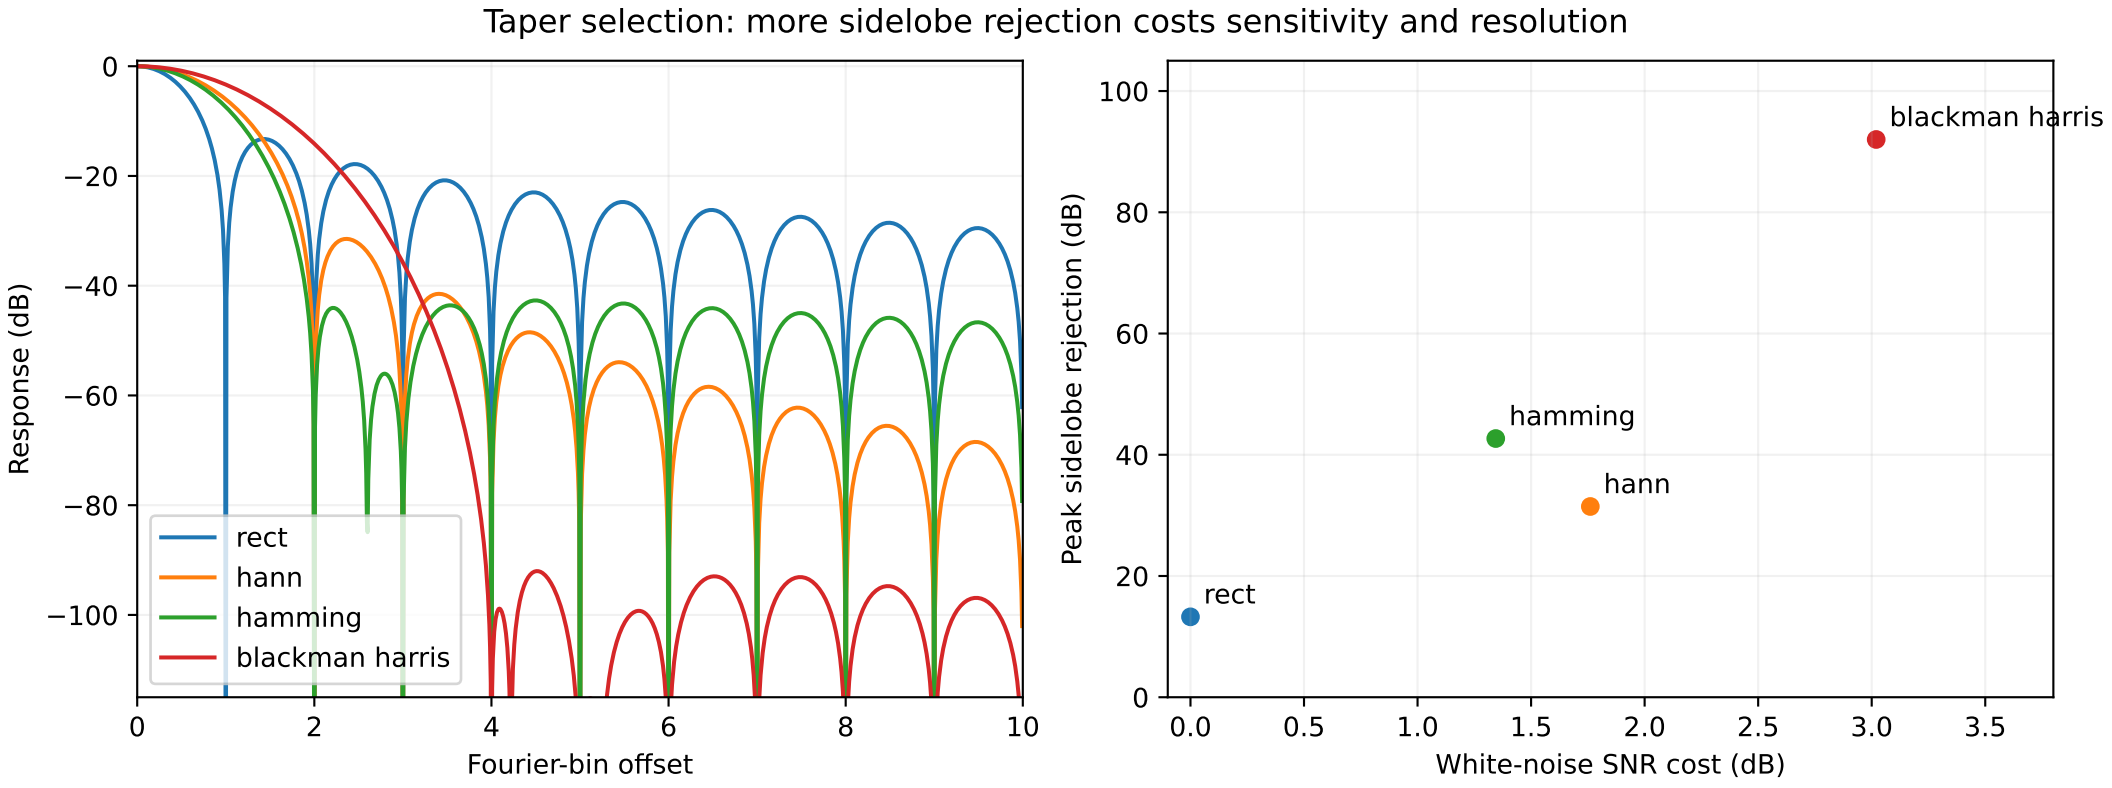
Taper selection: more sidelobe rejection costs sensitivity and resolution
Response (dB)
0
−20
−40
−60
−80
−100
0
2
4
6
8
10
Fourier-bin offset
rect
hann
hamming
blackman harris
Peak sidelobe rejection (dB)
100
80
60
40
20
0
0.0
0.5
1.0
1.5
2.0
2.5
3.0
3.5
White-noise SNR cost (dB)
blackman harris
hamming
hann
rect