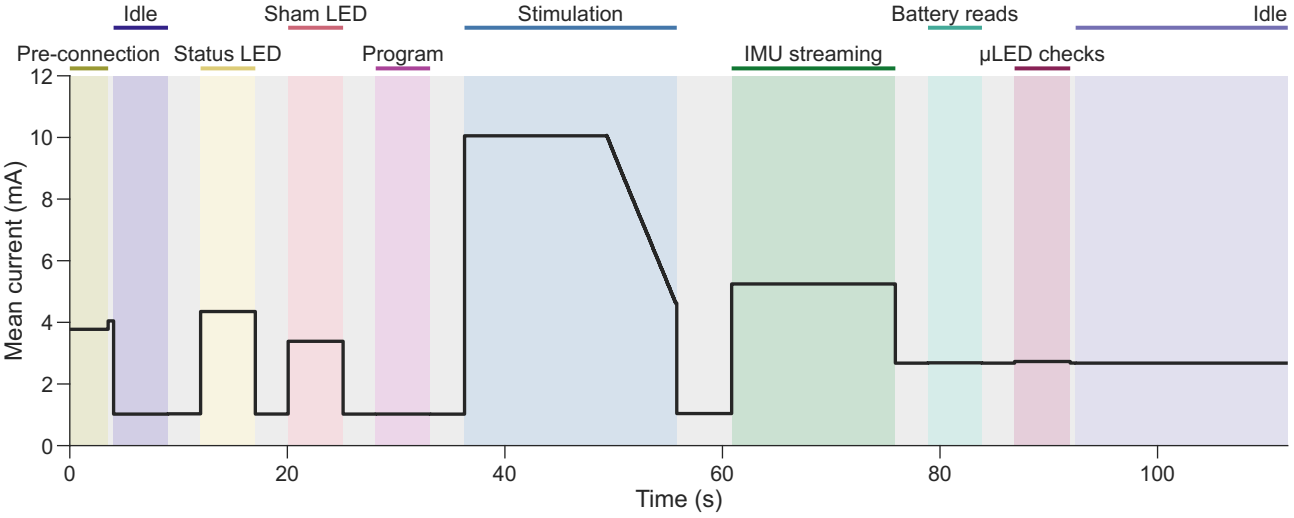
Idle
Sham LED
Stimulation
Battery reads
Idle
Pre-connection
Status LED
Program
IMU streaming
µLED checks
Mean current (mA)
12
10
8
6
4
2
0
0
20
40
60
80
100
Time (s)