

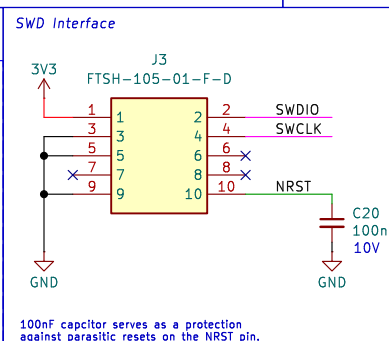
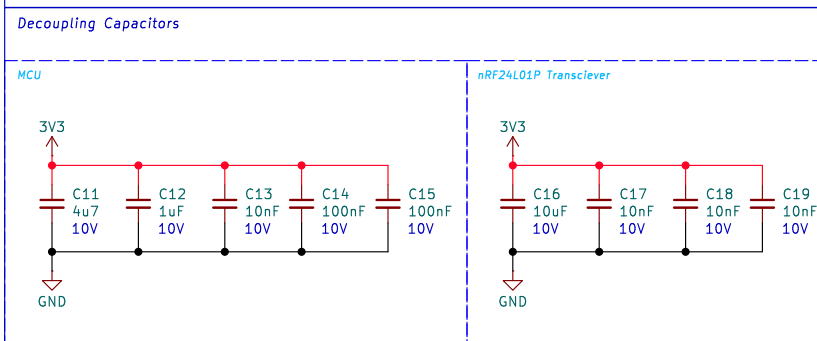
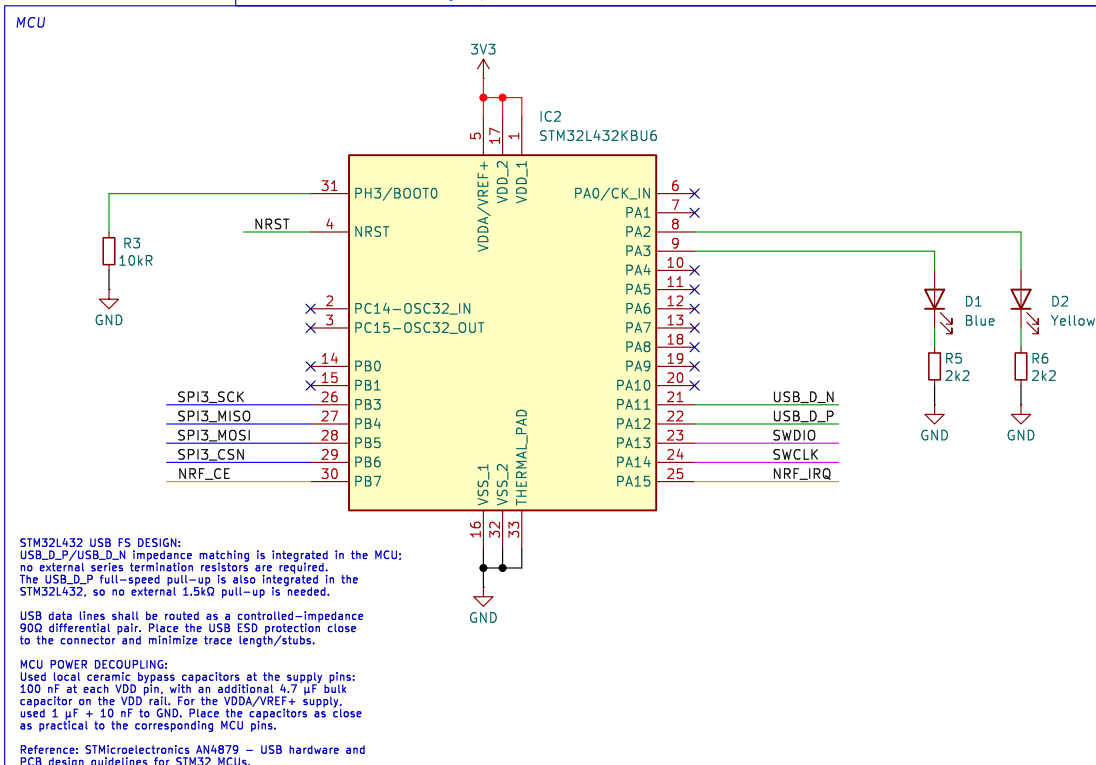
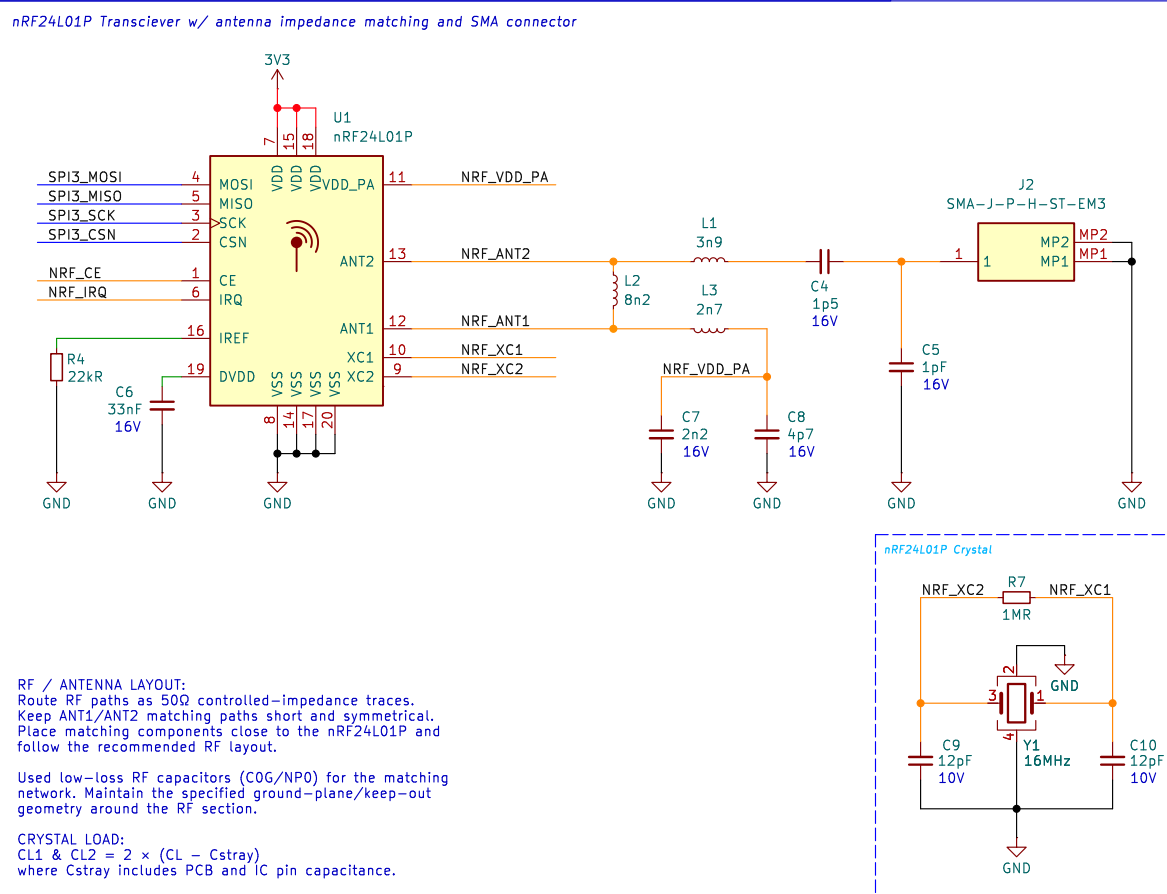
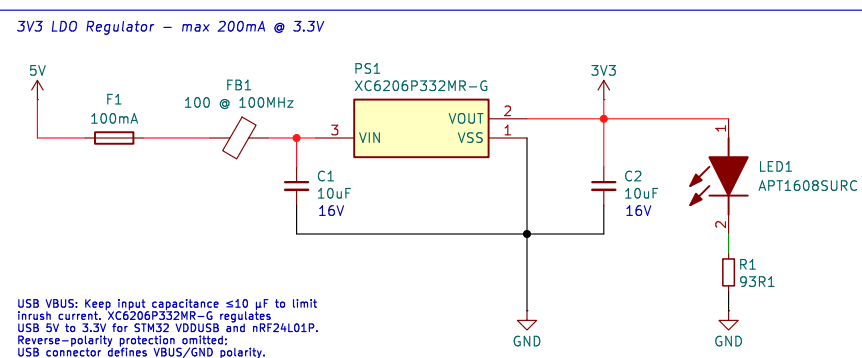


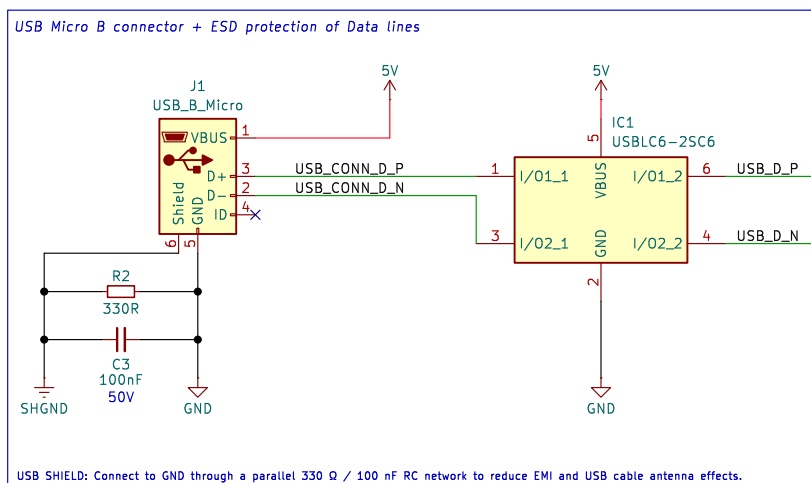

STM32-based USB-to-2.4GHz RF gateway featuring an nRF24L01P transceiver, USB Full-Speed interface, 3.3V power regulation, RF impedance matching, and 50Ω SMA antenna interface. Includes USB ESD protection and SWD interface.

By: Daniel Silva

Sheet: /

File: STM32-RF-USB-Gateway.kicad_sch

Title: STM32-RF-USB-Gateway

Size: User

Date: 02/07/2022

Size: User	
KiCad E.D.A. 9.0.6	

Rev: 23

Rev: 2.3
Id: 1/1