


Customer	: LFM CONTROL DE FLUIDOS S DE ...		Capacity	: 3,633.9 m³/h
Item number	: 500-LNN-700 / 1 - B1		Head	: 42.67 m
Service	: -		Density / Specific gravity	: - / 1.000
Flowserve reference	: 5812406415		Pump speed	: 885 rpm
Pump size & type / Stages	: 500-LNN-700	/ 1	Ns / Nss (per eye)	: 49 / 165 (SI)
Based on curve no.	: 947R1-AA		Test tolerance	: ANSI/HI 14.6 Grade 1U
Impeller diameter	: 657 mm		Date	: July 20, 2026



CURVES ARE APPROXIMATE, PUMP IS GUARANTEED FOR ONE SET OF CONDITIONS: CAPACITY, HEAD, AND EFFICIENCY.

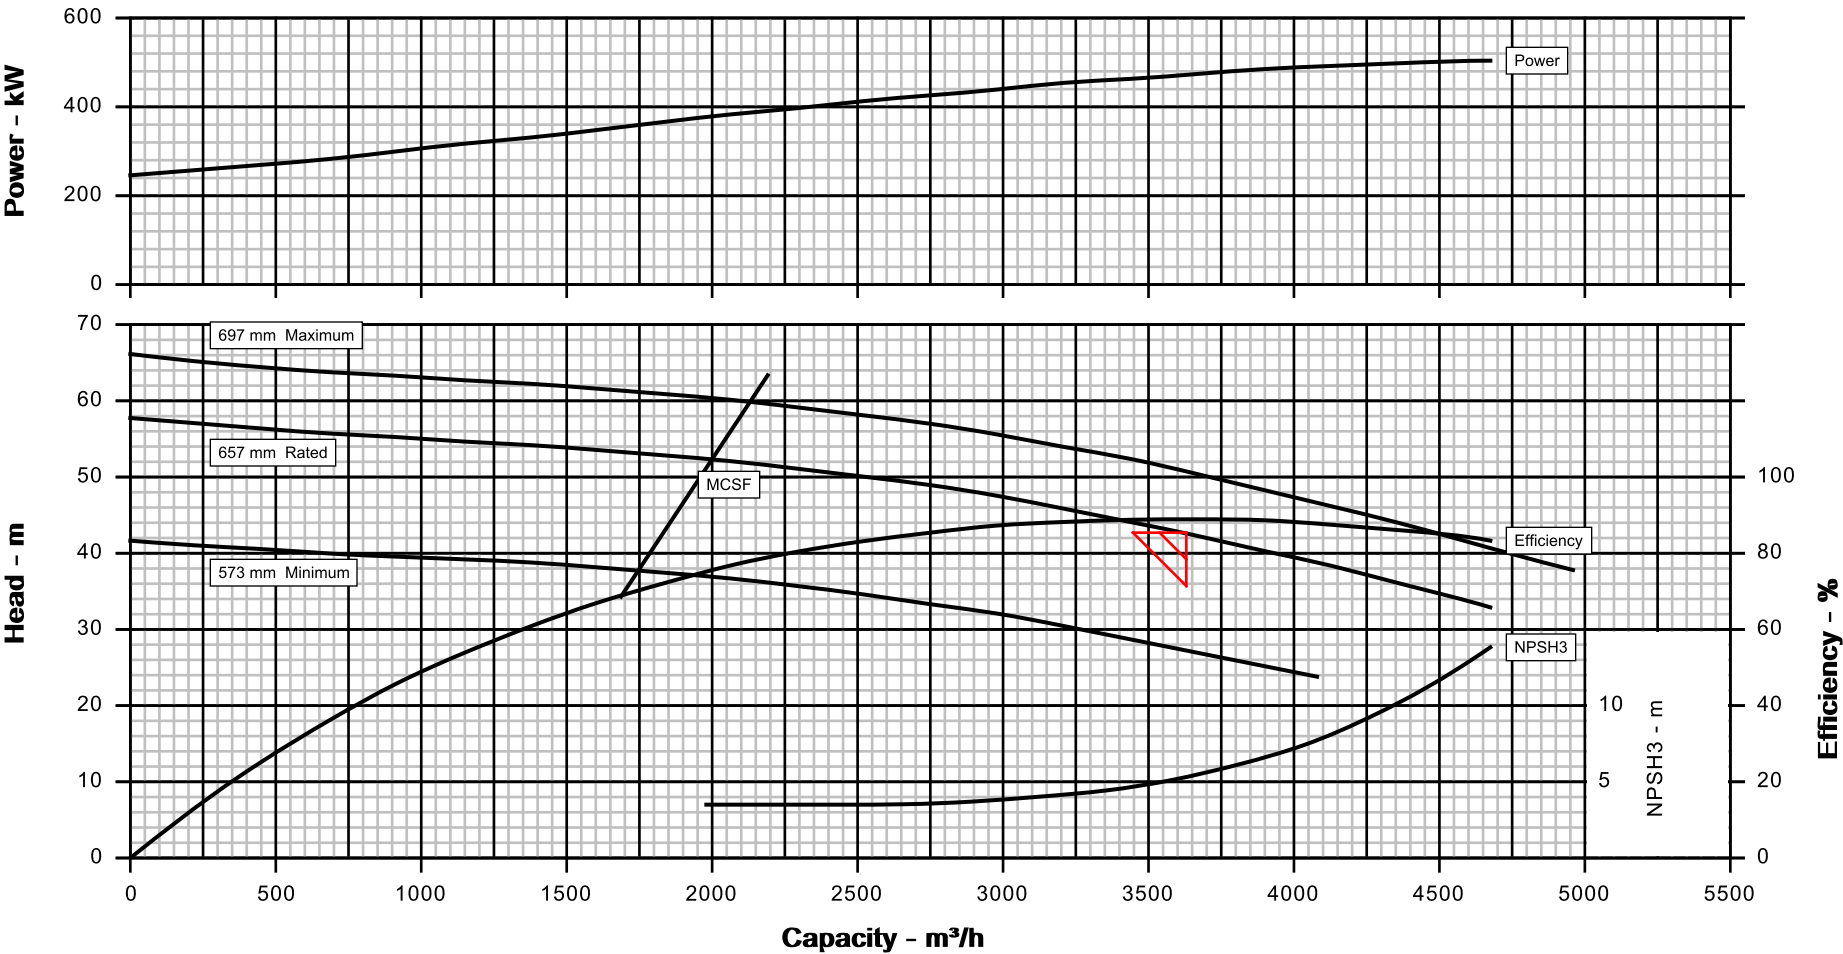


The customer must provide a minimum NPSHa of 8.3 m.

Customer	: LFM CONTROL DE FLUIDOS S DE ...	Pump / Stages	: 500-LNN-700 / 1
Customer reference	: OP-26-680812	Based on curve no.	: 947R1-AA
Item number	: 500-LNN-700 / 1 - B1	Flowserve reference	: 5812406415
Service	: -	Date	: July 20, 2026

Operating Conditions	Materials / Specification
Capacity (rated/normal) : 3,633.9 m³/h / -	Material column code : B1
Water capacity (CQ=1.00) : -	Pump specification : -
Total developed head : 42.67 m	Other Requirements Hydraulic selection : No specification Construction : No specification Test tolerance : ANSI/HI 14.6 Grade 1U Driver Sizing : Max Power(MCSF to EOC) using SF
Water head (CH=1.00) : -	
NPSHa/NPSHa less margin : Ample / -	
Maximum suction pressure : 0.0 kPa.g	
Liquid	
Liquid type : Other	
Liquid description : -	
Temperature : 16 °C	
Density / Specific gravity : - / 1.000	
Solid Size - Actual / Limit : - / -	
Viscosity / Vapor pressure : 1.00 cP / 0.00 kPa.a	


Performance			
Hydraulic power : 422 kW	Impeller diameter		
Pump speed : 885 rpm	Rated	: 657 mm	
Pump overall efficiency (CE=1.00) : 89.1 %	Maximum	: 697 mm	
NPSH required (NPSH3) (CNPSH=1.00) : 5.3 m	Minimum	: 573 mm	
Rated brake power : 473 kW	Ns / Nss (per eye)	: 49 / 165 (SI)	
	Minimum continuous flow	: 2,002.9 m³/h	
Maximum brake power : 504 kW	Maximum head at rated diameter	: 57.72 m	
Driver power rating : 700 hp / 522 kW	Flow at BEP	: 3,609.6 m³/h	
Casing working pressure : 565.3 kPa.g	Flow as % of BEP	: 100.7 %	
(based on shut off @ cut dia/rated SG)	Efficiency at normal flow	: -	
Maximum allowable : 1,000.0 kPa.g	Impeller diameter ratio (rated/max)	: 94.3 %	
Hydrostatic test pressure : 1,500.0 kPa.g	Head rise to shut off	: 35.3 %	
Estimated rated seal chamber pressure : 6.9 kPa.g	Total head ratio (rated / max) / (max / rated)	: 84.1 % / 118.9 %	

CURVES ARE APPROXIMATE, PUMP IS GUARANTEED FOR ONE SET OF CONDITIONS; CAPACITY, HEAD, AND EFFICIENCY.

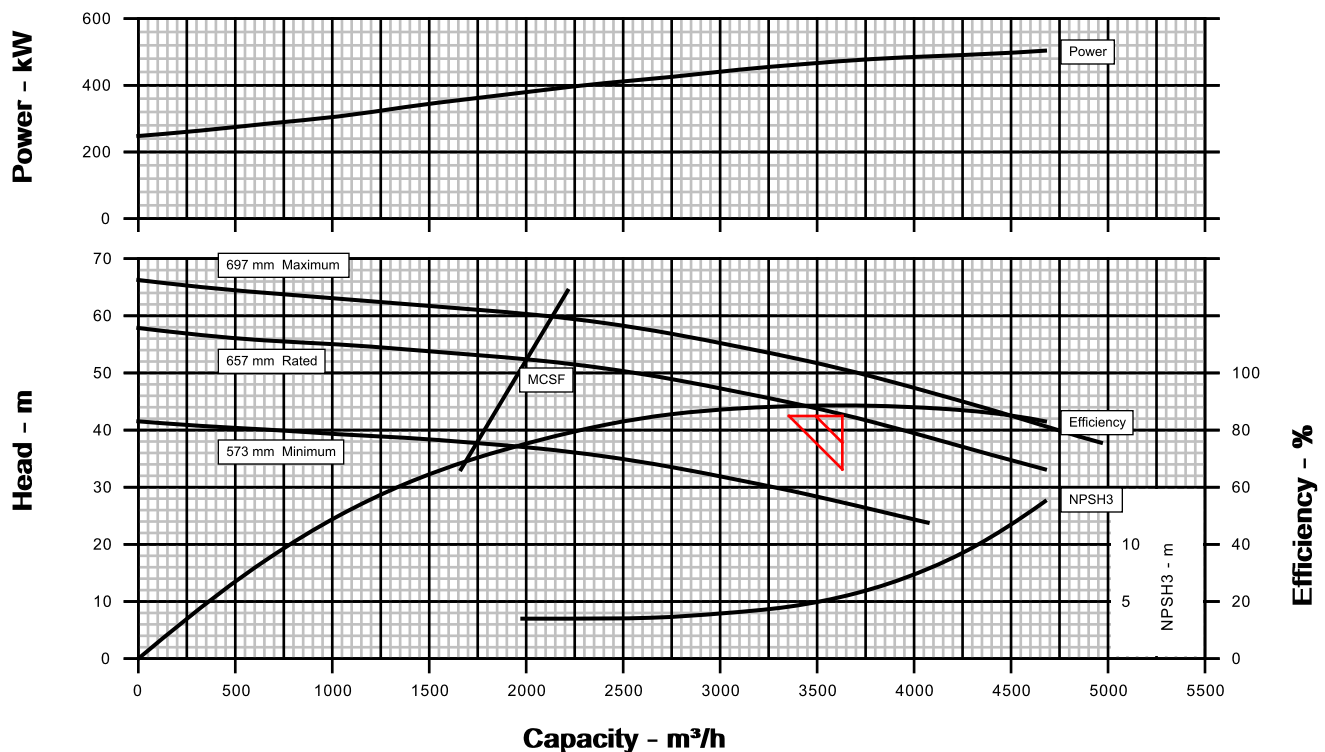

The customer must provide a minimum NPSHa of 8.3 m.

Customer : LFM CONTROL DE FLUIDOS S DE ...					Pump / Stages : 500-LNN-700 / 1	
Customer reference : OP-26-680812					Based on curve no. : 947R1-AA	
Item number : 500-LNN-700 / 1 - B1					Flowserve reference : 5812406415	
Service : -					Date : July 20, 2026	
Construction					Driver Information	
Nozzles	Size	Rating	Face	Position	Manufacturer : Not Supplied By Flowserve	
Suction	600 mm	PN16	FF	Side	Power : 700 hp / 522 kW	
Discharge	500 mm	PN16	FF	Side	Service factor (requested / actual) : 1.0 / -	
Casing mounting : Foot					Synchronous speed : 900 rpm	
Casing split : Axial					Orientation / Mounting : Horizontal / Foot	
Impeller type : Double Suction 7 Vanes					Driver type : NEMA	
Bearing type (radial) : Single Row Ball					Frame-size / material : - / -	
Bearing number (radial) : 6221					Enclosure : TEFC IP55	
Bearing type (thrust) : Single Row Ball					Hazardous area class : Not Supplied By Flowserve	
Bearing number (thrust) : 6221					Explosion 'T' rating : Not Supplied By Flowserve	
Bearing lubrication : Grease					Volts / Phase / Hz : 460 V / 3 / 60 Hz	
Rotation (view from coupling) : CW per Hyd. Institute					Amps-full load/locked rotor : - / -	
Materials					Motor starting : Direct on line (DOL)	
Casing : ASTM A536 60-40-18 0-18					Insulation : Cl. F	
Impeller : 10% Tin Bronze					Temperature rise : -	
Case wear ring : Cast Iron					Bearings : -	
Impeller wear ring : Not Fitted					Lubrication : -	
Inducer : N/A					Motor mounted by : No Motor	
Shaft : 13% Cr Steel					Sound Pressure (dBA @ 1.0 m)	
Sleeve : Not Fitted					Driver, expected : -	
Baseplate, Coupling and Guard					Pump & driver, estimated : 87 Pump only	
Baseplate type : No Baseplate					Seal Information	
Baseplate material : Not Supplied					Arrangement : Sing.Bal Cartridge	
Coupling manufacturer : No Coupling Supplied					Size : 4.5 in	
Coupling size : No Coupling Supplied					Manufacturer / Type : Flowserve / ISC2 in 316ss	
Coupling / Shaft guard : Not Supplied					Material code (Man'f/API) : SiC/Car/Vit / 5Z4T	
Weights (Approx.)					Internal neck bushing : None	
Bareshaft pump (net) : 2,450.0 kg					Gland	
Baseplate (net) : ***					Gland material : 316 St St	
Driver (net) : -					Flush : 1/2" NPT	
Shipping gross weight/volume : *** / ***					Vent : 1/2" NPT	
Testing					Drain : 1/2" NPT	
Hydrostatic test : Non witnessed					Auxiliary seal device : Carbon Bush	
Performance test : None					Piping	
NPSH test : None					Seal flush plan : Plan 11	
Paint and Package					Seal flush construction : -	
Pump paint : FPD STD JS7212					Seal flush material : Other	
Base grout surface prep : -					Aux seal flush plan : None	
Shipment type : Domestic					Aux seal flush construction : -	
					Aux seal flush material : -	
Notes						
Sound Pressure Levels:						
-Subject to 3 dBA tolerance						
-Refer for Contractual Values						
Refer for Values not shown						
-Values are for Pump only						
-						

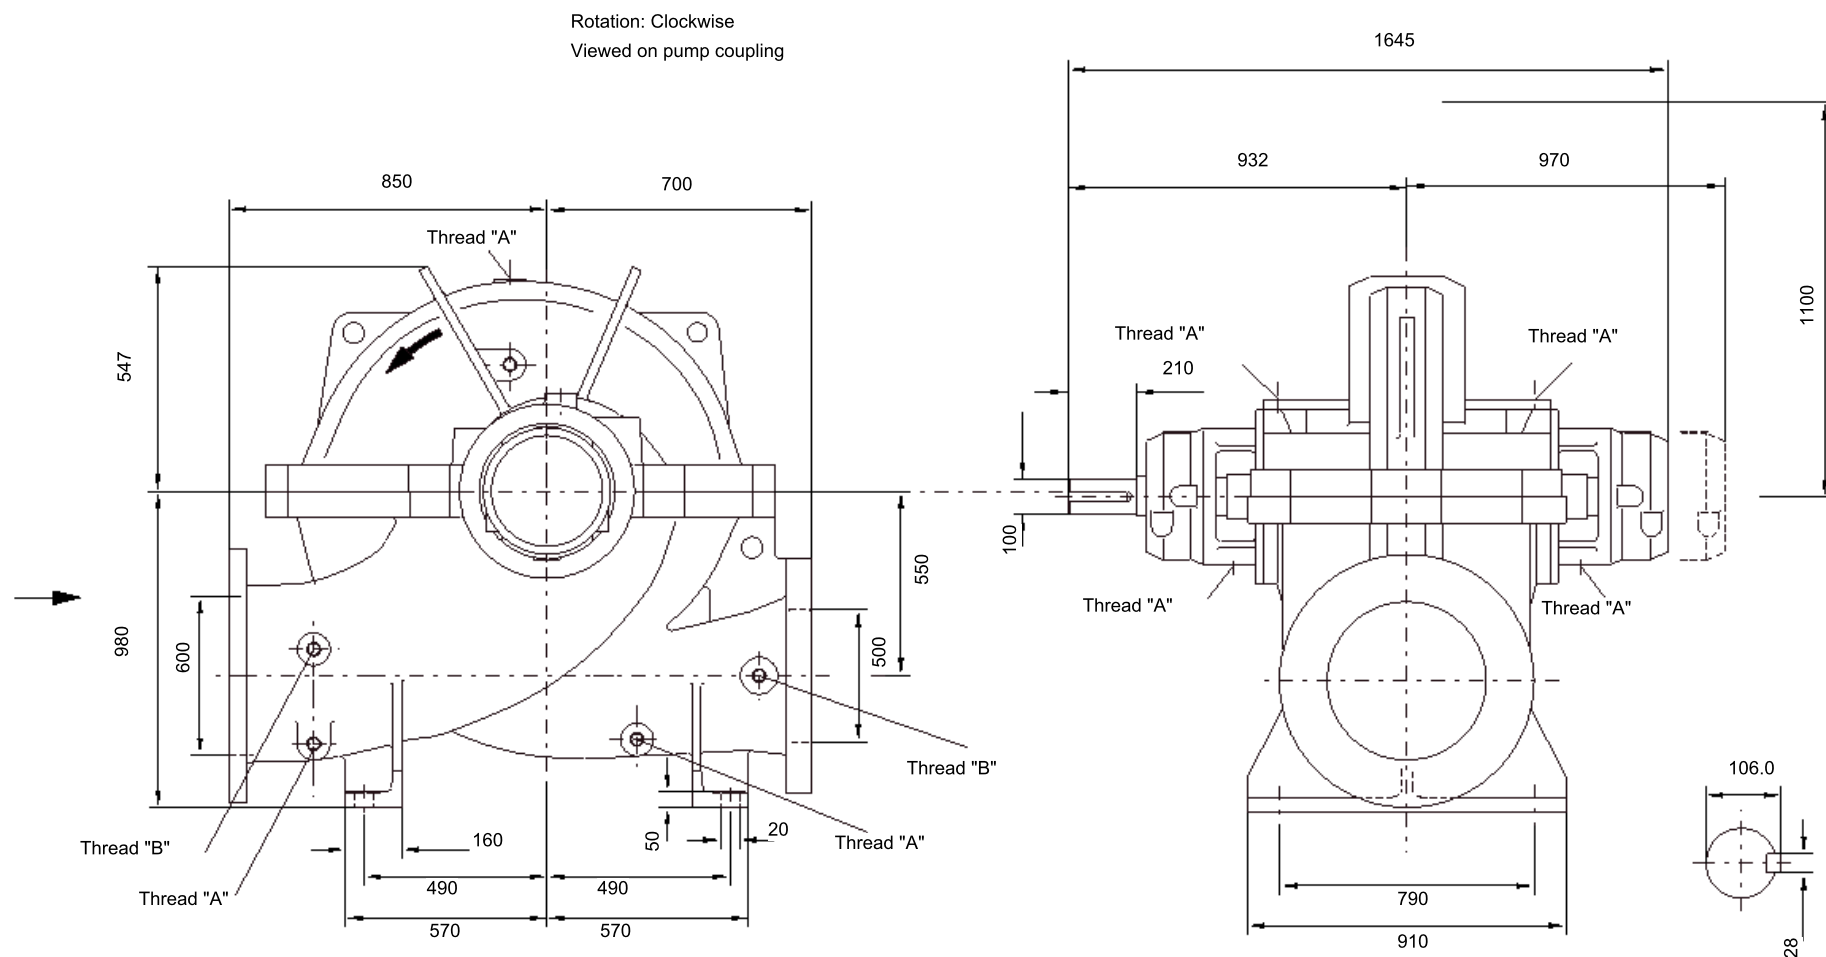

Not To Scale

"A" NPT 1 in
"B" NPT 1/2 in.
Flanges Drilled PN 16

Typical Drawing, not certified
Certified Drawing available with order

Customer	: LFM CONTROL DE FLUIDOS S...	Pump size & type	: 500-LNN-700	Drawing number	: -
Item number	: 500-LNN-700 / 1 - B1	Pump speed / Stages	: 885 rpm / 1	Date	: July 20, 2026
Service	: -	Flow / Head	: 3,633.9 m³/h / 42.67 m	Certified by / Date	: -
Customer PO #	: -	Driver power / Frame	: 700 hp / 522 kW / -	Seal type	: ISC2 in 316ss
Flowserve reference	: 5812406415	Volts / Phase / Hz	: 460 V / 3 / 60 Hz	Seal flush plan	: Plan 11

Customer	: LFM CONTROL DE FLUIDOS S DE ...		Capacity	: 3,633.9 m³/h
Item number	: 500-LNN-700 / 1 - B1		Head	: 42.67 m
Service	: -		Density / Specific gravity	: - / 1.000
Flowserve reference	: 5812406415		Pump speed	: 885 rpm
Pump size & type / Stages	: 500-LNN-700 / 1		Ns / Nss (per eye)	: 49 / 165 (SI)
Based on curve no.	: 947R1-AA		Pump WR² at 885 rpm	: 12.200 kg.m²
Impeller diameter	: 657 mm		Date	: July 20, 2026

CURVES ARE APPROXIMATE, PUMP IS GUARANTEED FOR ONE SET OF CONDITIONS; CAPACITY, HEAD, AND EFFICIENCY.

